

The RF Line

NPN Silicon

RF Power Transistor

The TP3006 is designed for cellular radio base station amplifiers up to 960 MHz. It incorporates high value emitter ballast resistors, gold metallizations and offers a high degree of reliability and ruggedness. The TP3006 also features input and output matching networks and high impedances. It can easily operate in a full 870–960 MHz bandwidth in a simple circuit.


- Class AB Operation
- Specified 26 Volts, 960 MHz Characteristics
 - Output Power — 5 Watts
 - Gain — 9 dB min
 - Efficiency — 45% min
- Circuit board photomaster available upon request by contacting RF Tactical Marketing in Phoenix, AZ.

TP3006

5 W, 870–960 MHz
RF POWER TRANSISTOR
NPN SILICON

MAXIMUM RATINGS

Rating	Symbol	Value	Unit
Collector–Emitter Voltage	V_{CE}	45	Vdc
Collector–Base Voltage	V_{CB}	55	Vdc
Emitter–Base Voltage	V_{EB}	3.5	Vdc
Collector–Current — Continuous	I_C	2	Adc
Storage Temperature Range	T_{stg}	– 40 to +100	°C
Operating Junction Temperature	T_J	200	°C
Total Device Dissipation @ $T_C = 25^\circ\text{C}$ Derate above 25°C	P_D	25 0.14	Watts W/°C



CASE 319–07, STYLE 2

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction to Case (1)	$R_{\theta JC}$	7	°C/W

ELECTRICAL CHARACTERISTICS ($T_C = 25^\circ\text{C}$ unless otherwise noted.)

Characteristic	Symbol	Min	Typ	Max	Unit
----------------	--------	-----	-----	-----	------

OFF CHARACTERISTICS

Collector–Emitter Breakdown Voltage ($I_C = 15\text{ mA}$, $R_{BE} = 75\ \Omega$)	$V_{(BR)CE}$	45	—	—	Vdc
Emitter–Base Breakdown Voltage ($I_E = 4\text{ mAdc}$)	$V_{(BR)EB}$	3.5	—	—	Vdc
Collector–Base Breakdown Voltage ($I_C = 15\text{ mAdc}$)	$V_{(BR)CB}$	55	—	—	Vdc
Collector–Emitter Leakage ($V_{CE} = 26\text{ V}$, $R_{BE} = 75\ \Omega$)	I_{CE}	—	—	4	mA

ON CHARACTERISTICS

DC Current Gain ($I_C = 0.5\text{ Adc}$, $V_{CE} = 10\text{ Vdc}$)	h_{FE}	15	—	100	—
--	----------	----	---	-----	---

NOTE:

(continued)

1. Thermal resistance is determined under specified RF operating condition at temperature test point (see drawing of the package).

ELECTRICAL CHARACTERISTICS — continued ($T_C = 25^\circ\text{C}$ unless otherwise noted.)


Characteristic	Symbol	Min	Typ	Max	Unit
DYNAMIC CHARACTERISTICS					
Output Capacitance ($V_{CB} = 26\text{ V}$, $I_E = 0$, $f = 1\text{ MHz}$)	C_{ob}	—	8.5	—	pF

FUNCTIONAL TESTS IN CW

Common-Emitter Amplifier Power Gain ($V_{CC} = 26\text{ V}$, $P_{out} = 5\text{ W}$, $I_{CQ} = 50\text{ mA}$, $f = 960\text{ MHz}$)	G_p	9	10.5	—	dB
Collector Efficiency ($V_{CC} = 26\text{ V}$, $P_{out} = 5\text{ W}$, $I_{CQ} = 50\text{ mA}$, $f = 960\text{ MHz}$)	h	45	50	—	%
Input Overdrive (no degradation in P_{out}) ($V_{CC} = 26\text{ V}$, $I_{CQ} = 50\text{ mA}$, $f = 960\text{ MHz}$)	P_{in}	3	—	—	dB


FUNCTIONAL TESTS IN 2 TONES

3rd Order Intermodulation ($V_{CC} = 26\text{ V}$, $P_{peak} = 5\text{ W}$, $I_{CQ} = 50\text{ mA}$, $f = 900\text{ MHz}$)	IMD3	—	-46	—	dB
5th Order Intermodulation ($V_{CC} = 26\text{ V}$, $P_{peak} = 5\text{ W}$, $I_{CQ} = 50\text{ mA}$, $f = 900\text{ MHz}$)	IMD5	—	-46	—	dB

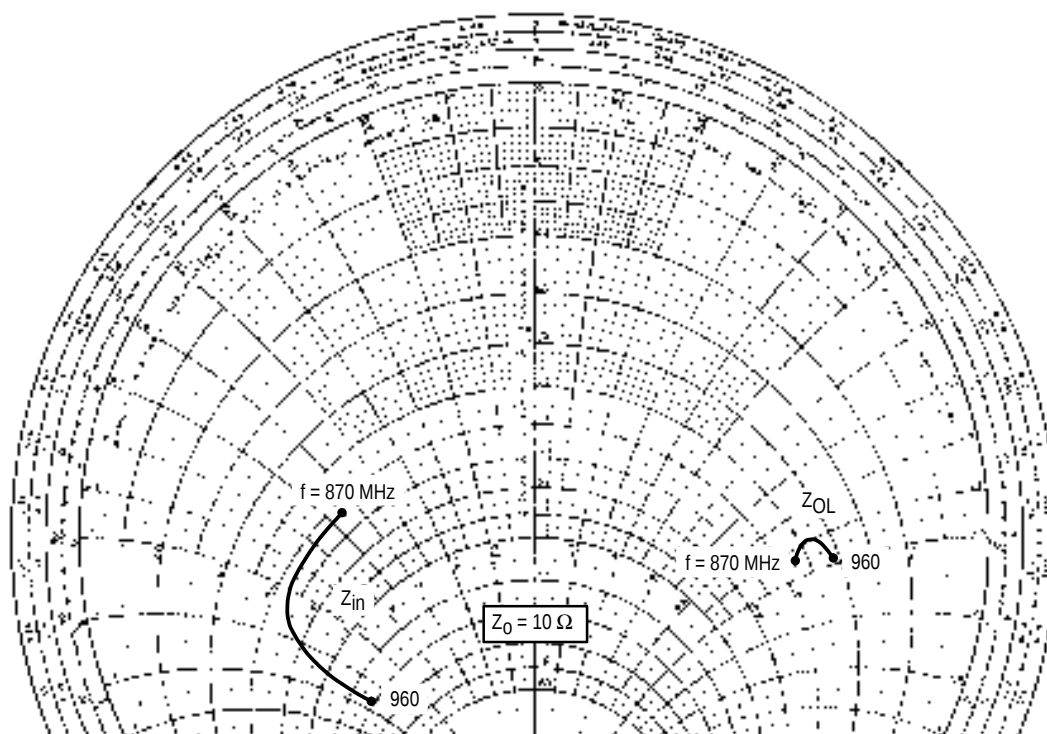
 $P_{out} = 5\text{ W (CW)}$, $V_{CE} = 26\text{ V}$, $I_{CQ} = 50\text{ mA}$

f (MHz)	Z_{in} (Ω)	Z_{OL} (Ω)
870	$6.26 - j6.40$	$5.22 + j9.47$
900	$7.40 - j12.3$	$4.17 + j9.02$
960	$14.8 - j12.9$	$4.21 + j9.91$

Figure 1. Series Equivalent Input and Output Impedances

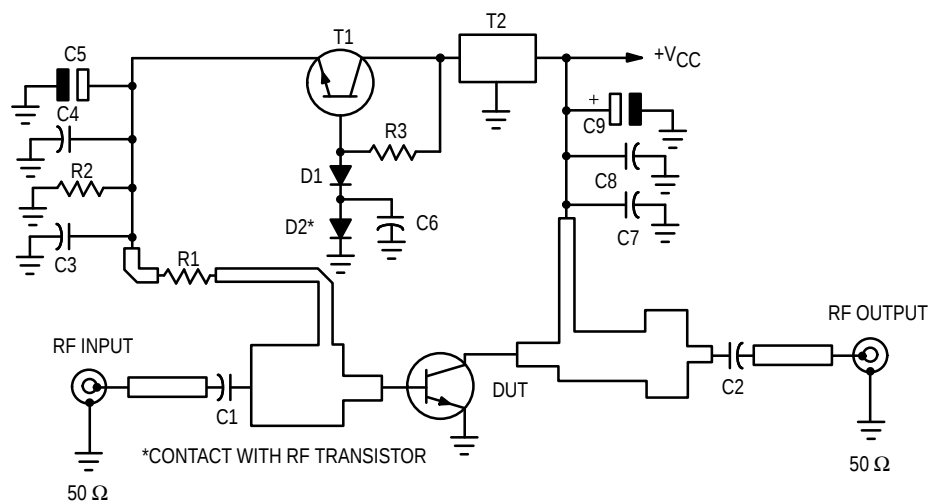

C1	22 pF, 5%, Chip Capacitor 0805	R1	2.2 Ω , 5%, Chip Resistor 1206
C2,C3	330 pF, Chip Capacitor 0805	R2	51 Ω , 5%, Chip Resistor 0805
C4,C7	15 nF, 5%, Chip Capacitor 0805	R3	470 Ω , 5%, Chip Resistor 0805 to be adjusted for $I_Q = 50$ mA
C5,C9	6.8 F, 35 V, Chip Capacitor 0805	T1	SMD Transistor, BCX54 or Similar
C6,C8	330 pF, Chip Capacitor 0805	T2	Voltage Regulator 7805
D1,D2	SMD Diode		

Figure 2. 960 MHz Electrical Schematic

TYPICAL CHARACTERISTICS CW – WIDEBAND

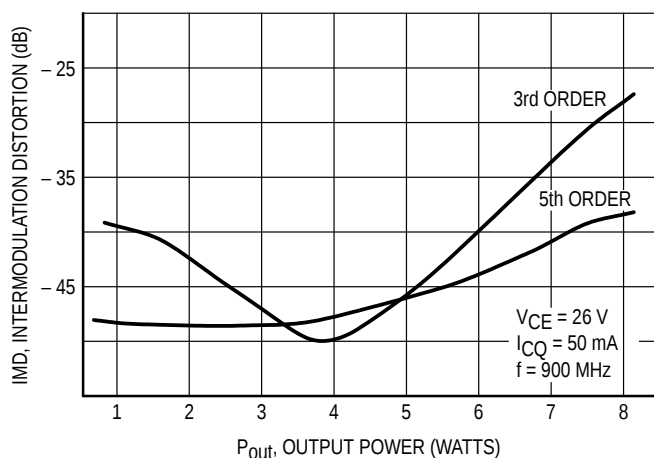


Figure 3. Intermodulation versus Output Power


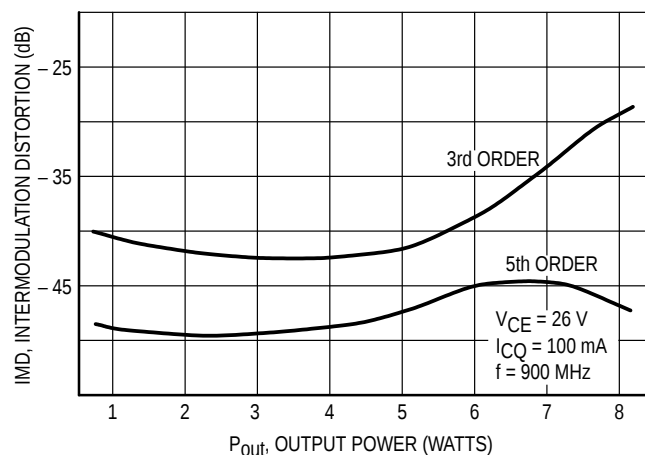


Figure 4. Intermodulation versus Output Power



TYPICAL CHARACTERISTICS CW – WIDEBAND

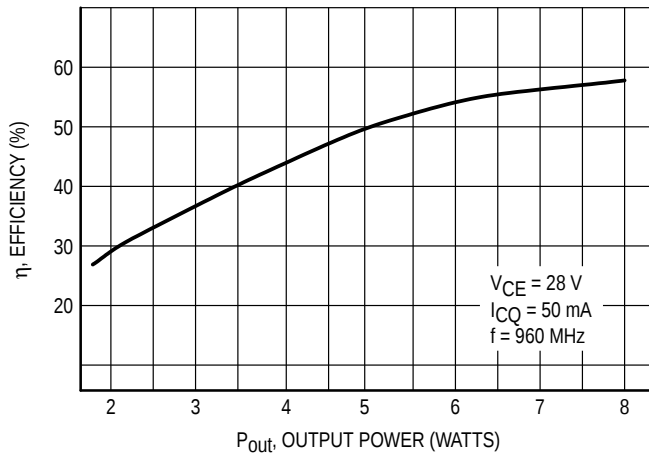


Figure 5. Collector Efficiency versus Output Power

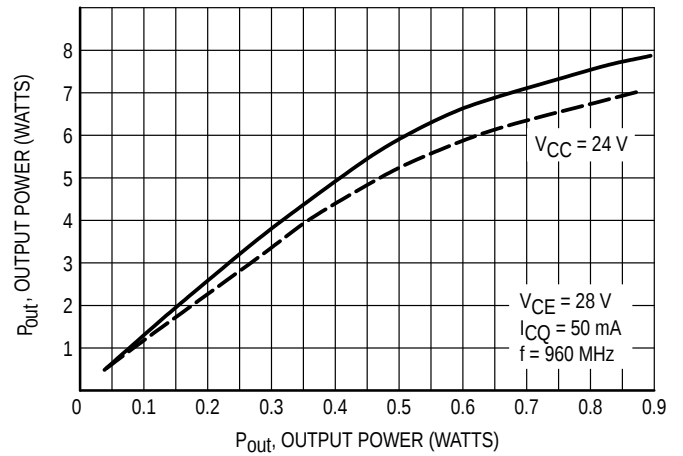


Figure 6. Output Power versus Input Power


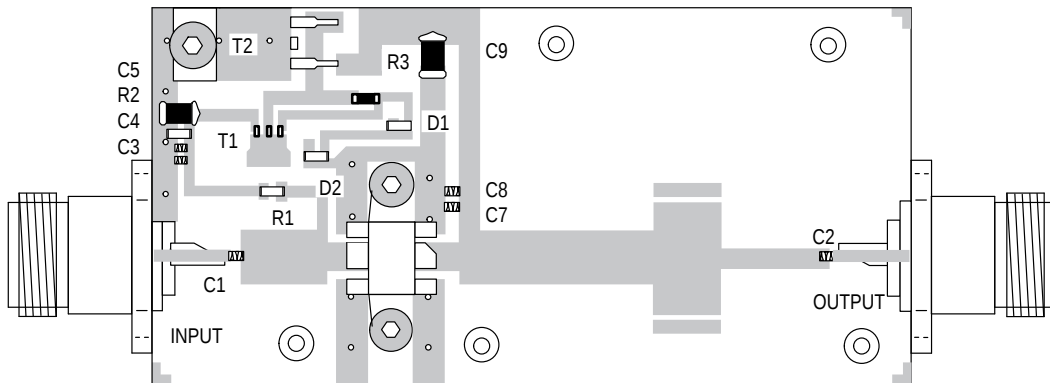


Figure 7. 960 MHz Test Circuit Components View

PACKAGE DIMENSIONS

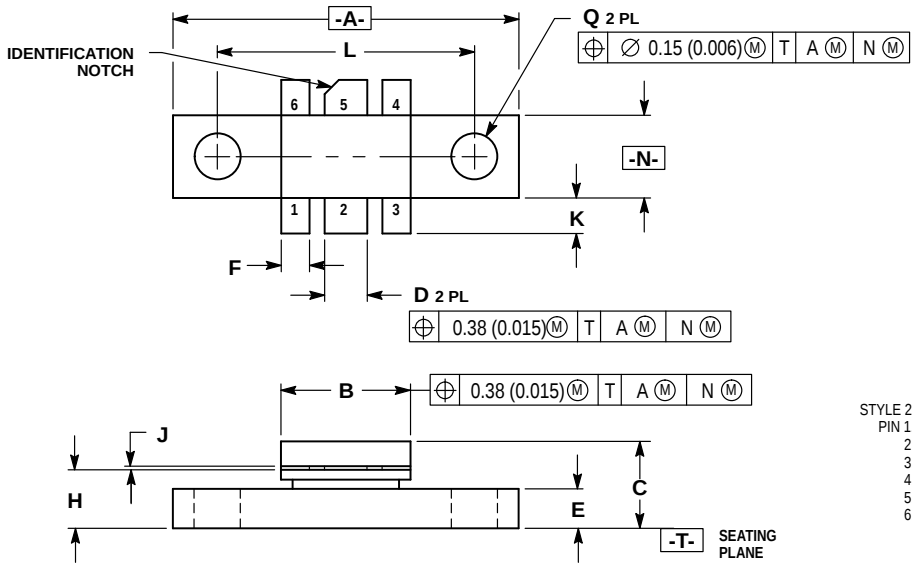

- NOTES:
- 1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
 - 2. CONTROLLING DIMENSION: INCH.

DIM	INCHES		MILLIMETER	
	MIN	MAX	MIN	MAX
A	0.965	0.985	24.52	25.01
B	0.355	0.375	9.02	9.52
C	0.230	0.260	5.85	6.60
D	0.115	0.125	2.93	3.17
E	0.102	0.114	2.59	2.90
F	0.075	0.085	1.91	2.15
H	0.160	0.170	4.07	4.31
J	0.004	0.006	0.11	0.15
K	0.090	0.110	2.29	2.79
L	0.725 BSC		18.42 BSC	
N	0.225	0.241	5.72	6.12
Q	0.125	0.135	3.18	3.42

- STYLE 2:
- PIN 1. EMITTER (COMMON)
 - 2. BASE (INPUT)
 - 3. EMITTER (COMMON)
 - 4. EMITTER (COMMON)
 - 5. COLLECTOR (OUTPUT)
 - 6. EMITTER (COMMON)

CASE 319-07
ISSUE M

Motorola reserves the right to make changes without further notice to any products herein. Motorola makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does Motorola assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation consequential or incidental damages. "Typical" parameters can and do vary in different applications. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. Motorola does not convey any license under its patent rights nor the rights of others. Motorola products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the Motorola product could create a situation where personal injury or death may occur. Should Buyer purchase or use Motorola products for any such unintended or unauthorized application, Buyer shall indemnify and hold Motorola and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that Motorola was negligent regarding the design or manufacture of the part. Motorola and  are registered trademarks of Motorola, Inc. Motorola, Inc. is an Equal Opportunity/Affirmative Action Employer.

Literature Distribution Centers:

USA: Motorola Literature Distribution; P.O. Box 20912; Phoenix, Arizona 85036.

EUROPE: Motorola Ltd.; European Literature Centre; 88 Tanners Drive, Blakelands, Milton Keynes, MK14 5BP, England.

JAPAN: Nippon Motorola Ltd.; 4-32-1, Nishi-Gotanda, Shinagawa-ku, Tokyo 141, Japan.

ASIA PACIFIC: Motorola Semiconductors H.K. Ltd.; Silicon Harbour Center, No. 2 Dai King Street, Tai Po Industrial Estate, Tai Po, N.T., Hong Kong.

