

# $\mu$ PD1723GF-013, $\mu$ PD1723GF-213

## PLL FREQUENCY SYNTHESIZER AND CONTROLLER FOR FM/MW/LF TUNER (CAR AUDIO)

The  $\mu$ PD1723GF-013 and  $\mu$ PD1723GF-213 are CMOS LSI developed for worldwide PLL frequency synthesizer FM/MW/LW tuner use.

Their package is a 64-pin QFP. On-chip PLL frequency synthesizer, controller, 200 MHz prescaler, LCD driver, and IF counter allow the construction of a compact FM/MW/LW tuner with a high-performance clock for high-end car stereo and home stereo sets.

### FEATURES

- Worldwide FM/MW banks and European LW band can be received.
- Abundant tuning functions, including manual tuning, autotuning (seek, scan), and preset memory scan
- Six buttons, independent preset memories for 18 FM stations (FM1, FM2, FM3; 6 stations each), 12 MW stations (MW1, MW2; 6 stations each), 6 LW stations, and VF band
- FM: 3, MW: 2, LW: 1, VF: 1 last channel memories
- VF broadcast station (traffic information) autotuning (SK signal search) and DK standby function
- MONO (MONORAL) and LOC (LOCAL/DX) control output and display
- "ST" (STEREO) display
- MTL (METAL), NR<sub>1</sub> (NOISE REDUCTION), NR<sub>2</sub>, and AMS (AUTO MUSIC SEARCH) control output and display
- Auto preset memory function
- "CD" (Compact Disk) display
- LOUD (LOUDNESS) control output and display
- 12 hour and 24 hour clock display function (no clock display also possible)
- Single 5 V  $\pm$ 10 % power supply
- On-chip prescaler (200 MHz max.  $V_{in} = 0.3 V_{P-P}$ ), IF counter, LCD driver (1/2 duty, 1/2 bias drive, frame frequency (100 Hz))

### ORDERING INFORMATION

| Order Code             | Package                    | Quality Grade |
|------------------------|----------------------------|---------------|
| $\mu$ PD1723GF-011-3BE | 64-pin plastic QFP (14x20) | Standard      |
| $\mu$ PD1723GF-211-3KE | 64-pin plastic QFP (14x20) | Standard      |

Please refer to "Quality grade on NEC Semiconductor Devices" (Document number IEI-1209) published by NEC Corporation to know the specification of quality grade on the devices and its recommended applications.

**FUNCTIONS**

**Receiving frequency, channel spacing, reference frequency, intermediate frequency**

| Area                      | Item<br>Band | Receiving Frequency   | Channel Space | Reference Frequency | Intermediate Frequency |
|---------------------------|--------------|-----------------------|---------------|---------------------|------------------------|
| Europe 1                  | FM           | 87.500 to 108.00 MHz  | 50 kHz        | 25 kHz              | 10.7 MHz               |
|                           | MW           | 522 to 1620 kHz       | 9 kHz         | 9 kHz               | 450 kHz                |
|                           | LW           | 144 to 290 kHz        | 1 kHz         | 1 kHz               | 450 kHz                |
| Europe 2                  | FM           | 87.500 to 108.000 MHz | 50 kHz        | 25 kHz              | 10.7 MHz               |
|                           | MW           | 522 to 1620 kHz       | 9 kHz         | 9 kHz               | 459 kHz                |
|                           | LW           | 144 to 290 kHz        | 1 kHz         | 1 kHz               | 459 kHz                |
| United States 1           | FM           | 87.5 to 108.0 MHz     | 100 kHz       | 25 kHz              | 10.7 MHz               |
|                           | MW           | 530 to 1620 kHz       | 10 kHz        | 10 kHz              | 450 kHz                |
| United States 2           | FM           | 87.5 to 107.9 MHz     | 200 kHz       | 25 kHz              | 10.7 MHz               |
|                           | MW           | 630 to 1620 kHz       | 10 kHz        | 10 kHz              | 450 kHz                |
| United States 3           | FM           | 87.5 to 107.9 MHz     | 200 kHz       | 25 kHz              | 10.7 MHz               |
|                           | MW           | 530 to 1710 kHz       | 10 kHz        | 10 kHz              | 450 kHz                |
| Australia and Middle East | FM           | 87.5 to 108.0 MHz     | 100 kHz       | 25 kHz              | 10.7 MHz               |
|                           | MW           | 531 to 1602 kHz       | 9 kHz         | 9 kHz               | 450 kHz                |
| Japan                     | FM           | 76.0 to 90.0 MHz      | 100 kHz       | 25 kHz              | -10.7 MHz              |
|                           | MW           | 522 to 1629 kHz       | 9 kHz         | 9 kHz               | 450 kHz                |
| Central and South America | FM           | 87.5 to 108.0 MHz     | 100 kHz       | 25 kHz              | 10.7 MHz               |
|                           | MW           | 520 to 1620 kHz       | 5 kHz         | 5 kHz               | 450 kHz                |

**RADIO FUNCTIONS**

- (1) Manual tuning
  - Manual up } .....
  - Manual down } .....
 Step and fast
- (2) Autotuning
  - Seek up } .....
  - Seek down } .....
  - Scan up } .....
  - Scan down } .....
 When a broadcast station is detected that frequency is held.  
 Broadcast station is received every 5 seconds.
- (3) Preset memory scan .....Contents of independent FM, MW and LW preset memories are received every 5 seconds.
- (4) VF autotuning
  - SK seek up } .....
  - SK seek down } .....
  - SK scan up } .....
  - SK scan down } .....
 When an SK signal is detected, that frequency is held.  
 Broadcast station with SK signal is received every 5 seconds.

- (5) Preset memory
  - FM band .....FM1: 6 stations, FM2: 6 stations, FM3: 6 stations
  - MW band .....MW1: 6 stations, MW2: 6 stations
  - LW band.....6 stations
  - VF band .....6 stations
  - When the LW band is used, MW2 cannot be used.
- (6) Last preset memory .....FM1, FM2, FM3, MW1, MW2, LW and VF; 1 station each
- (7) LOC (LOCAL) control output and display (Auto Local Function selection possible)
- (8) FM MONO (MONORAL) control output and display (VF band is same as FM)
- (9) "ST" (STEREO) display .....Effective at FM and VF
- (10) Auto preset memory
- (11) DK standby and SK alarm functions

#### **TAPE FUNCTIONS**

- (1) Tape direction display .....Flashes at 2 MHz at fast forward.
- (2) AMS (AUTO MUSIC SEARCH) control output and display
- (3) MTL (METAL) control output and display
- (4) NR<sub>1</sub> (NOISE REDUCTION) and NR<sub>2</sub> control output and display


#### **CLOCK FUNCTIONS**

- (1) 12 hour clock display (with "AM" and "PM" display) or 24 hour clock display selectable
- (2) Colon (":") flashing (1 Hz) selectable
- (3) In non-clock mode, low consumption current (10  $\mu$ A max.) backup possible

#### **OTHERS**

- (1) LOUD (LOUDNESS) control output and display .....Common in radio, tape, and CD modes
- (2) Key acknowledge (BEEP) output (2.25 kHz, 40 ms) .....Output by effective momentary key
- (3) Display switching and priority display functions
- (4) " " (compact disk) display
- (4) " " (compact disk) display

PIN CONFIGURATION (Top View)

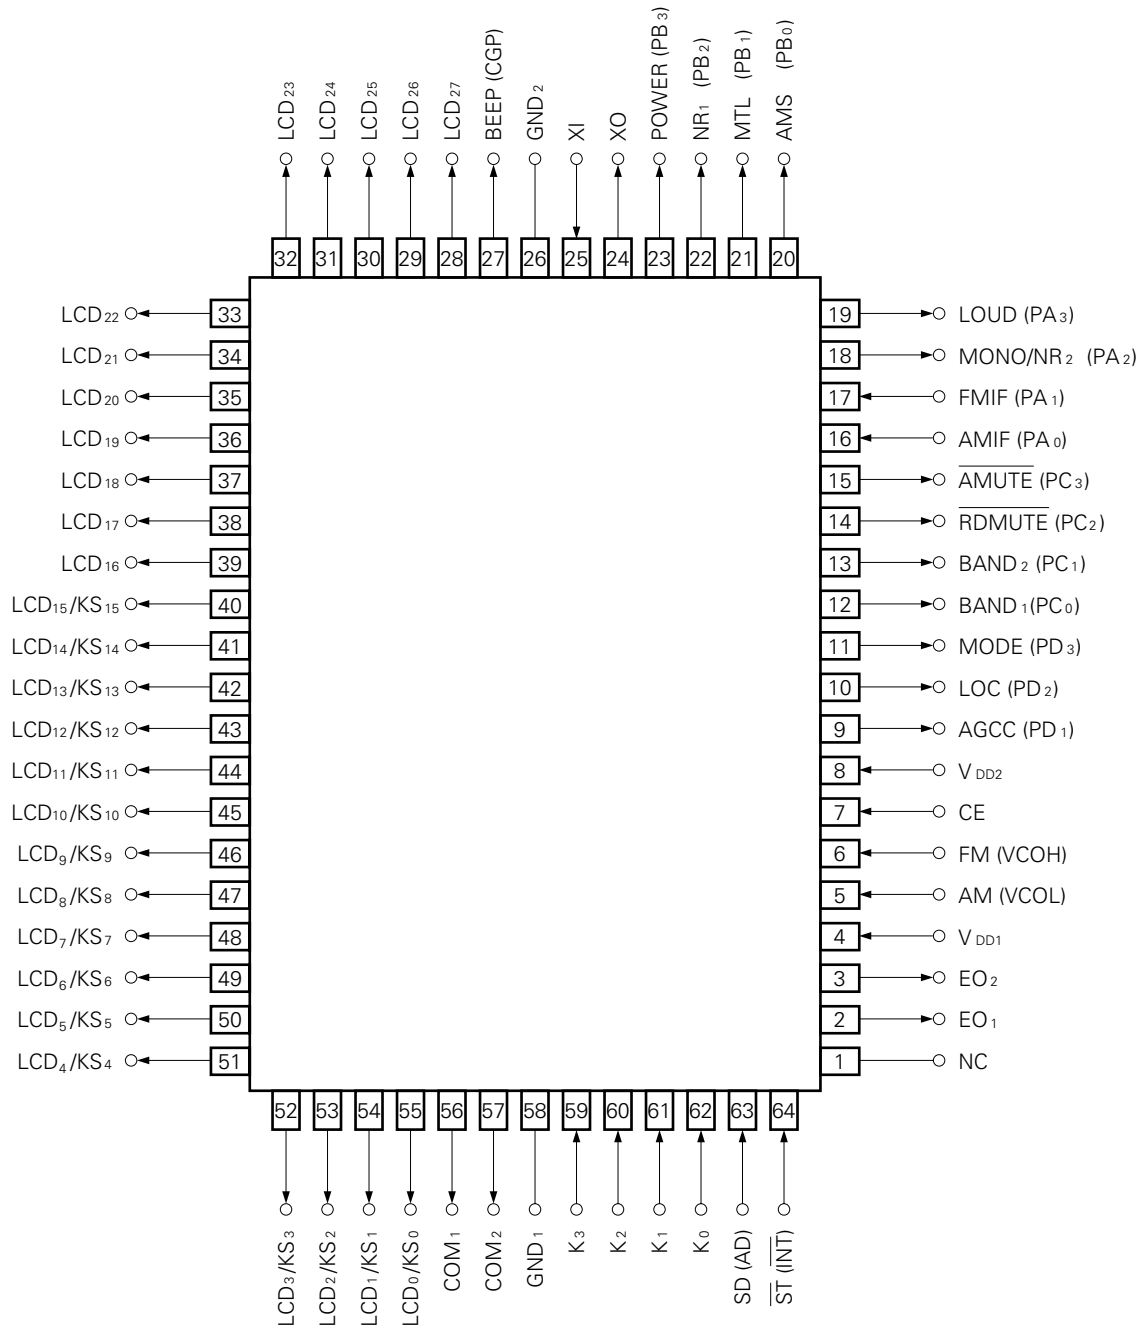

**PIN DESCRIPTIONS**

| PIN No. | SYMBOL                               | PIN NAME                   | DESCRIPTION  | OUTPUT TYPE  |
|---------|--------------------------------------|----------------------------|--|--------------|
| 1       | NC                                   | No connection              | This pin is not connected to the internal chip. Therefore, leave it open or connect it to GND, V <sub>DD</sub> , etc.  | —            |
| 2<br>3  | EO <sub>1</sub><br>EO <sub>2</sub>   | Error out                  | <p>PLL (Phase Locked Loop) error output pins. When the frequency obtained by dividing the local oscillation frequency (VCO output) is higher than the reference frequency, High level is output from these pins. When it is lower than the reference frequency, Low level is output from these pins. When the two frequencies are the same, these pins are floated.</p> <p>This output is input to an external LPF (Low Pass Filter) and is applied to a varactor diode through the LPF. EO<sub>1</sub> and EO<sub>2</sub> output the same waveform so that the pin to be used can be freely selected. When the radio is OFF, these pins are floated.</p>                      | CMOS 3-state |
| 4<br>8  | V <sub>DD1</sub><br>V <sub>DD2</sub> | Power supply input         | <p>Device power supply input pin.</p> <p>This pin supplies 5 V ±10 % power voltage during device operation (radio, tape, and CD modes). When the diode matrix NOCLK switch is 1 (shorted by diode), when the CE pin (pin 7) is made Low level, this pin drops to 2.5 V and data hold is enabled. When a voltage of 0 → 4.5 V is supplied to this pin, the data is initialized. Supply 0 → 4.5 V to this pin within 500 ms.</p> <p>Always connect pins 4 and 8 to the same potential. V<sub>DD1</sub> (pin 4) is the analog system (PLL, A/D converter, INT, CE) power supply and V<sub>DD2</sub> (pin 8) is the digital system (CPU, LCD driver, IF counter) power supply.</p> | —            |
| 5       | AM                                   | AM local oscillation input | <p>The AM (MW and LW band) local oscillation output (VCO output) is input to this pin. When the radio is turned on and the MW or LW band is received, this pin becomes active. Otherwise, it is pulled down internally.</p> <p>The input amplitude is 0.3 V<sub>P-P</sub> MIN.</p> <p>Since there is an on-chip AC amplifier, block the DC component with a capacitor.</p>   | Input        |

| PIN No. | SYMBOL | PIN NAME                   | DESCRIPTION  | OUTPUT TYPE   |
|---------|--------|----------------------------|--|---------------|
| 6       | FM     | FM local oscillation input | <p>The FM local oscillation output (VCO output) is input to this pin.</p> <p>When the radio is turned on and the FM band is received, this pin becomes active. Otherwise, it is pulled down internally.</p> <p>The input amplitude is 0.3 V<sub>P-P</sub> MIN.</p> <p>Since there is an on-chip AC amplifier, block the DC component of the input signal with a capacitor.</p>   | Input         |
| 7       | CE     | Chip enable                | <p>Device select signal input pin.</p> <p>When the device is operated normally (radio, tape, CD, clock display, etc.), High level is input and when the device is not used, Low level is input.</p> <p>However, High and Low levels of 134 μs or less are not accepted.</p> <p>When this pin is Low level, the radio, tape, CD, and display are turned off and the device enters the data hold state.</p> <p>At this time, data hold at low consumption current (400 nA or less) is possible by setting the NOCLK switch of the diode matrix to be described later to 1 (shorted by diode, no-clock mode).</p> | Input         |
| 9       | AGCC   | AGC cut output             | <p>Radio mode AGC (AUTOMATIC GAIN CONTROL) cut signal output pin.</p> <p>During autotuning, the High level shown below is output.</p> <p>① Key ON Chattering Wait<br/>② Premuting<br/>③ Postmuting</p>   | CMOS pushpull |

| PIN No.   | SYMBOL | PIN NAME           | DESCRIPTION  | OUTPUT TYPE   |      |            |   |                                      |   |              |   |             |   |           |   |   |   |                      |   |               |
|---|--------|--------------------|--|---------------|------|------------|---|--------------------------------------|---|--------------|---|-------------|---|-----------|---|---|---|----------------------|---|---------------|
| 10  | LOC    | Local output       | <p>Radio mode LOCAL signal output pin.</p> <p>This pin is valid when the initialize diode AUTOLOC switch is 0.</p> <p>Each time the <span style="border: 1px solid black; padding: 2px;">LOC</span> key is pressed, the LOCAL state is inverted. In the LOCAL state, the LCD panel "LOC" display lights.</p> <p>When autotuning (seek up/down, scan up/down, auto memory) is performed when the "LOC" display is ON, High level is output from this pin. The LOCAL state is common to the FM, VF, MW, and LW bands.</p> <p>When the power is turned on, this pin goes low.</p>   | CMOS pushpull |      |            |   |                                      |   |              |   |             |   |           |   |   |   |                      |   |               |
| 11  | MODE   | Mode signal output | <p>Mode switching signal output pin.</p> <p>Its output in each mode is shown below.</p> <table border="1" data-bbox="716 814 1328 1220"> <thead> <tr> <th>Mode</th> <th>MODE</th> </tr> </thead> <tbody> <tr> <td>• CW = Low</td> <td>0</td> </tr> <tr> <td>• CE = High; radio, tape, and CD OFF</td> <td>0</td> </tr> <tr> <td>• Radio mode</td> <td>1</td> </tr> <tr> <td>• Tape mode</td> <td>0</td> </tr> <tr> <td>• CD mode</td> <td>0</td> </tr> <tr> <td>• Tape DK standby<br/>• CD DK standby<br/>• DK ON</td> <td>1</td> </tr> <tr> <td>• Radio monitor mode</td> <td>1</td> </tr> </tbody> </table> <p style="text-align: right;">0: Low level, 1: High level</p> <p>That is, when the PLL is operated, High level is output from this pin. Therefore, use it to turn the tuner power on and off, etc.</p> | Mode          | MODE | • CW = Low | 0 | • CE = High; radio, tape, and CD OFF | 0 | • Radio mode | 1 | • Tape mode | 0 | • CD mode | 0 | • Tape DK standby<br>• CD DK standby<br>• DK ON | 1 | • Radio monitor mode | 1 | CMOS pushpull |
| Mode  | MODE   |                    |  |               |      |            |   |                                      |   |              |   |             |   |           |   |   |   |                      |   |               |
| • CW = Low                                      | 0      |                    |  |               |      |            |   |                                      |   |              |   |             |   |           |   |   |   |                      |   |               |
| • CE = High; radio, tape, and CD OFF            | 0      |                    |  |               |      |            |   |                                      |   |              |   |             |   |           |   |   |   |                      |   |               |
| • Radio mode                                    | 1      |                    |  |               |      |            |   |                                      |   |              |   |             |   |           |   |   |   |                      |   |               |
| • Tape mode                                     | 0      |                    |  |               |      |            |   |                                      |   |              |   |             |   |           |   |   |   |                      |   |               |
| • CD mode                                       | 0      |                    |  |               |      |            |   |                                      |   |              |   |             |   |           |   |   |   |                      |   |               |
| • Tape DK standby<br>• CD DK standby<br>• DK ON | 1      |                    |  |               |      |            |   |                                      |   |              |   |             |   |           |   |   |   |                      |   |               |
| • Radio monitor mode                            | 1      |                    |  |               |      |            |   |                                      |   |              |   |             |   |           |   |   |   |                      |   |               |

| PIN No.    | SYMBOL                                   | PIN NAME                     | DESCRIPTION   | OUTPUT TYPE |                   |                   |    |   |   |    |   |   |    |   |   |    |   |   |            |                   |                         |    |   |   |               |
|------------|--|------------------------------|---|-------------|-------------------|-------------------|----|---|---|----|---|---|----|---|---|----|---|---|------------|-------------------|-------------------------|----|---|---|---------------|
| 12<br>13   | BAND <sub>1</sub> ,<br>BAND <sub>2</sub> | Band switching signal output | <p>Radio mode band switching signal output pin. Its operation is described below.</p> <ul style="list-style-type: none"> <li>Radio mode<br/>When the receiving band is switched by band switching key, the following is output on each band:</li> <li>DK standby mode</li> </ul> <table border="1" data-bbox="646 478 1256 730"> <thead> <tr> <th>BAND \ Pin</th> <th>BAND<sub>1</sub></th> <th>BAND<sub>2</sub></th> </tr> </thead> <tbody> <tr> <td>MW</td> <td>0</td> <td>0</td> </tr> <tr> <td>LW</td> <td>0</td> <td>1</td> </tr> <tr> <td>FM</td> <td>1</td> <td>0</td> </tr> <tr> <td>VF</td> <td>1</td> <td>1</td> </tr> </tbody> </table> <p>(0: Low level, 1: High level)</p> <ul style="list-style-type: none"> <li>DK standby mode</li> <li>DK ON mode</li> </ul> <table border="1" data-bbox="646 898 1256 1020"> <thead> <tr> <th>BAND \ Pin</th> <th>BAND<sub>1</sub></th> <th>BAND<sub>2</sub> /OPT.</th> </tr> </thead> <tbody> <tr> <td>VF</td> <td>1</td> <td>1</td> </tr> </tbody> </table> <ul style="list-style-type: none"> <li>Radio monitor mode<br/>Same as radio mode.</li> <li>Tape mode</li> <li>CD mode<br/>Low level output</li> </ul> | BAND \ Pin  | BAND <sub>1</sub> | BAND <sub>2</sub> | MW | 0 | 0 | LW | 0 | 1 | FM | 1 | 0 | VF | 1 | 1 | BAND \ Pin | BAND <sub>1</sub> | BAND <sub>2</sub> /OPT. | VF | 1 | 1 | CMOS pushpull |
| BAND \ Pin | BAND <sub>1</sub>                        | BAND <sub>2</sub>            |   |             |                   |                   |    |   |   |    |   |   |    |   |   |    |   |   |            |                   |                         |    |   |   |               |
| MW         | 0  | 0                            |   |             |                   |                   |    |   |   |    |   |   |    |   |   |    |   |   |            |                   |                         |    |   |   |               |
| LW         | 0  | 1                            |   |             |                   |                   |    |   |   |    |   |   |    |   |   |    |   |   |            |                   |                         |    |   |   |               |
| FM         | 1  | 0                            |   |             |                   |                   |    |   |   |    |   |   |    |   |   |    |   |   |            |                   |                         |    |   |   |               |
| VF         | 1  | 1                            |   |             |                   |                   |    |   |   |    |   |   |    |   |   |    |   |   |            |                   |                         |    |   |   |               |
| BAND \ Pin | BAND <sub>1</sub>                        | BAND <sub>2</sub> /OPT.      |   |             |                   |                   |    |   |   |    |   |   |    |   |   |    |   |   |            |                   |                         |    |   |   |               |
| VF         | 1  | 1                            |   |             |                   |                   |    |   |   |    |   |   |    |   |   |    |   |   |            |                   |                         |    |   |   |               |



| PIN No. | SYMBOL                     | PIN NAME          | DESCRIPTION   | Output TYPE   |
|---------|----------------------------|-------------------|---|---------------|
| 14      | $\overline{\text{RDMUTE}}$ | Radio mute output | <p>Radio mute signal output pin.<br/>This pin operates as follows:</p> <ul style="list-style-type: none"> <li>• Radio mode<br/>Low level is output at radio ON/OFF, band switching, and receiving frequency switching.</li> <li>• Tape and CD modes<br/>High level or Low level can be selected by MUTESEL switch of the diode matrix to be described later. However, when using the DK standby or radio monitor function, set the MUTESEL switch to 0 and select low level output.</li> </ul> <p>For more information, see 4 "Mute Output Timing Chart".</p> | CMOS pushpull |
| 15      | $\overline{\text{AMUTE}}$  | Audio mute output | <p>Tape and CD mute signal output pin at DK • ON and radio monitor ON.</p> <p>In the radio mode, Low level is output and in the tape and CD modes, High level is output. When DK is turned on during DK standby and in the radio monitor mode, low level is output.</p> <p>For more information, see 4 "Mute Output Timing Chart".</p>  | CMOS pushpull |

| PIN No.          | SYMBOL    | PIN NAME                        | DESCRIPTION  | OUTPUT TYPE      |           |                               |                               |           |    |                   |                     |       |        |          |          |    |        |        |    |        |          |        |    |        |          |       |
|------------------|-----------|---------------------------------|--|------------------|-----------|-------------------------------|-------------------------------|-----------|----|-------------------|---------------------|-------|--------|----------|----------|----|--------|--------|----|--------|----------|--------|----|--------|----------|-------|
| 16               | AMIF      | AM intermediate frequency input | <p>AM (MW and LW bands) intermediate frequency (IF) input pin.</p> <p>The input amplitude is 0.1 V<sub>P-P</sub>. Since there is an on-chip AC amplifier, block the DC component of the input signal with a capacitor. This pin is valid when the initialize diode matrix DISAMIF switch is 0.</p> <p>This pin is used for detecting the presence of a broadcast station during MW and LW band autotuning. The input frequency ranges and input conditions for determining the presence of a broadcast station are shown below.</p> <table border="1" data-bbox="646 636 1256 926"> <thead> <tr> <th>Area \ Item Band</th> <th>Item Band</th> <th>Input Frequency Range ① [kHz]</th> <th>Input Frequency Range ② [kHz]</th> </tr> </thead> <tbody> <tr> <td rowspan="2">Europe 1</td> <td>MW</td> <td>450 ±5</td> <td>450 ±2</td> </tr> <tr> <td>LW</td> <td>450 ±5</td> <td>450 ±0.5</td> </tr> <tr> <td rowspan="2">Europe 2</td> <td>MW</td> <td>459 ±5</td> <td>459 ±2</td> </tr> <tr> <td>LW</td> <td>459 ±5</td> <td>459 ±0.5</td> </tr> <tr> <td>Others</td> <td>MW</td> <td>450 ±5</td> <td>450 ±0.5</td> </tr> </tbody> </table> <p>Input frequency range ① is the frequency that must be input within 20 ms after the PLL is locked.</p> <p>Input frequency range ② is the frequency that must be input within 40 ms after ① was input.</p> <p>When both input frequency ranges ① and ② are satisfied, a broadcast station is judged to be present and autotuning stops.</p> | Area \ Item Band | Item Band | Input Frequency Range ① [kHz] | Input Frequency Range ② [kHz] | Europe 1  | MW | 450 ±5            | 450 ±2              | LW    | 450 ±5 | 450 ±0.5 | Europe 2 | MW | 459 ±5 | 459 ±2 | LW | 459 ±5 | 459 ±0.5 | Others | MW | 450 ±5 | 450 ±0.5 | Input |
| Area \ Item Band | Item Band | Input Frequency Range ① [kHz]   | Input Frequency Range ② [kHz]  |                  |           |                               |                               |           |    |                   |                     |       |        |          |          |    |        |        |    |        |          |        |    |        |          |       |
| Europe 1         | MW        | 450 ±5                          | 450 ±2   |                  |           |                               |                               |           |    |                   |                     |       |        |          |          |    |        |        |    |        |          |        |    |        |          |       |
|                  | LW        | 450 ±5                          | 450 ±0.5   |                  |           |                               |                               |           |    |                   |                     |       |        |          |          |    |        |        |    |        |          |        |    |        |          |       |
| Europe 2         | MW        | 459 ±5                          | 459 ±2   |                  |           |                               |                               |           |    |                   |                     |       |        |          |          |    |        |        |    |        |          |        |    |        |          |       |
|                  | LW        | 459 ±5                          | 459 ±0.5   |                  |           |                               |                               |           |    |                   |                     |       |        |          |          |    |        |        |    |        |          |        |    |        |          |       |
| Others           | MW        | 450 ±5                          | 450 ±0.5   |                  |           |                               |                               |           |    |                   |                     |       |        |          |          |    |        |        |    |        |          |        |    |        |          |       |
| 17               | FMIF      | FM intermediate frequency input | <p>FM band intermediate frequency (IF) input.</p> <p>The input amplitude is 0.1 V<sub>P-P</sub>. Since there is an AC amplifier on the chip, block the DC component of the input signal with a capacitor. This pin is valid when the initialize diode matrix switch ENFMIF is 1.</p> <p>This pin is used for detecting the presence of a broadcast station during FM band autotuning. The input frequency ranges and input conditions for determining the presence of a broadcast station are shown below.</p> <table border="1" data-bbox="646 1572 1256 1696"> <thead> <tr> <th>Area \ Item</th> <th>Item</th> <th>Input Frequency Range ①</th> <th>Input Frequency Range ②</th> </tr> </thead> <tbody> <tr> <td>All areas</td> <td></td> <td>10.7 MHz ± 50 kHz</td> <td>10.7 MHz ± 12.5 kHz</td> </tr> </tbody> </table> <p>Input frequency range ① is the frequency that must be input within 20 ms after the PLL is locked.</p> <p>Input frequency range ② is the frequency that must be input within 20 ms after ① was input.</p> <p>When both input frequency ranges ① and ② are satisfied, a broadcast station is judged to be present and autotuning stops.</p>   | Area \ Item      | Item      | Input Frequency Range ①       | Input Frequency Range ②       | All areas |    | 10.7 MHz ± 50 kHz | 10.7 MHz ± 12.5 kHz | Input |        |          |          |    |        |        |    |        |          |        |    |        |          |       |
| Area \ Item      | Item      | Input Frequency Range ①         | Input Frequency Range ②  |                  |           |                               |                               |           |    |                   |                     |       |        |          |          |    |        |        |    |        |          |        |    |        |          |       |
| All areas        |           | 10.7 MHz ± 50 kHz               | 10.7 MHz ± 12.5 kHz  |                  |           |                               |                               |           |    |                   |                     |       |        |          |          |    |        |        |    |        |          |        |    |        |          |       |

| PIN No. | SYMBOL               | PIN NAME                            | DESCRIPTION  | OUTPUT TYPE   |
|---------|----------------------|-------------------------------------|--|---------------|
| 18      | MONO/NR <sub>2</sub> | Monaural and noise reduction output | <p>In the radio mode, this pin operates as the MONORAL signal output pin and in the tape mode, this pin operates as the NOISE REDUCTION signal output pin.</p> <ul style="list-style-type: none"> <li>• Radio mode<br/>Each time the <b>MONO</b> key is pressed on the FM and VF bands, the output is inverted. When the device is set to the MONORAL state by <b>MONO</b> key, the LCD panel "MONO" display lights and high level is output from this pin.<br/>On the MW and LW bands, this pin becomes low. When the power is turned on, this pin becomes low.</li> <li>• Tape mode<br/>This pin is valid when the diode matrix ENNR2 switch to be described later is 1 (shorted by diode). When NOISE REDUCTION NR<sub>2</sub> is selected by pressing the <b>NR</b> key or NOISE REDUCTION function key (selected by diode matrix), high level is output. At this time, the LCD panel "NR<sub>2</sub>" display lights.<br/>In the radio monitor and DK ON modes, the "MONO" display is inverted and the MONO/NR<sub>2</sub> pin is made MONO output by pressing the <b>MONO</b> key. When the power is turned on, this pin becomes low.</li> </ul> | CMOS pushpull |
| 19      | LOUD                 | LOUD output                         | <p>LOUDNESS signal output pin.<br/>In the radio, tape, and CD modes, the output is inverted each time the <b>LOUD</b> key is pressed. When the LOUDNESS state is selected by <b>LOUD</b> key, the LCD panel "LOUD" display lights and high level is output from this pin.<br/>When the power is turned on, this pin becomes low.</p>   | CMOS pushpull |
| 20      | AMS                  | AMD signal output                   | <p>Tape mode AMS (AUTO MUSIC SEARCH) control signal output pin.<br/>Its output is inverted each timer the <b>AMS</b> key is pressed.<br/>High level is output while the LCD panel "AMS" display is lit.</p>  | CMOS pushpull |

| PIN No.  | SYMBOL                               | PIN NAME               | DESCRIPTION   | OUTPUT TYPE             |
|----------|--------------------------------------|------------------------|---|-------------------------|
| 21       | MTL                                  | Metal output           | <p>Tape mode metal signal output pin.</p> <p>Its output is inverted each time the <b>MTL</b> key and METAL function key (selected by diode matrix) is pressed. When the METAL state is selected with these keys, the LCD panel “MTL” display lights and high level is output from this pin.</p> <p>When the power is turned on, this pin becomes low.</p> | CMOS pushpull           |
| 22       | NR <sub>1</sub>                      | Noise reduction output | <p>Tape mode noise reduction (NR) signal output pin.</p> <p>When NR<sub>1</sub> is selected by the <b>NR</b> key or NOISE REDUCTION function key (selected by diode matrix), the LCD panel “NR<sub>1</sub>” display lights and high level is output from this pin.</p>  | CMOS pushpull           |
| 23       | POWER                                | Power output           | <p>When the CE pin is high level, the output of this pin is inverted each time the <b>POWER</b> key is pressed.</p> <p>When the power is turned on, low level is output.</p> <p>This pin can be used to turn the set power on and off, etc.</p> <p>See <b>6 “Application Circuits”</b>.</p>   | CMOS pushpull           |
| 24<br>25 | XO<br>XI                             | Crystal oscillator     | <p>Crystal oscillator connection pin. It connects to a 4.5 MHz crystal oscillator.</p> <p>When the clock function is used, the accuracy of the clock is effected by the oscillation frequency accuracy only.</p> <p>Adjust the oscillation frequency while observing the LCD oscillation waveform and PLL local oscillation frequency.</p>                | CMOS (XO)<br>Input (XI) |
| 26<br>58 | GND <sub>2</sub><br>GND <sub>1</sub> | Ground                 | <p>Device ground pins.</p> <p><b>Remarks</b> Always connect pins 26 and 58 to the same potential.</p> <p>GND<sub>1</sub> (pin 58) is analog system ground and GND<sub>2</sub> is digital system ground.</p>   | —                       |

| PIN No.              | SYMBOL   | PIN NAME                          | DESCRIPTION  | OUTPUT TYPE   |
|----------------------|--|-----------------------------------|--|---------------|
| 27                   | BEEP   | Beep output                       | Beep output pin when momentary key pressed. A 2.25 kHz and 50 % duty square wave is output for approx. 40 ms. This time is equal to the premuting time. When a momentary key is pressed and the state of the LCD panel display or output port is changed (valid key) and at the end of 5 seconds hold during preset memory scan and scan operations, a beep is output. To disable the beep, float (leave open) this pin. The beep output is also used at SK alarm at DK standby.   | CMOS pushpull |
| 28 to 39<br>40 to 55 | LCD <sub>27</sub> to LCD <sub>16</sub><br>LCD <sub>15</sub> /KS <sub>15</sub> to LCD <sub>0</sub> /KS <sub>0</sub> | LCD segment and key source output | LCD panel segment signal output (pins 28 to 55) and key matrix key source signal output (pins 40 to 55) pins. 56-dot display is performed at the LCD panel by matrix with the COM <sub>1</sub> pin (pin 56) and COM <sub>2</sub> pin (pin 57). Since LCD <sub>15</sub> /KS <sub>15</sub> (pin 40) to LCD <sub>0</sub> /KS <sub>0</sub> (pin 55) share the key source signal and LCD segment signal, to use them as key source signals, a reverse current prevention diode is necessary. For the connection method, see 1.3 "Key Matrix Connection" and 6 "Application Circuits". | CMOS pushpull |
| 56<br>57             | COM <sub>1</sub><br>COM <sub>2</sub>   | LCD common signal output          | Common signal output to LCD panel. 56-dot display is performed at the LCD panel by matrix with LCD <sub>27</sub> (pin 28) to LCD <sub>0</sub> /KS <sub>0</sub> (pin 55).   | CMOS pushpull |
| 59 to 62             | K <sub>3</sub> to K <sub>0</sub>   | Key return signal input           | Key matrix key return signal input pin. Since the key source signal output is shared with the LCD segment signal, do not connect a pull-down resistor to this pin.   | Input         |

| PIN No.  | SYMBOL                 | PIN NAME                                     | DESCRIPTION   | OUTPUT TYPE |            |            |                       |    |       |  |       |    |  |       |    |       |  |       |    |    |  |       |      |            |            |                       |          |                  |  |       |                  |  |       |               |  |       |          |                  |  |       |                  |  |       |               |  |       |       |
|----------|------------------------|--|---|-------------|------------|------------|-----------------------|----|-------|--|-------|----|--|-------|----|-------|--|-------|----|----|--|-------|------|------------|------------|-----------------------|----------|------------------|--|-------|------------------|--|-------|---------------|--|-------|----------|------------------|--|-------|------------------|--|-------|---------------|--|-------|-------|
| 63       | SD                     | SD input                                     | <p>Autotuning SD (Station Detector) signal input pin. When the voltage shown below is applied to this pin during the seek operation, a broadcast station is judged to be present.</p> <table border="1" data-bbox="646 405 1256 779"> <thead> <tr> <th data-bbox="646 405 737 478">Band</th> <th data-bbox="737 405 834 478">LOCAL Mode</th> <th data-bbox="834 405 1105 478">SD Voltage</th> <th data-bbox="1105 405 1256 478">V<sub>DD</sub> = 5 V</th> </tr> </thead> <tbody> <tr> <td data-bbox="646 478 737 552" rowspan="2">FM</td> <td data-bbox="737 478 834 552">LOCAL</td> <td data-bbox="834 478 1105 552"><math>\frac{28.5}{64} \times V_{DD} \text{ min.}</math></td> <td data-bbox="1105 478 1256 552">2.227</td> </tr> <tr> <td data-bbox="737 552 834 625">DX</td> <td data-bbox="834 552 1105 625"><math>\frac{12.5}{64} \times V_{DD} \text{ min.}</math></td> <td data-bbox="1105 552 1256 625">0.977</td> </tr> <tr> <td data-bbox="646 625 737 699">MW</td> <td data-bbox="737 625 834 699">LOCAL</td> <td data-bbox="834 625 1105 699"><math>\frac{15.5}{64} \times V_{DD} \text{ min.}</math></td> <td data-bbox="1105 625 1256 699">1.211</td> </tr> <tr> <td data-bbox="646 699 737 779">LW</td> <td data-bbox="737 699 834 779">DX</td> <td data-bbox="834 699 1105 779"><math>\frac{12.5}{64} \times V_{DD} \text{ min.}</math></td> <td data-bbox="1105 699 1256 779">0.977</td> </tr> </tbody> </table> <p>In the auto preset memory mode, search is performed twice in the LOCAL mode and once in the DX mode. The voltage to determine the presence of a broadcast station at this time is shown below.</p> <table border="1" data-bbox="646 968 1256 1493"> <thead> <tr> <th data-bbox="646 968 737 1041">Band</th> <th data-bbox="737 968 834 1041">LOCAL Mode</th> <th data-bbox="834 968 1105 1041">SD Voltage</th> <th data-bbox="1105 968 1256 1041">V<sub>DD</sub> = 5 V</th> </tr> </thead> <tbody> <tr> <td data-bbox="646 1041 737 1115" rowspan="3">FM<br/>LW</td> <td data-bbox="737 1041 834 1115">LOCAL (1st time)</td> <td data-bbox="834 1041 1105 1115"><math>\frac{44.5}{64} \times V_{DD} \text{ min.}</math></td> <td data-bbox="1105 1041 1256 1115">3.477</td> </tr> <tr> <td data-bbox="737 1115 834 1188">LOCAL (2nd time)</td> <td data-bbox="834 1115 1105 1188"><math>\frac{28.5}{64} \times V_{DD} \text{ min.}</math></td> <td data-bbox="1105 1115 1256 1188">2.227</td> </tr> <tr> <td data-bbox="737 1188 834 1262">DX (3rd time)</td> <td data-bbox="834 1188 1105 1262"><math>\frac{12.5}{64} \times V_{DD} \text{ min.}</math></td> <td data-bbox="1105 1188 1256 1262">0.977</td> </tr> <tr> <td data-bbox="646 1262 737 1335" rowspan="3">MW<br/>LW</td> <td data-bbox="737 1262 834 1335">LOCAL (1st time)</td> <td data-bbox="834 1262 1105 1335"><math>\frac{18.5}{64} \times V_{DD} \text{ min.}</math></td> <td data-bbox="1105 1262 1256 1335">1.445</td> </tr> <tr> <td data-bbox="737 1335 834 1409">LOCAL (2nd time)</td> <td data-bbox="834 1335 1105 1409"><math>\frac{15.5}{64} \times V_{DD} \text{ min.}</math></td> <td data-bbox="1105 1335 1256 1409">1.211</td> </tr> <tr> <td data-bbox="737 1409 834 1493">DX (3rd time)</td> <td data-bbox="834 1409 1105 1493"><math>\frac{12.5}{64} \times V_{DD} \text{ min.}</math></td> <td data-bbox="1105 1409 1256 1493">0.977</td> </tr> </tbody> </table> <p>When using the IF count, a broadcast station is detected when a broadcast station is judged to be present by both IF and SD pins.</p> | Band        | LOCAL Mode | SD Voltage | V <sub>DD</sub> = 5 V | FM | LOCAL | $\frac{28.5}{64} \times V_{DD} \text{ min.}$ | 2.227 | DX | $\frac{12.5}{64} \times V_{DD} \text{ min.}$ | 0.977 | MW | LOCAL | $\frac{15.5}{64} \times V_{DD} \text{ min.}$ | 1.211 | LW | DX | $\frac{12.5}{64} \times V_{DD} \text{ min.}$ | 0.977 | Band | LOCAL Mode | SD Voltage | V <sub>DD</sub> = 5 V | FM<br>LW | LOCAL (1st time) | $\frac{44.5}{64} \times V_{DD} \text{ min.}$ | 3.477 | LOCAL (2nd time) | $\frac{28.5}{64} \times V_{DD} \text{ min.}$ | 2.227 | DX (3rd time) | $\frac{12.5}{64} \times V_{DD} \text{ min.}$ | 0.977 | MW<br>LW | LOCAL (1st time) | $\frac{18.5}{64} \times V_{DD} \text{ min.}$ | 1.445 | LOCAL (2nd time) | $\frac{15.5}{64} \times V_{DD} \text{ min.}$ | 1.211 | DX (3rd time) | $\frac{12.5}{64} \times V_{DD} \text{ min.}$ | 0.977 | Input |
| Band     | LOCAL Mode             | SD Voltage                                   | V <sub>DD</sub> = 5 V   |             |            |            |                       |    |       |  |       |    |  |       |    |       |  |       |    |    |  |       |      |            |            |                       |          |                  |  |       |                  |  |       |               |  |       |          |                  |  |       |                  |  |       |               |  |       |       |
| FM       | LOCAL                  | $\frac{28.5}{64} \times V_{DD} \text{ min.}$ | 2.227   |             |            |            |                       |    |       |  |       |    |  |       |    |       |  |       |    |    |  |       |      |            |            |                       |          |                  |  |       |                  |  |       |               |  |       |          |                  |  |       |                  |  |       |               |  |       |       |
|          | DX                     | $\frac{12.5}{64} \times V_{DD} \text{ min.}$ | 0.977   |             |            |            |                       |    |       |  |       |    |  |       |    |       |  |       |    |    |  |       |      |            |            |                       |          |                  |  |       |                  |  |       |               |  |       |          |                  |  |       |                  |  |       |               |  |       |       |
| MW       | LOCAL                  | $\frac{15.5}{64} \times V_{DD} \text{ min.}$ | 1.211   |             |            |            |                       |    |       |  |       |    |  |       |    |       |  |       |    |    |  |       |      |            |            |                       |          |                  |  |       |                  |  |       |               |  |       |          |                  |  |       |                  |  |       |               |  |       |       |
| LW       | DX                     | $\frac{12.5}{64} \times V_{DD} \text{ min.}$ | 0.977   |             |            |            |                       |    |       |  |       |    |  |       |    |       |  |       |    |    |  |       |      |            |            |                       |          |                  |  |       |                  |  |       |               |  |       |          |                  |  |       |                  |  |       |               |  |       |       |
| Band     | LOCAL Mode             | SD Voltage                                   | V <sub>DD</sub> = 5 V   |             |            |            |                       |    |       |  |       |    |  |       |    |       |  |       |    |    |  |       |      |            |            |                       |          |                  |  |       |                  |  |       |               |  |       |          |                  |  |       |                  |  |       |               |  |       |       |
| FM<br>LW | LOCAL (1st time)       | $\frac{44.5}{64} \times V_{DD} \text{ min.}$ | 3.477   |             |            |            |                       |    |       |  |       |    |  |       |    |       |  |       |    |    |  |       |      |            |            |                       |          |                  |  |       |                  |  |       |               |  |       |          |                  |  |       |                  |  |       |               |  |       |       |
|          | LOCAL (2nd time)       | $\frac{28.5}{64} \times V_{DD} \text{ min.}$ | 2.227   |             |            |            |                       |    |       |  |       |    |  |       |    |       |  |       |    |    |  |       |      |            |            |                       |          |                  |  |       |                  |  |       |               |  |       |          |                  |  |       |                  |  |       |               |  |       |       |
|          | DX (3rd time)          | $\frac{12.5}{64} \times V_{DD} \text{ min.}$ | 0.977   |             |            |            |                       |    |       |  |       |    |  |       |    |       |  |       |    |    |  |       |      |            |            |                       |          |                  |  |       |                  |  |       |               |  |       |          |                  |  |       |                  |  |       |               |  |       |       |
| MW<br>LW | LOCAL (1st time)       | $\frac{18.5}{64} \times V_{DD} \text{ min.}$ | 1.445   |             |            |            |                       |    |       |  |       |    |  |       |    |       |  |       |    |    |  |       |      |            |            |                       |          |                  |  |       |                  |  |       |               |  |       |          |                  |  |       |                  |  |       |               |  |       |       |
|          | LOCAL (2nd time)       | $\frac{15.5}{64} \times V_{DD} \text{ min.}$ | 1.211   |             |            |            |                       |    |       |  |       |    |  |       |    |       |  |       |    |    |  |       |      |            |            |                       |          |                  |  |       |                  |  |       |               |  |       |          |                  |  |       |                  |  |       |               |  |       |       |
|          | DX (3rd time)          | $\frac{12.5}{64} \times V_{DD} \text{ min.}$ | 0.977   |             |            |            |                       |    |       |  |       |    |  |       |    |       |  |       |    |    |  |       |      |            |            |                       |          |                  |  |       |                  |  |       |               |  |       |          |                  |  |       |                  |  |       |               |  |       |       |
| 64       | $\overline{\text{ST}}$ | Stereo signal input                          | <p>Radio mode "ST" (STEREO) display input pin. When low level is input to this pin, the LCD panel "ST" display lights. This pin is valid only on the FM and VF bands.</p> <p>In the MONO mode, "ST" is not displayed.</p>   | Input       |            |            |                       |    |       |  |       |    |  |       |    |       |  |       |    |    |  |       |      |            |            |                       |          |                  |  |       |                  |  |       |               |  |       |          |                  |  |       |                  |  |       |               |  |       |       |

CONTENTS

1. KEY MATRIX CONFIGURATION ..... 16

    1.1 KEY MATRIX LAYOUT ..... 16

    1.2 SWITCH CONNECTION ..... 17

    1.3 KEY MATRIX CONNECTION ..... 17

    1.4 DESCRIPTION OF KEY MATRIX ..... 18

2. MODE TRANSITION ..... 53

    2.1 WHEN INITIALIZE DIODE RDON = 1 (RADIO ON/OFF BY CE PIN) ..... 53

    2.2 RADIO ON/OFF BY RDSET SWITCH ..... 55

    2.3 DESCRIPTION OF EACH MODE ..... 57

    2.4 RADIO ON/OFF BY  POWER  KEY ..... 58

3. DISPLAY ..... 59

    3.1 LCD PANEL ..... 59

    3.2 FONT ..... 59

    3.3 SEGMENT LINES ..... 59

    3.4 COMMON LINES ..... 59

    3.5 LCD ASSIGNMENT TABLE ..... 60

    3.6 DESCRIPTION OF DISPLAYS ..... 61


4. RADIO MUTE OUTPUT TIMING (RDMUTE) ..... 63


    4.1 RADIO MUTE (RDMUTE PIN) OUTPUT TIMING CHARTS ..... 63


    4.2 RADIO MUTE (RDMUTE PIN) AND AUDIO MUTE (AMUTE PIN) OUTPUT TIMING CHARTS ..... 67

5. PIN I/O CIRCUITS ..... 69

6. APPLICATION CIRCUITS ..... 71

    6.1 POWER ON/OFF (NO CLOCK DISPLAY AT POWER OFF) BY ALTERNATE SWITCH (  ) ..... 71

    6.2 POWER ON/OFF (CLOCK DISPLAY AT POWER OFF) BY ALTERNATE SWITCH (  ) ..... 72

    6.3 POWER ON/OFF (CLOCK DISPLAY AT POWER OFF) BY MOMENTARY SWITCH (  ) ..... 73

7. ELECTRICAL SPECIFICATIONS ..... 74


8. PACKAGE DIMENSION ..... 76

9. RECOMMENDED SOLDERING CONDITIONS ..... 78

1. KEY MATRIX CONFIGURATION


1.1 KEY MATRIX LAYOUT

| Output pin \ Input pin                   | K <sub>3</sub> (59) | K <sub>2</sub> (60) | K <sub>1</sub> (61) | K <sub>0</sub> (62) |
|--|---------------------|---------------------|---------------------|---------------------|
| LCD <sub>15</sub> /KS <sub>15</sub> (40) | M1 (TP1)            | M2 (TP2)            | M3 (TP3)            | M4                  |
| LCD <sub>14</sub> /KS <sub>14</sub> (41) | M5                  | M6                  | VF                  | VF                  |
| LCD <sub>13</sub> /KS <sub>13</sub> (42) | SEEK DWN            | SEEK UP             | SCAN DWN            | SCAN UP             |
| LCD <sub>12</sub> /KS <sub>12</sub> (43) | BAND                | —                   | —                   | —                   |
| LCD <sub>11</sub> /KS <sub>11</sub> (44) | ME (DISP)           | MAN DWN             | MAN UP              | SCAN AMEMO          |
| LCD <sub>10</sub> /KS <sub>10</sub> (45) | LOUD                | LOC (TP4)           | MONO (TP5)          | —                   |
| LCD <sub>9</sub> /KS <sub>9</sub> (46)   | AMS                 | NR                  | MTL                 | RDMONI              |
| LCD <sub>8</sub> /KS <sub>8</sub> (47)   | —                   | —                   | —                   | DISP                |
| LCD <sub>7</sub> /KS <sub>7</sub> (48)   | CDSET               | TP SET              | RD SET              | POWER               |
| LCD <sub>6</sub> /KS <sub>6</sub> (49)   | SK                  | DK                  | FF                  | RL                  |
| LCD <sub>5</sub> /KS <sub>5</sub> (50)   | AUTO500             | MUTESEL             | AUTOLOC             | ENNR2               |
| LCD <sub>4</sub> /KS <sub>4</sub> (51)   | KAMS                | KNR                 | KMTL                | ENTPK               |
| LCD <sub>3</sub> /KS <sub>3</sub> (52)   | NOCLK               | CLK DISP            | FLASH               | DISAMEMO            |
| LCD <sub>2</sub> /KS <sub>2</sub> (53)   | ENFMIF              | DISAMIF             | PRIO2               | PRIO1               |
| LCD <sub>1</sub> /KS <sub>1</sub> (54)   | DISFM3              | ENMW2               | DISLW               | M2S                 |
| LCD <sub>0</sub> /KS <sub>0</sub> (55)   | AREA3               | AREA2               | AREA1               | RDON                |

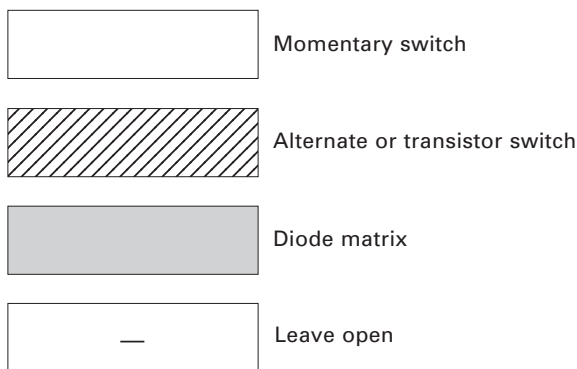




1.2 SWITCH CONNECTION

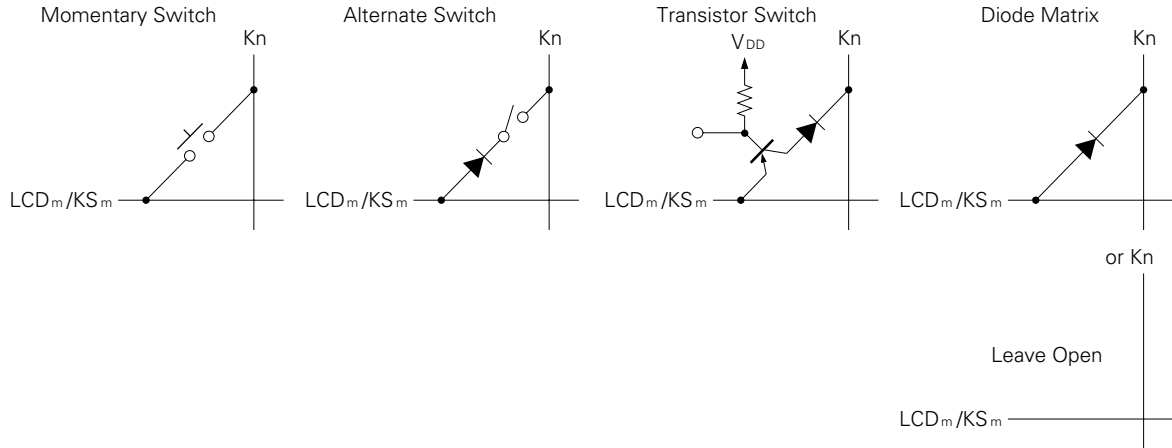

1.3 KEY MATRIX CONNECTION

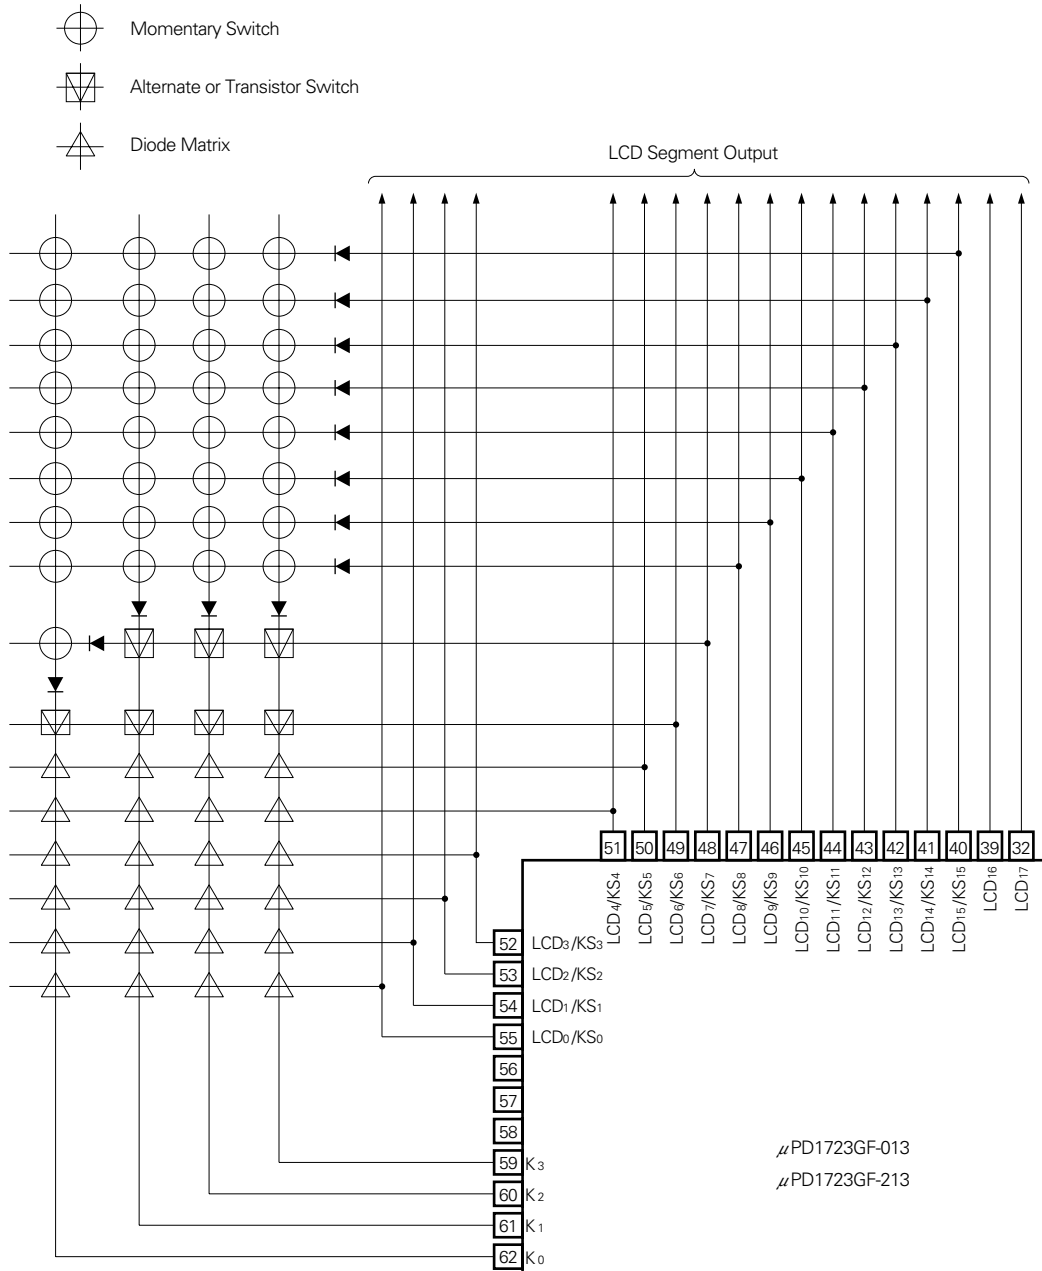

## 1.4 DESCRIPTION OF KEY MATRIX

### 1.4.1 Initialize Diode Matrix

The initialize diode matrix contains the switches shown below. These switches are read only when power is applied to the V<sub>DD</sub> pin for the first time (power ON reset) and when the CE pin changed from low level to high level (CE reset). Otherwise, they are ignored.

- (1) Receiving area setting switches  
AREA1, AREA2, AREA3
- (2) Receiving band setting switches  
DISFM3, ENMW2, DISLW
- (3) Auto memory setting switch  
DISAMEMO
- (4) IF counter setting switches  
ENFMIF, DISAMIF
- (5) Preset memory operation setting switch  
M2S
- (6) Tuning operation setting switch  
AUTO500
- (7) Display priority setting switches  
PRIO1, PRIO2
- (8) Radio ON/OFF method setting switch  
RDON
- (9) Clock function setting switches  
NOCLK, CLKDISP, FLASH
- (10) Tape function setting switches  
ENTPK, KAMS, KNR, KMTL, ENNR2
- (11) Muting output setting switch  
MUTESEL
- (12) Local operation setting switch  
AUTOLOCK

Set these switches by shorting them with a diode on the matrix or leave them open. In the following text, 1 signifies shorting by diode and 0 signifies leaving open.

| Symbol                            | Function  |       |                           |                         |       |                 |                       |   |          |   |                        |   |          |   |                    |   |                 |   |                         |   |                 |   |                   |   |                 |   |               |   |                        |   |                    |                |       |   |   |                    |                           |   |   |                         |   |   |   |               |   |   |   |                    |
|-----------------------------------|---|-------|---------------------------|-------------------------|-------|-----------------|-----------------------|---|----------|---|------------------------|---|----------|---|--------------------|---|-----------------|---|-------------------------|---|-----------------|---|-------------------|---|-----------------|---|---------------|---|------------------------|---|--------------------|----------------|-------|---|---|--------------------|---------------------------|---|---|-------------------------|---|---|---|---------------|---|---|---|--------------------|
| <p>AREA1<br/>AREA2<br/>AREA3</p>  | <p>Receiving area setting switch.<br/>Its settings are shown below.<br/>For the receiving frequencies, etc. at each area, see page 2.</p> <table border="1" data-bbox="591 327 1289 709"> <thead> <tr> <th>AREA3</th> <th>AREA2</th> <th>AREA1</th> <th>MODE</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>0</td> <td>0</td> <td>Europe 1</td> </tr> <tr> <td>0</td> <td>0</td> <td>1</td> <td>Europe 2</td> </tr> <tr> <td>0</td> <td>1</td> <td>0</td> <td>United States 1</td> </tr> <tr> <td>0</td> <td>1</td> <td>1</td> <td>United States 2</td> </tr> <tr> <td>1</td> <td>0</td> <td>0</td> <td>United States 3</td> </tr> <tr> <td>1</td> <td>0</td> <td>1</td> <td>Australia, Middle East</td> </tr> <tr> <td>1</td> <td>1</td> <td>0</td> <td>Japan</td> </tr> <tr> <td>1</td> <td>1</td> <td>1</td> <td>Central and South America</td> </tr> </tbody> </table>   | AREA3 | AREA2                     | AREA1                   | MODE  | 0               | 0                     | 0 | Europe 1 | 0 | 0                      | 1 | Europe 2 | 0 | 1                  | 0 | United States 1 | 0 | 1                       | 1 | United States 2 | 1 | 0                 | 0 | United States 3 | 1 | 0             | 1 | Australia, Middle East | 1 | 1                  | 0              | Japan | 1 | 1 | 1                  | Central and South America |   |   |                         |   |   |   |               |   |   |   |                    |
| AREA3                             | AREA2   | AREA1 | MODE                      |                         |       |                 |                       |   |          |   |                        |   |          |   |                    |   |                 |   |                         |   |                 |   |                   |   |                 |   |               |   |                        |   |                    |                |       |   |   |                    |                           |   |   |                         |   |   |   |               |   |   |   |                    |
| 0                                 | 0   | 0     | Europe 1                  |                         |       |                 |                       |   |          |   |                        |   |          |   |                    |   |                 |   |                         |   |                 |   |                   |   |                 |   |               |   |                        |   |                    |                |       |   |   |                    |                           |   |   |                         |   |   |   |               |   |   |   |                    |
| 0                                 | 0   | 1     | Europe 2                  |                         |       |                 |                       |   |          |   |                        |   |          |   |                    |   |                 |   |                         |   |                 |   |                   |   |                 |   |               |   |                        |   |                    |                |       |   |   |                    |                           |   |   |                         |   |   |   |               |   |   |   |                    |
| 0                                 | 1   | 0     | United States 1           |                         |       |                 |                       |   |          |   |                        |   |          |   |                    |   |                 |   |                         |   |                 |   |                   |   |                 |   |               |   |                        |   |                    |                |       |   |   |                    |                           |   |   |                         |   |   |   |               |   |   |   |                    |
| 0                                 | 1   | 1     | United States 2           |                         |       |                 |                       |   |          |   |                        |   |          |   |                    |   |                 |   |                         |   |                 |   |                   |   |                 |   |               |   |                        |   |                    |                |       |   |   |                    |                           |   |   |                         |   |   |   |               |   |   |   |                    |
| 1                                 | 0   | 0     | United States 3           |                         |       |                 |                       |   |          |   |                        |   |          |   |                    |   |                 |   |                         |   |                 |   |                   |   |                 |   |               |   |                        |   |                    |                |       |   |   |                    |                           |   |   |                         |   |   |   |               |   |   |   |                    |
| 1                                 | 0   | 1     | Australia, Middle East    |                         |       |                 |                       |   |          |   |                        |   |          |   |                    |   |                 |   |                         |   |                 |   |                   |   |                 |   |               |   |                        |   |                    |                |       |   |   |                    |                           |   |   |                         |   |   |   |               |   |   |   |                    |
| 1                                 | 1   | 0     | Japan                     |                         |       |                 |                       |   |          |   |                        |   |          |   |                    |   |                 |   |                         |   |                 |   |                   |   |                 |   |               |   |                        |   |                    |                |       |   |   |                    |                           |   |   |                         |   |   |   |               |   |   |   |                    |
| 1                                 | 1   | 1     | Central and South America |                         |       |                 |                       |   |          |   |                        |   |          |   |                    |   |                 |   |                         |   |                 |   |                   |   |                 |   |               |   |                        |   |                    |                |       |   |   |                    |                           |   |   |                         |   |   |   |               |   |   |   |                    |
| <p>DISFM3<br/>ENMW2<br/>DISLW</p> | <p>Receiving band setting switch.<br/>Its settings are shown below.</p> <ul style="list-style-type: none"> <li>• DISFM3 .....FM3 band is disabled by setting to 1.</li> <li>• ENMW2 .....MW2 band is enabled by setting to 1.</li> <li>• DISLW .....In Europe, the LW band is disabled by setting to 1.</li> </ul> <p>The DISLW switch is invalid in areas outside of Europe.<br/>The receiving bands for each area are set with these switches as shown below.</p> <table border="1" data-bbox="431 1041 1453 1507"> <thead> <tr> <th>AREA</th> <th>DISFM3</th> <th>ENMW2</th> <th>DISLW</th> <th>Receiving Bands</th> </tr> </thead> <tbody> <tr> <td rowspan="6">Europe 1,<br/>Europe 2</td> <td>0</td> <td>0</td> <td>0</td> <td>FM1, FM2, FM3, MW1, LW</td> </tr> <tr> <td>0</td> <td>0</td> <td>1</td> <td>FM1, FM2, FM3, MW1</td> </tr> <tr> <td>0</td> <td>1</td> <td>—</td> <td>FM1, FM2, FM3, MW1, MW2</td> </tr> <tr> <td>1</td> <td>0</td> <td>0</td> <td>FM1, FM2, MW1, LW</td> </tr> <tr> <td>1</td> <td>0</td> <td>1</td> <td>FM1, FM2, MW1</td> </tr> <tr> <td>1</td> <td>1</td> <td>—</td> <td>FM1, FM2, MW1, MW2</td> </tr> <tr> <td rowspan="4">Other<br/>areas</td> <td>0</td> <td>0</td> <td>—</td> <td>FM1, FM2, FM3, MW1</td> </tr> <tr> <td>0</td> <td>1</td> <td>—</td> <td>FM1, FM2, FM3, MW1, MW2</td> </tr> <tr> <td>1</td> <td>0</td> <td>—</td> <td>FM1, FM2, MW1</td> </tr> <tr> <td>1</td> <td>1</td> <td>—</td> <td>FM1, FM2, MW1, MW2</td> </tr> </tbody> </table> <p style="text-align: right;">--: Don't care</p> | AREA  | DISFM3                    | ENMW2                   | DISLW | Receiving Bands | Europe 1,<br>Europe 2 | 0 | 0        | 0 | FM1, FM2, FM3, MW1, LW | 0 | 0        | 1 | FM1, FM2, FM3, MW1 | 0 | 1               | — | FM1, FM2, FM3, MW1, MW2 | 1 | 0               | 0 | FM1, FM2, MW1, LW | 1 | 0               | 1 | FM1, FM2, MW1 | 1 | 1                      | — | FM1, FM2, MW1, MW2 | Other<br>areas | 0     | 0 | — | FM1, FM2, FM3, MW1 | 0                         | 1 | — | FM1, FM2, FM3, MW1, MW2 | 1 | 0 | — | FM1, FM2, MW1 | 1 | 1 | — | FM1, FM2, MW1, MW2 |
| AREA                              | DISFM3  | ENMW2 | DISLW                     | Receiving Bands         |       |                 |                       |   |          |   |                        |   |          |   |                    |   |                 |   |                         |   |                 |   |                   |   |                 |   |               |   |                        |   |                    |                |       |   |   |                    |                           |   |   |                         |   |   |   |               |   |   |   |                    |
| Europe 1,<br>Europe 2             | 0   | 0     | 0                         | FM1, FM2, FM3, MW1, LW  |       |                 |                       |   |          |   |                        |   |          |   |                    |   |                 |   |                         |   |                 |   |                   |   |                 |   |               |   |                        |   |                    |                |       |   |   |                    |                           |   |   |                         |   |   |   |               |   |   |   |                    |
|                                   | 0   | 0     | 1                         | FM1, FM2, FM3, MW1      |       |                 |                       |   |          |   |                        |   |          |   |                    |   |                 |   |                         |   |                 |   |                   |   |                 |   |               |   |                        |   |                    |                |       |   |   |                    |                           |   |   |                         |   |   |   |               |   |   |   |                    |
|                                   | 0   | 1     | —                         | FM1, FM2, FM3, MW1, MW2 |       |                 |                       |   |          |   |                        |   |          |   |                    |   |                 |   |                         |   |                 |   |                   |   |                 |   |               |   |                        |   |                    |                |       |   |   |                    |                           |   |   |                         |   |   |   |               |   |   |   |                    |
|                                   | 1   | 0     | 0                         | FM1, FM2, MW1, LW       |       |                 |                       |   |          |   |                        |   |          |   |                    |   |                 |   |                         |   |                 |   |                   |   |                 |   |               |   |                        |   |                    |                |       |   |   |                    |                           |   |   |                         |   |   |   |               |   |   |   |                    |
|                                   | 1   | 0     | 1                         | FM1, FM2, MW1           |       |                 |                       |   |          |   |                        |   |          |   |                    |   |                 |   |                         |   |                 |   |                   |   |                 |   |               |   |                        |   |                    |                |       |   |   |                    |                           |   |   |                         |   |   |   |               |   |   |   |                    |
|                                   | 1   | 1     | —                         | FM1, FM2, MW1, MW2      |       |                 |                       |   |          |   |                        |   |          |   |                    |   |                 |   |                         |   |                 |   |                   |   |                 |   |               |   |                        |   |                    |                |       |   |   |                    |                           |   |   |                         |   |   |   |               |   |   |   |                    |
| Other<br>areas                    | 0   | 0     | —                         | FM1, FM2, FM3, MW1      |       |                 |                       |   |          |   |                        |   |          |   |                    |   |                 |   |                         |   |                 |   |                   |   |                 |   |               |   |                        |   |                    |                |       |   |   |                    |                           |   |   |                         |   |   |   |               |   |   |   |                    |
|                                   | 0   | 1     | —                         | FM1, FM2, FM3, MW1, MW2 |       |                 |                       |   |          |   |                        |   |          |   |                    |   |                 |   |                         |   |                 |   |                   |   |                 |   |               |   |                        |   |                    |                |       |   |   |                    |                           |   |   |                         |   |   |   |               |   |   |   |                    |
|                                   | 1   | 0     | —                         | FM1, FM2, MW1           |       |                 |                       |   |          |   |                        |   |          |   |                    |   |                 |   |                         |   |                 |   |                   |   |                 |   |               |   |                        |   |                    |                |       |   |   |                    |                           |   |   |                         |   |   |   |               |   |   |   |                    |
|                                   | 1   | 1     | —                         | FM1, FM2, MW1, MW2      |       |                 |                       |   |          |   |                        |   |          |   |                    |   |                 |   |                         |   |                 |   |                   |   |                 |   |               |   |                        |   |                    |                |       |   |   |                    |                           |   |   |                         |   |   |   |               |   |   |   |                    |

| Symbol                    | Function  |         |   |   |  |   |   |
|---------------------------|---|---------|---|---|--|---|---|
| <p>M2SENMW2<br/>DISLW</p> | <p>Preset memory write method setting switch.<br/>Its settings are shown below.</p> <table border="1" data-bbox="423 296 1317 590"> <thead> <tr> <th data-bbox="423 296 516 338">M2S</th> <th data-bbox="516 296 1317 338">Write Method</th> </tr> </thead> <tbody> <tr> <td data-bbox="423 338 516 443">0</td> <td data-bbox="516 338 1317 443">                     Preset memory is written by pressing a <input type="text" value="M1 (TP1)"/> to <input type="text" value="M6"/> key in the 5 seconds memory write state by <input type="text" value="ME"/> key.                 </td> </tr> <tr> <td data-bbox="423 443 516 590">1</td> <td data-bbox="516 443 1317 590">                     Preset memory is written by holding down a <input type="text" value="M1 (TP1)"/> to <input type="text" value="M6"/> key for more than 2 seconds. The <input type="text" value="ME"/> key is invalid.                 </td> </tr> </tbody> </table> <p>For more information, see the <input type="text" value="ME"/> and <input type="text" value="M1 (TP1)"/> to <input type="text" value="M6"/> items.</p>   | M2S     | Write Method  | 0 | Preset memory is written by pressing a <input type="text" value="M1 (TP1)"/> to <input type="text" value="M6"/> key in the 5 seconds memory write state by <input type="text" value="ME"/> key.              | 1 | Preset memory is written by holding down a <input type="text" value="M1 (TP1)"/> to <input type="text" value="M6"/> key for more than 2 seconds. The <input type="text" value="ME"/> key is invalid.                                  |
| M2S                       | Write Method  |         |   |   |  |   |   |
| 0                         | Preset memory is written by pressing a <input type="text" value="M1 (TP1)"/> to <input type="text" value="M6"/> key in the 5 seconds memory write state by <input type="text" value="ME"/> key.   |         |   |   |  |   |   |
| 1                         | Preset memory is written by holding down a <input type="text" value="M1 (TP1)"/> to <input type="text" value="M6"/> key for more than 2 seconds. The <input type="text" value="ME"/> key is invalid.  |         |   |   |  |   |   |
| <p>AUTO500</p>            | <p><input type="text" value="MAN UP"/> and <input type="text" value="MAN DWN"/> keys function setting switch. The <input type="text" value="MAN UP"/> and <input type="text" value="MAN DWN"/> keys can also be used as autotuning (seek operation) keys by means of this switch. The settings of this switch are shown below.</p> <table border="1" data-bbox="358 821 1383 1251"> <thead> <tr> <th data-bbox="358 821 500 877">AUTO500</th> <th data-bbox="500 821 1383 877"><input type="text" value="MAN UP"/> , <input type="text" value="MAN DWN"/> Key Function</th> </tr> </thead> <tbody> <tr> <td data-bbox="358 877 500 1066">0</td> <td data-bbox="500 877 1383 1066">                     Manual tuning only.<br/>Each time the key is pressed, the channel is incremented or decremented by one. When the key is held down for more than 0.5 seconds, the channel is changed continuously and rapidly.                 </td> </tr> <tr> <td data-bbox="358 1066 500 1251">1</td> <td data-bbox="500 1066 1383 1251">                     Manual tuning and autotuning.<br/>Each time the key is pressed, the channel is incremented or decremented by one. When the key is held down for more than 0.5 seconds, autotuning (seek operation) is performed from the next channel.                 </td> </tr> </tbody> </table> | AUTO500 | <input type="text" value="MAN UP"/> , <input type="text" value="MAN DWN"/> Key Function | 0 | Manual tuning only.<br>Each time the key is pressed, the channel is incremented or decremented by one. When the key is held down for more than 0.5 seconds, the channel is changed continuously and rapidly. | 1 | Manual tuning and autotuning.<br>Each time the key is pressed, the channel is incremented or decremented by one. When the key is held down for more than 0.5 seconds, autotuning (seek operation) is performed from the next channel. |
| AUTO500                   | <input type="text" value="MAN UP"/> , <input type="text" value="MAN DWN"/> Key Function   |         |   |   |  |   |   |
| 0                         | Manual tuning only.<br>Each time the key is pressed, the channel is incremented or decremented by one. When the key is held down for more than 0.5 seconds, the channel is changed continuously and rapidly.  |         |   |   |  |   |   |
| 1                         | Manual tuning and autotuning.<br>Each time the key is pressed, the channel is incremented or decremented by one. When the key is held down for more than 0.5 seconds, autotuning (seek operation) is performed from the next channel.   |         |   |   |  |   |   |

| Symbol  | Function  |                |                |   |  |
|---------|---|----------------|----------------|---|--|
| AUTOLOC | <p>Local function setting switch.<br/>Its settings are shown below.</p>   |                |                |   |  |
|         | <table border="1"> <thead> <tr> <th data-bbox="431 296 573 338">AUTOLOC</th> <th data-bbox="573 296 1453 338">Local Function</th> </tr> </thead> <tbody> <tr> <td data-bbox="431 338 573 470">0</td> <td data-bbox="573 338 1453 470"> <p>LOCAL ON/OFF by key input.<br/>Each time the <b>LOC</b> key pressed, the "LOC" display is inverted.<br/>LOCAL output outputs high level only during autotuning (SEEK, SCAN, AMEMO).</p> </td> </tr> </tbody> </table>   | AUTOLOC        | Local Function | 0 | <p>LOCAL ON/OFF by key input.<br/>Each time the <b>LOC</b> key pressed, the "LOC" display is inverted.<br/>LOCAL output outputs high level only during autotuning (SEEK, SCAN, AMEMO).</p> |
|         | AUTOLOC   | Local Function |                |   |  |
| 0       | <p>LOCAL ON/OFF by key input.<br/>Each time the <b>LOC</b> key pressed, the "LOC" display is inverted.<br/>LOCAL output outputs high level only during autotuning (SEEK, SCAN, AMEMO).</p>  |                |                |   |  |
| 1       | <p>Auto local.<br/>The <b>LOC</b> key is invalid.<br/>When autotuning is selected by <b>SEEK UP</b>, <b>SEEK DWN</b>, <b>SEEK UP</b>, <b>SEEK DWN</b>, <b>AMEMO</b> keys, the "LOC" display lights and the LOCAL output becomes high and autotuning is performed.<br/>When autotuning is performed for one cycle, the device searches in the DX mode ("LOC" display OFF, LOCAL output = Low).<br/>However, the device enters the LOCAL1, LOCAL2 or DX mode only during auto memory operation.<br/>At other than autotuning, the "LOC" display goes off and the LOCAL output becomes low.<br/>If the same key (<b>SEEK UP</b> key for the seek-up operation, etc.) is pressed during autotuning, if the device is in the LOCAL mode, it searches in the DX mode, beginning from the frequency at which autotuning started. If the device is in the DX mode, autotuning stops.<br/>When AUTO500 switch is set to "1" (autotuning by pressing <b>MAN UP</b> or <b>MAN DWN</b> key for 0.5 second) when auto local is used, the following operations are performed:<br/>Auto local search (LOCAL) mode is performed by pressing the <b>MAN UP</b> or <b>MAN DWN</b> key for more than 0.5 seconds.<br/>When the <b>MAN UP</b> or <b>MAN DWN</b> key is pressed again during LOCAL search and the 2nd DX search, autotuning stops.</p> |                |                |   |  |







| Symbol         | Function  |                 |  |   |
|----------------|---|-----------------|--|---|
| PRI01<br>PRI02 | Priority display setting switch.<br>"Priority display" is display that returns to the previous display if no operation is performed within 5 seconds after the display was switched.<br>These switches are valid only when the NOCLK switch is set to 0 (clock mode) when the device is not in the DK standby mode and radio monitor is not used. Their settings are shown below. |                 |  |   |
|                | PRI01<br>PRI02  | PRI01<br>PRI02  | Priority<br>Display  | Description   |
|                | 0   | 0               | None   | Display switching is performed when the <b>DISP</b> key and melody selection key (during clock display) was operated. <ul style="list-style-type: none"> <li>• Radio mode<br/>The display switches between frequency display and clock display each time the <b>DISP</b> key is pressed. When the melody selection key is pressed during clock display, the display switches to frequency display.</li> <li>• Time mode<br/>The <b>DISP</b> key is disabled.</li> <li>• CD mode<br/>The display is switched between "L<sup>-</sup>C<sup>+</sup>" display and clock display each time the <b>DISP</b> key is pressed.</li> </ul> |
| 1              | 0   | Frequency<br>CD | When the display switched from frequency or "L <sup>-</sup> C <sup>+</sup> " display to clock display by <b>DISP</b> key, if no operation is performed within 5 seconds, the display returns to the original display. <ul style="list-style-type: none"> <li>• Radio mode<br/>Normally the frequency is displayed.<br/>The display is switched to 5 seconds clock display by pressing the <b>DISP</b> key.<br/>When the <b>DISP</b> key is pressed again, or the melody selection key is pressed, during 5 seconds clock display, the display returns to frequency display.</li> <li>• Tape mode<br/>Clock display.<br/>The <b>DISP</b> key is invalid.</li> <li>• CD mode<br/>Normally "L<sup>-</sup>C<sup>+</sup>" is displayed. The display is switched to 5 seconds clock display by pressing the <b>DISP</b> key.<br/>When the <b>DISP</b> key is pressed again during 5 seconds clock display, the display returns to CD display.</li> </ul> |   |

| Symbol  | Function |       |  |
|---|----------|-------|--|
| PRIO1<br>PRIO2  | PRIO1    | PRIO2 | Priority Display   |
|   | 0        | 1     | Clock<br><br>In the radio and CE modes, clock display has priority.<br>• Radio mode<br>Normally the clock is displayed.<br>The display is switched to 5 seconds frequency display by pressing the <b>DISP</b> key or melody selection key.<br>When the <b>DISP</b> key is pressed again during 5 seconds frequency display, the display returns to clock display.<br>• Tape mode<br>The <b>DISP</b> key is invalid.<br>• CD mode<br>Normally the clock is displayed.<br>The display is switched to 5 seconds "f <sub>L</sub> " display by pressing the <b>DISP</b> key.<br>When the <b>DISP</b> key is pressed again during 5 seconds "f <sub>L</sub> " display, the display returns to clock display. |
|   | 1        | 1     | —  |
| <p>"Frequency display" in the above means receiving frequency, receiving band, and preset memory display. Therefore, during radio reception, the 'PSCAN', 'SK', 'VF', 'ST', 'MONO', 'LOCAL', and 'LOUD' displays light even at clock display.</p> <p>In the tape mode, the 'LOUD', 'MTL', 'NR1', 'NR2', 'AMS', '▷', and '◁' displays also light at clock display.</p> |          |       |  |

| Symbol         | Function |              |   |   |
|----------------|----------|--------------|---|---|
| PRIO1<br>PRIO2 | PRIO1    | PRIO2        | Priority Display  | Description   |
|                | 0        | 0            | None  | <ul style="list-style-type: none"> <li>• Tape DK standby</li> <li>• Radio monitor</li> </ul> <p>The display switches between frequency display and clock display each time the <b>DISP</b> key is pressed.</p> <p>When the melody selection key is pressed during clock display, the display switches to frequency display.</p> <p>When the device entered the tape DK standby and radio monitor standby mode, frequency display displayed first.</p> <ul style="list-style-type: none"> <li>• CD DK standby</li> <li>• Radio monitor</li> </ul> <p>The display switches between frequency display, "L<sup>-</sup>C<sup>!</sup>" display and clock display each time the <b>DISP</b> key is pressed.</p> <p>When the melody selection key is pressed during "L<sup>-</sup>C<sup>!</sup>" display and clock display, the display switches to frequency display. When the device entered the CD DK standby and radio monitor mode, frequency display is displayed first.</p> <ul style="list-style-type: none"> <li>• DK ON</li> </ul> <p>Frequency displayed.</p> <p>The <b>DISP</b> key is invalid.</p> |
| 1              | 0        | Frequency CD | <ul style="list-style-type: none"> <li>• Tape DK standby</li> <li>• Radio monitor</li> </ul> <p>Normally the frequency is displayed. The display is switched to 5 seconds clock display by pressing the <b>DISP</b> key.</p> <p>When the <b>DISP</b> key or the melody selection key is pressed during 5 seconds clock display, the display returns to frequency display.</p> <ul style="list-style-type: none"> <li>• CD DK standby</li> <li>• Radio Monitor</li> </ul> <p>Normally "L<sup>-</sup>C<sup>!</sup>" is displayed. When the <b>DISP</b> key is pressed, the display switches to 5 seconds frequency display.</p> <p>When the <b>DISP</b> key is pressed during frequency display, the display switches to 5 seconds clock display.</p> <p>When the <b>DISP</b> key is pressed during clock display, the display returns to "L<sup>-</sup>C<sup>!</sup>" display.</p> <p>When the melody selection key is pressed during "L<sup>-</sup>C<sup>!</sup>" and clock display, the display switches to 5 seconds frequency display.</p> <ul style="list-style-type: none"> <li>• DK ON</li> </ul> <p>Frequency display</p> <p>The <b>DISP</b> key is invalid.</p> |   |



| Symbol   | Function   |                     |                          |
|--|--|---------------------|--------------------------|
| PRIO1<br>PRIO2   | PRIO1  | PRIO2               | Priority Display         |
|  | 0  | 1                   | Clock                    |
|  | Description  |                     |                          |
| <ul style="list-style-type: none"> <li>• Tape DK standby</li> <li>• Radio monitor</li> </ul> Normally the clock is displayed.<br>When the <span style="border: 1px solid black; padding: 2px;">DISP</span> key or melody selection key is pressed, the display switches to 5 seconds frequency display.<br>When the <span style="border: 1px solid black; padding: 2px;">DISP</span> key is pressed during 5 seconds frequency display the display returns to clock display.   |  |                     |                          |
| <ul style="list-style-type: none"> <li>• CD DK standby</li> <li>• Radio monitor</li> </ul> Normally the clock is displayed.<br>When the <span style="border: 1px solid black; padding: 2px;">DISP</span> key is pressed, the display switches 5 seconds "┌┐" display. When the <span style="border: 1px solid black; padding: 2px;">DISP</span> key is pressed during this "┌┐" display, the display switches to 5 seconds frequency display.<br>When the <span style="border: 1px solid black; padding: 2px;">DISP</span> key is pressed during frequency display, the display returns to clock display.<br>When the melody selection key is pressed during clock display or "┌┐" display, the display switches to 5 seconds frequency display. |  |                     |                          |
| <ul style="list-style-type: none"> <li>• DK ON</li> </ul> Frequency display.<br>The <span style="border: 1px solid black; padding: 2px;">DISP</span> key is invalid  |  |                     |                          |
| 1  | 1  | —                   | Do not set to this mode. |
| At no clock (NOCLK = 0), the following is displayed and the <span style="border: 1px solid black; padding: 2px;">DISP</span> key becomes invalid without regard to the setting of the PRIO1 and PRIO2 switches.<br>And the <span style="border: 1px solid black; padding: 2px;">DISP</span> key is invalid.  |  |                     |                          |
| Mode   |  | Display             |                          |
| Radio  |  | Frequency           |                          |
| Tape   |  | None                |                          |
| CD   |  | ┌┐                  |                          |
| Tape DK standby<br>CD DK standby<br>DK ON<br>Radio monitor   |  | Frequency           |                          |
| RDON   | Radio ON/OFF method setting switch.<br>Its settings are shown below. |                     |                          |
| RDON   |  | Radio ON/OFF Method |                          |
| 0  | Radio is turned on and off by RDSET switch.                          |                     |                          |
| 1  | Radio is turned on by making the CE pin High.                        |                     |                          |
| When this switch was set to 1, do not use the RDSET switch.  |  |                     |                          |

| Symbol  | Description  |         |                     |   |   |   |   |
|---------|--|---------|---------------------|---|---|---|---|
| NOCLK   | <p>Clock specified setting switch.<br/>Its settings are shown below.</p> <table border="1" data-bbox="727 285 1015 413"> <thead> <tr> <th>NOCLK</th> <th>Clock</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>Yes</td> </tr> <tr> <td>1</td> <td>No</td> </tr> </tbody> </table> <p>In the no-clock mode, low consumption current (10 μA max.) backup is possible by making the CE pin Low.</p>   | NOCLK   | Clock               | 0 | Yes   | 1 | No  |
| NOCLK   | Clock  |         |                     |   |   |   |   |
| 0       | Yes  |         |                     |   |   |   |   |
| 1       | No   |         |                     |   |   |   |   |
| CLKDISP | <p>Clock time system setting switch.<br/>Its settings are shown below.</p> <table border="1" data-bbox="609 617 1149 909"> <thead> <tr> <th>CLKDISP</th> <th>Time System</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>                     12-hour clock<br/>  </td> </tr> <tr> <td>1</td> <td>                     24-hour clock<br/>  </td> </tr> </tbody> </table> | CLKDISP | Time System         | 0 | 12-hour clock<br> | 1 | 24-hour clock<br> |
| CLKDISP | Time System  |         |                     |   |   |   |   |
| 0       | 12-hour clock<br>  |         |                     |   |   |   |   |
| 1       | 24-hour clock<br>  |         |                     |   |   |   |   |
| FLASH   | <p>Clock colon ( : ) display setting switch.<br/>Its settings are shown below.</p> <table border="1" data-bbox="609 1050 1149 1241"> <thead> <tr> <th>FLASH</th> <th>Colon ( : ) Display</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>Steady light</td> </tr> <tr> <td>1</td> <td>Flashing<br/>Frequency: 1 Hz<br/>Duty: 6 (ON): 4 (OFF)</td> </tr> </tbody> </table>   | FLASH   | Colon ( : ) Display | 0 | Steady light  | 1 | Flashing<br>Frequency: 1 Hz<br>Duty: 6 (ON): 4 (OFF)  |
| FLASH   | Colon ( : ) Display  |         |                     |   |   |   |   |
| 0       | Steady light   |         |                     |   |   |   |   |
| 1       | Flashing<br>Frequency: 1 Hz<br>Duty: 6 (ON): 4 (OFF)   |         |                     |   |   |   |   |

| Symbol   | Function   |   |            |                                       |                                       |  |   |   |  |                    |            |  |                                       |  |                                       |     |    |   |      |     |      |                    |   |   |                                       |                                       |                                       |   |   |   |     |     |     |   |   |    |     |    |   |   |     |   |     |     |   |   |   |   |     |   |   |   |   |   |     |     |   |   |   |   |    |   |   |   |   |   |     |   |   |   |   |   |   |   |   |  |  |  |  |  |
|--|--|---|------------|---------------------------------------|---------------------------------------|--|---|---|--|--------------------|------------|--|---------------------------------------|--|---------------------------------------|-----|----|---|------|-----|------|--------------------|---|---|---------------------------------------|---------------------------------------|---------------------------------------|---|---|---|-----|-----|-----|---|---|----|-----|----|---|---|-----|---|-----|-----|---|---|---|---|-----|---|---|---|---|---|-----|-----|---|---|---|---|----|---|---|---|---|---|-----|---|---|---|---|---|---|---|---|--|--|--|--|--|
| ENTPK<br>KAMS<br>KNR<br>KMTL   | <p>Switches for using the tape functions (AMS, NR, MTL) in common with the radio function keys. The keys that can be used in common can be selected as shown below.</p> <table border="1" data-bbox="431 296 1455 947"> <thead> <tr> <th data-bbox="431 296 574 338">ENTPK</th> <th colspan="5" data-bbox="574 296 1455 338">Function</th> </tr> </thead> <tbody> <tr> <td data-bbox="431 338 574 1060" rowspan="9">0</td> <td colspan="5" data-bbox="574 338 1455 443">                     The <input type="text" value="M1 (TP1)"/>, <input type="text" value="M2 (TP2)"/>, and <input type="text" value="M3 (TP3)"/> keys can be used as the AMS, NR, MTL function keys.<br/>                     The keys that can be selected as shown below.                 </td> </tr> <tr> <td colspan="5" data-bbox="574 443 1455 495"> <table border="1" data-bbox="591 499 1438 947"> <thead> <tr> <th rowspan="2">KAMS</th> <th rowspan="2">KNR</th> <th rowspan="2">KMTL</th> <th colspan="3">Dual-Function Keys</th> </tr> <tr> <th><input type="text" value="M1 (TP1)"/></th> <th><input type="text" value="M2 (TP2)"/></th> <th><input type="text" value="M3 (TP3)"/></th> </tr> </thead> <tbody> <tr><td>1</td><td>1</td><td>1</td><td>AMS</td><td>NR</td><td>MTL</td></tr> <tr><td>1</td><td>1</td><td>0</td><td>AMS</td><td>NR</td><td>—</td></tr> <tr><td>1</td><td>0</td><td>1</td><td>AMS</td><td>MTL</td><td>—</td></tr> <tr><td>1</td><td>0</td><td>0</td><td>AMS</td><td>—</td><td>—</td></tr> <tr><td>0</td><td>1</td><td>1</td><td>NR</td><td>MTL</td><td>—</td></tr> <tr><td>0</td><td>1</td><td>0</td><td>NR</td><td>—</td><td>—</td></tr> <tr><td>0</td><td>0</td><td>1</td><td>MTL</td><td>—</td><td>—</td></tr> <tr><td>0</td><td>0</td><td>0</td><td>—</td><td>—</td><td>—</td></tr> </tbody> </table> </td> </tr> <tr> <td colspan="5" data-bbox="574 947 1455 1060">                     That is, the functions selected by 1 are left-justified and used at the <input type="text" value="M1 (TP1)"/> to <input type="text" value="M3 (TP3)"/> keys.                 </td> </tr> </tbody> </table> | ENTPK                                   | Function   |                                       |                                       |  |   | 0 | The <input type="text" value="M1 (TP1)"/> , <input type="text" value="M2 (TP2)"/> , and <input type="text" value="M3 (TP3)"/> keys can be used as the AMS, NR, MTL function keys.<br>The keys that can be selected as shown below. |                    |            |  |                                       | <table border="1" data-bbox="591 499 1438 947"> <thead> <tr> <th rowspan="2">KAMS</th> <th rowspan="2">KNR</th> <th rowspan="2">KMTL</th> <th colspan="3">Dual-Function Keys</th> </tr> <tr> <th><input type="text" value="M1 (TP1)"/></th> <th><input type="text" value="M2 (TP2)"/></th> <th><input type="text" value="M3 (TP3)"/></th> </tr> </thead> <tbody> <tr><td>1</td><td>1</td><td>1</td><td>AMS</td><td>NR</td><td>MTL</td></tr> <tr><td>1</td><td>1</td><td>0</td><td>AMS</td><td>NR</td><td>—</td></tr> <tr><td>1</td><td>0</td><td>1</td><td>AMS</td><td>MTL</td><td>—</td></tr> <tr><td>1</td><td>0</td><td>0</td><td>AMS</td><td>—</td><td>—</td></tr> <tr><td>0</td><td>1</td><td>1</td><td>NR</td><td>MTL</td><td>—</td></tr> <tr><td>0</td><td>1</td><td>0</td><td>NR</td><td>—</td><td>—</td></tr> <tr><td>0</td><td>0</td><td>1</td><td>MTL</td><td>—</td><td>—</td></tr> <tr><td>0</td><td>0</td><td>0</td><td>—</td><td>—</td><td>—</td></tr> </tbody> </table> |                                       |     |    |   | KAMS | KNR | KMTL | Dual-Function Keys |   |   | <input type="text" value="M1 (TP1)"/> | <input type="text" value="M2 (TP2)"/> | <input type="text" value="M3 (TP3)"/> | 1 | 1 | 1 | AMS | NR  | MTL | 1 | 1 | 0  | AMS | NR | — | 1 | 0   | 1 | AMS | MTL | — | 1 | 0 | 0 | AMS | — | — | 0 | 1 | 1 | NR  | MTL | — | 0 | 1 | 0 | NR | — | — | 0 | 0 | 1 | MTL | — | — | 0 | 0 | 0 | — | — | — | That is, the functions selected by 1 are left-justified and used at the <input type="text" value="M1 (TP1)"/> to <input type="text" value="M3 (TP3)"/> keys. |  |  |  |  |
|  | ENTPK  | Function                                |            |                                       |                                       |  |   |   |  |                    |            |  |                                       |  |                                       |     |    |   |      |     |      |                    |   |   |                                       |                                       |                                       |   |   |   |     |     |     |   |   |    |     |    |   |   |     |   |     |     |   |   |   |   |     |   |   |   |   |   |     |     |   |   |   |   |    |   |   |   |   |   |     |   |   |   |   |   |   |   |   |  |  |  |  |  |
| 0  | The <input type="text" value="M1 (TP1)"/> , <input type="text" value="M2 (TP2)"/> , and <input type="text" value="M3 (TP3)"/> keys can be used as the AMS, NR, MTL function keys.<br>The keys that can be selected as shown below.   |   |            |                                       |                                       |  |   |   |  |                    |            |  |                                       |  |                                       |     |    |   |      |     |      |                    |   |   |                                       |                                       |                                       |   |   |   |     |     |     |   |   |    |     |    |   |   |     |   |     |     |   |   |   |   |     |   |   |   |   |   |     |     |   |   |   |   |    |   |   |   |   |   |     |   |   |   |   |   |   |   |   |  |  |  |  |  |
|  | <table border="1" data-bbox="591 499 1438 947"> <thead> <tr> <th rowspan="2">KAMS</th> <th rowspan="2">KNR</th> <th rowspan="2">KMTL</th> <th colspan="3">Dual-Function Keys</th> </tr> <tr> <th><input type="text" value="M1 (TP1)"/></th> <th><input type="text" value="M2 (TP2)"/></th> <th><input type="text" value="M3 (TP3)"/></th> </tr> </thead> <tbody> <tr><td>1</td><td>1</td><td>1</td><td>AMS</td><td>NR</td><td>MTL</td></tr> <tr><td>1</td><td>1</td><td>0</td><td>AMS</td><td>NR</td><td>—</td></tr> <tr><td>1</td><td>0</td><td>1</td><td>AMS</td><td>MTL</td><td>—</td></tr> <tr><td>1</td><td>0</td><td>0</td><td>AMS</td><td>—</td><td>—</td></tr> <tr><td>0</td><td>1</td><td>1</td><td>NR</td><td>MTL</td><td>—</td></tr> <tr><td>0</td><td>1</td><td>0</td><td>NR</td><td>—</td><td>—</td></tr> <tr><td>0</td><td>0</td><td>1</td><td>MTL</td><td>—</td><td>—</td></tr> <tr><td>0</td><td>0</td><td>0</td><td>—</td><td>—</td><td>—</td></tr> </tbody> </table>   |   |            |                                       |                                       | KAMS                                   | KNR                                     |   | KMTL   | Dual-Function Keys |            |  | <input type="text" value="M1 (TP1)"/> | <input type="text" value="M2 (TP2)"/>  | <input type="text" value="M3 (TP3)"/> | 1   | 1  | 1 | AMS  | NR  | MTL  | 1                  | 1 | 0 | AMS                                   | NR                                    | —                                     | 1 | 0 | 1 | AMS | MTL | —   | 1 | 0 | 0  | AMS | —  | — | 0 | 1   | 1 | NR  | MTL | — | 0 | 1 | 0 | NR  | — | — | 0 | 0 | 1 | MTL | —   | — | 0 | 0 | 0 | —  | — | — |   |   |   |     |   |   |   |   |   |   |   |   |  |  |  |  |  |
|  | KAMS   | KNR                                     | KMTL       | Dual-Function Keys                    |                                       |  |   |   |  |                    |            |  |                                       |  |                                       |     |    |   |      |     |      |                    |   |   |                                       |                                       |                                       |   |   |   |     |     |     |   |   |    |     |    |   |   |     |   |     |     |   |   |   |   |     |   |   |   |   |   |     |     |   |   |   |   |    |   |   |   |   |   |     |   |   |   |   |   |   |   |   |  |  |  |  |  |
|  |  |   |            | <input type="text" value="M1 (TP1)"/> | <input type="text" value="M2 (TP2)"/> | <input type="text" value="M3 (TP3)"/>  |   |   |  |                    |            |  |                                       |  |                                       |     |    |   |      |     |      |                    |   |   |                                       |                                       |                                       |   |   |   |     |     |     |   |   |    |     |    |   |   |     |   |     |     |   |   |   |   |     |   |   |   |   |   |     |     |   |   |   |   |    |   |   |   |   |   |     |   |   |   |   |   |   |   |   |  |  |  |  |  |
|  | 1  | 1                                       | 1          | AMS                                   | NR                                    | MTL                                    |   |   |  |                    |            |  |                                       |  |                                       |     |    |   |      |     |      |                    |   |   |                                       |                                       |                                       |   |   |   |     |     |     |   |   |    |     |    |   |   |     |   |     |     |   |   |   |   |     |   |   |   |   |   |     |     |   |   |   |   |    |   |   |   |   |   |     |   |   |   |   |   |   |   |   |  |  |  |  |  |
|  | 1  | 1                                       | 0          | AMS                                   | NR                                    | —                                      |   |   |  |                    |            |  |                                       |  |                                       |     |    |   |      |     |      |                    |   |   |                                       |                                       |                                       |   |   |   |     |     |     |   |   |    |     |    |   |   |     |   |     |     |   |   |   |   |     |   |   |   |   |   |     |     |   |   |   |   |    |   |   |   |   |   |     |   |   |   |   |   |   |   |   |  |  |  |  |  |
|  | 1  | 0                                       | 1          | AMS                                   | MTL                                   | —                                      |   |   |  |                    |            |  |                                       |  |                                       |     |    |   |      |     |      |                    |   |   |                                       |                                       |                                       |   |   |   |     |     |     |   |   |    |     |    |   |   |     |   |     |     |   |   |   |   |     |   |   |   |   |   |     |     |   |   |   |   |    |   |   |   |   |   |     |   |   |   |   |   |   |   |   |  |  |  |  |  |
|  | 1  | 0                                       | 0          | AMS                                   | —                                     | —                                      |   |   |  |                    |            |  |                                       |  |                                       |     |    |   |      |     |      |                    |   |   |                                       |                                       |                                       |   |   |   |     |     |     |   |   |    |     |    |   |   |     |   |     |     |   |   |   |   |     |   |   |   |   |   |     |     |   |   |   |   |    |   |   |   |   |   |     |   |   |   |   |   |   |   |   |  |  |  |  |  |
|  | 0  | 1                                       | 1          | NR                                    | MTL                                   | —                                      |   |   |  |                    |            |  |                                       |  |                                       |     |    |   |      |     |      |                    |   |   |                                       |                                       |                                       |   |   |   |     |     |     |   |   |    |     |    |   |   |     |   |     |     |   |   |   |   |     |   |   |   |   |   |     |     |   |   |   |   |    |   |   |   |   |   |     |   |   |   |   |   |   |   |   |  |  |  |  |  |
| 0  | 1  | 0                                       | NR         | —                                     | —                                     |  |   |   |  |                    |            |  |                                       |  |                                       |     |    |   |      |     |      |                    |   |   |                                       |                                       |                                       |   |   |   |     |     |     |   |   |    |     |    |   |   |     |   |     |     |   |   |   |   |     |   |   |   |   |   |     |     |   |   |   |   |    |   |   |   |   |   |     |   |   |   |   |   |   |   |   |  |  |  |  |  |
| 0  | 0  | 1                                       | MTL        | —                                     | —                                     |  |   |   |  |                    |            |  |                                       |  |                                       |     |    |   |      |     |      |                    |   |   |                                       |                                       |                                       |   |   |   |     |     |     |   |   |    |     |    |   |   |     |   |     |     |   |   |   |   |     |   |   |   |   |   |     |     |   |   |   |   |    |   |   |   |   |   |     |   |   |   |   |   |   |   |   |  |  |  |  |  |
| 0  | 0  | 0                                       | —          | —                                     | —                                     |  |   |   |  |                    |            |  |                                       |  |                                       |     |    |   |      |     |      |                    |   |   |                                       |                                       |                                       |   |   |   |     |     |     |   |   |    |     |    |   |   |     |   |     |     |   |   |   |   |     |   |   |   |   |   |     |     |   |   |   |   |    |   |   |   |   |   |     |   |   |   |   |   |   |   |   |  |  |  |  |  |
| That is, the functions selected by 1 are left-justified and used at the <input type="text" value="M1 (TP1)"/> to <input type="text" value="M3 (TP3)"/> keys.   |  |   |            |                                       |                                       |  |   |   |  |                    |            |  |                                       |  |                                       |     |    |   |      |     |      |                    |   |   |                                       |                                       |                                       |   |   |   |     |     |     |   |   |    |     |    |   |   |     |   |     |     |   |   |   |   |     |   |   |   |   |   |     |     |   |   |   |   |    |   |   |   |   |   |     |   |   |   |   |   |   |   |   |  |  |  |  |  |
| <p>Of the AMS, NR and MTL function keys, two functions can be used at the <input type="text" value="LOC (TP4)"/> and <input type="text" value="MONO (TP5)"/> keys.</p> <p>The following can be selected:</p> <table border="1" data-bbox="591 1220 1263 1665"> <thead> <tr> <th rowspan="2">KAMS</th> <th rowspan="2">KNR</th> <th rowspan="2">KMTL</th> <th colspan="2">Dual Function-Key</th> </tr> <tr> <th><input type="text" value="LOC (TP4)"/></th> <th><input type="text" value="MONO (TP5)"/></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>1</td> <td>1</td> <td colspan="2">Do not set</td> </tr> <tr> <td>1</td> <td>1</td> <td>0</td> <td>AMS</td> <td>NR</td> </tr> <tr> <td>1</td> <td>0</td> <td>1</td> <td>AMS</td> <td>MTL</td> </tr> <tr> <td>1</td> <td>0</td> <td>0</td> <td>AMS</td> <td>—</td> </tr> <tr> <td>0</td> <td>1</td> <td>1</td> <td>NR</td> <td>MTL</td> </tr> <tr> <td>0</td> <td>1</td> <td>0</td> <td>NR</td> <td>—</td> </tr> <tr> <td>0</td> <td>0</td> <td>1</td> <td>MTL</td> <td>—</td> </tr> <tr> <td>0</td> <td>0</td> <td>0</td> <td>—</td> <td>—</td> </tr> </tbody> </table> <p>The functions selected by 1 are left-justified and used at the <input type="text" value="LOC (TP4)"/> and <input type="text" value="MONO (TP5)"/> keys.</p> | KAMS   | KNR                                     | KMTL       | Dual Function-Key                     |                                       | <input type="text" value="LOC (TP4)"/> | <input type="text" value="MONO (TP5)"/> | 1 | 1  | 1                  | Do not set |  | 1                                     | 1  | 0                                     | AMS | NR | 1 | 0    | 1   | AMS  | MTL                | 1 | 0 | 0                                     | AMS                                   | —                                     | 0 | 1 | 1 | NR  | MTL | 0   | 1 | 0 | NR | —   | 0  | 0 | 1 | MTL | — | 0   | 0   | 0 | — | — |   |     |   |   |   |   |   |     |     |   |   |   |   |    |   |   |   |   |   |     |   |   |   |   |   |   |   |   |  |  |  |  |  |
| KAMS   |  |   |            | KNR                                   | KMTL                                  | Dual Function-Key                      |   |   |  |                    |            |  |                                       |  |                                       |     |    |   |      |     |      |                    |   |   |                                       |                                       |                                       |   |   |   |     |     |     |   |   |    |     |    |   |   |     |   |     |     |   |   |   |   |     |   |   |   |   |   |     |     |   |   |   |   |    |   |   |   |   |   |     |   |   |   |   |   |   |   |   |  |  |  |  |  |
|  | <input type="text" value="LOC (TP4)"/>   | <input type="text" value="MONO (TP5)"/> |            |                                       |                                       |  |   |   |  |                    |            |  |                                       |  |                                       |     |    |   |      |     |      |                    |   |   |                                       |                                       |                                       |   |   |   |     |     |     |   |   |    |     |    |   |   |     |   |     |     |   |   |   |   |     |   |   |   |   |   |     |     |   |   |   |   |    |   |   |   |   |   |     |   |   |   |   |   |   |   |   |  |  |  |  |  |
| 1  | 1  | 1                                       | Do not set |                                       |                                       |  |   |   |  |                    |            |  |                                       |  |                                       |     |    |   |      |     |      |                    |   |   |                                       |                                       |                                       |   |   |   |     |     |     |   |   |    |     |    |   |   |     |   |     |     |   |   |   |   |     |   |   |   |   |   |     |     |   |   |   |   |    |   |   |   |   |   |     |   |   |   |   |   |   |   |   |  |  |  |  |  |
| 1  | 1  | 0                                       | AMS        | NR                                    |                                       |  |   |   |  |                    |            |  |                                       |  |                                       |     |    |   |      |     |      |                    |   |   |                                       |                                       |                                       |   |   |   |     |     |     |   |   |    |     |    |   |   |     |   |     |     |   |   |   |   |     |   |   |   |   |   |     |     |   |   |   |   |    |   |   |   |   |   |     |   |   |   |   |   |   |   |   |  |  |  |  |  |
| 1  | 0  | 1                                       | AMS        | MTL                                   |                                       |  |   |   |  |                    |            |  |                                       |  |                                       |     |    |   |      |     |      |                    |   |   |                                       |                                       |                                       |   |   |   |     |     |     |   |   |    |     |    |   |   |     |   |     |     |   |   |   |   |     |   |   |   |   |   |     |     |   |   |   |   |    |   |   |   |   |   |     |   |   |   |   |   |   |   |   |  |  |  |  |  |
| 1  | 0  | 0                                       | AMS        | —                                     |                                       |  |   |   |  |                    |            |  |                                       |  |                                       |     |    |   |      |     |      |                    |   |   |                                       |                                       |                                       |   |   |   |     |     |     |   |   |    |     |    |   |   |     |   |     |     |   |   |   |   |     |   |   |   |   |   |     |     |   |   |   |   |    |   |   |   |   |   |     |   |   |   |   |   |   |   |   |  |  |  |  |  |
| 0  | 1  | 1                                       | NR         | MTL                                   |                                       |  |   |   |  |                    |            |  |                                       |  |                                       |     |    |   |      |     |      |                    |   |   |                                       |                                       |                                       |   |   |   |     |     |     |   |   |    |     |    |   |   |     |   |     |     |   |   |   |   |     |   |   |   |   |   |     |     |   |   |   |   |    |   |   |   |   |   |     |   |   |   |   |   |   |   |   |  |  |  |  |  |
| 0  | 1  | 0                                       | NR         | —                                     |                                       |  |   |   |  |                    |            |  |                                       |  |                                       |     |    |   |      |     |      |                    |   |   |                                       |                                       |                                       |   |   |   |     |     |     |   |   |    |     |    |   |   |     |   |     |     |   |   |   |   |     |   |   |   |   |   |     |     |   |   |   |   |    |   |   |   |   |   |     |   |   |   |   |   |   |   |   |  |  |  |  |  |
| 0  | 0  | 1                                       | MTL        | —                                     |                                       |  |   |   |  |                    |            |  |                                       |  |                                       |     |    |   |      |     |      |                    |   |   |                                       |                                       |                                       |   |   |   |     |     |     |   |   |    |     |    |   |   |     |   |     |     |   |   |   |   |     |   |   |   |   |   |     |     |   |   |   |   |    |   |   |   |   |   |     |   |   |   |   |   |   |   |   |  |  |  |  |  |
| 0  | 0  | 0                                       | —          | —                                     |                                       |  |   |   |  |                    |            |  |                                       |  |                                       |     |    |   |      |     |      |                    |   |   |                                       |                                       |                                       |   |   |   |     |     |     |   |   |    |     |    |   |   |     |   |     |     |   |   |   |   |     |   |   |   |   |   |     |     |   |   |   |   |    |   |   |   |   |   |     |   |   |   |   |   |   |   |   |  |  |  |  |  |

| Symbol   | Function   |       |      |  |          |          |          |           |            |                         |   |                           |   |   |   |    |     |   |   |  |   |   |     |    |   |   |   |     |     |   |   |   |     |  |   |   |   |    |     |   |   |   |    |  |   |   |   |     |  |   |   |   |  |  |   |   |   |   |               |  |  |  |  |   |   |   |  |  |  |     |    |   |   |   |  |  |  |     |     |   |   |   |  |  |  |     |  |   |   |   |  |  |  |    |     |   |   |   |  |  |  |    |  |   |   |   |  |  |  |     |  |   |   |   |  |  |  |  |  |
|--|--|-------|------|--|----------|----------|----------|-----------|------------|-------------------------|---|---------------------------|---|---|---|----|-----|---|---|--|---|---|-----|----|---|---|---|-----|-----|---|---|---|-----|--|---|---|---|----|-----|---|---|---|----|--|---|---|---|-----|--|---|---|---|--|--|---|---|---|---|---------------|--|--|--|--|---|---|---|--|--|--|-----|----|---|---|---|--|--|--|-----|-----|---|---|---|--|--|--|-----|--|---|---|---|--|--|--|----|-----|---|---|---|--|--|--|----|--|---|---|---|--|--|--|-----|--|---|---|---|--|--|--|--|--|
| ENTPK<br>KAMS<br>KNR<br>KMTL   | The operation of each key is the same as that of the momentary keys <span style="border: 1px solid black; padding: 2px;">AMS</span> , <span style="border: 1px solid black; padding: 2px;">NR</span> , and <span style="border: 1px solid black; padding: 2px;">MTL</span> .<br>Summarizing the above, the five keys <span style="border: 1px solid black; padding: 2px;">M1 (TP1)</span> to <span style="border: 1px solid black; padding: 2px;">M3 (TP3)</span> , <span style="border: 1px solid black; padding: 2px;">LOC (TP4)</span> , and <span style="border: 1px solid black; padding: 2px;">MONO (TP5)</span> can be used as tape function keys. Which functions are used in common are determined by the ENTPK, KAMS, KNR and KMTL switches. This is summarized below.   |       |      |  |          |          |          |           |            |                         |   |                           |   |   |   |    |     |   |   |  |   |   |     |    |   |   |   |     |     |   |   |   |     |  |   |   |   |    |     |   |   |   |    |  |   |   |   |     |  |   |   |   |  |  |   |   |   |   |               |  |  |  |  |   |   |   |  |  |  |     |    |   |   |   |  |  |  |     |     |   |   |   |  |  |  |     |  |   |   |   |  |  |  |    |     |   |   |   |  |  |  |    |  |   |   |   |  |  |  |     |  |   |   |   |  |  |  |  |  |
|  | <table border="1" style="width:100%; border-collapse: collapse;"> <thead> <tr> <th>ENTPK</th> <th>KAMS</th> <th>KNR</th> <th>KMTL</th> <th>M1 (TP1)</th> <th>M2 (TP2)</th> <th>T3 (TP3)</th> <th>LOC (TP4)</th> <th>MONO (TP5)</th> </tr> </thead> <tbody> <tr> <td rowspan="8" style="text-align:center; vertical-align:middle;">0</td> <td>1</td><td>1</td><td>1</td><td>AMS</td><td>NR</td><td rowspan="8" style="text-align:center; vertical-align:middle;">MTL</td><td></td><td></td> </tr> <tr> <td>1</td><td>1</td><td>0</td><td>AMS</td><td>NR</td> </tr> <tr> <td>1</td><td>0</td><td>1</td><td>AMS</td><td>MTL</td> </tr> <tr> <td>1</td><td>0</td><td>0</td><td>AMS</td><td></td> </tr> <tr> <td>0</td><td>1</td><td>1</td><td>NR</td><td>MTL</td> </tr> <tr> <td>0</td><td>1</td><td>0</td><td>NR</td><td></td> </tr> <tr> <td>0</td><td>0</td><td>1</td><td>MTL</td><td></td> </tr> <tr> <td>0</td><td>0</td><td>0</td><td></td><td></td> </tr> <tr> <td rowspan="8" style="text-align:center; vertical-align:middle;">1</td> <td>1</td><td>1</td><td>1</td><td colspan="2" style="text-align:center;">← Do not set.</td><td></td><td></td><td></td> </tr> <tr> <td>1</td><td>1</td><td>0</td><td></td><td></td><td></td><td>AMS</td><td>NR</td> </tr> <tr> <td>1</td><td>0</td><td>1</td><td></td><td></td><td></td><td>AMS</td><td>MTL</td> </tr> <tr> <td>1</td><td>0</td><td>0</td><td></td><td></td><td></td><td>AMS</td><td></td> </tr> <tr> <td>0</td><td>1</td><td>1</td><td></td><td></td><td></td><td>NR</td><td>MTL</td> </tr> <tr> <td>0</td><td>1</td><td>0</td><td></td><td></td><td></td><td>NR</td><td></td> </tr> <tr> <td>0</td><td>0</td><td>1</td><td></td><td></td><td></td><td>MTL</td><td></td> </tr> <tr> <td>0</td><td>0</td><td>0</td><td></td><td></td><td></td><td></td><td></td> </tr> </tbody> </table> | ENTPK | KAMS | KNR  | KMTL     | M1 (TP1) | M2 (TP2) | T3 (TP3)  | LOC (TP4)  | MONO (TP5)              | 0 | 1                         | 1 | 1 | AMS   | NR | MTL |   |   | 1  | 1 | 0 | AMS | NR | 1 | 0 | 1 | AMS | MTL | 1 | 0 | 0 | AMS |  | 0 | 1 | 1 | NR | MTL | 0 | 1 | 0 | NR |  | 0 | 0 | 1 | MTL |  | 0 | 0 | 0 |  |  | 1 | 1 | 1 | 1 | ← Do not set. |  |  |  |  | 1 | 1 | 0 |  |  |  | AMS | NR | 1 | 0 | 1 |  |  |  | AMS | MTL | 1 | 0 | 0 |  |  |  | AMS |  | 0 | 1 | 1 |  |  |  | NR | MTL | 0 | 1 | 0 |  |  |  | NR |  | 0 | 0 | 1 |  |  |  | MTL |  | 0 | 0 | 0 |  |  |  |  |  |
|  | ENTPK  | KAMS  | KNR  | KMTL   | M1 (TP1) | M2 (TP2) | T3 (TP3) | LOC (TP4) | MONO (TP5) |                         |   |                           |   |   |   |    |     |   |   |  |   |   |     |    |   |   |   |     |     |   |   |   |     |  |   |   |   |    |     |   |   |   |    |  |   |   |   |     |  |   |   |   |  |  |   |   |   |   |               |  |  |  |  |   |   |   |  |  |  |     |    |   |   |   |  |  |  |     |     |   |   |   |  |  |  |     |  |   |   |   |  |  |  |    |     |   |   |   |  |  |  |    |  |   |   |   |  |  |  |     |  |   |   |   |  |  |  |  |  |
|  | 0  | 1     | 1    | 1  | AMS      | NR       | MTL      |           |            |                         |   |                           |   |   |   |    |     |   |   |  |   |   |     |    |   |   |   |     |     |   |   |   |     |  |   |   |   |    |     |   |   |   |    |  |   |   |   |     |  |   |   |   |  |  |   |   |   |   |               |  |  |  |  |   |   |   |  |  |  |     |    |   |   |   |  |  |  |     |     |   |   |   |  |  |  |     |  |   |   |   |  |  |  |    |     |   |   |   |  |  |  |    |  |   |   |   |  |  |  |     |  |   |   |   |  |  |  |  |  |
|  |  | 1     | 1    | 0  | AMS      | NR       |          |           |            |                         |   |                           |   |   |   |    |     |   |   |  |   |   |     |    |   |   |   |     |     |   |   |   |     |  |   |   |   |    |     |   |   |   |    |  |   |   |   |     |  |   |   |   |  |  |   |   |   |   |               |  |  |  |  |   |   |   |  |  |  |     |    |   |   |   |  |  |  |     |     |   |   |   |  |  |  |     |  |   |   |   |  |  |  |    |     |   |   |   |  |  |  |    |  |   |   |   |  |  |  |     |  |   |   |   |  |  |  |  |  |
|  |  | 1     | 0    | 1  | AMS      | MTL      |          |           |            |                         |   |                           |   |   |   |    |     |   |   |  |   |   |     |    |   |   |   |     |     |   |   |   |     |  |   |   |   |    |     |   |   |   |    |  |   |   |   |     |  |   |   |   |  |  |   |   |   |   |               |  |  |  |  |   |   |   |  |  |  |     |    |   |   |   |  |  |  |     |     |   |   |   |  |  |  |     |  |   |   |   |  |  |  |    |     |   |   |   |  |  |  |    |  |   |   |   |  |  |  |     |  |   |   |   |  |  |  |  |  |
|  |  | 1     | 0    | 0  | AMS      |          |          |           |            |                         |   |                           |   |   |   |    |     |   |   |  |   |   |     |    |   |   |   |     |     |   |   |   |     |  |   |   |   |    |     |   |   |   |    |  |   |   |   |     |  |   |   |   |  |  |   |   |   |   |               |  |  |  |  |   |   |   |  |  |  |     |    |   |   |   |  |  |  |     |     |   |   |   |  |  |  |     |  |   |   |   |  |  |  |    |     |   |   |   |  |  |  |    |  |   |   |   |  |  |  |     |  |   |   |   |  |  |  |  |  |
|  |  | 0     | 1    | 1  | NR       | MTL      |          |           |            |                         |   |                           |   |   |   |    |     |   |   |  |   |   |     |    |   |   |   |     |     |   |   |   |     |  |   |   |   |    |     |   |   |   |    |  |   |   |   |     |  |   |   |   |  |  |   |   |   |   |               |  |  |  |  |   |   |   |  |  |  |     |    |   |   |   |  |  |  |     |     |   |   |   |  |  |  |     |  |   |   |   |  |  |  |    |     |   |   |   |  |  |  |    |  |   |   |   |  |  |  |     |  |   |   |   |  |  |  |  |  |
|  |  | 0     | 1    | 0  | NR       |          |          |           |            |                         |   |                           |   |   |   |    |     |   |   |  |   |   |     |    |   |   |   |     |     |   |   |   |     |  |   |   |   |    |     |   |   |   |    |  |   |   |   |     |  |   |   |   |  |  |   |   |   |   |               |  |  |  |  |   |   |   |  |  |  |     |    |   |   |   |  |  |  |     |     |   |   |   |  |  |  |     |  |   |   |   |  |  |  |    |     |   |   |   |  |  |  |    |  |   |   |   |  |  |  |     |  |   |   |   |  |  |  |  |  |
|  |  | 0     | 0    | 1  | MTL      |          |          |           |            |                         |   |                           |   |   |   |    |     |   |   |  |   |   |     |    |   |   |   |     |     |   |   |   |     |  |   |   |   |    |     |   |   |   |    |  |   |   |   |     |  |   |   |   |  |  |   |   |   |   |               |  |  |  |  |   |   |   |  |  |  |     |    |   |   |   |  |  |  |     |     |   |   |   |  |  |  |     |  |   |   |   |  |  |  |    |     |   |   |   |  |  |  |    |  |   |   |   |  |  |  |     |  |   |   |   |  |  |  |  |  |
| 0  |  | 0     | 0    |  |          |          |          |           |            |                         |   |                           |   |   |   |    |     |   |   |  |   |   |     |    |   |   |   |     |     |   |   |   |     |  |   |   |   |    |     |   |   |   |    |  |   |   |   |     |  |   |   |   |  |  |   |   |   |   |               |  |  |  |  |   |   |   |  |  |  |     |    |   |   |   |  |  |  |     |     |   |   |   |  |  |  |     |  |   |   |   |  |  |  |    |     |   |   |   |  |  |  |    |  |   |   |   |  |  |  |     |  |   |   |   |  |  |  |  |  |
| 1  | 1  | 1     | 1    | ← Do not set.  |          |          |          |           |            |                         |   |                           |   |   |   |    |     |   |   |  |   |   |     |    |   |   |   |     |     |   |   |   |     |  |   |   |   |    |     |   |   |   |    |  |   |   |   |     |  |   |   |   |  |  |   |   |   |   |               |  |  |  |  |   |   |   |  |  |  |     |    |   |   |   |  |  |  |     |     |   |   |   |  |  |  |     |  |   |   |   |  |  |  |    |     |   |   |   |  |  |  |    |  |   |   |   |  |  |  |     |  |   |   |   |  |  |  |  |  |
|  | 1  | 1     | 0    |  |          |          | AMS      | NR        |            |                         |   |                           |   |   |   |    |     |   |   |  |   |   |     |    |   |   |   |     |     |   |   |   |     |  |   |   |   |    |     |   |   |   |    |  |   |   |   |     |  |   |   |   |  |  |   |   |   |   |               |  |  |  |  |   |   |   |  |  |  |     |    |   |   |   |  |  |  |     |     |   |   |   |  |  |  |     |  |   |   |   |  |  |  |    |     |   |   |   |  |  |  |    |  |   |   |   |  |  |  |     |  |   |   |   |  |  |  |  |  |
|  | 1  | 0     | 1    |  |          |          | AMS      | MTL       |            |                         |   |                           |   |   |   |    |     |   |   |  |   |   |     |    |   |   |   |     |     |   |   |   |     |  |   |   |   |    |     |   |   |   |    |  |   |   |   |     |  |   |   |   |  |  |   |   |   |   |               |  |  |  |  |   |   |   |  |  |  |     |    |   |   |   |  |  |  |     |     |   |   |   |  |  |  |     |  |   |   |   |  |  |  |    |     |   |   |   |  |  |  |    |  |   |   |   |  |  |  |     |  |   |   |   |  |  |  |  |  |
|  | 1  | 0     | 0    |  |          |          | AMS      |           |            |                         |   |                           |   |   |   |    |     |   |   |  |   |   |     |    |   |   |   |     |     |   |   |   |     |  |   |   |   |    |     |   |   |   |    |  |   |   |   |     |  |   |   |   |  |  |   |   |   |   |               |  |  |  |  |   |   |   |  |  |  |     |    |   |   |   |  |  |  |     |     |   |   |   |  |  |  |     |  |   |   |   |  |  |  |    |     |   |   |   |  |  |  |    |  |   |   |   |  |  |  |     |  |   |   |   |  |  |  |  |  |
|  | 0  | 1     | 1    |  |          |          | NR       | MTL       |            |                         |   |                           |   |   |   |    |     |   |   |  |   |   |     |    |   |   |   |     |     |   |   |   |     |  |   |   |   |    |     |   |   |   |    |  |   |   |   |     |  |   |   |   |  |  |   |   |   |   |               |  |  |  |  |   |   |   |  |  |  |     |    |   |   |   |  |  |  |     |     |   |   |   |  |  |  |     |  |   |   |   |  |  |  |    |     |   |   |   |  |  |  |    |  |   |   |   |  |  |  |     |  |   |   |   |  |  |  |  |  |
|  | 0  | 1     | 0    |  |          |          | NR       |           |            |                         |   |                           |   |   |   |    |     |   |   |  |   |   |     |    |   |   |   |     |     |   |   |   |     |  |   |   |   |    |     |   |   |   |    |  |   |   |   |     |  |   |   |   |  |  |   |   |   |   |               |  |  |  |  |   |   |   |  |  |  |     |    |   |   |   |  |  |  |     |     |   |   |   |  |  |  |     |  |   |   |   |  |  |  |    |     |   |   |   |  |  |  |    |  |   |   |   |  |  |  |     |  |   |   |   |  |  |  |  |  |
|  | 0  | 0     | 1    |  |          |          | MTL      |           |            |                         |   |                           |   |   |   |    |     |   |   |  |   |   |     |    |   |   |   |     |     |   |   |   |     |  |   |   |   |    |     |   |   |   |    |  |   |   |   |     |  |   |   |   |  |  |   |   |   |   |               |  |  |  |  |   |   |   |  |  |  |     |    |   |   |   |  |  |  |     |     |   |   |   |  |  |  |     |  |   |   |   |  |  |  |    |     |   |   |   |  |  |  |    |  |   |   |   |  |  |  |     |  |   |   |   |  |  |  |  |  |
|  | 0  | 0     | 0    |  |          |          |          |           |            |                         |   |                           |   |   |   |    |     |   |   |  |   |   |     |    |   |   |   |     |     |   |   |   |     |  |   |   |   |    |     |   |   |   |    |  |   |   |   |     |  |   |   |   |  |  |   |   |   |   |               |  |  |  |  |   |   |   |  |  |  |     |    |   |   |   |  |  |  |     |     |   |   |   |  |  |  |     |  |   |   |   |  |  |  |    |     |   |   |   |  |  |  |    |  |   |   |   |  |  |  |     |  |   |   |   |  |  |  |  |  |
| When these functions are used, tuning operations in the tape DK standby, CD DK standby and radio monitor, and DK ON modes are restricted as follows:   |  |       |      |  |          |          |          |           |            |                         |   |                           |   |   |   |    |     |   |   |  |   |   |     |    |   |   |   |     |     |   |   |   |     |  |   |   |   |    |     |   |   |   |    |  |   |   |   |     |  |   |   |   |  |  |   |   |   |   |               |  |  |  |  |   |   |   |  |  |  |     |    |   |   |   |  |  |  |     |     |   |   |   |  |  |  |     |  |   |   |   |  |  |  |    |     |   |   |   |  |  |  |    |  |   |   |   |  |  |  |     |  |   |   |   |  |  |  |  |  |
| <table border="1" style="width:100%; border-collapse: collapse;"> <thead> <tr> <th>ENTPK</th> <th>KAMS</th> <th>KNR</th> <th>KMTL</th> <th></th> </tr> </thead> <tbody> <tr> <td>0</td> <td>0</td> <td>0</td> <td>0</td> <td>Normal tuning possible.</td> </tr> <tr> <td>0</td> <td colspan="3" style="text-align:center;">When even one switch is 1</td> <td>Tuning by <span style="border: 1px solid black; padding: 2px;">M1 (TP1)</span> to <span style="border: 1px solid black; padding: 2px;">M6</span> key is possible.</td> </tr> <tr> <td>1</td> <td style="text-align:center;">—</td> <td style="text-align:center;">—</td> <td style="text-align:center;">—</td> <td>The <span style="border: 1px solid black; padding: 2px;">LOC (TP4)</span> and <span style="border: 1px solid black; padding: 2px;">MONO (TP5)</span> keys cannot be used as local and monaural keys.</td> </tr> </tbody> </table> | ENTPK  | KAMS  | KNR  | KMTL   |          | 0        | 0        | 0         | 0          | Normal tuning possible. | 0 | When even one switch is 1 |   |   | Tuning by <span style="border: 1px solid black; padding: 2px;">M1 (TP1)</span> to <span style="border: 1px solid black; padding: 2px;">M6</span> key is possible. | 1  | —   | — | — | The <span style="border: 1px solid black; padding: 2px;">LOC (TP4)</span> and <span style="border: 1px solid black; padding: 2px;">MONO (TP5)</span> keys cannot be used as local and monaural keys. |   |   |     |    |   |   |   |     |     |   |   |   |     |  |   |   |   |    |     |   |   |   |    |  |   |   |   |     |  |   |   |   |  |  |   |   |   |   |               |  |  |  |  |   |   |   |  |  |  |     |    |   |   |   |  |  |  |     |     |   |   |   |  |  |  |     |  |   |   |   |  |  |  |    |     |   |   |   |  |  |  |    |  |   |   |   |  |  |  |     |  |   |   |   |  |  |  |  |  |
| ENTPK  | KAMS   | KNR   | KMTL |  |          |          |          |           |            |                         |   |                           |   |   |   |    |     |   |   |  |   |   |     |    |   |   |   |     |     |   |   |   |     |  |   |   |   |    |     |   |   |   |    |  |   |   |   |     |  |   |   |   |  |  |   |   |   |   |               |  |  |  |  |   |   |   |  |  |  |     |    |   |   |   |  |  |  |     |     |   |   |   |  |  |  |     |  |   |   |   |  |  |  |    |     |   |   |   |  |  |  |    |  |   |   |   |  |  |  |     |  |   |   |   |  |  |  |  |  |
| 0  | 0  | 0     | 0    | Normal tuning possible.  |          |          |          |           |            |                         |   |                           |   |   |   |    |     |   |   |  |   |   |     |    |   |   |   |     |     |   |   |   |     |  |   |   |   |    |     |   |   |   |    |  |   |   |   |     |  |   |   |   |  |  |   |   |   |   |               |  |  |  |  |   |   |   |  |  |  |     |    |   |   |   |  |  |  |     |     |   |   |   |  |  |  |     |  |   |   |   |  |  |  |    |     |   |   |   |  |  |  |    |  |   |   |   |  |  |  |     |  |   |   |   |  |  |  |  |  |
| 0  | When even one switch is 1  |       |      | Tuning by <span style="border: 1px solid black; padding: 2px;">M1 (TP1)</span> to <span style="border: 1px solid black; padding: 2px;">M6</span> key is possible.                                    |          |          |          |           |            |                         |   |                           |   |   |   |    |     |   |   |  |   |   |     |    |   |   |   |     |     |   |   |   |     |  |   |   |   |    |     |   |   |   |    |  |   |   |   |     |  |   |   |   |  |  |   |   |   |   |               |  |  |  |  |   |   |   |  |  |  |     |    |   |   |   |  |  |  |     |     |   |   |   |  |  |  |     |  |   |   |   |  |  |  |    |     |   |   |   |  |  |  |    |  |   |   |   |  |  |  |     |  |   |   |   |  |  |  |  |  |
| 1  | —  | —     | —    | The <span style="border: 1px solid black; padding: 2px;">LOC (TP4)</span> and <span style="border: 1px solid black; padding: 2px;">MONO (TP5)</span> keys cannot be used as local and monaural keys. |          |          |          |           |            |                         |   |                           |   |   |   |    |     |   |   |  |   |   |     |    |   |   |   |     |     |   |   |   |     |  |   |   |   |    |     |   |   |   |    |  |   |   |   |     |  |   |   |   |  |  |   |   |   |   |               |  |  |  |  |   |   |   |  |  |  |     |    |   |   |   |  |  |  |     |     |   |   |   |  |  |  |     |  |   |   |   |  |  |  |    |     |   |   |   |  |  |  |    |  |   |   |   |  |  |  |     |  |   |   |   |  |  |  |  |  |

| Symbol                              | Function   |                                      |                                       |   |  |                               |   |                                |                                 |                                |                                |                                |                                |                                     |                                     |                                      |                                |                                |                               |                                     |                                     |
|-------------------------------------|--|--------------------------------------|---------------------------------------|---|--|-------------------------------|---|--------------------------------|---------------------------------|--------------------------------|--------------------------------|--------------------------------|--------------------------------|-------------------------------------|-------------------------------------|--------------------------------------|--------------------------------|--------------------------------|-------------------------------|-------------------------------------|-------------------------------------|
| ENNR2                               | <p>Switch that enables the NR<sub>2</sub> (Noise Reduction) function in the tape mode. Its settings are shown below.</p>   |                                      |                                       |   |  |                               |   |                                |                                 |                                |                                |                                |                                |                                     |                                     |                                      |                                |                                |                               |                                     |                                     |
|                                     | <table border="1"> <thead> <tr> <th data-bbox="428 296 545 331">ENNR2</th> <th data-bbox="545 296 1463 331">Description</th> </tr> </thead> <tbody> <tr> <td data-bbox="428 331 545 569">0</td> <td data-bbox="545 331 1463 569"> <p>NR<sub>2</sub> function cannot be used.</p> <p>When the <b>NR</b> key or NR function key (selected by KNR switch) is pressed, the LCD panel "NR<sub>1</sub>" display and NR<sub>1</sub> pin output changes as follows:</p> <div style="border: 1px solid black; padding: 5px; width: fit-content; margin: 10px auto;"> <p style="text-align: center;">"NR<sub>1</sub>" display OFF → "NR<sub>1</sub>" display ON<br/>                     NR<sub>1</sub> pin Low output → NR<sub>1</sub> pin High output</p> </div> </td> </tr> <tr> <td data-bbox="428 569 545 1039">1</td> <td data-bbox="545 569 1463 1039"> <p>Both the NR<sub>1</sub> and NR<sub>2</sub> functions can be used.</p> <p>When the <b>NR</b> key or NR function key (selected by KNR switch) is pressed, the LCD panel "NR<sub>1</sub>" and "NR<sub>2</sub>" displays and NR<sub>1</sub> and MONO/NR<sub>2</sub> pins output change as follows:</p> <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="width: 33%;"></th> <th style="width: 33%;"></th> <th style="width: 33%;"></th> </tr> </thead> <tbody> <tr> <td style="text-align: center;">"NR<sub>1</sub>" display OFF</td> <td style="text-align: center;">"NR<sub>1</sub>" display ON</td> <td style="text-align: center;">"NR<sub>1</sub>" display OFF</td> </tr> <tr> <td style="text-align: center;">NR<sub>1</sub> pin Low output</td> <td style="text-align: center;">NR<sub>1</sub> pin High output</td> <td style="text-align: center;">NR<sub>1</sub> pin Low output</td> </tr> <tr> <td style="text-align: center;">"NR<sub>2</sub>" display OFF</td> <td style="text-align: center;">"NR<sub>2</sub>" display OFF</td> <td style="text-align: center;">"NR<sub>2</sub>" display ON</td> </tr> <tr> <td style="text-align: center;">MONO/NR<sub>2</sub> pin Low output</td> <td style="text-align: center;">MONO/NR<sub>2</sub> pin Low output</td> <td style="text-align: center;">MONO/NR<sub>2</sub> pin High output</td> </tr> </tbody> </table> </td> </tr> </tbody> </table> | ENNR2                                | Description                           | 0 | <p>NR<sub>2</sub> function cannot be used.</p> <p>When the <b>NR</b> key or NR function key (selected by KNR switch) is pressed, the LCD panel "NR<sub>1</sub>" display and NR<sub>1</sub> pin output changes as follows:</p> <div style="border: 1px solid black; padding: 5px; width: fit-content; margin: 10px auto;"> <p style="text-align: center;">"NR<sub>1</sub>" display OFF → "NR<sub>1</sub>" display ON<br/>                     NR<sub>1</sub> pin Low output → NR<sub>1</sub> pin High output</p> </div> | 1                             | <p>Both the NR<sub>1</sub> and NR<sub>2</sub> functions can be used.</p> <p>When the <b>NR</b> key or NR function key (selected by KNR switch) is pressed, the LCD panel "NR<sub>1</sub>" and "NR<sub>2</sub>" displays and NR<sub>1</sub> and MONO/NR<sub>2</sub> pins output change as follows:</p> <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="width: 33%;"></th> <th style="width: 33%;"></th> <th style="width: 33%;"></th> </tr> </thead> <tbody> <tr> <td style="text-align: center;">"NR<sub>1</sub>" display OFF</td> <td style="text-align: center;">"NR<sub>1</sub>" display ON</td> <td style="text-align: center;">"NR<sub>1</sub>" display OFF</td> </tr> <tr> <td style="text-align: center;">NR<sub>1</sub> pin Low output</td> <td style="text-align: center;">NR<sub>1</sub> pin High output</td> <td style="text-align: center;">NR<sub>1</sub> pin Low output</td> </tr> <tr> <td style="text-align: center;">"NR<sub>2</sub>" display OFF</td> <td style="text-align: center;">"NR<sub>2</sub>" display OFF</td> <td style="text-align: center;">"NR<sub>2</sub>" display ON</td> </tr> <tr> <td style="text-align: center;">MONO/NR<sub>2</sub> pin Low output</td> <td style="text-align: center;">MONO/NR<sub>2</sub> pin Low output</td> <td style="text-align: center;">MONO/NR<sub>2</sub> pin High output</td> </tr> </tbody> </table> |                                |                                 |                                | "NR <sub>1</sub> " display OFF | "NR <sub>1</sub> " display ON  | "NR <sub>1</sub> " display OFF | NR <sub>1</sub> pin Low output      | NR <sub>1</sub> pin High output     | NR <sub>1</sub> pin Low output       | "NR <sub>2</sub> " display OFF | "NR <sub>2</sub> " display OFF | "NR <sub>2</sub> " display ON | MONO/NR <sub>2</sub> pin Low output | MONO/NR <sub>2</sub> pin Low output |
| ENNR2                               | Description  |                                      |                                       |   |  |                               |   |                                |                                 |                                |                                |                                |                                |                                     |                                     |                                      |                                |                                |                               |                                     |                                     |
| 0                                   | <p>NR<sub>2</sub> function cannot be used.</p> <p>When the <b>NR</b> key or NR function key (selected by KNR switch) is pressed, the LCD panel "NR<sub>1</sub>" display and NR<sub>1</sub> pin output changes as follows:</p> <div style="border: 1px solid black; padding: 5px; width: fit-content; margin: 10px auto;"> <p style="text-align: center;">"NR<sub>1</sub>" display OFF → "NR<sub>1</sub>" display ON<br/>                     NR<sub>1</sub> pin Low output → NR<sub>1</sub> pin High output</p> </div>   |                                      |                                       |   |  |                               |   |                                |                                 |                                |                                |                                |                                |                                     |                                     |                                      |                                |                                |                               |                                     |                                     |
| 1                                   | <p>Both the NR<sub>1</sub> and NR<sub>2</sub> functions can be used.</p> <p>When the <b>NR</b> key or NR function key (selected by KNR switch) is pressed, the LCD panel "NR<sub>1</sub>" and "NR<sub>2</sub>" displays and NR<sub>1</sub> and MONO/NR<sub>2</sub> pins output change as follows:</p> <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="width: 33%;"></th> <th style="width: 33%;"></th> <th style="width: 33%;"></th> </tr> </thead> <tbody> <tr> <td style="text-align: center;">"NR<sub>1</sub>" display OFF</td> <td style="text-align: center;">"NR<sub>1</sub>" display ON</td> <td style="text-align: center;">"NR<sub>1</sub>" display OFF</td> </tr> <tr> <td style="text-align: center;">NR<sub>1</sub> pin Low output</td> <td style="text-align: center;">NR<sub>1</sub> pin High output</td> <td style="text-align: center;">NR<sub>1</sub> pin Low output</td> </tr> <tr> <td style="text-align: center;">"NR<sub>2</sub>" display OFF</td> <td style="text-align: center;">"NR<sub>2</sub>" display OFF</td> <td style="text-align: center;">"NR<sub>2</sub>" display ON</td> </tr> <tr> <td style="text-align: center;">MONO/NR<sub>2</sub> pin Low output</td> <td style="text-align: center;">MONO/NR<sub>2</sub> pin Low output</td> <td style="text-align: center;">MONO/NR<sub>2</sub> pin High output</td> </tr> </tbody> </table>  |                                      |                                       |   | "NR <sub>1</sub> " display OFF   | "NR <sub>1</sub> " display ON | "NR <sub>1</sub> " display OFF  | NR <sub>1</sub> pin Low output | NR <sub>1</sub> pin High output | NR <sub>1</sub> pin Low output | "NR <sub>2</sub> " display OFF | "NR <sub>2</sub> " display OFF | "NR <sub>2</sub> " display ON  | MONO/NR <sub>2</sub> pin Low output | MONO/NR <sub>2</sub> pin Low output | MONO/NR <sub>2</sub> pin High output |                                |                                |                               |                                     |                                     |
|                                     |  |                                      |                                       |   |  |                               |   |                                |                                 |                                |                                |                                |                                |                                     |                                     |                                      |                                |                                |                               |                                     |                                     |
| "NR <sub>1</sub> " display OFF      | "NR <sub>1</sub> " display ON  | "NR <sub>1</sub> " display OFF       |                                       |   |  |                               |   |                                |                                 |                                |                                |                                |                                |                                     |                                     |                                      |                                |                                |                               |                                     |                                     |
| NR <sub>1</sub> pin Low output      | NR <sub>1</sub> pin High output  | NR <sub>1</sub> pin Low output       |                                       |   |  |                               |   |                                |                                 |                                |                                |                                |                                |                                     |                                     |                                      |                                |                                |                               |                                     |                                     |
| "NR <sub>2</sub> " display OFF      | "NR <sub>2</sub> " display OFF   | "NR <sub>2</sub> " display ON        |                                       |   |  |                               |   |                                |                                 |                                |                                |                                |                                |                                     |                                     |                                      |                                |                                |                               |                                     |                                     |
| MONO/NR <sub>2</sub> pin Low output | MONO/NR <sub>2</sub> pin Low output  | MONO/NR <sub>2</sub> pin High output |                                       |   |  |                               |   |                                |                                 |                                |                                |                                |                                |                                     |                                     |                                      |                                |                                |                               |                                     |                                     |
| MUTESEL                             | <p>Sets the <math>\overline{\text{RDMUTE}}</math> pin output method in the tape and CD modes. Its settings are shown below.</p>  |                                      |                                       |   |  |                               |   |                                |                                 |                                |                                |                                |                                |                                     |                                     |                                      |                                |                                |                               |                                     |                                     |
|                                     | <table border="1"> <thead> <tr> <th data-bbox="428 1167 561 1203">MUTESEL</th> <th data-bbox="561 1167 1463 1203"><math>\overline{\text{RDMUTE}}</math> Pin Output</th> </tr> </thead> <tbody> <tr> <td data-bbox="428 1203 561 1560">1</td> <td data-bbox="561 1203 1463 1560"> <ul style="list-style-type: none"> <li>In the tape and CD modes, muting is turned off.</li> </ul>  <p>When MUTESEL = 1 is set, do not use the DK standby and radio monitor functions.</p> </td> </tr> <tr> <td data-bbox="428 1560 561 1843">0</td> <td data-bbox="561 1560 1463 1843"> <ul style="list-style-type: none"> <li>In the tape and CD modes, muting remains ON.</li> </ul>  </td> </tr> </tbody> </table> <p>For details, see 4 "Radio Mute Output Timing".</p>   | MUTESEL                              | $\overline{\text{RDMUTE}}$ Pin Output | 1 | <ul style="list-style-type: none"> <li>In the tape and CD modes, muting is turned off.</li> </ul>  <p>When MUTESEL = 1 is set, do not use the DK standby and radio monitor functions.</p>  | 0                             | <ul style="list-style-type: none"> <li>In the tape and CD modes, muting remains ON.</li> </ul>    |                                |                                 |                                |                                |                                |                                |                                     |                                     |                                      |                                |                                |                               |                                     |                                     |
| MUTESEL                             | $\overline{\text{RDMUTE}}$ Pin Output  |                                      |                                       |   |  |                               |   |                                |                                 |                                |                                |                                |                                |                                     |                                     |                                      |                                |                                |                               |                                     |                                     |
| 1                                   | <ul style="list-style-type: none"> <li>In the tape and CD modes, muting is turned off.</li> </ul>  <p>When MUTESEL = 1 is set, do not use the DK standby and radio monitor functions.</p>  |                                      |                                       |   |  |                               |   |                                |                                 |                                |                                |                                |                                |                                     |                                     |                                      |                                |                                |                               |                                     |                                     |
| 0                                   | <ul style="list-style-type: none"> <li>In the tape and CD modes, muting remains ON.</li> </ul>   |                                      |                                       |   |  |                               |   |                                |                                 |                                |                                |                                |                                |                                     |                                     |                                      |                                |                                |                               |                                     |                                     |

| Symbol            | Function   |   |        |                                    |
|-------------------|--|---|--------|------------------------------------|
| ENFMIF<br>DISAMIF | IF counter use setting switch.<br>Its settings are shown below.  |   |        |                                    |
|                   | ENFMIF   | DISAMIF   | Band   | Broadcast Station Detection Method |
|                   | 1  | 0   | FM     | IF counter and SD system           |
|                   | 1  | 0   | MW, LW | IF counter and SD system           |
|                   | 1  | 1   | FM     | IF counter and SD system           |
|                   | 1  | 1   | MW, LW | SD system                          |
|                   | 0  | 0   | FM     | SD system                          |
|                   | 0  | 0   | MW, LW | IF counter and SD system           |
|                   | 0  | 1   | FM     | SD system                          |
|                   | 0  | 1   | MW, LW | SD system                          |
| DISAMEMO          | Auto preset memory function disable switch.<br>Its settings are shown below.   |   |        |                                    |
|                   | DISAMEMO   | Description   |        |                                    |
|                   | 0  | Enables the auto preset memory function.<br>When the <table border="1" data-bbox="646 905 797 947"><tr><td>PSCAN<br/>AMEMO</td></tr></table> key is pressed for more than 2 seconds, auto preset memory operation begins. |        |                                    |
| PSCAN<br>AMEMO    |  |   |        |                                    |
| 1                 | Disables the auto preset memory function.<br>The <table border="1" data-bbox="646 1031 797 1073"><tr><td>PSCAN<br/>AMEMO</td></tr></table> key performs the preset scan function only. |   |        | PSCAN<br>AMEMO                     |
| PSCAN<br>AMEMO    |  |   |        |                                    |







1.4.2 Alternate or Transistor Switch

| Symbol | Function  |         |    |         |   |   |    |   |    |   |   |    |   |    |
|--------|---|---------|----|---------|---|---|----|---|----|---|---|----|---|----|
| CDSET  | <p>CD mode setting switch.<br/>                     This switch is valid only when the CE pin is high level.<br/>                     The CD mode can be set by setting this switch to ON.<br/>                     For details, see 2 "Mode Transition".</p>   |         |    |         |   |   |    |   |    |   |   |    |   |    |
| TPSET  | <p>Tape mode setting switch.<br/>                     This switch is valid only when the CE pin is high level.<br/>                     When this switch is set to ON when the CSDSET is OFF, the device is set to the tape mode.<br/>                     For details, see 2 "Mode Transition".</p>  |         |    |         |   |   |    |   |    |   |   |    |   |    |
| RDSET  | <p>Radio mode setting switch.<br/>                     This switch is valid only when the CE pin is high level.<br/>                     When this switch is set to ON when the CDSET and TPSET switches are OFF, the device is set to the radio mode.<br/>                     For details, see 2 "Mode Transition".<br/>                     When using this switch, set the RDON switch (diode matrix) to 0.</p>   |         |    |         |   |   |    |   |    |   |   |    |   |    |
| FF     | <p>Tape mode fast forward signal input switch.<br/>                     The tape fast forward display (◀▷) lights as shown below according to the state of the RL switch.</p> <table border="1" style="margin-left: auto; margin-right: auto;"> <thead> <tr> <th>FF</th> <th>RL</th> <th>Display</th> </tr> </thead> <tbody> <tr> <td rowspan="2">0</td> <td>0</td> <td>◀▷</td> </tr> <tr> <td>1</td> <td>◁▶</td> </tr> <tr> <td rowspan="2">1</td> <td>0</td> <td>◀▷</td> </tr> <tr> <td>1</td> <td>◁▶</td> </tr> </tbody> </table> <p>▷ : Light OFF, ▶ : Light ON, ◁▶ : Flash (2 Hz)<br/>                     0: OFF, 1: ON</p> | FF      | RL | Display | 0 | 0 | ◀▷ | 1 | ◁▶ | 1 | 0 | ◀▷ | 1 | ◁▶ |
| FF     | RL  | Display |    |         |   |   |    |   |    |   |   |    |   |    |
| 0      | 0   | ◀▷      |    |         |   |   |    |   |    |   |   |    |   |    |
|        | 1   | ◁▶      |    |         |   |   |    |   |    |   |   |    |   |    |
| 1      | 0   | ◀▷      |    |         |   |   |    |   |    |   |   |    |   |    |
|        | 1   | ◁▶      |    |         |   |   |    |   |    |   |   |    |   |    |
| SK     | <p>VF broadcast station SK signal input switch.<br/>                     When this switch is set to ON on the FM and VF bands, the LCD panel "SK" display lights.<br/>                     On the FM and VF bands, this signal is also used as the auto tuning stop signal. At this time, 250 to 375 ms after the broadcast station is judged to be present by IF and SD pin, this switch is checked and if it is ON, a traffic information station is judged to be present and autotuning stops.</p>   |         |    |         |   |   |    |   |    |   |   |    |   |    |
| RL     | <p>Tape mode travel direction signal input switch.<br/>                     The tape travel display (◁▷) lights according to the state of the FF switch. For the lighting contents, see the FF switch above.</p>  |         |    |         |   |   |    |   |    |   |   |    |   |    |
| DK     | <p>VF broadcast station DK signal input switch.<br/>                     When this switch is set to ON in the tape DK standby and CD DK standby modes, the device enters the tape DK ON and CD DK ON mode.</p>  |         |    |         |   |   |    |   |    |   |   |    |   |    |

1.4.3 Momentary Keys

| Symbol   | Function  |     |             |       |   |      |   |
|--|---|-----|-------------|-------|---|------|---|
| <div style="display: flex; flex-direction: column; align-items: center;"> <div style="border: 1px solid black; padding: 2px; margin-bottom: 2px;">M1 (TP1)</div> <div style="border: 1px solid black; padding: 2px; margin-bottom: 2px;">M2 (TP2)</div> <div style="border: 1px solid black; padding: 2px; margin-bottom: 2px;">M3 (TP3)</div> <div style="border: 1px solid black; padding: 2px; margin-bottom: 2px;">M4</div> <div style="border: 1px solid black; padding: 2px; margin-bottom: 2px;">M5</div> <div style="border: 1px solid black; padding: 2px; margin-bottom: 2px;">M6</div> </div> | <p>In the radio mode, these keys are used to call and write preset memory. In the tape mode, these are used as tape function keys by initialize diode (ENTPK, KAMS, KNR, KMTL).</p> <ul style="list-style-type: none"> <li>Radio mode                     <ul style="list-style-type: none"> <li>Preset memory call and write keys.</li> <li>One key can memorize the FM1, FM2, FM3, VF, MW1, MW2, and LW bands independently (max. 6 bands).</li> <li>The following operations are performed according to the state of M2S of the initialize diodes:</li> </ul> </li> </ul> <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th data-bbox="357 567 454 598">M2S</th> <th data-bbox="454 567 1380 598">Description</th> </tr> </thead> <tbody> <tr> <td data-bbox="357 598 454 1354" style="text-align: center; vertical-align: middle;">Write</td> <td data-bbox="454 598 1380 1354"> <p>The device is placed into the 5 seconds preset memory write mode by pressing the <b>ME</b> key during frequency display. When one of the keys <b>M1 (TP1)</b> to <b>M6</b> is pressed during this 5 seconds, the current receiving frequency is written to the preset memory corresponding to the pressed key.</p> <p>When the <b>ME</b> key is held down, writing is not performed. During writing, radio muting is not output.</p> <p><b>Example</b></p> <p>When the same preset memory key is pressed while the current preset memory contents are being received, the same operation is performed.</p> </td> </tr> <tr> <td data-bbox="357 1354 454 1932" style="text-align: center; vertical-align: middle;">Call</td> <td data-bbox="454 1354 1380 1932"> <p>In the radio mode, when the device is in the memory unwritable state, when one of the <b>M1 (TP1)</b> to <b>M6</b> keys is pressed, the preset memory contents corresponding to the pressed key can be called.</p> <p><b>Example</b></p> <p>When the same preset memory key is pressed while the current preset memory contents are being received, no operation is performed. However, if the clock is being displayed, BEEP is output and the display switches to frequency display. Radio muting is not output.</p> </td> </tr> </tbody> </table> | M2S | Description | Write | <p>The device is placed into the 5 seconds preset memory write mode by pressing the <b>ME</b> key during frequency display. When one of the keys <b>M1 (TP1)</b> to <b>M6</b> is pressed during this 5 seconds, the current receiving frequency is written to the preset memory corresponding to the pressed key.</p> <p>When the <b>ME</b> key is held down, writing is not performed. During writing, radio muting is not output.</p> <p><b>Example</b></p> <p>When the same preset memory key is pressed while the current preset memory contents are being received, the same operation is performed.</p> | Call | <p>In the radio mode, when the device is in the memory unwritable state, when one of the <b>M1 (TP1)</b> to <b>M6</b> keys is pressed, the preset memory contents corresponding to the pressed key can be called.</p> <p><b>Example</b></p> <p>When the same preset memory key is pressed while the current preset memory contents are being received, no operation is performed. However, if the clock is being displayed, BEEP is output and the display switches to frequency display. Radio muting is not output.</p> |
| M2S  | Description   |     |             |       |   |      |   |
| Write  | <p>The device is placed into the 5 seconds preset memory write mode by pressing the <b>ME</b> key during frequency display. When one of the keys <b>M1 (TP1)</b> to <b>M6</b> is pressed during this 5 seconds, the current receiving frequency is written to the preset memory corresponding to the pressed key.</p> <p>When the <b>ME</b> key is held down, writing is not performed. During writing, radio muting is not output.</p> <p><b>Example</b></p> <p>When the same preset memory key is pressed while the current preset memory contents are being received, the same operation is performed.</p>   |     |             |       |   |      |   |
| Call   | <p>In the radio mode, when the device is in the memory unwritable state, when one of the <b>M1 (TP1)</b> to <b>M6</b> keys is pressed, the preset memory contents corresponding to the pressed key can be called.</p> <p><b>Example</b></p> <p>When the same preset memory key is pressed while the current preset memory contents are being received, no operation is performed. However, if the clock is being displayed, BEEP is output and the display switches to frequency display. Radio muting is not output.</p>   |     |             |       |   |      |   |

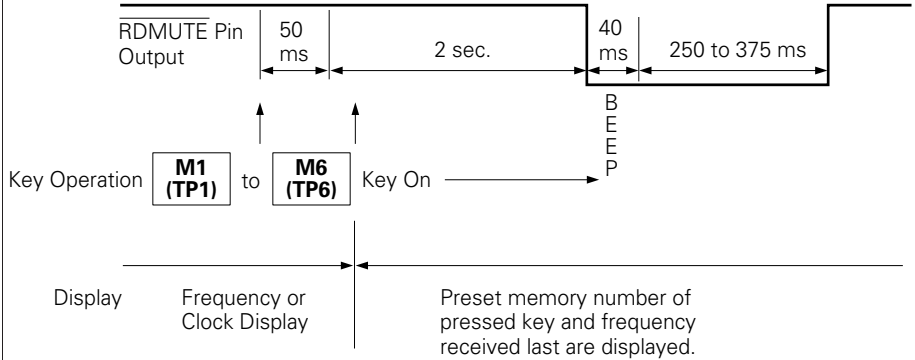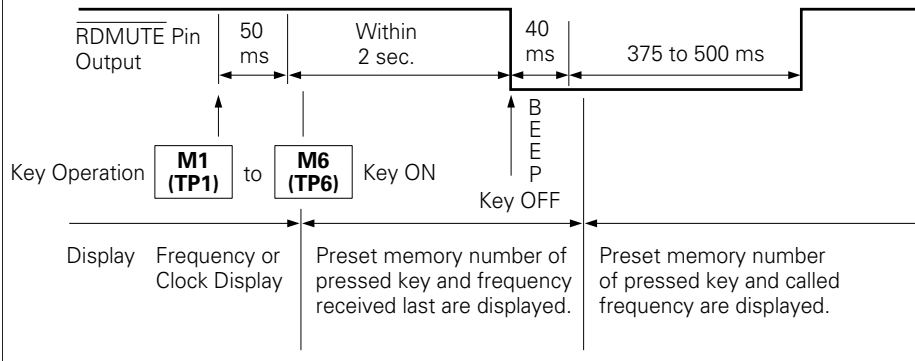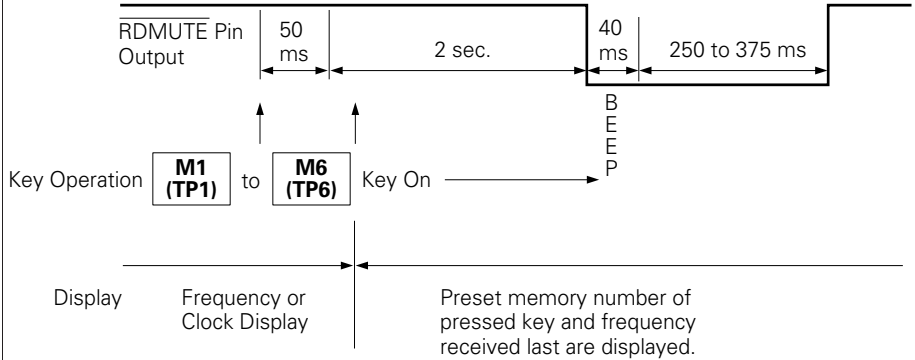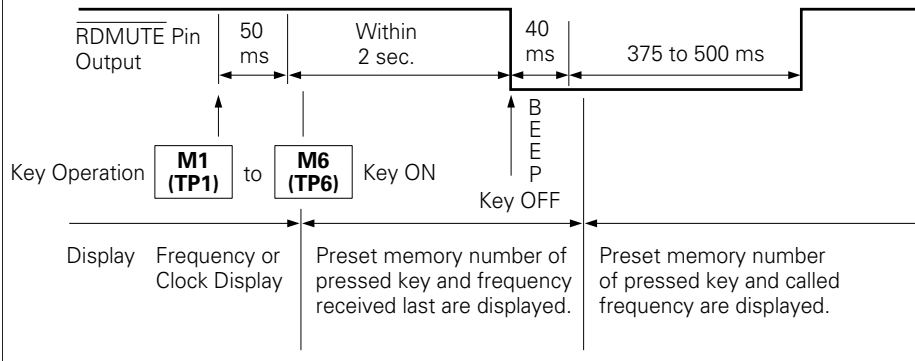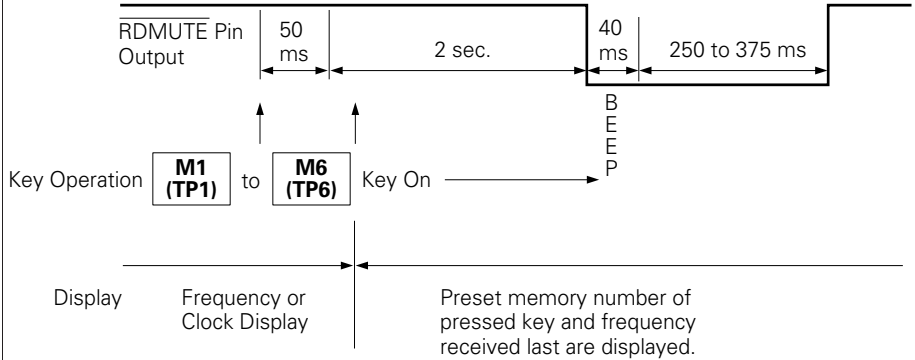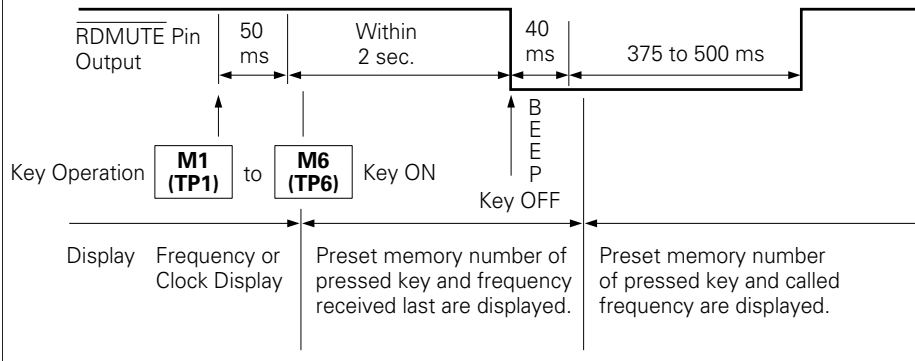

| Symbol   | Function   |             |             |       |  |      |   |
|--|--|-------------|-------------|-------|--|------|---|
| <div style="display: flex; flex-direction: column; align-items: center;"> <div style="border: 1px solid black; padding: 2px; margin-bottom: 2px;">M1 (TP1)</div> <div style="border: 1px solid black; padding: 2px; margin-bottom: 2px;">M2 (TP2)</div> <div style="border: 1px solid black; padding: 2px; margin-bottom: 2px;">M3 (TP3)</div> <div style="border: 1px solid black; padding: 2px; margin-bottom: 2px;">M4</div> <div style="border: 1px solid black; padding: 2px; margin-bottom: 2px;">M5</div> <div style="border: 1px solid black; padding: 2px; margin-bottom: 2px;">M6</div> </div> | <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th data-bbox="423 205 500 241" style="width: 5%;">M2S</th> <th data-bbox="500 205 1461 241" style="width: 95%;">Description</th> </tr> </thead> <tbody> <tr> <td data-bbox="423 241 500 1039" style="text-align: center; vertical-align: middle;">Write</td> <td data-bbox="500 241 1461 1039"> <p>When one of the key <span style="border: 1px solid black; padding: 2px;">M1 (TP1)</span> to <span style="border: 1px solid black; padding: 2px;">M6</span> is pressed for more than 2 seconds, the preset memory corresponding to the pressed key is written.</p> <p>At the end of writing to the preset memory, radio muting is output as acknowledgment.</p>  <p>When the same preset memory key is pressed while the current preset memory contents are being received, nothing is performed. However, if the clock is being displayed, BEEP is output when the key is released or after 2 seconds and the display switches to frequency display. At this time, radio muting is not output.</p> <p>If a key is pressed during the seek operation, the call operation is immediately performed (2-second count is ignored).</p> </td> </tr> <tr> <td data-bbox="423 1039 500 1795" style="text-align: center; vertical-align: middle;">Call</td> <td data-bbox="500 1039 1461 1795"> <p>When a <span style="border: 1px solid black; padding: 2px;">M1 (TP1)</span> to <span style="border: 1px solid black; padding: 2px;">M6</span> key is pressed and released within 2 seconds, the preset memory contents at the time the key was released are called.</p>  <p>When the same preset memory key is pressed while the current preset memory contents are being received, nothing is performed. However, if the clock is being displayed, BEEP is output and the display switches to frequency display. Radio muting is not output.</p> <p>If a key is pressed during the seek operation, the call operation is immediately performed.</p> </td> </tr> </tbody> </table> | M2S         | Description | Write | <p>When one of the key <span style="border: 1px solid black; padding: 2px;">M1 (TP1)</span> to <span style="border: 1px solid black; padding: 2px;">M6</span> is pressed for more than 2 seconds, the preset memory corresponding to the pressed key is written.</p> <p>At the end of writing to the preset memory, radio muting is output as acknowledgment.</p>  <p>When the same preset memory key is pressed while the current preset memory contents are being received, nothing is performed. However, if the clock is being displayed, BEEP is output when the key is released or after 2 seconds and the display switches to frequency display. At this time, radio muting is not output.</p> <p>If a key is pressed during the seek operation, the call operation is immediately performed (2-second count is ignored).</p> | Call | <p>When a <span style="border: 1px solid black; padding: 2px;">M1 (TP1)</span> to <span style="border: 1px solid black; padding: 2px;">M6</span> key is pressed and released within 2 seconds, the preset memory contents at the time the key was released are called.</p>  <p>When the same preset memory key is pressed while the current preset memory contents are being received, nothing is performed. However, if the clock is being displayed, BEEP is output and the display switches to frequency display. Radio muting is not output.</p> <p>If a key is pressed during the seek operation, the call operation is immediately performed.</p> |
|  | M2S  | Description |             |       |  |      |   |
| Write  | <p>When one of the key <span style="border: 1px solid black; padding: 2px;">M1 (TP1)</span> to <span style="border: 1px solid black; padding: 2px;">M6</span> is pressed for more than 2 seconds, the preset memory corresponding to the pressed key is written.</p> <p>At the end of writing to the preset memory, radio muting is output as acknowledgment.</p>  <p>When the same preset memory key is pressed while the current preset memory contents are being received, nothing is performed. However, if the clock is being displayed, BEEP is output when the key is released or after 2 seconds and the display switches to frequency display. At this time, radio muting is not output.</p> <p>If a key is pressed during the seek operation, the call operation is immediately performed (2-second count is ignored).</p>   |             |             |       |  |      |   |
| Call   | <p>When a <span style="border: 1px solid black; padding: 2px;">M1 (TP1)</span> to <span style="border: 1px solid black; padding: 2px;">M6</span> key is pressed and released within 2 seconds, the preset memory contents at the time the key was released are called.</p>  <p>When the same preset memory key is pressed while the current preset memory contents are being received, nothing is performed. However, if the clock is being displayed, BEEP is output and the display switches to frequency display. Radio muting is not output.</p> <p>If a key is pressed during the seek operation, the call operation is immediately performed.</p>  |             |             |       |  |      |   |







| Symbol  | Function   |  |      |      |      |       |       |      |             |  |     |    |    |    |    |    |      |  |  |  |  |  |  |  |          |     |  |      |      |      |      |       |      |     |  |     |     |     |      |     |     |          |     |  |     |     |      |      |     |     |    |  |     |     |     |     |     |     |   |     |  |      |      |      |       |      |      |     |  |     |     |      |      |     |     |                           |     |  |      |      |      |       |      |      |     |  |     |     |     |      |     |     |       |     |  |      |      |      |      |      |      |     |  |     |     |     |      |     |     |                              |     |  |      |      |      |       |      |      |     |  |     |     |     |      |      |     |
|---|--|--|------|------|------|-------|-------|------|-------------|--|-----|----|----|----|----|----|------|--|--|--|--|--|--|--|----------|-----|--|------|------|------|------|-------|------|-----|--|-----|-----|-----|------|-----|-----|----------|-----|--|-----|-----|------|------|-----|-----|----|--|-----|-----|-----|-----|-----|-----|---|-----|--|------|------|------|-------|------|------|-----|--|-----|-----|------|------|-----|-----|---------------------------|-----|--|------|------|------|-------|------|------|-----|--|-----|-----|-----|------|-----|-----|-------|-----|--|------|------|------|------|------|------|-----|--|-----|-----|-----|------|-----|-----|------------------------------|-----|--|------|------|------|-------|------|------|-----|--|-----|-----|-----|------|------|-----|
|   | <p>When the power is turned on, the frequency shown below are written to M1 to M6 to facilitate set adjustment.</p> <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th rowspan="2">Area</th> <th colspan="2">Memory Band</th> <th>M1E</th> <th>M2</th> <th>M3</th> <th>M4</th> <th>M5</th> <th>M6</th> </tr> <tr> <th>Band</th> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td rowspan="2">Europe 1</td> <td>FM1</td> <td></td> <td>87.5</td> <td>87.7</td> <td>92.3</td> <td>96.3</td> <td>105.9</td> <td>87.5</td> </tr> <tr> <td>MW1</td> <td></td> <td>522</td> <td>603</td> <td>954</td> <td>1386</td> <td>522</td> <td>522</td> </tr> <tr> <td rowspan="2">Europe 2</td> <td>MW2</td> <td></td> <td>522</td> <td>621</td> <td>1098</td> <td>1530</td> <td>522</td> <td>522</td> </tr> <tr> <td>LW</td> <td></td> <td>144</td> <td>155</td> <td>208</td> <td>256</td> <td>144</td> <td>144</td> </tr> <tr> <td rowspan="2">United States 1,<br/>United States 2,<br/>United States 3</td> <td>FM1</td> <td></td> <td>87.5</td> <td>87.9</td> <td>97.1</td> <td>105.1</td> <td>87.5</td> <td>87.5</td> </tr> <tr> <td>MW1</td> <td></td> <td>530</td> <td>620</td> <td>1010</td> <td>1490</td> <td>530</td> <td>530</td> </tr> <tr> <td rowspan="2">Australia,<br/>Middle East</td> <td>FM1</td> <td></td> <td>87.5</td> <td>87.9</td> <td>97.1</td> <td>105.1</td> <td>87.5</td> <td>87.5</td> </tr> <tr> <td>MW1</td> <td></td> <td>531</td> <td>612</td> <td>963</td> <td>1395</td> <td>531</td> <td>531</td> </tr> <tr> <td rowspan="2">Japan</td> <td>FM1</td> <td></td> <td>76.0</td> <td>76.4</td> <td>85.6</td> <td>76.0</td> <td>76.0</td> <td>76.0</td> </tr> <tr> <td>MW1</td> <td></td> <td>522</td> <td>603</td> <td>954</td> <td>1386</td> <td>522</td> <td>522</td> </tr> <tr> <td rowspan="2">Central and<br/>South America</td> <td>FM1</td> <td></td> <td>87.5</td> <td>87.9</td> <td>97.1</td> <td>105.1</td> <td>87.5</td> <td>87.5</td> </tr> <tr> <td>MW1</td> <td></td> <td>520</td> <td>565</td> <td>760</td> <td>1000</td> <td>1400</td> <td>520</td> </tr> </tbody> </table> |  |      |      |      |       |       | Area | Memory Band |  | M1E | M2 | M3 | M4 | M5 | M6 | Band |  |  |  |  |  |  |  | Europe 1 | FM1 |  | 87.5 | 87.7 | 92.3 | 96.3 | 105.9 | 87.5 | MW1 |  | 522 | 603 | 954 | 1386 | 522 | 522 | Europe 2 | MW2 |  | 522 | 621 | 1098 | 1530 | 522 | 522 | LW |  | 144 | 155 | 208 | 256 | 144 | 144 | United States 1,<br>United States 2,<br>United States 3 | FM1 |  | 87.5 | 87.9 | 97.1 | 105.1 | 87.5 | 87.5 | MW1 |  | 530 | 620 | 1010 | 1490 | 530 | 530 | Australia,<br>Middle East | FM1 |  | 87.5 | 87.9 | 97.1 | 105.1 | 87.5 | 87.5 | MW1 |  | 531 | 612 | 963 | 1395 | 531 | 531 | Japan | FM1 |  | 76.0 | 76.4 | 85.6 | 76.0 | 76.0 | 76.0 | MW1 |  | 522 | 603 | 954 | 1386 | 522 | 522 | Central and<br>South America | FM1 |  | 87.5 | 87.9 | 97.1 | 105.1 | 87.5 | 87.5 | MW1 |  | 520 | 565 | 760 | 1000 | 1400 | 520 |
| Area  | Memory Band  |  | M1E  | M2   | M3   | M4    | M5    |      | M6          |  |     |    |    |    |    |    |      |  |  |  |  |  |  |  |          |     |  |      |      |      |      |       |      |     |  |     |     |     |      |     |     |          |     |  |     |     |      |      |     |     |    |  |     |     |     |     |     |     |   |     |  |      |      |      |       |      |      |     |  |     |     |      |      |     |     |                           |     |  |      |      |      |       |      |      |     |  |     |     |     |      |     |     |       |     |  |      |      |      |      |      |      |     |  |     |     |     |      |     |     |                              |     |  |      |      |      |       |      |      |     |  |     |     |     |      |      |     |
|   | Band   |  |      |      |      |       |       |      |             |  |     |    |    |    |    |    |      |  |  |  |  |  |  |  |          |     |  |      |      |      |      |       |      |     |  |     |     |     |      |     |     |          |     |  |     |     |      |      |     |     |    |  |     |     |     |     |     |     |   |     |  |      |      |      |       |      |      |     |  |     |     |      |      |     |     |                           |     |  |      |      |      |       |      |      |     |  |     |     |     |      |     |     |       |     |  |      |      |      |      |      |      |     |  |     |     |     |      |     |     |                              |     |  |      |      |      |       |      |      |     |  |     |     |     |      |      |     |
| Europe 1  | FM1  |  | 87.5 | 87.7 | 92.3 | 96.3  | 105.9 | 87.5 |             |  |     |    |    |    |    |    |      |  |  |  |  |  |  |  |          |     |  |      |      |      |      |       |      |     |  |     |     |     |      |     |     |          |     |  |     |     |      |      |     |     |    |  |     |     |     |     |     |     |   |     |  |      |      |      |       |      |      |     |  |     |     |      |      |     |     |                           |     |  |      |      |      |       |      |      |     |  |     |     |     |      |     |     |       |     |  |      |      |      |      |      |      |     |  |     |     |     |      |     |     |                              |     |  |      |      |      |       |      |      |     |  |     |     |     |      |      |     |
|   | MW1  |  | 522  | 603  | 954  | 1386  | 522   | 522  |             |  |     |    |    |    |    |    |      |  |  |  |  |  |  |  |          |     |  |      |      |      |      |       |      |     |  |     |     |     |      |     |     |          |     |  |     |     |      |      |     |     |    |  |     |     |     |     |     |     |   |     |  |      |      |      |       |      |      |     |  |     |     |      |      |     |     |                           |     |  |      |      |      |       |      |      |     |  |     |     |     |      |     |     |       |     |  |      |      |      |      |      |      |     |  |     |     |     |      |     |     |                              |     |  |      |      |      |       |      |      |     |  |     |     |     |      |      |     |
| Europe 2  | MW2  |  | 522  | 621  | 1098 | 1530  | 522   | 522  |             |  |     |    |    |    |    |    |      |  |  |  |  |  |  |  |          |     |  |      |      |      |      |       |      |     |  |     |     |     |      |     |     |          |     |  |     |     |      |      |     |     |    |  |     |     |     |     |     |     |   |     |  |      |      |      |       |      |      |     |  |     |     |      |      |     |     |                           |     |  |      |      |      |       |      |      |     |  |     |     |     |      |     |     |       |     |  |      |      |      |      |      |      |     |  |     |     |     |      |     |     |                              |     |  |      |      |      |       |      |      |     |  |     |     |     |      |      |     |
|   | LW   |  | 144  | 155  | 208  | 256   | 144   | 144  |             |  |     |    |    |    |    |    |      |  |  |  |  |  |  |  |          |     |  |      |      |      |      |       |      |     |  |     |     |     |      |     |     |          |     |  |     |     |      |      |     |     |    |  |     |     |     |     |     |     |   |     |  |      |      |      |       |      |      |     |  |     |     |      |      |     |     |                           |     |  |      |      |      |       |      |      |     |  |     |     |     |      |     |     |       |     |  |      |      |      |      |      |      |     |  |     |     |     |      |     |     |                              |     |  |      |      |      |       |      |      |     |  |     |     |     |      |      |     |
| United States 1,<br>United States 2,<br>United States 3   | FM1  |  | 87.5 | 87.9 | 97.1 | 105.1 | 87.5  | 87.5 |             |  |     |    |    |    |    |    |      |  |  |  |  |  |  |  |          |     |  |      |      |      |      |       |      |     |  |     |     |     |      |     |     |          |     |  |     |     |      |      |     |     |    |  |     |     |     |     |     |     |   |     |  |      |      |      |       |      |      |     |  |     |     |      |      |     |     |                           |     |  |      |      |      |       |      |      |     |  |     |     |     |      |     |     |       |     |  |      |      |      |      |      |      |     |  |     |     |     |      |     |     |                              |     |  |      |      |      |       |      |      |     |  |     |     |     |      |      |     |
|   | MW1  |  | 530  | 620  | 1010 | 1490  | 530   | 530  |             |  |     |    |    |    |    |    |      |  |  |  |  |  |  |  |          |     |  |      |      |      |      |       |      |     |  |     |     |     |      |     |     |          |     |  |     |     |      |      |     |     |    |  |     |     |     |     |     |     |   |     |  |      |      |      |       |      |      |     |  |     |     |      |      |     |     |                           |     |  |      |      |      |       |      |      |     |  |     |     |     |      |     |     |       |     |  |      |      |      |      |      |      |     |  |     |     |     |      |     |     |                              |     |  |      |      |      |       |      |      |     |  |     |     |     |      |      |     |
| Australia,<br>Middle East   | FM1  |  | 87.5 | 87.9 | 97.1 | 105.1 | 87.5  | 87.5 |             |  |     |    |    |    |    |    |      |  |  |  |  |  |  |  |          |     |  |      |      |      |      |       |      |     |  |     |     |     |      |     |     |          |     |  |     |     |      |      |     |     |    |  |     |     |     |     |     |     |   |     |  |      |      |      |       |      |      |     |  |     |     |      |      |     |     |                           |     |  |      |      |      |       |      |      |     |  |     |     |     |      |     |     |       |     |  |      |      |      |      |      |      |     |  |     |     |     |      |     |     |                              |     |  |      |      |      |       |      |      |     |  |     |     |     |      |      |     |
|   | MW1  |  | 531  | 612  | 963  | 1395  | 531   | 531  |             |  |     |    |    |    |    |    |      |  |  |  |  |  |  |  |          |     |  |      |      |      |      |       |      |     |  |     |     |     |      |     |     |          |     |  |     |     |      |      |     |     |    |  |     |     |     |     |     |     |   |     |  |      |      |      |       |      |      |     |  |     |     |      |      |     |     |                           |     |  |      |      |      |       |      |      |     |  |     |     |     |      |     |     |       |     |  |      |      |      |      |      |      |     |  |     |     |     |      |     |     |                              |     |  |      |      |      |       |      |      |     |  |     |     |     |      |      |     |
| Japan   | FM1  |  | 76.0 | 76.4 | 85.6 | 76.0  | 76.0  | 76.0 |             |  |     |    |    |    |    |    |      |  |  |  |  |  |  |  |          |     |  |      |      |      |      |       |      |     |  |     |     |     |      |     |     |          |     |  |     |     |      |      |     |     |    |  |     |     |     |     |     |     |   |     |  |      |      |      |       |      |      |     |  |     |     |      |      |     |     |                           |     |  |      |      |      |       |      |      |     |  |     |     |     |      |     |     |       |     |  |      |      |      |      |      |      |     |  |     |     |     |      |     |     |                              |     |  |      |      |      |       |      |      |     |  |     |     |     |      |      |     |
|   | MW1  |  | 522  | 603  | 954  | 1386  | 522   | 522  |             |  |     |    |    |    |    |    |      |  |  |  |  |  |  |  |          |     |  |      |      |      |      |       |      |     |  |     |     |     |      |     |     |          |     |  |     |     |      |      |     |     |    |  |     |     |     |     |     |     |   |     |  |      |      |      |       |      |      |     |  |     |     |      |      |     |     |                           |     |  |      |      |      |       |      |      |     |  |     |     |     |      |     |     |       |     |  |      |      |      |      |      |      |     |  |     |     |     |      |     |     |                              |     |  |      |      |      |       |      |      |     |  |     |     |     |      |      |     |
| Central and<br>South America  | FM1  |  | 87.5 | 87.9 | 97.1 | 105.1 | 87.5  | 87.5 |             |  |     |    |    |    |    |    |      |  |  |  |  |  |  |  |          |     |  |      |      |      |      |       |      |     |  |     |     |     |      |     |     |          |     |  |     |     |      |      |     |     |    |  |     |     |     |     |     |     |   |     |  |      |      |      |       |      |      |     |  |     |     |      |      |     |     |                           |     |  |      |      |      |       |      |      |     |  |     |     |     |      |     |     |       |     |  |      |      |      |      |      |      |     |  |     |     |     |      |     |     |                              |     |  |      |      |      |       |      |      |     |  |     |     |     |      |      |     |
|   | MW1  |  | 520  | 565  | 760  | 1000  | 1400  | 520  |             |  |     |    |    |    |    |    |      |  |  |  |  |  |  |  |          |     |  |      |      |      |      |       |      |     |  |     |     |     |      |     |     |          |     |  |     |     |      |      |     |     |    |  |     |     |     |     |     |     |   |     |  |      |      |      |       |      |      |     |  |     |     |      |      |     |     |                           |     |  |      |      |      |       |      |      |     |  |     |     |     |      |     |     |       |     |  |      |      |      |      |      |      |     |  |     |     |     |      |     |     |                              |     |  |      |      |      |       |      |      |     |  |     |     |     |      |      |     |
| <div style="border: 1px solid black; padding: 2px; width: fit-content; margin-bottom: 5px;">M1 (TP1)</div> <div style="border: 1px solid black; padding: 2px; width: fit-content; margin-bottom: 5px;">M2 (TP2)</div> <div style="border: 1px solid black; padding: 2px; width: fit-content; margin-bottom: 5px;">M3 (TP3)</div> <div style="border: 1px solid black; padding: 2px; width: fit-content; margin-bottom: 5px;">M4</div> <div style="border: 1px solid black; padding: 2px; width: fit-content; margin-bottom: 5px;">M5</div> <div style="border: 1px solid black; padding: 2px; width: fit-content; margin-bottom: 5px;">M6</div> | <p>The lowest frequency of each area is M1 to M6 of the FM2, FM3, VF, and MW2 bands of other than Europe 1 and 2.</p> <ul style="list-style-type: none"> <li>Tape mode<br/>These keys can be used as tape function keys by means of initialize diode matrix switches ENTPK, KAMS, and KMTL.<br/>For the keys that can be used, see the diode matrix. For a description of each key operation, see the <span style="border: 1px solid black; padding: 0 5px;">AMS</span>, <span style="border: 1px solid black; padding: 0 5px;">NR</span>, and <span style="border: 1px solid black; padding: 0 5px;">MTL</span> key items.</li> </ul>   |  |      |      |      |       |       |      |             |  |     |    |    |    |    |    |      |  |  |  |  |  |  |  |          |     |  |      |      |      |      |       |      |     |  |     |     |     |      |     |     |          |     |  |     |     |      |      |     |     |    |  |     |     |     |     |     |     |   |     |  |      |      |      |       |      |      |     |  |     |     |      |      |     |     |                           |     |  |      |      |      |       |      |      |     |  |     |     |     |      |     |     |       |     |  |      |      |      |      |      |      |     |  |     |     |     |      |     |     |                              |     |  |      |      |      |       |      |      |     |  |     |     |     |      |      |     |
| <div style="border: 1px solid black; padding: 2px; width: fit-content;">VF</div>  | <p>VF (traffic information) broadcast station search key. Its operation is described below.</p> <p>When this key is pressed in the radio mode (FM, MW, or LW band), the LCD panel "VF" display and Band2 pin output are inverted.</p> <p>When this key is pressed, the VF band is selected and 375 to 500 ms later, whether or not there is a broadcast station (IF count and SD check) and SK signal are detected. If no VF broadcast station is judged not to be present (The presence of a VF broadcast station is determined by the presence of an IF count, SD signal, and SK signal), autotuning starts from that frequency.</p> <p>When the first broadcast station is detected, that frequency is held until the autotuning key is pressed thereafter, even when there is no SK signal.</p> <p>When the IF count and SD check are judged to be present, the autotuning operation is the same as normal autotuning, except that the SK signal is detected after 375 to 500 ms. Autotuning (seek up) is performed automatically only when the VF band is selected by <span style="border: 1px solid black; padding: 0 5px;">VF</span> key for the first time. Autotuning is not performed automatically even if another tuning key (other than autotuning) is pressed.</p>   |  |      |      |      |       |       |      |             |  |     |    |    |    |    |    |      |  |  |  |  |  |  |  |          |     |  |      |      |      |      |       |      |     |  |     |     |     |      |     |     |          |     |  |     |     |      |      |     |     |    |  |     |     |     |     |     |     |   |     |  |      |      |      |       |      |      |     |  |     |     |      |      |     |     |                           |     |  |      |      |      |       |      |      |     |  |     |     |     |      |     |     |       |     |  |      |      |      |      |      |      |     |  |     |     |     |      |     |     |                              |     |  |      |      |      |       |      |      |     |  |     |     |     |      |      |     |

| Symbol  | Function   |
|---|--|
| <div style="border: 1px solid black; padding: 2px; width: fit-content; margin: 0 auto;">VF</div>              | <p>To reset the VF band, press the <span style="border: 1px solid black; padding: 2px;">VF</span> key or <span style="border: 1px solid black; padding: 2px;">BAND</span> key.</p> <p>The VF band has 6 independent memories. The last channel is also independent.</p> <p>When the device is set to the tape or CD mode by TPSET or CDSET switch while on the VF band, it switches to the DK standby mode. The device also switches to the DK standby mode when the <span style="border: 1px solid black; padding: 2px;">VF</span> key is pressed in the tape or CD mode. In the DK standby mode, all the keys, other than the <span style="border: 1px solid black; padding: 2px;">BAND</span> key, are valid. When the DK switch is set to ON in the DK standby mode, the device switches to the DK ON mode. In the DK ON mode, radio muting (<math>\overline{\text{RDMUTE}}</math> pin) is turned off and audio muting (<math>\overline{\text{AMUTE}}</math> pin) is turned on.</p> <p>When both the SD and SK signals or one of signals are lost during VF band reception (including TAPE or CD DK standby mode), BEEP is output.</p> <p>The SD and SK signals are checked 512 times once every 30 ms and if there are no SD and SK signals for 256 times or more, BEEP is output.</p> <p>For BEEP, 120 ms ON and 120 ms OFF are output 5 times, respectively.</p>  |
| <div style="border: 1px solid black; padding: 2px; width: fit-content; margin: 0 auto;">PSCAN<br/>AMEMO</div> | <p>Preset memory scan and auto store memory key.</p> <p>The auto store memory function is enabled when initialize diode DISAMEMO is 0.</p> <p>When the auto store memory is used (DISAMEMO = 0), when this key is pressed and released within 2 seconds, preset memory scanning is performed. When this key is held down for more than 2 seconds, operation switches to auto store memory operation.</p> <p>When the auto store memory is not used (DISAMEMO = 1), the preset memory scanning operation starts the moment the button is pressed.</p> <p>The preset memory scan and auto store memory operations are described below.</p> <p><b>(1) Preset memory scan operation</b></p> <p>The preset memory contents are called automatically every 5 seconds.</p> <p>If other than the current preset memory is being received, the preset memories are called from M1, and if a present memory is being received, the preset memories are called from the next preset memory (for instance, from M4 if M3 is being received) sequentially every 5 seconds. This operation is shown below.</p> <p><b>Example</b> When FM1 band being received</p> <p style="margin-left: 40px;">FM1</p> <div style="margin-left: 40px; border: 1px solid black; padding: 5px; display: inline-block;"> <p>→ M1→M2→M3→M4→M5→M6 →</p> </div> <p style="margin-left: 40px;">Other than preset memory being received on FM1 band      M3 being received on FM1 band</p> <p>This operation is the same for the MW bands (MW1, MW2) and LW band.</p> |

| Symbol   | Function  |                   |                  |                 |  |                   |   |  |               |                    |                   |
|--|---|-------------------|------------------|-----------------|--|-------------------|---|--|---------------|--------------------|-------------------|
| <div style="border: 1px solid black; padding: 2px; width: fit-content; margin-bottom: 10px;">PSCAN<br/>AMEMO</div>   | <p>When the next preset memory is called at the end of 5 second hold, BEEP is output.<br/>           During 5-second hold, the preset memory number display flashes at 1 Hz (duty 50 %). The "ch" display does not flash.</p> <p>To stop at that preset memory during 5-second hold, press this key again, or press the same preset memory key as the preset memory being received. Writing of preset memory (for example, writing to M5 during M1 hold) is also possible, but the preset memory scan operation ends when the preset memory was written.</p> <p>The preset memory write operation during 5 second hold is described below.</p> <table border="1" data-bbox="358 527 1383 1108"> <thead> <tr> <th data-bbox="358 527 423 569">M2S</th> <th data-bbox="423 527 1383 569">Description</th> </tr> </thead> <tbody> <tr> <td data-bbox="358 569 423 877">0</td> <td data-bbox="423 569 1383 877"> <p>When the <b>ME</b> key is pressed, the device enters the 5-second memory write mode. Writing is performed by pressing a <b>M1 (TP1)</b> to <b>M6</b> key in the memory writable mode. At the end of writing, auto preset memory scanning stops. In the memory writable mode, the "ch" display flashes. If no operation is performed within 5 seconds, the next preset memory channel is called and auto preset scanning continues.</p> <p>If the <b>ME</b> key is pressed again in the memory writable mode, the memory writable mode is canceled and the next channel is called 5 seconds after the key was pressed.</p> </td> </tr> <tr> <td data-bbox="358 877 423 1108">1</td> <td data-bbox="423 877 1383 1108"> <p>When a <b>M1 (TP1)</b> to <b>M6</b> key is pressed for more than 2 seconds, the frequency currently being received is written to the preset memory corresponding to the pressed key.</p> <p>Auto preset scanning ends when the frequency was written to the preset memory (2 seconds after the key was pressed).</p> </td> </tr> </tbody> </table> | M2S               | Description      | 0               | <p>When the <b>ME</b> key is pressed, the device enters the 5-second memory write mode. Writing is performed by pressing a <b>M1 (TP1)</b> to <b>M6</b> key in the memory writable mode. At the end of writing, auto preset memory scanning stops. In the memory writable mode, the "ch" display flashes. If no operation is performed within 5 seconds, the next preset memory channel is called and auto preset scanning continues.</p> <p>If the <b>ME</b> key is pressed again in the memory writable mode, the memory writable mode is canceled and the next channel is called 5 seconds after the key was pressed.</p> | 1                 | <p>When a <b>M1 (TP1)</b> to <b>M6</b> key is pressed for more than 2 seconds, the frequency currently being received is written to the preset memory corresponding to the pressed key.</p> <p>Auto preset scanning ends when the frequency was written to the preset memory (2 seconds after the key was pressed).</p> |  |               |                    |                   |
|  | M2S   | Description       |                  |                 |  |                   |   |  |               |                    |                   |
| 0  | <p>When the <b>ME</b> key is pressed, the device enters the 5-second memory write mode. Writing is performed by pressing a <b>M1 (TP1)</b> to <b>M6</b> key in the memory writable mode. At the end of writing, auto preset memory scanning stops. In the memory writable mode, the "ch" display flashes. If no operation is performed within 5 seconds, the next preset memory channel is called and auto preset scanning continues.</p> <p>If the <b>ME</b> key is pressed again in the memory writable mode, the memory writable mode is canceled and the next channel is called 5 seconds after the key was pressed.</p>  |                   |                  |                 |  |                   |   |  |               |                    |                   |
| 1  | <p>When a <b>M1 (TP1)</b> to <b>M6</b> key is pressed for more than 2 seconds, the frequency currently being received is written to the preset memory corresponding to the pressed key.</p> <p>Auto preset scanning ends when the frequency was written to the preset memory (2 seconds after the key was pressed).</p>   |                   |                  |                 |  |                   |   |  |               |                    |                   |
| <p>When one of the following keys is pressed during preset memory scanning, preset memory scanning stops and the operation of the pressed key is performed.</p> <table border="1" data-bbox="358 1213 1029 1293"> <tr> <td><b>MAN UP</b> ,</td> <td><b>MAN DWN</b> ,</td> <td><b>SEEK UP</b> ,</td> <td><b>SEEK DWN</b></td> </tr> <tr> <td><b>SCAN UP</b> ,</td> <td><b>SCAN DWN</b> ,</td> <td><b>VF</b></td> <td></td> </tr> </table> <p>Memory call key other than memory being received (held)<br/>           Band switching key</p> <p>When one of the following keys is pressed during preset memory scanning, after the operation of the pressed key is performed, preset memory scanning is continued.</p> <table border="1" data-bbox="358 1465 854 1507"> <tr> <td><b>LOUD</b> ,</td> <td><b>LOC (TP4)</b> ,</td> <td><b>MONO (TP5)</b></td> </tr> </table> | <b>MAN UP</b> ,   | <b>MAN DWN</b> ,  | <b>SEEK UP</b> , | <b>SEEK DWN</b> | <b>SCAN UP</b> ,   | <b>SCAN DWN</b> , | <b>VF</b>   |  | <b>LOUD</b> , | <b>LOC (TP4)</b> , | <b>MONO (TP5)</b> |
| <b>MAN UP</b> ,  | <b>MAN DWN</b> ,  | <b>SEEK UP</b> ,  | <b>SEEK DWN</b>  |                 |  |                   |   |  |               |                    |                   |
| <b>SCAN UP</b> ,   | <b>SCAN DWN</b> ,   | <b>VF</b>         |                  |                 |  |                   |   |  |               |                    |                   |
| <b>LOUD</b> ,  | <b>LOC (TP4)</b> ,  | <b>MONO (TP5)</b> |                  |                 |  |                   |   |  |               |                    |                   |

| Symbol    | Function  |           |            |                  |                    |                  |                  |               |      |      |      |  |   |   |   |   |   |   |   |   |   |         |     |      |  |     |     |     |     |     |  |           |             |  |  |                  |                  |                  |                  |               |      |           |      |      |      |      |      |      |      |  |  |  |  |   |   |   |   |         |      |  |            |     |     |     |  |           |             |  |  |  |                    |               |      |
|-----------|---|-----------|------------|------------------|--------------------|------------------|------------------|---------------|------|------|------|--|---|---|---|---|---|---|---|---|---|---------|-----|------|--|-----|-----|-----|-----|-----|--|-----------|-------------|--|--|------------------|------------------|------------------|------------------|---------------|------|-----------|------|------|------|------|------|------|------|--|--|--|--|---|---|---|---|---------|------|--|------------|-----|-----|-----|--|-----------|-------------|--|--|--|--------------------|---------------|------|
|           | <p><b>Example</b> FM band (FM1, M1 = 76.0 MHz, M2 = 80.0 MHz, M3 = 90.0 MHz), M4 = 88.0 MHz, M2S = 0</p>  |           |            |                  |                    |                  |                  |               |      |      |      |  |   |   |   |   |   |   |   |   |   |         |     |      |  |     |     |     |     |     |  |           |             |  |  |                  |                  |                  |                  |               |      |           |      |      |      |      |      |      |      |  |  |  |  |   |   |   |   |         |      |  |            |     |     |     |  |           |             |  |  |  |                    |               |      |
|           | <p><b>(2) Auto store memory</b></p> <p>This operation searches for a broadcast station and writes it to preset memory automatically.</p> <p>Broadcast station search is performed in the up direction, starting from the frequency currently being received.</p> <p>If the preset memory channel which is written is receiving the current preset memory, it is incremented from the preset memory channel being received (from M3 if M3 is being received). If a channel other than a preset memory channel is being received, the preset memory channel which is written is incremented from M1. When broadcast stations are stored up to M6, the auto store memory operation ends.</p> <p>The auto store memory operation broadcast station search method in the LOCAL mode and DX mode differs as shown below.</p> <ul style="list-style-type: none"> <li>• DX mode</li> </ul> <p>The frequencies are searched in the up direction, starting from the frequency currently being received, and ends when the preset memories are written up to M6 or all the search frequencies were searched once.</p> <p><b>Example 1)</b> Japan, FM band 78.0 MHz (M3) reception</p> <table border="0"> <tr> <td>Frequency</td> <td>78.0</td> <td>78.1</td> <td>Seek</td> <td>80.0</td> <td>80.1</td> <td>82.5</td> <td>84.7</td> <td>87.9</td> <td>80.0</td> </tr> <tr> <td></td> <td>→</td> <td>→</td> <td>→</td> <td>→</td> <td>→</td> <td>→</td> <td>→</td> <td>→</td> <td>→</td> </tr> <tr> <td>Display</td> <td>ch3</td> <td>↑ch3</td> <td></td> <td>ch3</td> <td>ch4</td> <td>ch4</td> <td>ch5</td> <td>ch6</td> <td></td> </tr> <tr> <td>Operation</td> <td colspan="3">PSCAN AMEMO</td> <td>Station M3 Write</td> <td>Station M4 Write</td> <td>Station M5 Write</td> <td>Station M6 Write</td> <td>↑ Auto Memory</td> <td>Stop</td> </tr> </table> <p><b>Example 2)</b> Japan, FM band 78.0 MHz reception</p> <table border="0"> <tr> <td>Frequency</td> <td>78.0</td> <td>78.1</td> <td>Seek</td> <td>90.0</td> <td>76.0</td> <td>77.9</td> <td>78.0</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td>→</td> <td>→</td> <td>→</td> <td>→</td> </tr> <tr> <td>Display</td> <td>↑ch1</td> <td></td> <td>No Station</td> <td>ch1</td> <td>ch1</td> <td>ch1</td> <td></td> </tr> <tr> <td>Operation</td> <td colspan="3">PSCAN AMEMO</td> <td></td> <td>1 Cycle No Station</td> <td>↑ Auto Memory</td> <td>Stop</td> </tr> </table> <p>For auto store memory in the DX mode, the SD pin broadcast station detection level is:</p> | Frequency | 78.0       | 78.1             | Seek               | 80.0             | 80.1             | 82.5          | 84.7 | 87.9 | 80.0 |  | → | → | → | → | → | → | → | → | → | Display | ch3 | ↑ch3 |  | ch3 | ch4 | ch4 | ch5 | ch6 |  | Operation | PSCAN AMEMO |  |  | Station M3 Write | Station M4 Write | Station M5 Write | Station M6 Write | ↑ Auto Memory | Stop | Frequency | 78.0 | 78.1 | Seek | 90.0 | 76.0 | 77.9 | 78.0 |  |  |  |  | → | → | → | → | Display | ↑ch1 |  | No Station | ch1 | ch1 | ch1 |  | Operation | PSCAN AMEMO |  |  |  | 1 Cycle No Station | ↑ Auto Memory | Stop |
| Frequency | 78.0  | 78.1      | Seek       | 80.0             | 80.1               | 82.5             | 84.7             | 87.9          | 80.0 |      |      |  |   |   |   |   |   |   |   |   |   |         |     |      |  |     |     |     |     |     |  |           |             |  |  |                  |                  |                  |                  |               |      |           |      |      |      |      |      |      |      |  |  |  |  |   |   |   |   |         |      |  |            |     |     |     |  |           |             |  |  |  |                    |               |      |
|           | →   | →         | →          | →                | →                  | →                | →                | →             | →    |      |      |  |   |   |   |   |   |   |   |   |   |         |     |      |  |     |     |     |     |     |  |           |             |  |  |                  |                  |                  |                  |               |      |           |      |      |      |      |      |      |      |  |  |  |  |   |   |   |   |         |      |  |            |     |     |     |  |           |             |  |  |  |                    |               |      |
| Display   | ch3   | ↑ch3      |            | ch3              | ch4                | ch4              | ch5              | ch6           |      |      |      |  |   |   |   |   |   |   |   |   |   |         |     |      |  |     |     |     |     |     |  |           |             |  |  |                  |                  |                  |                  |               |      |           |      |      |      |      |      |      |      |  |  |  |  |   |   |   |   |         |      |  |            |     |     |     |  |           |             |  |  |  |                    |               |      |
| Operation | PSCAN AMEMO   |           |            | Station M3 Write | Station M4 Write   | Station M5 Write | Station M6 Write | ↑ Auto Memory | Stop |      |      |  |   |   |   |   |   |   |   |   |   |         |     |      |  |     |     |     |     |     |  |           |             |  |  |                  |                  |                  |                  |               |      |           |      |      |      |      |      |      |      |  |  |  |  |   |   |   |   |         |      |  |            |     |     |     |  |           |             |  |  |  |                    |               |      |
| Frequency | 78.0  | 78.1      | Seek       | 90.0             | 76.0               | 77.9             | 78.0             |               |      |      |      |  |   |   |   |   |   |   |   |   |   |         |     |      |  |     |     |     |     |     |  |           |             |  |  |                  |                  |                  |                  |               |      |           |      |      |      |      |      |      |      |  |  |  |  |   |   |   |   |         |      |  |            |     |     |     |  |           |             |  |  |  |                    |               |      |
|           |   |           |            | →                | →                  | →                | →                |               |      |      |      |  |   |   |   |   |   |   |   |   |   |         |     |      |  |     |     |     |     |     |  |           |             |  |  |                  |                  |                  |                  |               |      |           |      |      |      |      |      |      |      |  |  |  |  |   |   |   |   |         |      |  |            |     |     |     |  |           |             |  |  |  |                    |               |      |
| Display   | ↑ch1  |           | No Station | ch1              | ch1                | ch1              |                  |               |      |      |      |  |   |   |   |   |   |   |   |   |   |         |     |      |  |     |     |     |     |     |  |           |             |  |  |                  |                  |                  |                  |               |      |           |      |      |      |      |      |      |      |  |  |  |  |   |   |   |   |         |      |  |            |     |     |     |  |           |             |  |  |  |                    |               |      |
| Operation | PSCAN AMEMO   |           |            |                  | 1 Cycle No Station | ↑ Auto Memory    | Stop             |               |      |      |      |  |   |   |   |   |   |   |   |   |   |         |     |      |  |     |     |     |     |     |  |           |             |  |  |                  |                  |                  |                  |               |      |           |      |      |      |      |      |      |      |  |  |  |  |   |   |   |   |         |      |  |            |     |     |     |  |           |             |  |  |  |                    |               |      |

| Symbol    | Function  |   |   |   |   |          |                   |                                 |                                  |                   |                                 |                                  |                |                                 |                                  |          |                   |                                 |                                  |                   |                                 |                                  |                |                                 |                                  |           |                                    |  |  |  |  |  |  |           |      |      |     |      |  |   |   |   |   |         |     |     |     |     |           |                                    |  |  |  |           |      |      |     |     |      |  |   |   |   |   |   |         |     |     |     |     |     |           |   |  |  |  |  |           |      |  |   |           |                                    |
|-----------|---|---|---|---|---|----------|-------------------|---------------------------------|----------------------------------|-------------------|---------------------------------|----------------------------------|----------------|---------------------------------|----------------------------------|----------|-------------------|---------------------------------|----------------------------------|-------------------|---------------------------------|----------------------------------|----------------|---------------------------------|----------------------------------|-----------|------------------------------------|--|--|--|--|--|--|-----------|------|------|-----|------|--|---|---|---|---|---------|-----|-----|-----|-----|-----------|------------------------------------|--|--|--|-----------|------|------|-----|-----|------|--|---|---|---|---|---|---------|-----|-----|-----|-----|-----|-----------|---|--|--|--|--|-----------|------|--|---|-----------|------------------------------------|
|           | <table border="1" style="margin: auto; border-collapse: collapse;"> <thead> <tr> <th style="width: 10%;">Band</th> <th>Lowest Voltage to Determine the Presence of Station</th> </tr> </thead> <tbody> <tr> <td>FM</td> <td rowspan="4" style="text-align: center; vertical-align: middle;"> <math>\frac{12.5}{64} \times V_{DD}</math><br/>                     0.977 V at <math>V_{DD} = 5\text{ V}</math> </td> </tr> <tr> <td>MW</td> </tr> <tr> <td>LW</td> </tr> <tr> <td>VF</td> </tr> </tbody> </table>   | Band                                      | Lowest Voltage to Determine the Presence of Station | FM  | $\frac{12.5}{64} \times V_{DD}$<br>0.977 V at $V_{DD} = 5\text{ V}$ | MW       | LW                | VF                              |                                  |                   |                                 |                                  |                |                                 |                                  |          |                   |                                 |                                  |                   |                                 |                                  |                |                                 |                                  |           |                                    |  |  |  |  |  |  |           |      |      |     |      |  |   |   |   |   |         |     |     |     |     |           |                                    |  |  |  |           |      |      |     |     |      |  |   |   |   |   |   |         |     |     |     |     |     |           |   |  |  |  |  |           |      |  |   |           |                                    |
| Band      | Lowest Voltage to Determine the Presence of Station   |   |   |   |   |          |                   |                                 |                                  |                   |                                 |                                  |                |                                 |                                  |          |                   |                                 |                                  |                   |                                 |                                  |                |                                 |                                  |           |                                    |  |  |  |  |  |  |           |      |      |     |      |  |   |   |   |   |         |     |     |     |     |           |                                    |  |  |  |           |      |      |     |     |      |  |   |   |   |   |   |         |     |     |     |     |     |           |   |  |  |  |  |           |      |  |   |           |                                    |
| FM        | $\frac{12.5}{64} \times V_{DD}$<br>0.977 V at $V_{DD} = 5\text{ V}$   |   |   |   |   |          |                   |                                 |                                  |                   |                                 |                                  |                |                                 |                                  |          |                   |                                 |                                  |                   |                                 |                                  |                |                                 |                                  |           |                                    |  |  |  |  |  |  |           |      |      |     |      |  |   |   |   |   |         |     |     |     |     |           |                                    |  |  |  |           |      |      |     |     |      |  |   |   |   |   |   |         |     |     |     |     |     |           |   |  |  |  |  |           |      |  |   |           |                                    |
| MW        |   |   |   |   |   |          |                   |                                 |                                  |                   |                                 |                                  |                |                                 |                                  |          |                   |                                 |                                  |                   |                                 |                                  |                |                                 |                                  |           |                                    |  |  |  |  |  |  |           |      |      |     |      |  |   |   |   |   |         |     |     |     |     |           |                                    |  |  |  |           |      |      |     |     |      |  |   |   |   |   |   |         |     |     |     |     |     |           |   |  |  |  |  |           |      |  |   |           |                                    |
| LW        |   |   |   |   |   |          |                   |                                 |                                  |                   |                                 |                                  |                |                                 |                                  |          |                   |                                 |                                  |                   |                                 |                                  |                |                                 |                                  |           |                                    |  |  |  |  |  |  |           |      |      |     |      |  |   |   |   |   |         |     |     |     |     |           |                                    |  |  |  |           |      |      |     |     |      |  |   |   |   |   |   |         |     |     |     |     |     |           |   |  |  |  |  |           |      |  |   |           |                                    |
| VF        |   |   |   |   |   |          |                   |                                 |                                  |                   |                                 |                                  |                |                                 |                                  |          |                   |                                 |                                  |                   |                                 |                                  |                |                                 |                                  |           |                                    |  |  |  |  |  |  |           |      |      |     |      |  |   |   |   |   |         |     |     |     |     |           |                                    |  |  |  |           |      |      |     |     |      |  |   |   |   |   |   |         |     |     |     |     |     |           |   |  |  |  |  |           |      |  |   |           |                                    |
|           | <ul style="list-style-type: none"> <li> <b>LOCAL mode</b><br/>                     The frequencies are searched in the up direction, starting from the frequency currently being received.<br/>                     In the LOCAL mode, the SD detection level is changed and the frequencies are searched twice. In the DX mode, the frequencies are searched once. When the preset memories are written up to M6 during this time or at the end of 3 searches, the auto store memory operation ends.                 </li> </ul> <p><b>Example)</b> Japan, AM band 1422 kHz reception</p> <div style="margin-left: 20px;"> <table style="border-collapse: collapse; margin-bottom: 10px;"> <tr> <td style="padding-right: 10px;">Frequency</td> <td style="padding-right: 10px;">1422</td> <td style="padding-right: 10px;">1531</td> <td style="padding-right: 10px;">Seek</td> <td style="padding-right: 10px;">1620</td> <td style="padding-right: 10px;">1629</td> <td style="padding-right: 10px;">522</td> <td style="padding-right: 10px;">1411</td> </tr> <tr> <td></td> <td style="text-align: center;">→</td> <td style="text-align: center;">→</td> <td style="text-align: center;">→</td> <td style="text-align: center;">→</td> <td style="text-align: center;">→</td> <td style="text-align: center;">→</td> <td style="text-align: center;">→</td> </tr> <tr> <td>Display</td> <td style="text-align: center;">↑ ch1</td> <td></td> <td></td> <td style="text-align: center;">ch1</td> <td style="text-align: center;">ch2</td> <td style="text-align: center;">ch2</td> <td style="text-align: center;">ch2</td> </tr> <tr> <td>Operation</td> <td colspan="7" style="border: 1px solid black; padding: 2px; text-align: center;">                     PSCAN<br/>AMEMO<br/>(LOCAL 1st Time)                 </td> </tr> </table> <table style="border-collapse: collapse; margin-bottom: 10px;"> <tr> <td style="padding-right: 10px;">Frequency</td> <td style="padding-right: 10px;">1422</td> <td style="padding-right: 10px;">1629</td> <td style="padding-right: 10px;">522</td> <td style="padding-right: 10px;">1411</td> </tr> <tr> <td></td> <td style="text-align: center;">→</td> <td style="text-align: center;">→</td> <td style="text-align: center;">→</td> <td style="text-align: center;">→</td> </tr> <tr> <td>Display</td> <td style="text-align: center;">ch2</td> <td style="text-align: center;">ch2</td> <td style="text-align: center;">ch2</td> <td style="text-align: center;">ch2</td> </tr> <tr> <td>Operation</td> <td colspan="4" style="border: 1px solid black; padding: 2px; text-align: center;">                     PSCAN<br/>AMEMO<br/>(LOCAL 2nd Time)                 </td> </tr> </table> <table style="border-collapse: collapse; margin-bottom: 10px;"> <tr> <td style="padding-right: 10px;">Frequency</td> <td style="padding-right: 10px;">1422</td> <td style="padding-right: 10px;">1629</td> <td style="padding-right: 10px;">522</td> <td style="padding-right: 10px;">695</td> <td style="padding-right: 10px;">1411</td> </tr> <tr> <td></td> <td style="text-align: center;">→</td> <td style="text-align: center;">→</td> <td style="text-align: center;">→</td> <td style="text-align: center;">→</td> <td style="text-align: center;">→</td> </tr> <tr> <td>Display</td> <td style="text-align: center;">ch2</td> <td style="text-align: center;">ch2</td> <td style="text-align: center;">ch2</td> <td style="text-align: center;">ch2</td> <td style="text-align: center;">ch3</td> </tr> <tr> <td>Operation</td> <td colspan="5" style="border: 1px solid black; padding: 2px; text-align: center;">                     PSCAN<br/>AMEMO<br/>Station<br/>M2<br/>Write<br/>(DX 1st Time)                 </td> </tr> </table> <table style="border-collapse: collapse;"> <tr> <td style="padding-right: 10px;">Frequency</td> <td style="padding-right: 10px;">1422</td> </tr> <tr> <td></td> <td style="text-align: center;">→</td> </tr> <tr> <td>Operation</td> <td style="border: 1px solid black; padding: 2px; text-align: center;">                     PSCAN<br/>AMEMO<br/>Auto Memory Stop                 </td> </tr> </table> </div> | Frequency                                 | 1422  | 1531                                      | Seek  | 1620     | 1629              | 522                             | 1411                             |                   | →                               | →                                | →              | →                               | →                                | →        | →                 | Display                         | ↑ ch1                            |                   |                                 | ch1                              | ch2            | ch2                             | ch2                              | Operation | PSCAN<br>AMEMO<br>(LOCAL 1st Time) |  |  |  |  |  |  | Frequency | 1422 | 1629 | 522 | 1411 |  | → | → | → | → | Display | ch2 | ch2 | ch2 | ch2 | Operation | PSCAN<br>AMEMO<br>(LOCAL 2nd Time) |  |  |  | Frequency | 1422 | 1629 | 522 | 695 | 1411 |  | → | → | → | → | → | Display | ch2 | ch2 | ch2 | ch2 | ch3 | Operation | PSCAN<br>AMEMO<br>Station<br>M2<br>Write<br>(DX 1st Time) |  |  |  |  | Frequency | 1422 |  | → | Operation | PSCAN<br>AMEMO<br>Auto Memory Stop |
| Frequency | 1422  | 1531                                      | Seek  | 1620                                      | 1629  | 522      | 1411              |                                 |                                  |                   |                                 |                                  |                |                                 |                                  |          |                   |                                 |                                  |                   |                                 |                                  |                |                                 |                                  |           |                                    |  |  |  |  |  |  |           |      |      |     |      |  |   |   |   |   |         |     |     |     |     |           |                                    |  |  |  |           |      |      |     |     |      |  |   |   |   |   |   |         |     |     |     |     |     |           |   |  |  |  |  |           |      |  |   |           |                                    |
|           | →   | →   | →   | →   | →   | →        | →                 |                                 |                                  |                   |                                 |                                  |                |                                 |                                  |          |                   |                                 |                                  |                   |                                 |                                  |                |                                 |                                  |           |                                    |  |  |  |  |  |  |           |      |      |     |      |  |   |   |   |   |         |     |     |     |     |           |                                    |  |  |  |           |      |      |     |     |      |  |   |   |   |   |   |         |     |     |     |     |     |           |   |  |  |  |  |           |      |  |   |           |                                    |
| Display   | ↑ ch1   |   |   | ch1                                       | ch2   | ch2      | ch2               |                                 |                                  |                   |                                 |                                  |                |                                 |                                  |          |                   |                                 |                                  |                   |                                 |                                  |                |                                 |                                  |           |                                    |  |  |  |  |  |  |           |      |      |     |      |  |   |   |   |   |         |     |     |     |     |           |                                    |  |  |  |           |      |      |     |     |      |  |   |   |   |   |   |         |     |     |     |     |     |           |   |  |  |  |  |           |      |  |   |           |                                    |
| Operation | PSCAN<br>AMEMO<br>(LOCAL 1st Time)  |   |   |   |   |          |                   |                                 |                                  |                   |                                 |                                  |                |                                 |                                  |          |                   |                                 |                                  |                   |                                 |                                  |                |                                 |                                  |           |                                    |  |  |  |  |  |  |           |      |      |     |      |  |   |   |   |   |         |     |     |     |     |           |                                    |  |  |  |           |      |      |     |     |      |  |   |   |   |   |   |         |     |     |     |     |     |           |   |  |  |  |  |           |      |  |   |           |                                    |
| Frequency | 1422  | 1629                                      | 522   | 1411                                      |   |          |                   |                                 |                                  |                   |                                 |                                  |                |                                 |                                  |          |                   |                                 |                                  |                   |                                 |                                  |                |                                 |                                  |           |                                    |  |  |  |  |  |  |           |      |      |     |      |  |   |   |   |   |         |     |     |     |     |           |                                    |  |  |  |           |      |      |     |     |      |  |   |   |   |   |   |         |     |     |     |     |     |           |   |  |  |  |  |           |      |  |   |           |                                    |
|           | →   | →   | →   | →   |   |          |                   |                                 |                                  |                   |                                 |                                  |                |                                 |                                  |          |                   |                                 |                                  |                   |                                 |                                  |                |                                 |                                  |           |                                    |  |  |  |  |  |  |           |      |      |     |      |  |   |   |   |   |         |     |     |     |     |           |                                    |  |  |  |           |      |      |     |     |      |  |   |   |   |   |   |         |     |     |     |     |     |           |   |  |  |  |  |           |      |  |   |           |                                    |
| Display   | ch2   | ch2                                       | ch2   | ch2                                       |   |          |                   |                                 |                                  |                   |                                 |                                  |                |                                 |                                  |          |                   |                                 |                                  |                   |                                 |                                  |                |                                 |                                  |           |                                    |  |  |  |  |  |  |           |      |      |     |      |  |   |   |   |   |         |     |     |     |     |           |                                    |  |  |  |           |      |      |     |     |      |  |   |   |   |   |   |         |     |     |     |     |     |           |   |  |  |  |  |           |      |  |   |           |                                    |
| Operation | PSCAN<br>AMEMO<br>(LOCAL 2nd Time)  |   |   |   |   |          |                   |                                 |                                  |                   |                                 |                                  |                |                                 |                                  |          |                   |                                 |                                  |                   |                                 |                                  |                |                                 |                                  |           |                                    |  |  |  |  |  |  |           |      |      |     |      |  |   |   |   |   |         |     |     |     |     |           |                                    |  |  |  |           |      |      |     |     |      |  |   |   |   |   |   |         |     |     |     |     |     |           |   |  |  |  |  |           |      |  |   |           |                                    |
| Frequency | 1422  | 1629                                      | 522   | 695                                       | 1411  |          |                   |                                 |                                  |                   |                                 |                                  |                |                                 |                                  |          |                   |                                 |                                  |                   |                                 |                                  |                |                                 |                                  |           |                                    |  |  |  |  |  |  |           |      |      |     |      |  |   |   |   |   |         |     |     |     |     |           |                                    |  |  |  |           |      |      |     |     |      |  |   |   |   |   |   |         |     |     |     |     |     |           |   |  |  |  |  |           |      |  |   |           |                                    |
|           | →   | →   | →   | →   | →   |          |                   |                                 |                                  |                   |                                 |                                  |                |                                 |                                  |          |                   |                                 |                                  |                   |                                 |                                  |                |                                 |                                  |           |                                    |  |  |  |  |  |  |           |      |      |     |      |  |   |   |   |   |         |     |     |     |     |           |                                    |  |  |  |           |      |      |     |     |      |  |   |   |   |   |   |         |     |     |     |     |     |           |   |  |  |  |  |           |      |  |   |           |                                    |
| Display   | ch2   | ch2                                       | ch2   | ch2                                       | ch3   |          |                   |                                 |                                  |                   |                                 |                                  |                |                                 |                                  |          |                   |                                 |                                  |                   |                                 |                                  |                |                                 |                                  |           |                                    |  |  |  |  |  |  |           |      |      |     |      |  |   |   |   |   |         |     |     |     |     |           |                                    |  |  |  |           |      |      |     |     |      |  |   |   |   |   |   |         |     |     |     |     |     |           |   |  |  |  |  |           |      |  |   |           |                                    |
| Operation | PSCAN<br>AMEMO<br>Station<br>M2<br>Write<br>(DX 1st Time)   |   |   |   |   |          |                   |                                 |                                  |                   |                                 |                                  |                |                                 |                                  |          |                   |                                 |                                  |                   |                                 |                                  |                |                                 |                                  |           |                                    |  |  |  |  |  |  |           |      |      |     |      |  |   |   |   |   |         |     |     |     |     |           |                                    |  |  |  |           |      |      |     |     |      |  |   |   |   |   |   |         |     |     |     |     |     |           |   |  |  |  |  |           |      |  |   |           |                                    |
| Frequency | 1422  |   |   |   |   |          |                   |                                 |                                  |                   |                                 |                                  |                |                                 |                                  |          |                   |                                 |                                  |                   |                                 |                                  |                |                                 |                                  |           |                                    |  |  |  |  |  |  |           |      |      |     |      |  |   |   |   |   |         |     |     |     |     |           |                                    |  |  |  |           |      |      |     |     |      |  |   |   |   |   |   |         |     |     |     |     |     |           |   |  |  |  |  |           |      |  |   |           |                                    |
|           | →   |   |   |   |   |          |                   |                                 |                                  |                   |                                 |                                  |                |                                 |                                  |          |                   |                                 |                                  |                   |                                 |                                  |                |                                 |                                  |           |                                    |  |  |  |  |  |  |           |      |      |     |      |  |   |   |   |   |         |     |     |     |     |           |                                    |  |  |  |           |      |      |     |     |      |  |   |   |   |   |   |         |     |     |     |     |     |           |   |  |  |  |  |           |      |  |   |           |                                    |
| Operation | PSCAN<br>AMEMO<br>Auto Memory Stop  |   |   |   |   |          |                   |                                 |                                  |                   |                                 |                                  |                |                                 |                                  |          |                   |                                 |                                  |                   |                                 |                                  |                |                                 |                                  |           |                                    |  |  |  |  |  |  |           |      |      |     |      |  |   |   |   |   |         |     |     |     |     |           |                                    |  |  |  |           |      |      |     |     |      |  |   |   |   |   |   |         |     |     |     |     |     |           |   |  |  |  |  |           |      |  |   |           |                                    |
|           | <p>The SD detection level for LOCAL mode auto store memory is:</p> <table border="1" style="margin: auto; border-collapse: collapse; width: 100%;"> <thead> <tr> <th style="width: 10%;">Band</th> <th style="width: 10%;">Mode</th> <th style="width: 30%;">Lowest Voltage Judged a Broadcast Station</th> <th style="width: 50%;"></th> </tr> </thead> <tbody> <tr> <td rowspan="3" style="text-align: center; vertical-align: middle;">FM<br/>VF</td> <td style="text-align: center;">LOCAL<br/>1st time</td> <td style="text-align: center;"><math>\frac{44.5}{64} \times V_{DD}</math></td> <td style="text-align: center;">3.477 V at <math>V_{DD} = 5\text{ V}</math></td> </tr> <tr> <td style="text-align: center;">LOCAL<br/>2nd time</td> <td style="text-align: center;"><math>\frac{28.5}{64} \times V_{DD}</math></td> <td style="text-align: center;">2.277 V at <math>V_{DD} = 5\text{ V}</math></td> </tr> <tr> <td style="text-align: center;">DX<br/>1st time</td> <td style="text-align: center;"><math>\frac{12.5}{64} \times V_{DD}</math></td> <td style="text-align: center;">0.977 V at <math>V_{DD} = 5\text{ V}</math></td> </tr> <tr> <td rowspan="3" style="text-align: center; vertical-align: middle;">MW<br/>LW</td> <td style="text-align: center;">LOCAL<br/>1st time</td> <td style="text-align: center;"><math>\frac{18.5}{64} \times V_{DD}</math></td> <td style="text-align: center;">1.445 V at <math>V_{DD} = 5\text{ V}</math></td> </tr> <tr> <td style="text-align: center;">LOCAL<br/>2nd time</td> <td style="text-align: center;"><math>\frac{15.5}{64} \times V_{DD}</math></td> <td style="text-align: center;">1.211 V at <math>V_{DD} = 5\text{ V}</math></td> </tr> <tr> <td style="text-align: center;">DX<br/>1st time</td> <td style="text-align: center;"><math>\frac{12.5}{64} \times V_{DD}</math></td> <td style="text-align: center;">0.977 V at <math>V_{DD} = 5\text{ V}</math></td> </tr> </tbody> </table>  | Band                                      | Mode  | Lowest Voltage Judged a Broadcast Station |   | FM<br>VF | LOCAL<br>1st time | $\frac{44.5}{64} \times V_{DD}$ | 3.477 V at $V_{DD} = 5\text{ V}$ | LOCAL<br>2nd time | $\frac{28.5}{64} \times V_{DD}$ | 2.277 V at $V_{DD} = 5\text{ V}$ | DX<br>1st time | $\frac{12.5}{64} \times V_{DD}$ | 0.977 V at $V_{DD} = 5\text{ V}$ | MW<br>LW | LOCAL<br>1st time | $\frac{18.5}{64} \times V_{DD}$ | 1.445 V at $V_{DD} = 5\text{ V}$ | LOCAL<br>2nd time | $\frac{15.5}{64} \times V_{DD}$ | 1.211 V at $V_{DD} = 5\text{ V}$ | DX<br>1st time | $\frac{12.5}{64} \times V_{DD}$ | 0.977 V at $V_{DD} = 5\text{ V}$ |           |                                    |  |  |  |  |  |  |           |      |      |     |      |  |   |   |   |   |         |     |     |     |     |           |                                    |  |  |  |           |      |      |     |     |      |  |   |   |   |   |   |         |     |     |     |     |     |           |   |  |  |  |  |           |      |  |   |           |                                    |
| Band      | Mode  | Lowest Voltage Judged a Broadcast Station |   |   |   |          |                   |                                 |                                  |                   |                                 |                                  |                |                                 |                                  |          |                   |                                 |                                  |                   |                                 |                                  |                |                                 |                                  |           |                                    |  |  |  |  |  |  |           |      |      |     |      |  |   |   |   |   |         |     |     |     |     |           |                                    |  |  |  |           |      |      |     |     |      |  |   |   |   |   |   |         |     |     |     |     |     |           |   |  |  |  |  |           |      |  |   |           |                                    |
| FM<br>VF  | LOCAL<br>1st time   | $\frac{44.5}{64} \times V_{DD}$           | 3.477 V at $V_{DD} = 5\text{ V}$                    |   |   |          |                   |                                 |                                  |                   |                                 |                                  |                |                                 |                                  |          |                   |                                 |                                  |                   |                                 |                                  |                |                                 |                                  |           |                                    |  |  |  |  |  |  |           |      |      |     |      |  |   |   |   |   |         |     |     |     |     |           |                                    |  |  |  |           |      |      |     |     |      |  |   |   |   |   |   |         |     |     |     |     |     |           |   |  |  |  |  |           |      |  |   |           |                                    |
|           | LOCAL<br>2nd time   | $\frac{28.5}{64} \times V_{DD}$           | 2.277 V at $V_{DD} = 5\text{ V}$                    |   |   |          |                   |                                 |                                  |                   |                                 |                                  |                |                                 |                                  |          |                   |                                 |                                  |                   |                                 |                                  |                |                                 |                                  |           |                                    |  |  |  |  |  |  |           |      |      |     |      |  |   |   |   |   |         |     |     |     |     |           |                                    |  |  |  |           |      |      |     |     |      |  |   |   |   |   |   |         |     |     |     |     |     |           |   |  |  |  |  |           |      |  |   |           |                                    |
|           | DX<br>1st time  | $\frac{12.5}{64} \times V_{DD}$           | 0.977 V at $V_{DD} = 5\text{ V}$                    |   |   |          |                   |                                 |                                  |                   |                                 |                                  |                |                                 |                                  |          |                   |                                 |                                  |                   |                                 |                                  |                |                                 |                                  |           |                                    |  |  |  |  |  |  |           |      |      |     |      |  |   |   |   |   |         |     |     |     |     |           |                                    |  |  |  |           |      |      |     |     |      |  |   |   |   |   |   |         |     |     |     |     |     |           |   |  |  |  |  |           |      |  |   |           |                                    |
| MW<br>LW  | LOCAL<br>1st time   | $\frac{18.5}{64} \times V_{DD}$           | 1.445 V at $V_{DD} = 5\text{ V}$                    |   |   |          |                   |                                 |                                  |                   |                                 |                                  |                |                                 |                                  |          |                   |                                 |                                  |                   |                                 |                                  |                |                                 |                                  |           |                                    |  |  |  |  |  |  |           |      |      |     |      |  |   |   |   |   |         |     |     |     |     |           |                                    |  |  |  |           |      |      |     |     |      |  |   |   |   |   |   |         |     |     |     |     |     |           |   |  |  |  |  |           |      |  |   |           |                                    |
|           | LOCAL<br>2nd time   | $\frac{15.5}{64} \times V_{DD}$           | 1.211 V at $V_{DD} = 5\text{ V}$                    |   |   |          |                   |                                 |                                  |                   |                                 |                                  |                |                                 |                                  |          |                   |                                 |                                  |                   |                                 |                                  |                |                                 |                                  |           |                                    |  |  |  |  |  |  |           |      |      |     |      |  |   |   |   |   |         |     |     |     |     |           |                                    |  |  |  |           |      |      |     |     |      |  |   |   |   |   |   |         |     |     |     |     |     |           |   |  |  |  |  |           |      |  |   |           |                                    |
|           | DX<br>1st time  | $\frac{12.5}{64} \times V_{DD}$           | 0.977 V at $V_{DD} = 5\text{ V}$                    |   |   |          |                   |                                 |                                  |                   |                                 |                                  |                |                                 |                                  |          |                   |                                 |                                  |                   |                                 |                                  |                |                                 |                                  |           |                                    |  |  |  |  |  |  |           |      |      |     |      |  |   |   |   |   |         |     |     |     |     |           |                                    |  |  |  |           |      |      |     |     |      |  |   |   |   |   |   |         |     |     |     |     |     |           |   |  |  |  |  |           |      |  |   |           |                                    |
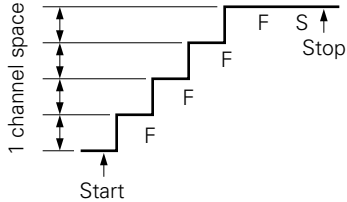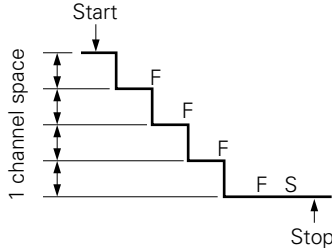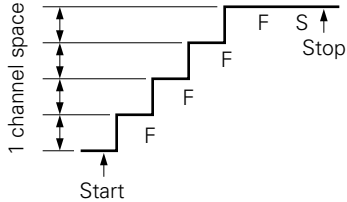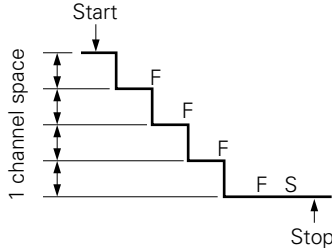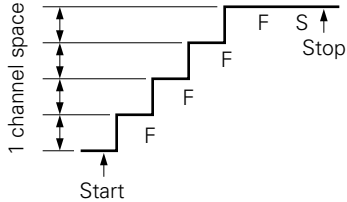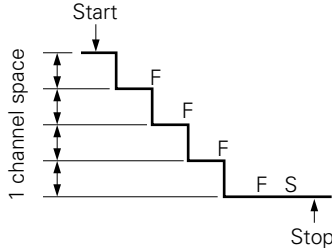
| Symbol  | Function   |         |           |   |   |   |  |
|---|--|---------|-----------|---|---|---|--|
| <p style="text-align: center;"><b>PSCAN<br/>AMEMO</b></p>   | <p>When the auto local function is used, each time the <b>PSCAN AMEMO</b> key is pressed, the local mode is switched as shown below.</p> <p style="text-align: center;">LOCAL1 → LOCAL2 → DX → auto memory stop</p> <p>When the local mode is switched, the auto memory operation is repeated from the frequency at which is started. When the auto memory operation was stopped, if even one broadcast station was written, operation shifts automatically from the preset memory when the auto memory operation started to preset scan operation.</p>  |         |           |   |   |   |  |
| <p style="text-align: center;"><b>SEEK UP</b></p> <p style="text-align: center;"><b>SEEK DWN</b></p>  | <p>Autotuning (seek operation) key.</p> <p>The frequencies are incremented ( <b>SEEK UP</b> key) or decremented ( <b>SEEK DWN</b> key) in 1 channel space and whether or not there is a broadcast station (IF count and SD signal) is detected at each receiving frequency and when there is a broadcast station, that frequency is held.</p> <p>On the VF band, when there is judged to be a broadcast station by IF count and SD signal, the SK switch is checked 250 to 375 ms later and if there is an SK signal, that frequency is held.</p> <p>When seek up (seek down) reaches the highest (lowest) frequency, it returns to the lowest (highest) frequency and, that is, sawtooth wave mode tuning is performed.</p> <p>The channel seek up (seek down) operation is shown below:</p> <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="width: 50%; text-align: center;">Seek Up</th> <th style="width: 50%; text-align: center;">Seek Down</th> </tr> </thead> <tbody> <tr> <td style="text-align: center;">  </td> <td style="text-align: center;">  </td> </tr> <tr> <td colspan="2" style="text-align: center;"> <p>For the S (slow) and F (fast) IF count conditions, see the FMIF pin and AMIF pin above.</p> <p>For the 1 channel space frequency width, see the receiving frequencies above.</p> </td> </tr> </tbody> </table> <p>When band switching is performed during the seek operation (no broadcast station), when switching returns to the same band and when the radio is turned off (including mode switching) and then turned back on, <u>the frequency at which seek started</u> is received.</p> <p>The keys that are valid during the seek operation are shown in the following table.</p> <p>Keys that are not shown are invalid. ( <b>POWER</b> key is valid.)</p> <p>When using the <b>SEEK UP</b> and <b>SEEK DWN</b> keys, set the AUTO500 switch (diode matrix) to 0.</p> | Seek Up | Seek Down |  |  | <p>For the S (slow) and F (fast) IF count conditions, see the FMIF pin and AMIF pin above.</p> <p>For the 1 channel space frequency width, see the receiving frequencies above.</p> |  |
| Seek Up   | Seek Down  |         |           |   |   |   |  |
|    |   |         |           |   |   |   |  |
| <p>For the S (slow) and F (fast) IF count conditions, see the FMIF pin and AMIF pin above.</p> <p>For the 1 channel space frequency width, see the receiving frequencies above.</p> |  |         |           |   |   |   |  |

| Symbol  | Function   |  |  |  |  |
|---|--|--|--|--|--|
| <div style="display: flex; flex-direction: column; align-items: center; gap: 10px;"> <div style="border: 1px solid black; padding: 2px 5px;">SEEK UP</div> <div style="border: 1px solid black; padding: 2px 5px;">SEEK DWN</div> </div>  | <p>When the auto local function is used, the local mode is switched as shown below each time the <b>SEEK UP</b> or <b>SEEK DWN</b> key is pressed.</p> <p>LOCAL → DX → seek operation stop</p> <p>When the local mode is switched, seek is repeated from the frequency at which it started.</p>  |  |  |  |  |
|   | <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="width: 20%;">Key</th> <th>Operation</th> </tr> </thead> <tbody> <tr> <td style="vertical-align: top;"> <div style="border: 1px solid black; padding: 2px 5px; width: fit-content; margin-bottom: 5px;">SEEK UP</div> <div style="border: 1px solid black; padding: 2px 5px; width: fit-content;">SEEK DWN</div> </td> <td> <ul style="list-style-type: none"> <li>• <b>SEEK UP</b> key during seek up and <b>SEEK DWN</b> key during seek down<br/>Seek stops and returns to the <u>frequency at which it started.</u><br/>However, when the auto local function is used, the local mode is switched.</li> <li>• <b>SEEK DWN</b> key during seek up and <b>SEEK UP</b> key during seek down<br/>Shifts to the operation of the pressed key (to seek down during seek up) from the <u>frequency when the key was pressed.</u><br/>Key transfer operation is also enabled.</li> </ul> </td> </tr> </tbody> </table> | Key  | Operation  | <div style="border: 1px solid black; padding: 2px 5px; width: fit-content; margin-bottom: 5px;">SEEK UP</div> <div style="border: 1px solid black; padding: 2px 5px; width: fit-content;">SEEK DWN</div> | <ul style="list-style-type: none"> <li>• <b>SEEK UP</b> key during seek up and <b>SEEK DWN</b> key during seek down<br/>Seek stops and returns to the <u>frequency at which it started.</u><br/>However, when the auto local function is used, the local mode is switched.</li> <li>• <b>SEEK DWN</b> key during seek up and <b>SEEK UP</b> key during seek down<br/>Shifts to the operation of the pressed key (to seek down during seek up) from the <u>frequency when the key was pressed.</u><br/>Key transfer operation is also enabled.</li> </ul> |
|   | Key  | Operation  |  |  |  |
|   | <div style="border: 1px solid black; padding: 2px 5px; width: fit-content; margin-bottom: 5px;">SEEK UP</div> <div style="border: 1px solid black; padding: 2px 5px; width: fit-content;">SEEK DWN</div>   | <ul style="list-style-type: none"> <li>• <b>SEEK UP</b> key during seek up and <b>SEEK DWN</b> key during seek down<br/>Seek stops and returns to the <u>frequency at which it started.</u><br/>However, when the auto local function is used, the local mode is switched.</li> <li>• <b>SEEK DWN</b> key during seek up and <b>SEEK UP</b> key during seek down<br/>Shifts to the operation of the pressed key (to seek down during seek up) from the <u>frequency when the key was pressed.</u><br/>Key transfer operation is also enabled.</li> </ul> |  |  |  |
|   | <table border="1" style="width: 100%; border-collapse: collapse;"> <tbody> <tr> <td style="width: 20%; vertical-align: top;"> <div style="border: 1px solid black; padding: 2px 5px; width: fit-content; margin-bottom: 5px;">SCAN UP</div> <div style="border: 1px solid black; padding: 2px 5px; width: fit-content;">SCAN DWN</div> </td> <td>Scan up (scan down) operation starts from the frequency when the key was pressed.</td> </tr> </tbody> </table>  | <div style="border: 1px solid black; padding: 2px 5px; width: fit-content; margin-bottom: 5px;">SCAN UP</div> <div style="border: 1px solid black; padding: 2px 5px; width: fit-content;">SCAN DWN</div>   | Scan up (scan down) operation starts from the frequency when the key was pressed.  |  |  |
|   | <div style="border: 1px solid black; padding: 2px 5px; width: fit-content; margin-bottom: 5px;">SCAN UP</div> <div style="border: 1px solid black; padding: 2px 5px; width: fit-content;">SCAN DWN</div>   | Scan up (scan down) operation starts from the frequency when the key was pressed.  |  |  |  |
|   | <table border="1" style="width: 100%; border-collapse: collapse;"> <tbody> <tr> <td style="width: 20%; vertical-align: top;"> <div style="border: 1px solid black; padding: 2px 5px; width: fit-content; margin-bottom: 5px;">MAN UP</div> <div style="border: 1px solid black; padding: 2px 5px; width: fit-content;">MAN DWN</div> </td> <td>Seek operation stops and returns to the frequency when seek started.</td> </tr> </tbody> </table>   | <div style="border: 1px solid black; padding: 2px 5px; width: fit-content; margin-bottom: 5px;">MAN UP</div> <div style="border: 1px solid black; padding: 2px 5px; width: fit-content;">MAN DWN</div>   | Seek operation stops and returns to the frequency when seek started.   |  |  |
|   | <div style="border: 1px solid black; padding: 2px 5px; width: fit-content; margin-bottom: 5px;">MAN UP</div> <div style="border: 1px solid black; padding: 2px 5px; width: fit-content;">MAN DWN</div>   | Seek operation stops and returns to the frequency when seek started.   |  |  |  |
|   | <table border="1" style="width: 100%; border-collapse: collapse;"> <tbody> <tr> <td style="width: 20%; vertical-align: top;"> <div style="border: 1px solid black; padding: 2px 5px; width: fit-content;">BAND</div> </td> <td> <p>Seek operation stops and the band is switched sequentially as shown below.</p> <div style="border: 1px solid black; padding: 5px; width: fit-content; margin: 5px auto;">             → FM1 → FM2 → FM3 → MW1 → MW2 → LW →           </div> <p>However, bands disabled by receiving area and DISFM3, ENMW2, and DISLW switches are skipped.</p> <p>When switching returns to the same band, it becomes the frequency when seek started.</p> </td> </tr> </tbody> </table>   | <div style="border: 1px solid black; padding: 2px 5px; width: fit-content;">BAND</div>   | <p>Seek operation stops and the band is switched sequentially as shown below.</p> <div style="border: 1px solid black; padding: 5px; width: fit-content; margin: 5px auto;">             → FM1 → FM2 → FM3 → MW1 → MW2 → LW →           </div> <p>However, bands disabled by receiving area and DISFM3, ENMW2, and DISLW switches are skipped.</p> <p>When switching returns to the same band, it becomes the frequency when seek started.</p> |  |  |
|   | <div style="border: 1px solid black; padding: 2px 5px; width: fit-content;">BAND</div>   | <p>Seek operation stops and the band is switched sequentially as shown below.</p> <div style="border: 1px solid black; padding: 5px; width: fit-content; margin: 5px auto;">             → FM1 → FM2 → FM3 → MW1 → MW2 → LW →           </div> <p>However, bands disabled by receiving area and DISFM3, ENMW2, and DISLW switches are skipped.</p> <p>When switching returns to the same band, it becomes the frequency when seek started.</p>   |  |  |  |
| <table border="1" style="width: 100%; border-collapse: collapse;"> <tbody> <tr> <td style="width: 20%; vertical-align: top;"> <div style="border: 1px solid black; padding: 2px 5px; width: fit-content; margin-bottom: 5px;">M1 (TP1)</div> <div style="text-align: center; margin-bottom: 5px;">to</div> <div style="border: 1px solid black; padding: 2px 5px; width: fit-content;">M6</div> </td> <td>The preset memory contents of the pressed key at the time the key was pressed are called without regard to the state of the M2S switch.</td> </tr> </tbody> </table>            | <div style="border: 1px solid black; padding: 2px 5px; width: fit-content; margin-bottom: 5px;">M1 (TP1)</div> <div style="text-align: center; margin-bottom: 5px;">to</div> <div style="border: 1px solid black; padding: 2px 5px; width: fit-content;">M6</div>  | The preset memory contents of the pressed key at the time the key was pressed are called without regard to the state of the M2S switch.  |  |  |  |
| <div style="border: 1px solid black; padding: 2px 5px; width: fit-content; margin-bottom: 5px;">M1 (TP1)</div> <div style="text-align: center; margin-bottom: 5px;">to</div> <div style="border: 1px solid black; padding: 2px 5px; width: fit-content;">M6</div>   | The preset memory contents of the pressed key at the time the key was pressed are called without regard to the state of the M2S switch.  |  |  |  |  |
| <table border="1" style="width: 100%; border-collapse: collapse;"> <tbody> <tr> <td style="width: 20%; vertical-align: top;"> <div style="border: 1px solid black; padding: 2px 5px; width: fit-content;">VF</div> </td> <td>Seek operation stops and the key operation is performed.</td> </tr> </tbody> </table>  | <div style="border: 1px solid black; padding: 2px 5px; width: fit-content;">VF</div>   | Seek operation stops and the key operation is performed.   |  |  |  |
| <div style="border: 1px solid black; padding: 2px 5px; width: fit-content;">VF</div>  | Seek operation stops and the key operation is performed.   |  |  |  |  |
| <table border="1" style="width: 100%; border-collapse: collapse;"> <tbody> <tr> <td style="width: 20%; vertical-align: top;"> <div style="border: 1px solid black; padding: 2px 5px; width: fit-content;">PSCAN AMEMO</div> </td> <td>Seek operation stops and preset scanning is performed.</td> </tr> </tbody> </table>   | <div style="border: 1px solid black; padding: 2px 5px; width: fit-content;">PSCAN AMEMO</div>  | Seek operation stops and preset scanning is performed.   |  |  |  |
| <div style="border: 1px solid black; padding: 2px 5px; width: fit-content;">PSCAN AMEMO</div>   | Seek operation stops and preset scanning is performed.   |  |  |  |  |
| <table border="1" style="width: 100%; border-collapse: collapse;"> <tbody> <tr> <td style="width: 20%; vertical-align: top;"> <div style="border: 1px solid black; padding: 2px 5px; width: fit-content; margin-bottom: 5px;">LOCD</div> <div style="border: 1px solid black; padding: 2px 5px; width: fit-content; margin-bottom: 5px;">LOC (TP4)</div> <div style="border: 1px solid black; padding: 2px 5px; width: fit-content;">MONO (TP5)</div> </td> <td> <p>The operation of the pressed key is performed.</p> <p>The seek operation continues.</p> </td> </tr> </tbody> </table> | <div style="border: 1px solid black; padding: 2px 5px; width: fit-content; margin-bottom: 5px;">LOCD</div> <div style="border: 1px solid black; padding: 2px 5px; width: fit-content; margin-bottom: 5px;">LOC (TP4)</div> <div style="border: 1px solid black; padding: 2px 5px; width: fit-content;">MONO (TP5)</div>  | <p>The operation of the pressed key is performed.</p> <p>The seek operation continues.</p>   |  |  |  |
| <div style="border: 1px solid black; padding: 2px 5px; width: fit-content; margin-bottom: 5px;">LOCD</div> <div style="border: 1px solid black; padding: 2px 5px; width: fit-content; margin-bottom: 5px;">LOC (TP4)</div> <div style="border: 1px solid black; padding: 2px 5px; width: fit-content;">MONO (TP5)</div>   | <p>The operation of the pressed key is performed.</p> <p>The seek operation continues.</p>   |  |  |  |  |



| Symbol   | Function   |     |           |  |  |  |   |  |  |  |  |
|--|--|-----|-----------|--|--|--|---|--|--|--|--|
| <div style="border: 1px solid black; padding: 2px; width: fit-content; margin-bottom: 5px;">SCAN UP</div> <div style="border: 1px solid black; padding: 2px; width: fit-content;">SCAN DWN</div> | <p>Auto tuning (scan operation) key.</p> <p>The frequencies are searched up ( <span style="border: 1px solid black; padding: 2px;">SCAN UP</span> key) or down ( <span style="border: 1px solid black; padding: 2px;">SCAN DWN</span> key) in 1 channel steps and whether or not there is a broadcast station (IF count and SD signal) is detected at each receiving frequency and when a broadcast station is judged to be present, that frequency is held for 5 seconds. On the VF band, whether or not there is an SK signal is detected as well as seek operation. If no operation is performed during this 5 seconds, the seek operation is repeated and the next broadcast station is received sequentially every 5 seconds (scan operation).</p> <p>During this 5 seconds hold, the frequency display flashes at 1 Hz (duty 50 %).</p> <p>At the end of the 5 seconds hold, BEEP is output.</p> <p>Seek operations (channel up/down method, AUTOSTP switch and IF count, SD detection, SK signal detection) are the same as the <span style="border: 1px solid black; padding: 2px;">SEEK UP</span> and <span style="border: 1px solid black; padding: 2px;">SEEK DWN</span> keys. When the radio is turned off (including mode switching) and then turned on, <u>the frequency held last</u> (when there is not even 1 broadcast station, the frequency when the scan operation started) is received. The operation of each key during seek operation (other than at 5 seconds hold) is shown below.</p> <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="width: 20%;">Key</th> <th>Operation</th> </tr> </thead> <tbody> <tr> <td style="vertical-align: top;"> <div style="border: 1px solid black; padding: 2px; width: fit-content; margin-bottom: 5px;">SCAN UP</div> <div style="border: 1px solid black; padding: 2px; width: fit-content;">SCAN DWN</div> </td> <td> <ul style="list-style-type: none"> <li>• <span style="border: 1px solid black; padding: 2px;">SCAN UP</span> key during scan up and <span style="border: 1px solid black; padding: 2px;">SCAN DWN</span> key during scan down<br/>Scanning stops and returns to the frequency held last.<br/>However, when the auto local function is used, the local mode is switched.</li> <li>• <span style="border: 1px solid black; padding: 2px;">SCAN DWN</span> key during scan up and <span style="border: 1px solid black; padding: 2px;">SCAN UP</span> key during scan down<br/>Operation shifts to operation of the pressed key from the frequency when the key was pressed.<br/>Key transfer operation is also enabled.</li> </ul> </td> </tr> <tr> <td style="vertical-align: top;"> <div style="border: 1px solid black; padding: 2px; width: fit-content; margin-bottom: 5px;">SEEK UP</div> <div style="border: 1px solid black; padding: 2px; width: fit-content;">SEEK DWN</div> </td> <td>Scanning stops and seek operation starts from the frequency when the key was pressed.</td> </tr> <tr> <td style="vertical-align: top;"> <div style="border: 1px solid black; padding: 2px; width: fit-content; margin-bottom: 5px;">MAN UP</div> <div style="border: 1px solid black; padding: 2px; width: fit-content;">MAN DWN</div> </td> <td>Scanning stops and returns to the frequency held last (when a frequency was not held, returns to the frequency when scanning started).<br/>Scanning stops the moment the key is pressed even when the AUTO500 switch is 1 (when the <span style="border: 1px solid black; padding: 2px;">MAN UP</span> or <span style="border: 1px solid black; padding: 2px;">MAN DWN</span> key is pressed for more than 0.5 seconds, seek is performed).</td> </tr> <tr> <td style="vertical-align: top;"> <div style="border: 1px solid black; padding: 2px; width: fit-content;">BAND</div> </td> <td>Scanning stops and the band is switched sequentially as shown below.<br/> <div style="text-align: center; margin: 5px 0;"> <span style="border: 1px solid black; padding: 2px;">→ FM1 → FM2 → FM3 → MW1 → MW2 → LW →</span> </div>                     However, bands disabled by receiving area and DISFM3, ENMW2, and DISLW switches are skipped.<br/>                     When switching returns to the same band, the frequency held last is received. When a frequency was not held, the frequency when scanning started is received.                 </td> </tr> </tbody> </table> | Key | Operation | <div style="border: 1px solid black; padding: 2px; width: fit-content; margin-bottom: 5px;">SCAN UP</div> <div style="border: 1px solid black; padding: 2px; width: fit-content;">SCAN DWN</div> | <ul style="list-style-type: none"> <li>• <span style="border: 1px solid black; padding: 2px;">SCAN UP</span> key during scan up and <span style="border: 1px solid black; padding: 2px;">SCAN DWN</span> key during scan down<br/>Scanning stops and returns to the frequency held last.<br/>However, when the auto local function is used, the local mode is switched.</li> <li>• <span style="border: 1px solid black; padding: 2px;">SCAN DWN</span> key during scan up and <span style="border: 1px solid black; padding: 2px;">SCAN UP</span> key during scan down<br/>Operation shifts to operation of the pressed key from the frequency when the key was pressed.<br/>Key transfer operation is also enabled.</li> </ul> | <div style="border: 1px solid black; padding: 2px; width: fit-content; margin-bottom: 5px;">SEEK UP</div> <div style="border: 1px solid black; padding: 2px; width: fit-content;">SEEK DWN</div> | Scanning stops and seek operation starts from the frequency when the key was pressed. | <div style="border: 1px solid black; padding: 2px; width: fit-content; margin-bottom: 5px;">MAN UP</div> <div style="border: 1px solid black; padding: 2px; width: fit-content;">MAN DWN</div> | Scanning stops and returns to the frequency held last (when a frequency was not held, returns to the frequency when scanning started).<br>Scanning stops the moment the key is pressed even when the AUTO500 switch is 1 (when the <span style="border: 1px solid black; padding: 2px;">MAN UP</span> or <span style="border: 1px solid black; padding: 2px;">MAN DWN</span> key is pressed for more than 0.5 seconds, seek is performed). | <div style="border: 1px solid black; padding: 2px; width: fit-content;">BAND</div> | Scanning stops and the band is switched sequentially as shown below.<br><div style="text-align: center; margin: 5px 0;"> <span style="border: 1px solid black; padding: 2px;">→ FM1 → FM2 → FM3 → MW1 → MW2 → LW →</span> </div> However, bands disabled by receiving area and DISFM3, ENMW2, and DISLW switches are skipped.<br>When switching returns to the same band, the frequency held last is received. When a frequency was not held, the frequency when scanning started is received. |
| Key  | Operation  |     |           |  |  |  |   |  |  |  |  |
| <div style="border: 1px solid black; padding: 2px; width: fit-content; margin-bottom: 5px;">SCAN UP</div> <div style="border: 1px solid black; padding: 2px; width: fit-content;">SCAN DWN</div> | <ul style="list-style-type: none"> <li>• <span style="border: 1px solid black; padding: 2px;">SCAN UP</span> key during scan up and <span style="border: 1px solid black; padding: 2px;">SCAN DWN</span> key during scan down<br/>Scanning stops and returns to the frequency held last.<br/>However, when the auto local function is used, the local mode is switched.</li> <li>• <span style="border: 1px solid black; padding: 2px;">SCAN DWN</span> key during scan up and <span style="border: 1px solid black; padding: 2px;">SCAN UP</span> key during scan down<br/>Operation shifts to operation of the pressed key from the frequency when the key was pressed.<br/>Key transfer operation is also enabled.</li> </ul>   |     |           |  |  |  |   |  |  |  |  |
| <div style="border: 1px solid black; padding: 2px; width: fit-content; margin-bottom: 5px;">SEEK UP</div> <div style="border: 1px solid black; padding: 2px; width: fit-content;">SEEK DWN</div> | Scanning stops and seek operation starts from the frequency when the key was pressed.  |     |           |  |  |  |   |  |  |  |  |
| <div style="border: 1px solid black; padding: 2px; width: fit-content; margin-bottom: 5px;">MAN UP</div> <div style="border: 1px solid black; padding: 2px; width: fit-content;">MAN DWN</div>   | Scanning stops and returns to the frequency held last (when a frequency was not held, returns to the frequency when scanning started).<br>Scanning stops the moment the key is pressed even when the AUTO500 switch is 1 (when the <span style="border: 1px solid black; padding: 2px;">MAN UP</span> or <span style="border: 1px solid black; padding: 2px;">MAN DWN</span> key is pressed for more than 0.5 seconds, seek is performed).   |     |           |  |  |  |   |  |  |  |  |
| <div style="border: 1px solid black; padding: 2px; width: fit-content;">BAND</div>   | Scanning stops and the band is switched sequentially as shown below.<br><div style="text-align: center; margin: 5px 0;"> <span style="border: 1px solid black; padding: 2px;">→ FM1 → FM2 → FM3 → MW1 → MW2 → LW →</span> </div> However, bands disabled by receiving area and DISFM3, ENMW2, and DISLW switches are skipped.<br>When switching returns to the same band, the frequency held last is received. When a frequency was not held, the frequency when scanning started is received.   |     |           |  |  |  |   |  |  |  |  |







| Symbol   | Function   |     |           |  |   |   |   |  |  |  |   |     |           |   |   |   |   |   |   |   |   |
|--|--|-----|-----------|--|---|---|---|--|--|--|---|-----|-----------|---|---|---|---|---|---|---|---|
|  | <table border="1" style="width: 100%;"> <thead> <tr> <th style="width: 20%;">Key</th> <th>Operation</th> </tr> </thead> <tbody> <tr> <td> <div style="border: 1px solid black; padding: 2px; display: inline-block; text-align: center;">M1<br/>(TP1)</div><br/>to<br/> <div style="border: 1px solid black; padding: 2px; display: inline-block; text-align: center;">M6</div> </td> <td>When a key is pressed, scanning stops and the preset memory contents of the pressed key are called without regard to the state of the M2S switch.</td> </tr> <tr> <td> <div style="border: 1px solid black; padding: 2px; display: inline-block; text-align: center;">VF</div> </td> <td>Scanning stops and operation of the key is performed.</td> </tr> <tr> <td> <div style="border: 1px solid black; padding: 2px; display: inline-block; text-align: center;">PSCAN<br/>AMEMO</div> </td> <td>Scanning stops and preset scan is performed from M1.</td> </tr> <tr> <td> <div style="border: 1px solid black; padding: 2px; display: inline-block; text-align: center;">LOUD</div><br/> <div style="border: 1px solid black; padding: 2px; display: inline-block; text-align: center;">LOC<br/>(TP4)</div><br/> <div style="border: 1px solid black; padding: 2px; display: inline-block; text-align: center;">MONO<br/>(TP5)</div> </td> <td>The operation of the pressed key is performed. Seek (scan operation) continues.</td> </tr> </tbody> </table> <p>Momentary keys other than those described above are invalid. (However, the <div style="border: 1px solid black; padding: 2px; display: inline-block; text-align: center;">POWER</div> key is valid.)</p> <p>Operation of each key during 5-second hold is shown below.</p> <table border="1" style="width: 100%;"> <thead> <tr> <th style="width: 20%;">Key</th> <th>Operation</th> </tr> </thead> <tbody> <tr> <td> <div style="border: 1px solid black; padding: 2px; display: inline-block; text-align: center;">SCAN UP</div><br/> <div style="border: 1px solid black; padding: 2px; display: inline-block; text-align: center;">SCAN DWN</div> </td> <td> <ul style="list-style-type: none"> <li>• <div style="border: 1px solid black; padding: 2px; display: inline-block; text-align: center;">SCAN UP</div> key during scan up and <div style="border: 1px solid black; padding: 2px; display: inline-block; text-align: center;">SCAN DWN</div> during scan down<br/>Scanning stops and the frequency being held is held.</li> <li>• <div style="border: 1px solid black; padding: 2px; display: inline-block; text-align: center;">SCAN DWN</div> key during scan up and <div style="border: 1px solid black; padding: 2px; display: inline-block; text-align: center;">SCAN UP</div> key during scan down<br/>And then the operation of the pressed key is performed.</li> </ul> </td> </tr> <tr> <td> <div style="border: 1px solid black; padding: 2px; display: inline-block; text-align: center;">SEEK UP</div><br/> <div style="border: 1px solid black; padding: 2px; display: inline-block; text-align: center;">SEEK DWN</div> </td> <td>Scanning stops and seek starts from the frequency being held.</td> </tr> <tr> <td> <div style="border: 1px solid black; padding: 2px; display: inline-block; text-align: center;">MAN UP</div><br/> <div style="border: 1px solid black; padding: 2px; display: inline-block; text-align: center;">MAN DWN</div> </td> <td>Scanning stops and operation of the <div style="border: 1px solid black; padding: 2px; display: inline-block; text-align: center;">MAN UP</div> or <div style="border: 1px solid black; padding: 2px; display: inline-block; text-align: center;">MAN DWN</div> key is performed from the frequency being held.</td> </tr> <tr> <td> <div style="border: 1px solid black; padding: 2px; display: inline-block; text-align: center;">BAND</div> </td> <td> <p>Scanning stops and the band is switched sequentially as shown below.</p> <div style="border: 1px solid black; padding: 5px; display: inline-block; margin: 5px 0;">             → FM1 → FM2 → FM3 → MW1 → MW2 → LW →           </div> <p>However, bands disabled by receiving area and DISFM3, ENMW2, and DISLW switches are skipped. When switching returns to the same band, it returns to the held frequency.</p> </td> </tr> </tbody> </table> | Key | Operation | <div style="border: 1px solid black; padding: 2px; display: inline-block; text-align: center;">M1<br/>(TP1)</div><br>to<br><div style="border: 1px solid black; padding: 2px; display: inline-block; text-align: center;">M6</div> | When a key is pressed, scanning stops and the preset memory contents of the pressed key are called without regard to the state of the M2S switch. | <div style="border: 1px solid black; padding: 2px; display: inline-block; text-align: center;">VF</div> | Scanning stops and operation of the key is performed. | <div style="border: 1px solid black; padding: 2px; display: inline-block; text-align: center;">PSCAN<br/>AMEMO</div> | Scanning stops and preset scan is performed from M1. | <div style="border: 1px solid black; padding: 2px; display: inline-block; text-align: center;">LOUD</div><br><div style="border: 1px solid black; padding: 2px; display: inline-block; text-align: center;">LOC<br/>(TP4)</div><br><div style="border: 1px solid black; padding: 2px; display: inline-block; text-align: center;">MONO<br/>(TP5)</div> | The operation of the pressed key is performed. Seek (scan operation) continues. | Key | Operation | <div style="border: 1px solid black; padding: 2px; display: inline-block; text-align: center;">SCAN UP</div><br><div style="border: 1px solid black; padding: 2px; display: inline-block; text-align: center;">SCAN DWN</div> | <ul style="list-style-type: none"> <li>• <div style="border: 1px solid black; padding: 2px; display: inline-block; text-align: center;">SCAN UP</div> key during scan up and <div style="border: 1px solid black; padding: 2px; display: inline-block; text-align: center;">SCAN DWN</div> during scan down<br/>Scanning stops and the frequency being held is held.</li> <li>• <div style="border: 1px solid black; padding: 2px; display: inline-block; text-align: center;">SCAN DWN</div> key during scan up and <div style="border: 1px solid black; padding: 2px; display: inline-block; text-align: center;">SCAN UP</div> key during scan down<br/>And then the operation of the pressed key is performed.</li> </ul> | <div style="border: 1px solid black; padding: 2px; display: inline-block; text-align: center;">SEEK UP</div><br><div style="border: 1px solid black; padding: 2px; display: inline-block; text-align: center;">SEEK DWN</div> | Scanning stops and seek starts from the frequency being held. | <div style="border: 1px solid black; padding: 2px; display: inline-block; text-align: center;">MAN UP</div><br><div style="border: 1px solid black; padding: 2px; display: inline-block; text-align: center;">MAN DWN</div> | Scanning stops and operation of the <div style="border: 1px solid black; padding: 2px; display: inline-block; text-align: center;">MAN UP</div> or <div style="border: 1px solid black; padding: 2px; display: inline-block; text-align: center;">MAN DWN</div> key is performed from the frequency being held. | <div style="border: 1px solid black; padding: 2px; display: inline-block; text-align: center;">BAND</div> | <p>Scanning stops and the band is switched sequentially as shown below.</p> <div style="border: 1px solid black; padding: 5px; display: inline-block; margin: 5px 0;">             → FM1 → FM2 → FM3 → MW1 → MW2 → LW →           </div> <p>However, bands disabled by receiving area and DISFM3, ENMW2, and DISLW switches are skipped. When switching returns to the same band, it returns to the held frequency.</p> |
| Key  | Operation  |     |           |  |   |   |   |  |  |  |   |     |           |   |   |   |   |   |   |   |   |
| <div style="border: 1px solid black; padding: 2px; display: inline-block; text-align: center;">M1<br/>(TP1)</div><br>to<br><div style="border: 1px solid black; padding: 2px; display: inline-block; text-align: center;">M6</div>   | When a key is pressed, scanning stops and the preset memory contents of the pressed key are called without regard to the state of the M2S switch.  |     |           |  |   |   |   |  |  |  |   |     |           |   |   |   |   |   |   |   |   |
| <div style="border: 1px solid black; padding: 2px; display: inline-block; text-align: center;">VF</div>  | Scanning stops and operation of the key is performed.  |     |           |  |   |   |   |  |  |  |   |     |           |   |   |   |   |   |   |   |   |
| <div style="border: 1px solid black; padding: 2px; display: inline-block; text-align: center;">PSCAN<br/>AMEMO</div>   | Scanning stops and preset scan is performed from M1.   |     |           |  |   |   |   |  |  |  |   |     |           |   |   |   |   |   |   |   |   |
| <div style="border: 1px solid black; padding: 2px; display: inline-block; text-align: center;">LOUD</div><br><div style="border: 1px solid black; padding: 2px; display: inline-block; text-align: center;">LOC<br/>(TP4)</div><br><div style="border: 1px solid black; padding: 2px; display: inline-block; text-align: center;">MONO<br/>(TP5)</div> | The operation of the pressed key is performed. Seek (scan operation) continues.  |     |           |  |   |   |   |  |  |  |   |     |           |   |   |   |   |   |   |   |   |
| Key  | Operation  |     |           |  |   |   |   |  |  |  |   |     |           |   |   |   |   |   |   |   |   |
| <div style="border: 1px solid black; padding: 2px; display: inline-block; text-align: center;">SCAN UP</div><br><div style="border: 1px solid black; padding: 2px; display: inline-block; text-align: center;">SCAN DWN</div>  | <ul style="list-style-type: none"> <li>• <div style="border: 1px solid black; padding: 2px; display: inline-block; text-align: center;">SCAN UP</div> key during scan up and <div style="border: 1px solid black; padding: 2px; display: inline-block; text-align: center;">SCAN DWN</div> during scan down<br/>Scanning stops and the frequency being held is held.</li> <li>• <div style="border: 1px solid black; padding: 2px; display: inline-block; text-align: center;">SCAN DWN</div> key during scan up and <div style="border: 1px solid black; padding: 2px; display: inline-block; text-align: center;">SCAN UP</div> key during scan down<br/>And then the operation of the pressed key is performed.</li> </ul>  |     |           |  |   |   |   |  |  |  |   |     |           |   |   |   |   |   |   |   |   |
| <div style="border: 1px solid black; padding: 2px; display: inline-block; text-align: center;">SEEK UP</div><br><div style="border: 1px solid black; padding: 2px; display: inline-block; text-align: center;">SEEK DWN</div>  | Scanning stops and seek starts from the frequency being held.  |     |           |  |   |   |   |  |  |  |   |     |           |   |   |   |   |   |   |   |   |
| <div style="border: 1px solid black; padding: 2px; display: inline-block; text-align: center;">MAN UP</div><br><div style="border: 1px solid black; padding: 2px; display: inline-block; text-align: center;">MAN DWN</div>  | Scanning stops and operation of the <div style="border: 1px solid black; padding: 2px; display: inline-block; text-align: center;">MAN UP</div> or <div style="border: 1px solid black; padding: 2px; display: inline-block; text-align: center;">MAN DWN</div> key is performed from the frequency being held.  |     |           |  |   |   |   |  |  |  |   |     |           |   |   |   |   |   |   |   |   |
| <div style="border: 1px solid black; padding: 2px; display: inline-block; text-align: center;">BAND</div>  | <p>Scanning stops and the band is switched sequentially as shown below.</p> <div style="border: 1px solid black; padding: 5px; display: inline-block; margin: 5px 0;">             → FM1 → FM2 → FM3 → MW1 → MW2 → LW →           </div> <p>However, bands disabled by receiving area and DISFM3, ENMW2, and DISLW switches are skipped. When switching returns to the same band, it returns to the held frequency.</p>  |     |           |  |   |   |   |  |  |  |   |     |           |   |   |   |   |   |   |   |   |

| Symbol   | Function  |  |           |  |  |            |   |           |  |                        |  |             |  |                      |                     |                       |                     |
|--|---|--|-----------|--|--|------------|---|-----------|--|------------------------|--|-------------|--|----------------------|---------------------|-----------------------|---------------------|
| <div style="border: 1px solid black; padding: 2px; margin-bottom: 5px; width: fit-content;">SCAN UP</div> <div style="border: 1px solid black; padding: 2px; margin-bottom: 5px; width: fit-content;">SCAN DWN</div> | <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="width: 15%;">Key</th> <th>Operation</th> </tr> </thead> <tbody> <tr> <td></td> <td> <ul style="list-style-type: none"> <li>When the M2S switch is 1, this key is invalid.</li> <li>When M2S switch = 0</li> </ul> <p>Each time the key is pressed, the memory write state is inverted as shown below.</p> <p>(i)</p> <p>Key Operation: Station   ME Key   Memory Writable</p> <p>Display Example: 90.0   90.1   90.1 ch   90.2</p> </td> </tr> <tr> <td style="text-align: center;"><b>MEF</b></td> <td> <p>(ii)</p> <p>Key Operation: Station   ME   ME   Memory Writable</p> <p>Display Example: 90.0   90.1   90.1 ch   90.1   90.2</p> <p>When a <b>M1 (TP1)</b> to <b>M6 (TP6)</b> key is pressed in the memory writable state, data is written to the present memory corresponding to the pressed key.</p> </td> </tr> <tr> <td style="text-align: center;"><b>VF</b></td> <td>Scanning is canceled and the key operation is performed.</td> </tr> <tr> <td style="text-align: center;"><b>PSCAN<br/>AMEMO</b></td> <td>Scanning is canceled and the key operation is performed.</td> </tr> <tr> <td style="text-align: center;"><b>LOUD</b></td> <td>The operation of the pressed key is performed.</td> </tr> <tr> <td style="text-align: center;"><b>LOC<br/>(TP4)</b></td> <td>Scanning continues.</td> </tr> <tr> <td style="text-align: center;"><b>MONO<br/>(TP5)</b></td> <td>Scanning continues.</td> </tr> </tbody> </table> | Key  | Operation |  | <ul style="list-style-type: none"> <li>When the M2S switch is 1, this key is invalid.</li> <li>When M2S switch = 0</li> </ul> <p>Each time the key is pressed, the memory write state is inverted as shown below.</p> <p>(i)</p> <p>Key Operation: Station   ME Key   Memory Writable</p> <p>Display Example: 90.0   90.1   90.1 ch   90.2</p> | <b>MEF</b> | <p>(ii)</p> <p>Key Operation: Station   ME   ME   Memory Writable</p> <p>Display Example: 90.0   90.1   90.1 ch   90.1   90.2</p> <p>When a <b>M1 (TP1)</b> to <b>M6 (TP6)</b> key is pressed in the memory writable state, data is written to the present memory corresponding to the pressed key.</p> | <b>VF</b> | Scanning is canceled and the key operation is performed. | <b>PSCAN<br/>AMEMO</b> | Scanning is canceled and the key operation is performed. | <b>LOUD</b> | The operation of the pressed key is performed. | <b>LOC<br/>(TP4)</b> | Scanning continues. | <b>MONO<br/>(TP5)</b> | Scanning continues. |
|  | Key   | Operation  |           |  |  |            |   |           |  |                        |  |             |  |                      |                     |                       |                     |
|  |   | <ul style="list-style-type: none"> <li>When the M2S switch is 1, this key is invalid.</li> <li>When M2S switch = 0</li> </ul> <p>Each time the key is pressed, the memory write state is inverted as shown below.</p> <p>(i)</p> <p>Key Operation: Station   ME Key   Memory Writable</p> <p>Display Example: 90.0   90.1   90.1 ch   90.2</p> |           |  |  |            |   |           |  |                        |  |             |  |                      |                     |                       |                     |
|  | <b>MEF</b>  | <p>(ii)</p> <p>Key Operation: Station   ME   ME   Memory Writable</p> <p>Display Example: 90.0   90.1   90.1 ch   90.1   90.2</p> <p>When a <b>M1 (TP1)</b> to <b>M6 (TP6)</b> key is pressed in the memory writable state, data is written to the present memory corresponding to the pressed key.</p>  |           |  |  |            |   |           |  |                        |  |             |  |                      |                     |                       |                     |
|  | <b>VF</b>   | Scanning is canceled and the key operation is performed.   |           |  |  |            |   |           |  |                        |  |             |  |                      |                     |                       |                     |
| <b>PSCAN<br/>AMEMO</b>   | Scanning is canceled and the key operation is performed.  |  |           |  |  |            |   |           |  |                        |  |             |  |                      |                     |                       |                     |
| <b>LOUD</b>  | The operation of the pressed key is performed.  |  |           |  |  |            |   |           |  |                        |  |             |  |                      |                     |                       |                     |
| <b>LOC<br/>(TP4)</b>   | Scanning continues.   |  |           |  |  |            |   |           |  |                        |  |             |  |                      |                     |                       |                     |
| <b>MONO<br/>(TP5)</b>  | Scanning continues.   |  |           |  |  |            |   |           |  |                        |  |             |  |                      |                     |                       |                     |

| Symbol   | Function   |           |           |  |   |  |  |  |  |
|--|--|-----------|-----------|--|---|--|--|--|--|
| <div style="display: flex; flex-direction: column; align-items: center; gap: 10px;"> <div style="border: 1px solid black; padding: 2px 10px; margin-bottom: 5px;">SCAN UP</div> <div style="border: 1px solid black; padding: 2px 10px; margin-bottom: 5px;">SCAN DWN</div> <div style="border: 1px solid black; padding: 2px 10px; margin-bottom: 5px;">M1 (TP1)</div> <div style="border: 1px solid black; padding: 2px 10px; margin-bottom: 5px;">M2 (TP2)</div> <div style="border: 1px solid black; padding: 2px 10px; margin-bottom: 5px;">M3 (TP3)</div> <div style="border: 1px solid black; padding: 2px 10px; margin-bottom: 5px;">M4</div> <div style="border: 1px solid black; padding: 2px 10px; margin-bottom: 5px;">M5</div> <div style="border: 1px solid black; padding: 2px 10px; margin-bottom: 5px;">M6</div> </div> | <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="width: 15%;">Key</th> <th style="width: 85%;">Operation</th> </tr> </thead> <tbody> <tr> <td></td> <td> <ul style="list-style-type: none"> <li>When M2S switch = 0                             <ul style="list-style-type: none"> <li>Memory unwritable state<br/>The scanning operation is canceled and the preset memory contents corresponding to the pressed key is called.</li> <li>Memory writable state (See the <span style="border: 1px solid black; padding: 2px;">ME</span> key below.)<br/>The held frequency is written to the preset memory corresponding to the pressed key and the memory writable state is canceled. Then, the hold state is held for 2 seconds. If an operations not performed during this time, the next station is searched.</li> </ul> </li> </ul> <p><b>(Example)</b></p> </td> </tr> <tr> <td></td> <td> <ul style="list-style-type: none"> <li>When M2S switch = 1                             <ul style="list-style-type: none"> <li>When key released within 2 seconds<br/>The preset memory contents corresponding to the pressed key are called and the scan operation is reset the moment the key is released.</li> </ul> </li> </ul> <p><b>(Example)</b></p> </td> </tr> <tr> <td></td> <td> <ul style="list-style-type: none"> <li>When key pressed for more than 2 seconds<br/>The held frequency is written to the preset memory corresponding to the pressed key 2 seconds after the key has been passed for 2 seconds. 2 seconds after the end of writing, hold ends and the next station is searched (seek operation).</li> </ul> <p><b>(Example)</b></p> </td> </tr> </tbody> </table> | Key       | Operation |  | <ul style="list-style-type: none"> <li>When M2S switch = 0                             <ul style="list-style-type: none"> <li>Memory unwritable state<br/>The scanning operation is canceled and the preset memory contents corresponding to the pressed key is called.</li> <li>Memory writable state (See the <span style="border: 1px solid black; padding: 2px;">ME</span> key below.)<br/>The held frequency is written to the preset memory corresponding to the pressed key and the memory writable state is canceled. Then, the hold state is held for 2 seconds. If an operations not performed during this time, the next station is searched.</li> </ul> </li> </ul> <p><b>(Example)</b></p> |  | <ul style="list-style-type: none"> <li>When M2S switch = 1                             <ul style="list-style-type: none"> <li>When key released within 2 seconds<br/>The preset memory contents corresponding to the pressed key are called and the scan operation is reset the moment the key is released.</li> </ul> </li> </ul> <p><b>(Example)</b></p> |  | <ul style="list-style-type: none"> <li>When key pressed for more than 2 seconds<br/>The held frequency is written to the preset memory corresponding to the pressed key 2 seconds after the key has been passed for 2 seconds. 2 seconds after the end of writing, hold ends and the next station is searched (seek operation).</li> </ul> <p><b>(Example)</b></p> |
|  | Key  | Operation |           |  |   |  |  |  |  |
|  | <ul style="list-style-type: none"> <li>When M2S switch = 0                             <ul style="list-style-type: none"> <li>Memory unwritable state<br/>The scanning operation is canceled and the preset memory contents corresponding to the pressed key is called.</li> <li>Memory writable state (See the <span style="border: 1px solid black; padding: 2px;">ME</span> key below.)<br/>The held frequency is written to the preset memory corresponding to the pressed key and the memory writable state is canceled. Then, the hold state is held for 2 seconds. If an operations not performed during this time, the next station is searched.</li> </ul> </li> </ul> <p><b>(Example)</b></p>  |           |           |  |   |  |  |  |  |
|  | <ul style="list-style-type: none"> <li>When M2S switch = 1                             <ul style="list-style-type: none"> <li>When key released within 2 seconds<br/>The preset memory contents corresponding to the pressed key are called and the scan operation is reset the moment the key is released.</li> </ul> </li> </ul> <p><b>(Example)</b></p>   |           |           |  |   |  |  |  |  |
|  | <ul style="list-style-type: none"> <li>When key pressed for more than 2 seconds<br/>The held frequency is written to the preset memory corresponding to the pressed key 2 seconds after the key has been passed for 2 seconds. 2 seconds after the end of writing, hold ends and the next station is searched (seek operation).</li> </ul> <p><b>(Example)</b></p>   |           |           |  |   |  |  |  |  |

| Symbol  | Function   |     |           |   |   |
|---|--|-----|-----------|---|---|
| <p style="text-align: center;"><b>BAND</b></p>                          | <p>Receiving band selection switch.<br/>It is valid only in the radio mode.<br/>Each time this switch is pressed, the band is switched sequentially as shown below.</p> <p style="text-align: center;">→ FM1 → FM2 → FM3 → MW1 → MW2 → LW →</p> <p>However, bands disabled by receiving area and DISFM3, ENMW2, and DISLW switches are skipped.<br/>When the band is switched (FM1 → FM2 → FM3 → MW1 → MW2) in the same band (FM, MW), the band display and last channel change.<br/>When the <b>BAND</b> key is pressed during VF band reception, the VF band is reset and the device returns to the band received last.</p>  |     |           |   |   |
| <p style="text-align: center;"><b>ME</b></p>                            | <p>In the radio mode, during frequency display, this key is used as the preset memory writable state setting key and during clock display (CE pin = High level), this key is used with the <b>MAN UP</b> and <b>MAN DWN</b> keys as the clock adjustment key.<br/>When the ME2S = 0, this key operates as the preset memory writable state and clock adjustment key. When ME2S = 1, this key operates as the preset memory writable state and clock adjustment key. When ME2S = 0, use the <b>DISP</b> key to switch the display.<br/>This key operation is described below.</p> <ul style="list-style-type: none"> <li>• Radio mode frequency display<br/>This key is used as the preset memory writable state setting key.<br/>It is valid only when the initialize diode M2S switch is 0.<br/>When this key is pressed, the device enters the preset memory writable state for 5 seconds from the moment the key was pressed and the current receiving frequency is written to the preset memory corresponding to the pressed key by pressing the <b>M1 (TP1)</b> to <b>M6</b> key. If the <b>ME</b> key is pressed continuously at this time, the write operation is not performed.<br/>During the preset memory writable state, the "ch" display flashes at 1 Hz (duty 50 %). If preset memory is being received, the preset memory number flashes also.<br/>This key is invalid during the seek operation (including seek operation at scanning). However, it is valid at 5 seconds hold during the preset memory scan and scan operations.<br/>Each key operation in the preset memory writable state is shown below.</li> </ul> <table border="1" data-bbox="431 1446 1455 1646"> <thead> <tr> <th data-bbox="431 1446 618 1488">Key</th> <th data-bbox="618 1446 1455 1488">Operation</th> </tr> </thead> <tbody> <tr> <td data-bbox="431 1488 618 1646"> <p style="text-align: center;"><b>M1 (TP1)</b><br/>to<br/><b>M6</b></p> </td> <td data-bbox="618 1488 1455 1646"> <p>The frequency being received when a key is pressed is written to the preset memory corresponding to the pressed key.<br/>Muting is not output.</p> </td> </tr> </tbody> </table> | Key | Operation | <p style="text-align: center;"><b>M1 (TP1)</b><br/>to<br/><b>M6</b></p> | <p>The frequency being received when a key is pressed is written to the preset memory corresponding to the pressed key.<br/>Muting is not output.</p> |
| Key   | Operation  |     |           |   |   |
| <p style="text-align: center;"><b>M1 (TP1)</b><br/>to<br/><b>M6</b></p> | <p>The frequency being received when a key is pressed is written to the preset memory corresponding to the pressed key.<br/>Muting is not output.</p>  |     |           |   |   |

| Symbol  | Function   |   |              |               |  |                |                |                 |                |                 |               |                |             |  |
|---|--|---|--------------|---------------|--|----------------|----------------|-----------------|----------------|-----------------|---------------|----------------|-------------|--|
| <div style="border: 1px solid black; padding: 5px; width: fit-content; margin: 10px auto;">ME</div>   | <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="text-align: center;">Key</th> <th style="text-align: center;">Operation</th> </tr> </thead> <tbody> <tr> <td style="text-align: center;"><b>VF</b></td> <td rowspan="9" style="vertical-align: top; padding: 5px;">Preset memory write mode is reset and each key operation is performed.</td> </tr> <tr> <td style="text-align: center;">PSCAN<br/>AMEMO</td> </tr> <tr> <td style="text-align: center;"><b>SEEK UP</b></td> </tr> <tr> <td style="text-align: center;"><b>SEEK DWN</b></td> </tr> <tr> <td style="text-align: center;"><b>SCAN UP</b></td> </tr> <tr> <td style="text-align: center;"><b>SCAN DWN</b></td> </tr> <tr> <td style="text-align: center;"><b>MAN UP</b></td> </tr> <tr> <td style="text-align: center;"><b>MAN DWN</b></td> </tr> <tr> <td style="text-align: center;"><b>DISP</b></td> </tr> </tbody> </table>   | Key   | Operation    | <b>VF</b>     | Preset memory write mode is reset and each key operation is performed. | PSCAN<br>AMEMO | <b>SEEK UP</b> | <b>SEEK DWN</b> | <b>SCAN UP</b> | <b>SCAN DWN</b> | <b>MAN UP</b> | <b>MAN DWN</b> | <b>DISP</b> |  |
|   | Key  | Operation   |              |               |  |                |                |                 |                |                 |               |                |             |  |
|   | <b>VF</b>  | Preset memory write mode is reset and each key operation is performed.        |              |               |  |                |                |                 |                |                 |               |                |             |  |
|   | PSCAN<br>AMEMO   |   |              |               |  |                |                |                 |                |                 |               |                |             |  |
|   | <b>SEEK UP</b>   |   |              |               |  |                |                |                 |                |                 |               |                |             |  |
| <b>SEEK DWN</b>   |  |   |              |               |  |                |                |                 |                |                 |               |                |             |  |
| <b>SCAN UP</b>  |  |   |              |               |  |                |                |                 |                |                 |               |                |             |  |
| <b>SCAN DWN</b>   |  |   |              |               |  |                |                |                 |                |                 |               |                |             |  |
| <b>MAN UP</b>   |  |   |              |               |  |                |                |                 |                |                 |               |                |             |  |
| <b>MAN DWN</b>  |  |   |              |               |  |                |                |                 |                |                 |               |                |             |  |
| <b>DISP</b>   |  |   |              |               |  |                |                |                 |                |                 |               |                |             |  |
| <div style="border: 1px solid black; padding: 5px; width: fit-content; margin: 10px auto;">BAND</div>   | <p>The preset memory writable state is reset and the band is switched sequentially as shown below.</p> <div style="text-align: center; margin: 10px 0;"> <pre> graph LR     FM1 --&gt; FM2 --&gt; FM3 --&gt; MW1 --&gt; MW2 --&gt; LW             </pre> </div> <p>However, bands disabled by receiving area and DISFM3, ENMW2, and DISLW switches are skipped.</p>  |   |              |               |  |                |                |                 |                |                 |               |                |             |  |
| <div style="border: 1px solid black; padding: 5px; width: fit-content; margin: 10px auto;">ME</div>   | <p>The preset memory writable state is reset.</p>  |   |              |               |  |                |                |                 |                |                 |               |                |             |  |
| <table border="1" style="width: 100%; border-collapse: collapse;"> <tbody> <tr> <td style="text-align: center;"><b>LOUD</b></td> <td rowspan="3" style="vertical-align: top; padding: 5px;">The preset memory writable state is held and each key operation is performed.</td> </tr> <tr> <td style="text-align: center;">LOC<br/>(TP4)</td> </tr> <tr> <td style="text-align: center;">MONO<br/>(TP5)</td> </tr> </tbody> </table> | <b>LOUD</b>  | The preset memory writable state is held and each key operation is performed. | LOC<br>(TP4) | MONO<br>(TP5) |  |                |                |                 |                |                 |               |                |             |  |
| <b>LOUD</b>   | The preset memory writable state is held and each key operation is performed.  |   |              |               |  |                |                |                 |                |                 |               |                |             |  |
| LOC<br>(TP4)  |  |   |              |               |  |                |                |                 |                |                 |               |                |             |  |
| MONO<br>(TP5)   |  |   |              |               |  |                |                |                 |                |                 |               |                |             |  |
|   | <p>Keys other than those described above (except the <b>POWER</b> key) are invalid.</p> <p>When the radio is turned off and then turned back on (including tape and CD mode switching) in the preset memory writable state, the writable state is released.</p> <ul style="list-style-type: none"> <li>• Clock display                     <p>This key is used as the time adjustment key.</p> <p>The minute and hour digits are adjusted as shown below by pressing the <b>MAN UP</b> and <b>MAN DWN</b> keys while pressing the <b>ME</b> key.</p> <ul style="list-style-type: none"> <li>• Hour adjustment                             <p>The hour is advanced one hour each time the <b>MAN DWN</b> key is pressed. When the key is held down for more than 0.5 seconds, the hour changes continuously at a speed of 4 hours/sec (1 hour in 250 ms) until the key is released.</p> <p>The minute digit and seconds count are not affected.</p> </li> <li>• Minute digit adjustment                             <p>The minute digit is advanced one minute each time the <b>MAN UP</b> key is pressed. When the key held down for more than 0.5 seconds, the minute digit changes at a speed of 8 minutes/sec (1 minute in 125 ms) until the key is released. Carry to the hour digit is not performed. Each time the minute digit is adjusted, the seconds count is reset.</p> </li> </ul> </li> </ul> |   |              |               |  |                |                |                 |                |                 |               |                |             |  |
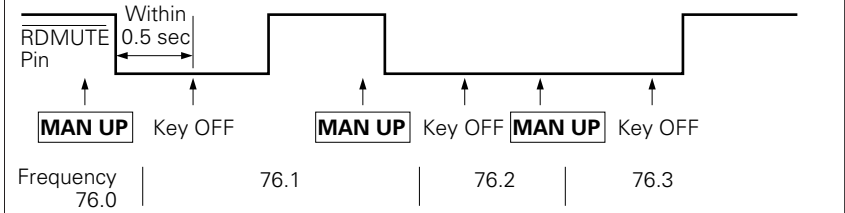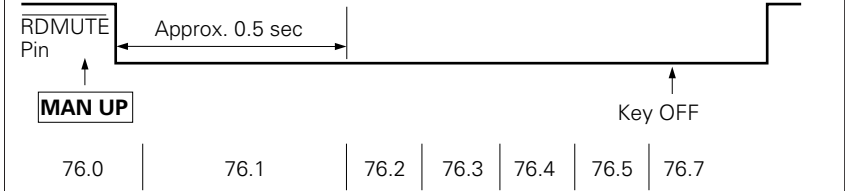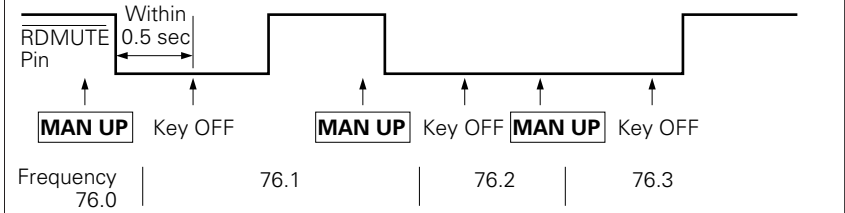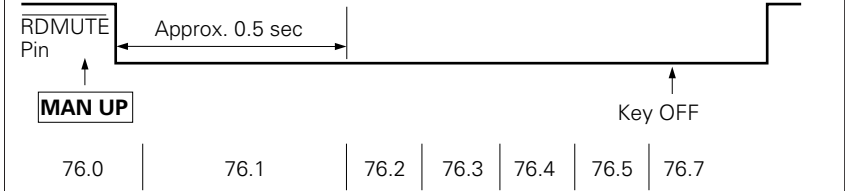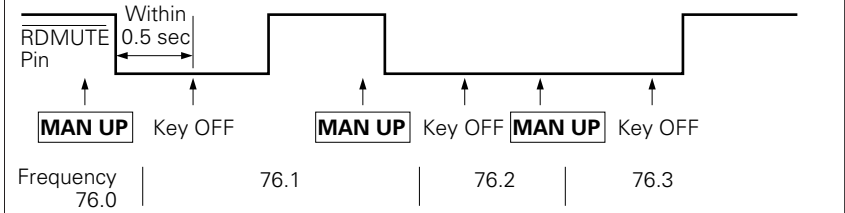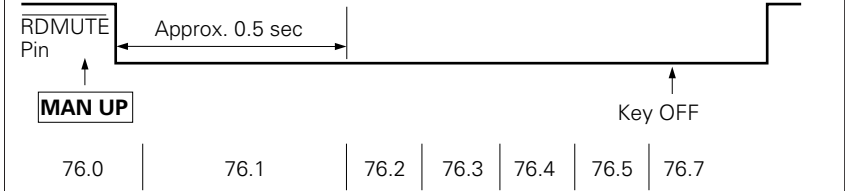
| Symbol  | Function   |         |             |   |  |
|---------|--|---------|-------------|---|--|
|         | <p>In the radio mode, these keys are used as the receiving frequency up/down keys. During clock display, these keys are used with the <b>ME</b> key as the clock adjustment keys. Their operation is shown below.</p> <ul style="list-style-type: none"> <li>Radio mode           <p>These keys operate as shown below, depending on the setting of the initialize diode matrix AUTO500 switch.</p> <ul style="list-style-type: none"> <li>Operation by AUTO500 switch</li> </ul> </li> </ul> <table border="1" data-bbox="431 478 1458 1297"> <thead> <tr> <th data-bbox="431 478 618 520">AUTO500</th> <th data-bbox="618 478 1458 520">Description</th> </tr> </thead> <tbody> <tr> <td data-bbox="431 520 618 1297">0</td> <td data-bbox="618 520 1458 1297"> <p>Each time a key is pressed, the frequency is incremented ( <b>MAN UP</b> key) or decremented ( <b>MAN DWN</b> key) one step (1 channel space). When the key is held down for approx. 0.5 seconds, the frequency changes continuously at a speed of approx. 50 ms per step until the key is released.</p> <p><b>Example 1)</b> When key released within 0.5 seconds</p>  <p><b>Example 2)</b> When key held down for more than 0.5 seconds</p>  </td> </tr> </tbody> </table> | AUTO500 | Description | 0 | <p>Each time a key is pressed, the frequency is incremented ( <b>MAN UP</b> key) or decremented ( <b>MAN DWN</b> key) one step (1 channel space). When the key is held down for approx. 0.5 seconds, the frequency changes continuously at a speed of approx. 50 ms per step until the key is released.</p> <p><b>Example 1)</b> When key released within 0.5 seconds</p>  <p><b>Example 2)</b> When key held down for more than 0.5 seconds</p>  |
| AUTO500 | Description  |         |             |   |  |
| 0       | <p>Each time a key is pressed, the frequency is incremented ( <b>MAN UP</b> key) or decremented ( <b>MAN DWN</b> key) one step (1 channel space). When the key is held down for approx. 0.5 seconds, the frequency changes continuously at a speed of approx. 50 ms per step until the key is released.</p> <p><b>Example 1)</b> When key released within 0.5 seconds</p>  <p><b>Example 2)</b> When key held down for more than 0.5 seconds</p>    |         |             |   |  |

**MAN UP**

**MAN DWN**

| Symbol   | Function  |         |             |  |   |
|--|---|---------|-------------|--|---|
|  | <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="width: 15%;">AUTO500</th> <th style="width: 85%;">Description</th> </tr> </thead> <tbody> <tr> <td></td> <td> <p>Each time a key is pressed, the frequency is incremented ( <b>MAN UP</b> key) or decremented ( <b>MAN DWN</b> key) one step. When the key is held down for more than 0.5 seconds, the seek operation (seek up for <b>MAN UP</b> and seek down for <b>MAN DWN</b> ) starts at the point after 0.5 seconds. This seek operation is the same as that of the <b>SEEK UP</b> and <b>SEEK DWN</b> keys. After the key was held down for more than 0.5 seconds, the seek operation continues even if the key is released.</p> <p><b>Example 1)</b> When key released within 0.5 seconds</p>  <p><b>Example 2)</b> When key held down for more than 0.5 seconds</p>  <p>When the AUTO500 switch was set to 1, do not use the <b>SEEK UP</b> and <b>SEEK DWN</b> keys.</p> </td> </tr> </tbody> </table> <ul style="list-style-type: none"> <li>• <b>During clock display</b><br/>                     When the clock is displayed and the <b>ME</b> key was pressed and held, the minute and hour digits are adjusted by pressing the <b>MAN UP</b> and <b>MAN DWN</b> keys. For a description of the minute and hour digits adjustment method, see the <b>ME</b> key above.                 </li> </ul> | AUTO500 | Description |  | <p>Each time a key is pressed, the frequency is incremented ( <b>MAN UP</b> key) or decremented ( <b>MAN DWN</b> key) one step. When the key is held down for more than 0.5 seconds, the seek operation (seek up for <b>MAN UP</b> and seek down for <b>MAN DWN</b> ) starts at the point after 0.5 seconds. This seek operation is the same as that of the <b>SEEK UP</b> and <b>SEEK DWN</b> keys. After the key was held down for more than 0.5 seconds, the seek operation continues even if the key is released.</p> <p><b>Example 1)</b> When key released within 0.5 seconds</p>  <p><b>Example 2)</b> When key held down for more than 0.5 seconds</p>  <p>When the AUTO500 switch was set to 1, do not use the <b>SEEK UP</b> and <b>SEEK DWN</b> keys.</p> |
| AUTO500  | Description   |         |             |  |   |
|  | <p>Each time a key is pressed, the frequency is incremented ( <b>MAN UP</b> key) or decremented ( <b>MAN DWN</b> key) one step. When the key is held down for more than 0.5 seconds, the seek operation (seek up for <b>MAN UP</b> and seek down for <b>MAN DWN</b> ) starts at the point after 0.5 seconds. This seek operation is the same as that of the <b>SEEK UP</b> and <b>SEEK DWN</b> keys. After the key was held down for more than 0.5 seconds, the seek operation continues even if the key is released.</p> <p><b>Example 1)</b> When key released within 0.5 seconds</p>  <p><b>Example 2)</b> When key held down for more than 0.5 seconds</p>  <p>When the AUTO500 switch was set to 1, do not use the <b>SEEK UP</b> and <b>SEEK DWN</b> keys.</p>   |         |             |  |   |
| <p style="text-align: center;"><b>LOUD</b></p> | <p>LOUD (LOUDNESS) control key.<br/>                     It is valid in the radio, tape, and CD modes.<br/>                     Each time this key is pressed, the LCD panel "LOUD" display and the LOUD pin (pin 19) output are inverted.<br/>                     The LOUD state is held even when radio, tape, and CD mode switching is performed.<br/>                     When the power is turned on, the OFF state is set ("LOUD" display OFF, LOUD pin LOW level).</p>  |         |             |  |   |



| Symbol   | Function  |
|--|---|
| <div style="border: 1px solid black; padding: 2px; width: fit-content; margin: auto;">                     LOC<br/>(TP4)                 </div>  | <p>In the radio mode, this key is used as the LOCAL (LOCAL/DX) control key. In the tape mode, this key is used as the tape function key by initialize diode.</p> <ul style="list-style-type: none"> <li>• Radio mode                     <p>This key is valid only when initialize diode AUTOLOC switch = 0.</p> <p>Each time this key is pressed, the LCD panel “LOC” display and the LOC pin (pin 10) output are inverted. High level is output from the LOC pin while “LOC” is displayed.</p> <p>The FM, MW, and LW bands common VF band is the same as the FM band.</p> <p>When the power is turned on, the OFF state (“LOC” display off, LOC pin low level) is set.</p> </li> <li>• Tape mode                     <p>When the initialize diode ENTPK switch is 1, this key is used as the AMS, NR (NOISE REDUCTION), or MTL (METAL) function key. For whether the AMS, NR, or MTL function is selected, see the initialize diode KAMS, KNR and KMTL switches above.</p> <p>When the AMS, MTL, or NR function key is selected, operation is the same as the <span style="border: 1px solid black; padding: 2px 5px;">AMS</span>, <span style="border: 1px solid black; padding: 2px 5px;">MTL</span>, and <span style="border: 1px solid black; padding: 2px 5px;">NR</span> keys. See the description of each key.</p> </li> </ul> |
| <div style="border: 1px solid black; padding: 2px; width: fit-content; margin: auto;">                     MONO<br/>(TP5)                 </div> | <p>In the radio mode, this key is used as the MONO (MONORAL) control key. In the tape mode, this key is used as the tape function key by initialize diode.</p> <ul style="list-style-type: none"> <li>• Radio mode                     <p>This key is valid only in FM and VF bands.</p> <p>Each time this key is pressed, the LCD panel “MONO” display and the MONO/NR<sub>2</sub> pin (pin 18) output the inverted. High level is output from the MONO/NR<sub>2</sub> pin while “MONO” is displayed.</p> <p>When the power is turned on, the OFF state is set (“MONO” display OFF, MONO/NR<sub>2</sub> pin Low level).</p> </li> <li>• Tape mode                     <p>This key can be used as the AMS, MTL, or NR function key by initialize diode ENTPK, KAMS, KNR, and KMTL switches.</p> <p>See the ENTPK, KAMS, and KMTL switches items.</p> <p>When the AMS or MTL function is selected, this key operates the same as the <span style="border: 1px solid black; padding: 2px 5px;">MTL</span>, <span style="border: 1px solid black; padding: 2px 5px;">AMS</span> or <span style="border: 1px solid black; padding: 2px 5px;">NR</span> key. See the description of each key.</p> <p>In the radio monitor and DK ON modes, this key operates as the MONO control key.</p> </li> </ul>  |
| <div style="border: 1px solid black; padding: 2px; width: fit-content; margin: auto;">                     MTL                 </div>            | <p>MTL (METAL) control key.</p> <p>This key is valid in the tape mode.</p> <p>Each time this key is pressed, the LCD panel “MTL” display and the MTL pin (pin 21) output are inverted.</p> <p>High level is output from the LOC/MTL pin while “MTL” is displayed.</p> <p>When the power is turned on, the OFF state is set (“MTL” display OFF, MTL pin Low level).</p>  |

| Symbol   | Function   |   |  |   |  |   |  |   |   |   |  |  |  |  |   |  |
|--|--|---|--|---|--|---|--|---|---|---|--|--|--|--|---|--|
| <p style="text-align: center;"><b>NR</b></p>   | <p>NR<sub>1</sub> (NOISE REDUCTION) and NR<sub>2</sub> control key.<br/>                     This key is valid in the tape mode.<br/>                     Its operations depends on the setting of the initialize diode ENNR2 switch as shown below.</p> <table border="1" data-bbox="358 348 1385 999"> <thead> <tr> <th data-bbox="358 348 469 394">ENNR<sub>2</sub></th> <th data-bbox="469 348 1385 394">Key Operation</th> </tr> </thead> <tbody> <tr> <td data-bbox="358 394 469 579" style="text-align: center;">0</td> <td data-bbox="469 394 1385 579"> <p>Each time this key is pressed, the LCD panel "NR<sub>1</sub>" display and the NR<sub>1</sub> pin (pin 22) output are inverted.<br/>                             High level is output from the NR<sub>1</sub> pin while "NR<sub>1</sub>" is displayed.<br/>                             When the power is turned on, the OFF state is set ("NR<sub>1</sub>" display OFF, NR<sub>1</sub> pin Low level).</p> </td> </tr> <tr> <td data-bbox="358 579 469 999" style="text-align: center;">1</td> <td data-bbox="469 579 1385 999"> <p>Each time this key is pressed, the display and output are switched as shown below.</p> <div style="text-align: center;"> <table border="0" data-bbox="607 646 1162 940"> <tr> <td style="padding-right: 20px;">                             "NR<sub>1</sub>" display OFF<br/>                             NR<sub>1</sub> pin Low<br/>                             "NR<sub>2</sub>" display OFF<br/>                             MONO/NR<sub>2</sub> pin Low                         </td> <td style="font-size: 2em; vertical-align: middle;">→</td> <td>                             "NR<sub>1</sub>" display ON<br/>                             NR<sub>1</sub> pin High<br/>                             "NR<sub>2</sub>" display OFF<br/>                             MONO/NR<sub>2</sub> pin Low                         </td> </tr> <tr> <td colspan="3" style="padding: 10px 0 10px 100px;"> <table border="0" style="margin: auto;"> <tr> <td style="padding-right: 20px;">                             "NR<sub>1</sub>" display ON<br/>                             NR<sub>1</sub> pin Low<br/>                             "NR<sub>2</sub>" display ON<br/>                             MONO/NR<sub>2</sub> pin High                         </td> <td style="font-size: 2em; vertical-align: middle;">←</td> <td></td> </tr> </table> </td> </tr> </table> <p>When the power is turned on, NR<sub>1</sub> and NR<sub>2</sub> are both turned off.</p> </div></td> </tr> </tbody> </table> | ENNR <sub>2</sub>   | Key Operation  | 0   | <p>Each time this key is pressed, the LCD panel "NR<sub>1</sub>" display and the NR<sub>1</sub> pin (pin 22) output are inverted.<br/>                             High level is output from the NR<sub>1</sub> pin while "NR<sub>1</sub>" is displayed.<br/>                             When the power is turned on, the OFF state is set ("NR<sub>1</sub>" display OFF, NR<sub>1</sub> pin Low level).</p>                                | 1 | <p>Each time this key is pressed, the display and output are switched as shown below.</p> <div style="text-align: center;"> <table border="0" data-bbox="607 646 1162 940"> <tr> <td style="padding-right: 20px;">                             "NR<sub>1</sub>" display OFF<br/>                             NR<sub>1</sub> pin Low<br/>                             "NR<sub>2</sub>" display OFF<br/>                             MONO/NR<sub>2</sub> pin Low                         </td> <td style="font-size: 2em; vertical-align: middle;">→</td> <td>                             "NR<sub>1</sub>" display ON<br/>                             NR<sub>1</sub> pin High<br/>                             "NR<sub>2</sub>" display OFF<br/>                             MONO/NR<sub>2</sub> pin Low                         </td> </tr> <tr> <td colspan="3" style="padding: 10px 0 10px 100px;"> <table border="0" style="margin: auto;"> <tr> <td style="padding-right: 20px;">                             "NR<sub>1</sub>" display ON<br/>                             NR<sub>1</sub> pin Low<br/>                             "NR<sub>2</sub>" display ON<br/>                             MONO/NR<sub>2</sub> pin High                         </td> <td style="font-size: 2em; vertical-align: middle;">←</td> <td></td> </tr> </table> </td> </tr> </table> <p>When the power is turned on, NR<sub>1</sub> and NR<sub>2</sub> are both turned off.</p> </div> | "NR <sub>1</sub> " display OFF<br>NR <sub>1</sub> pin Low<br>"NR <sub>2</sub> " display OFF<br>MONO/NR <sub>2</sub> pin Low | → | "NR <sub>1</sub> " display ON<br>NR <sub>1</sub> pin High<br>"NR <sub>2</sub> " display OFF<br>MONO/NR <sub>2</sub> pin Low | <table border="0" style="margin: auto;"> <tr> <td style="padding-right: 20px;">                             "NR<sub>1</sub>" display ON<br/>                             NR<sub>1</sub> pin Low<br/>                             "NR<sub>2</sub>" display ON<br/>                             MONO/NR<sub>2</sub> pin High                         </td> <td style="font-size: 2em; vertical-align: middle;">←</td> <td></td> </tr> </table> |  |  | "NR <sub>1</sub> " display ON<br>NR <sub>1</sub> pin Low<br>"NR <sub>2</sub> " display ON<br>MONO/NR <sub>2</sub> pin High | ← |  |
| ENNR <sub>2</sub>  | Key Operation  |   |  |   |  |   |  |   |   |   |  |  |  |  |   |  |
| 0  | <p>Each time this key is pressed, the LCD panel "NR<sub>1</sub>" display and the NR<sub>1</sub> pin (pin 22) output are inverted.<br/>                             High level is output from the NR<sub>1</sub> pin while "NR<sub>1</sub>" is displayed.<br/>                             When the power is turned on, the OFF state is set ("NR<sub>1</sub>" display OFF, NR<sub>1</sub> pin Low level).</p>  |   |  |   |  |   |  |   |   |   |  |  |  |  |   |  |
| 1  | <p>Each time this key is pressed, the display and output are switched as shown below.</p> <div style="text-align: center;"> <table border="0" data-bbox="607 646 1162 940"> <tr> <td style="padding-right: 20px;">                             "NR<sub>1</sub>" display OFF<br/>                             NR<sub>1</sub> pin Low<br/>                             "NR<sub>2</sub>" display OFF<br/>                             MONO/NR<sub>2</sub> pin Low                         </td> <td style="font-size: 2em; vertical-align: middle;">→</td> <td>                             "NR<sub>1</sub>" display ON<br/>                             NR<sub>1</sub> pin High<br/>                             "NR<sub>2</sub>" display OFF<br/>                             MONO/NR<sub>2</sub> pin Low                         </td> </tr> <tr> <td colspan="3" style="padding: 10px 0 10px 100px;"> <table border="0" style="margin: auto;"> <tr> <td style="padding-right: 20px;">                             "NR<sub>1</sub>" display ON<br/>                             NR<sub>1</sub> pin Low<br/>                             "NR<sub>2</sub>" display ON<br/>                             MONO/NR<sub>2</sub> pin High                         </td> <td style="font-size: 2em; vertical-align: middle;">←</td> <td></td> </tr> </table> </td> </tr> </table> <p>When the power is turned on, NR<sub>1</sub> and NR<sub>2</sub> are both turned off.</p> </div>   | "NR <sub>1</sub> " display OFF<br>NR <sub>1</sub> pin Low<br>"NR <sub>2</sub> " display OFF<br>MONO/NR <sub>2</sub> pin Low | →  | "NR <sub>1</sub> " display ON<br>NR <sub>1</sub> pin High<br>"NR <sub>2</sub> " display OFF<br>MONO/NR <sub>2</sub> pin Low | <table border="0" style="margin: auto;"> <tr> <td style="padding-right: 20px;">                             "NR<sub>1</sub>" display ON<br/>                             NR<sub>1</sub> pin Low<br/>                             "NR<sub>2</sub>" display ON<br/>                             MONO/NR<sub>2</sub> pin High                         </td> <td style="font-size: 2em; vertical-align: middle;">←</td> <td></td> </tr> </table> |   |  | "NR <sub>1</sub> " display ON<br>NR <sub>1</sub> pin Low<br>"NR <sub>2</sub> " display ON<br>MONO/NR <sub>2</sub> pin High  | ← |   |  |  |  |  |   |  |
| "NR <sub>1</sub> " display OFF<br>NR <sub>1</sub> pin Low<br>"NR <sub>2</sub> " display OFF<br>MONO/NR <sub>2</sub> pin Low  | →  | "NR <sub>1</sub> " display ON<br>NR <sub>1</sub> pin High<br>"NR <sub>2</sub> " display OFF<br>MONO/NR <sub>2</sub> pin Low |  |   |  |   |  |   |   |   |  |  |  |  |   |  |
| <table border="0" style="margin: auto;"> <tr> <td style="padding-right: 20px;">                             "NR<sub>1</sub>" display ON<br/>                             NR<sub>1</sub> pin Low<br/>                             "NR<sub>2</sub>" display ON<br/>                             MONO/NR<sub>2</sub> pin High                         </td> <td style="font-size: 2em; vertical-align: middle;">←</td> <td></td> </tr> </table> |  |   | "NR <sub>1</sub> " display ON<br>NR <sub>1</sub> pin Low<br>"NR <sub>2</sub> " display ON<br>MONO/NR <sub>2</sub> pin High | ←   |  |   |  |   |   |   |  |  |  |  |   |  |
| "NR <sub>1</sub> " display ON<br>NR <sub>1</sub> pin Low<br>"NR <sub>2</sub> " display ON<br>MONO/NR <sub>2</sub> pin High   | ←  |   |  |   |  |   |  |   |   |   |  |  |  |  |   |  |
| <p style="text-align: center;"><b>AMS</b></p>  | <p>AMS (AUTO MUSIC SEARCH) control key.<br/>                     This key is valid in the tape mode.<br/>                     Each time this key is pressed, the LCD panel "AMS" display and the AMS pin (pin 20) output are inverted. High level is output from the AMS pin while "AMS" is displayed.<br/>                     When the AMS pin is High level (AMS mode), if the TPSET switch is ON, the AMS pin holds the High level output even if the mode is switched to the CD or radio mode.<br/>                     When the power is turned on, AMS is turned off ("AMS" display OFF, AMS pin Low level).</p>  |   |  |   |  |   |  |   |   |   |  |  |  |  |   |  |
| <p style="text-align: center;"><b>RDMONI</b></p>   | <p>Radio monitor key.<br/>                     This key is valid in the tape and CD modes.<br/>                     Each time this key is pressed, the radio monitor mode is inverted. In the radio monitor mode, the LCD panel "RDMONI" display lights.<br/>                     In the radio monitor mode, all band tuning operations are possible and radio muting (<math>\overline{\text{RDMUTE}}</math> pin) is turned off and audio muting (<math>\overline{\text{AMUTE}}</math> pin) is turned on.</p>  |   |  |   |  |   |  |   |   |   |  |  |  |  |   |  |

| Symbol  | Function  |  |   |                  |             |   |      |   |  |   |  |   |   |   |       |   |   |
|---|---|--|---|------------------|-------------|---|------|---|--|---|--|---|---|---|-------|---|---|
| <div style="border: 1px solid black; padding: 2px; width: fit-content; margin-bottom: 10px;">DISP</div>   | <p>Display switching key.<br/>                     This key is valid when initialize diode NOCLK = 0 (clock), ME2S = 0.<br/>                     The display switching operation is shown below.</p> <ul style="list-style-type: none"> <li>Radio mode<br/>                             Each time this key is pressed, the frequency display and clock display are switched.<br/>                             This key is invalid at seek scan and auto preset scan.<br/>                             Operation according to the setting of the initialize diode PRIO1 and PRIO2 switches is shown below.</li> </ul> <table border="1" data-bbox="431 520 1456 1045"> <thead> <tr> <th>PRIO1</th> <th>PRIO2</th> <th>Priority Display</th> <th>Description</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>0</td> <td>None</td> <td>Each time the <span style="border: 1px solid black; padding: 2px;">DISP</span> key is pressed, the frequency display and clock display are switched.</td> </tr> <tr> <td>0</td> <td>1</td> <td>Frequency display</td> <td>When the <span style="border: 1px solid black; padding: 2px;">DISP</span> key is pressed during frequency display, the clock is displayed for 5 seconds. When the <span style="border: 1px solid black; padding: 2px;">DISP</span> key is pressed during the 5 seconds clock display, the display returns to the frequency display.</td> </tr> <tr> <td>1</td> <td>0</td> <td>Clock display</td> <td>When the <span style="border: 1px solid black; padding: 2px;">DISP</span> key is pressed during clock display, the frequency display is displayed for 5 seconds. When the <span style="border: 1px solid black; padding: 2px;">DISP</span> key is pressed during the 5 seconds frequency display, the display returns to the clock display.</td> </tr> </tbody> </table> | PRIO1                                  | PRIO2   | Priority Display | Description | 0 | 0    | None  | Each time the <span style="border: 1px solid black; padding: 2px;">DISP</span> key is pressed, the frequency display and clock display are switched. | 0 | 1                                      | Frequency display   | When the <span style="border: 1px solid black; padding: 2px;">DISP</span> key is pressed during frequency display, the clock is displayed for 5 seconds. When the <span style="border: 1px solid black; padding: 2px;">DISP</span> key is pressed during the 5 seconds clock display, the display returns to the frequency display. | 1 | 0     | Clock display   | When the <span style="border: 1px solid black; padding: 2px;">DISP</span> key is pressed during clock display, the frequency display is displayed for 5 seconds. When the <span style="border: 1px solid black; padding: 2px;">DISP</span> key is pressed during the 5 seconds frequency display, the display returns to the clock display. |
|   | PRIO1   | PRIO2                                  | Priority Display  | Description      |             |   |      |   |  |   |  |   |   |   |       |   |   |
| 0   | 0   | None                                   | Each time the <span style="border: 1px solid black; padding: 2px;">DISP</span> key is pressed, the frequency display and clock display are switched.  |                  |             |   |      |   |  |   |  |   |   |   |       |   |   |
| 0   | 1   | Frequency display                      | When the <span style="border: 1px solid black; padding: 2px;">DISP</span> key is pressed during frequency display, the clock is displayed for 5 seconds. When the <span style="border: 1px solid black; padding: 2px;">DISP</span> key is pressed during the 5 seconds clock display, the display returns to the frequency display.   |                  |             |   |      |   |  |   |  |   |   |   |       |   |   |
| 1   | 0   | Clock display                          | When the <span style="border: 1px solid black; padding: 2px;">DISP</span> key is pressed during clock display, the frequency display is displayed for 5 seconds. When the <span style="border: 1px solid black; padding: 2px;">DISP</span> key is pressed during the 5 seconds frequency display, the display returns to the clock display.   |                  |             |   |      |   |  |   |  |   |   |   |       |   |   |
| <p>When the device is switched to the radio mode, display starts from frequency display.</p> <ul style="list-style-type: none"> <li>Tape mode<br/>                             The <span style="border: 1px solid black; padding: 2px;">DISP</span> key is invalid.</li> <li>CD mode<br/>                             Each time this key is pressed, the "L<sub>0</sub><sup>1</sup>" display and clock display are switched.<br/>                             Operation according to the setting of the initialize diodes PRIO1 and PRIO2 is shown below.</li> </ul> <table border="1" data-bbox="431 1344 1456 1869"> <thead> <tr> <th>PRIO1</th> <th>PRIO2</th> <th>Priority Display</th> <th>Description</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>0</td> <td>None</td> <td>Each time the <span style="border: 1px solid black; padding: 2px;">DISP</span> key is pressed, the "L<sub>0</sub><sup>1</sup>" display and clock display are switched.</td> </tr> <tr> <td>0</td> <td>1</td> <td>"L<sub>0</sub><sup>1</sup>" display</td> <td>When the <span style="border: 1px solid black; padding: 2px;">DISP</span> key is pressed, during "L<sub>0</sub><sup>1</sup>" display, the clock is displayed for 5 seconds.<br/>When the <span style="border: 1px solid black; padding: 2px;">DISP</span> key is pressed during the 5 seconds clock display, the display returns to "L<sub>0</sub><sup>1</sup>" display.</td> </tr> <tr> <td>1</td> <td>0</td> <td>Clock</td> <td>When the <span style="border: 1px solid black; padding: 2px;">DISP</span> key is pressed during clock display, the "L<sub>0</sub><sup>1</sup>" display is displayed for 5 seconds.<br/>When the <span style="border: 1px solid black; padding: 2px;">DISP</span> key is pressed during the 5 seconds "L<sub>0</sub><sup>1</sup>" display, the display returns to the "L<sub>0</sub><sup>1</sup>" display.</td> </tr> </tbody> </table> <p>When the device is switched to the CD mode, display starts from "L<sub>0</sub><sup>1</sup>" display.</p> | PRIO1   | PRIO2                                  | Priority Display  | Description      | 0           | 0 | None | Each time the <span style="border: 1px solid black; padding: 2px;">DISP</span> key is pressed, the "L <sub>0</sub> <sup>1</sup> " display and clock display are switched. | 0  | 1 | "L <sub>0</sub> <sup>1</sup> " display | When the <span style="border: 1px solid black; padding: 2px;">DISP</span> key is pressed, during "L <sub>0</sub> <sup>1</sup> " display, the clock is displayed for 5 seconds.<br>When the <span style="border: 1px solid black; padding: 2px;">DISP</span> key is pressed during the 5 seconds clock display, the display returns to "L <sub>0</sub> <sup>1</sup> " display. | 1   | 0 | Clock | When the <span style="border: 1px solid black; padding: 2px;">DISP</span> key is pressed during clock display, the "L <sub>0</sub> <sup>1</sup> " display is displayed for 5 seconds.<br>When the <span style="border: 1px solid black; padding: 2px;">DISP</span> key is pressed during the 5 seconds "L <sub>0</sub> <sup>1</sup> " display, the display returns to the "L <sub>0</sub> <sup>1</sup> " display. |   |
| PRIO1   | PRIO2   | Priority Display                       | Description   |                  |             |   |      |   |  |   |  |   |   |   |       |   |   |
| 0   | 0   | None                                   | Each time the <span style="border: 1px solid black; padding: 2px;">DISP</span> key is pressed, the "L <sub>0</sub> <sup>1</sup> " display and clock display are switched.   |                  |             |   |      |   |  |   |  |   |   |   |       |   |   |
| 0   | 1   | "L <sub>0</sub> <sup>1</sup> " display | When the <span style="border: 1px solid black; padding: 2px;">DISP</span> key is pressed, during "L <sub>0</sub> <sup>1</sup> " display, the clock is displayed for 5 seconds.<br>When the <span style="border: 1px solid black; padding: 2px;">DISP</span> key is pressed during the 5 seconds clock display, the display returns to "L <sub>0</sub> <sup>1</sup> " display.                                     |                  |             |   |      |   |  |   |  |   |   |   |       |   |   |
| 1   | 0   | Clock                                  | When the <span style="border: 1px solid black; padding: 2px;">DISP</span> key is pressed during clock display, the "L <sub>0</sub> <sup>1</sup> " display is displayed for 5 seconds.<br>When the <span style="border: 1px solid black; padding: 2px;">DISP</span> key is pressed during the 5 seconds "L <sub>0</sub> <sup>1</sup> " display, the display returns to the "L <sub>0</sub> <sup>1</sup> " display. |                  |             |   |      |   |  |   |  |   |   |   |       |   |   |

| Symbol | Function  |
|--------|---|
| POWER  | <p>This key is used when turning the radio ON and OFF momentary key, controlling the illumination, etc.</p> <p>This key is valid only when the CE pin is High.</p> <p>The POWER pin (pin 23) output is inverted by pressing this key.</p> <p>When using this key, set the RDON switch (diode matrix) to 0.</p> <p>The radio is turned on and off by turning the transistor switch RDON ON and OFF with the output of the POWER pin.</p> <p>For details, see 2 <b>“Mode Transition”</b> and 6 <b>“Application Circuits”</b>.</p> |

**2. MODE TRANSITION**

With the μPD1723GF-013 and μPD1723GF-213, the radio can be turned on and off by the following two methods:

- (i) By CE pin when initialize diode switch RDON = 1
- (ii) By turning the transistor or alternate switch RDSET on and off

The mode transition at each operation is described in 2.1, 2.2, and 2.3.

**2.1 WHEN INITIALIZE DIODE RDON = 1 (RADIO ON/OFF BY CE PIN)**


The radio mode is turned on and off by CE pin.

Switching to the tape and CD modes is performed by TPSET and CDSET switches, respectively.


When RDON = 1, do not use the RDSET switch.

When the CE pin is made Low level, clock display is not performed.

**(1) When CE pin changed Low to High**

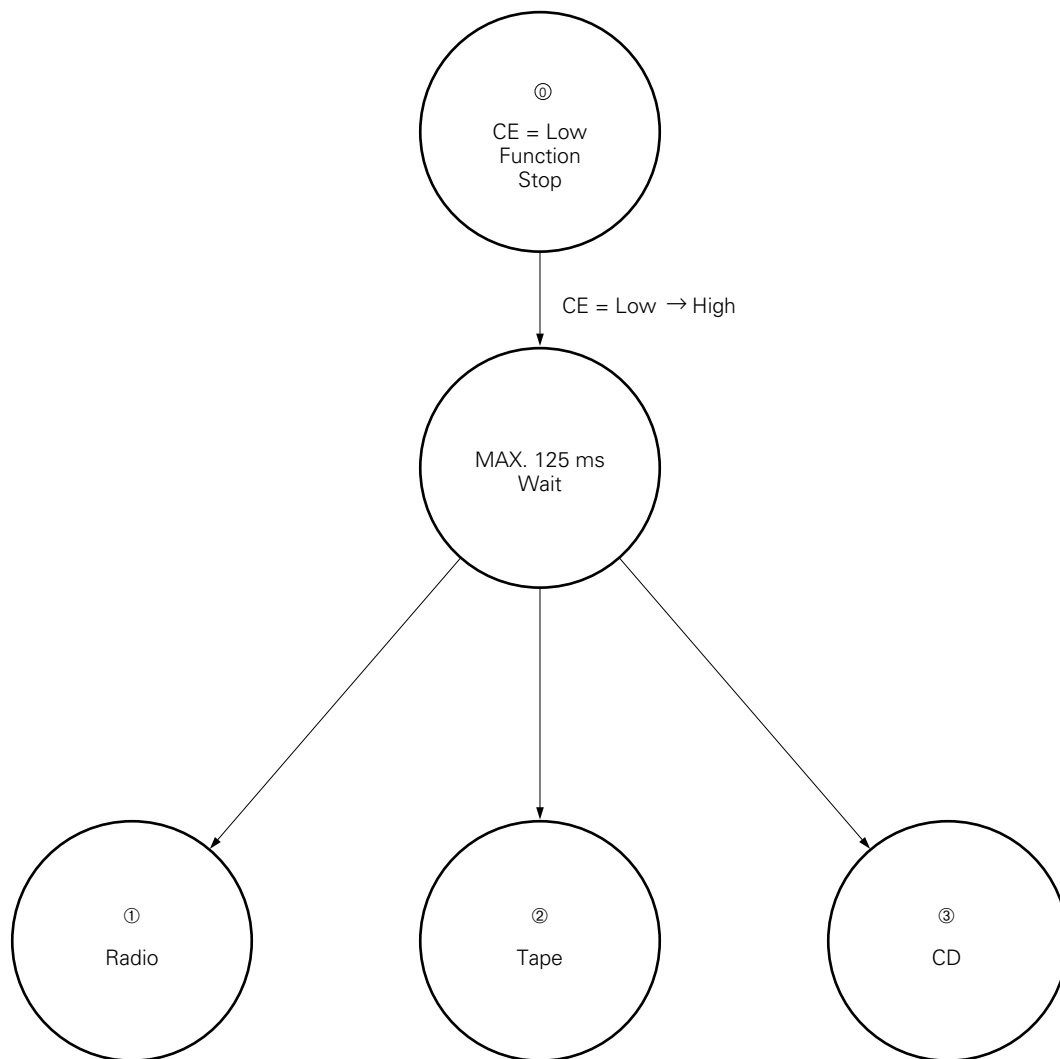

(2) When CE pin High level

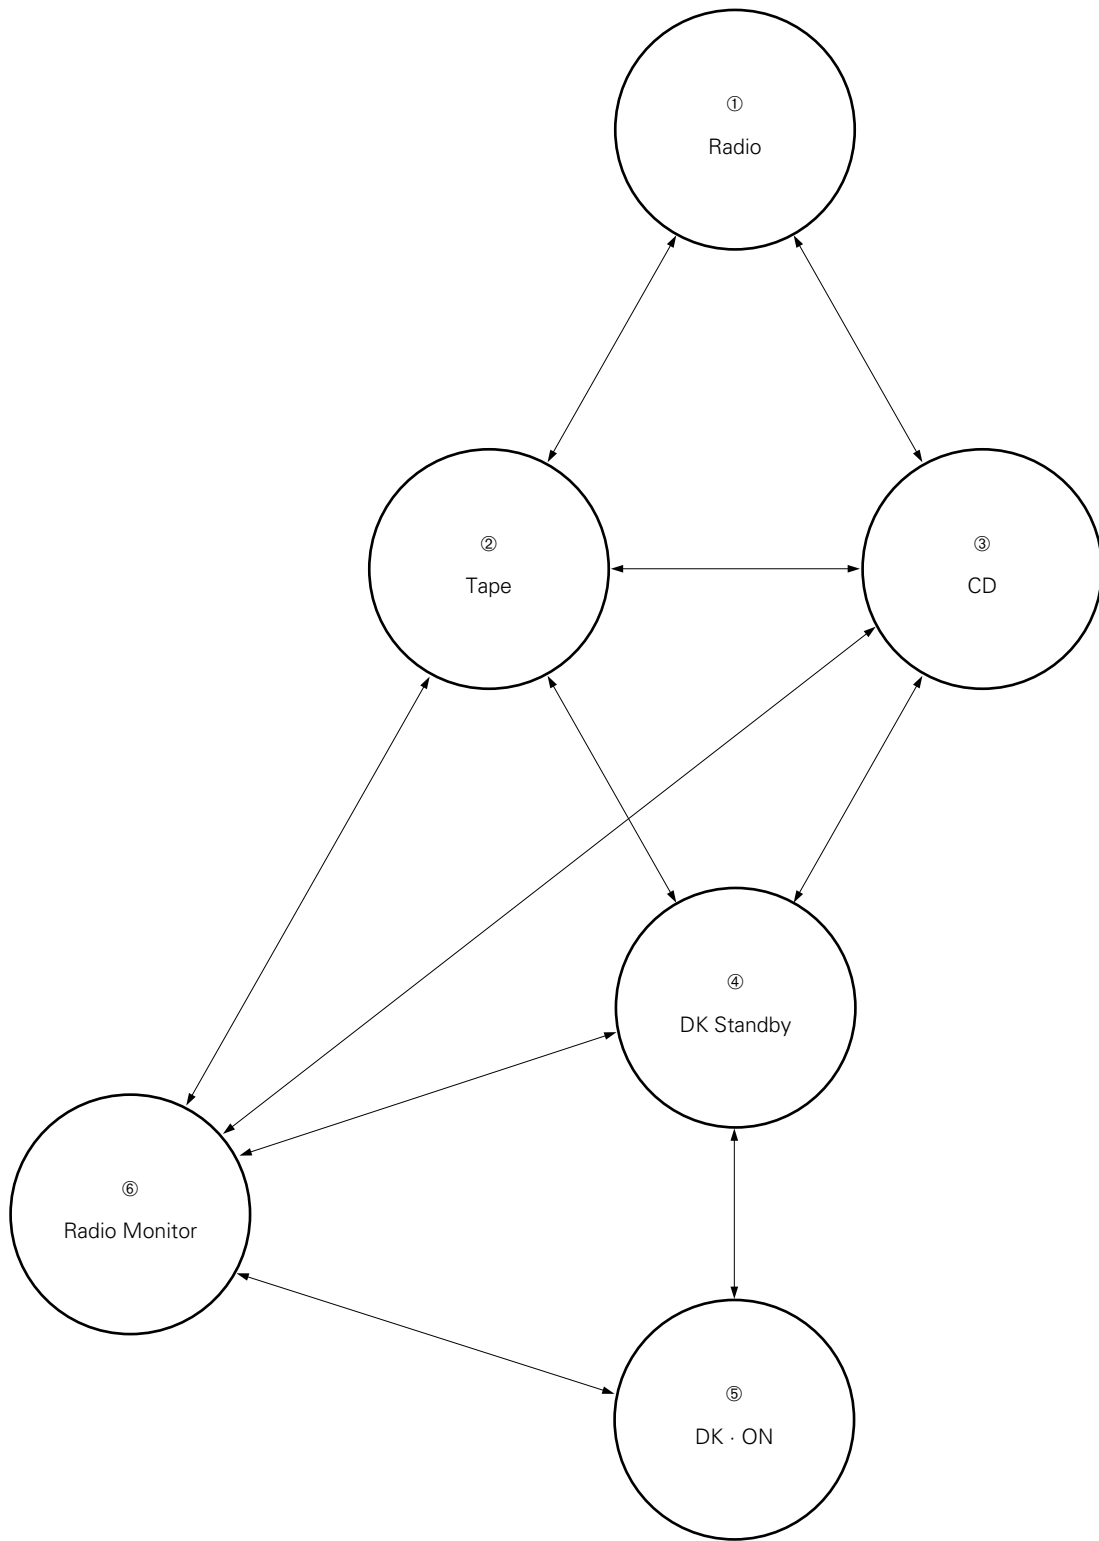


**2.2 RADIO ON/OFF BY RSET SWITCH**

The radio mode is turned on and off by RSET switch.


Switching to the tape and CD mode is performed by TPSET and CDSET switch, respectively.

The difference from RDON = 1 of 3.1 is that the clock is displayed even when the radio, tape, and CD modes are OFF.

**(1) When CE pin changed Low to High**

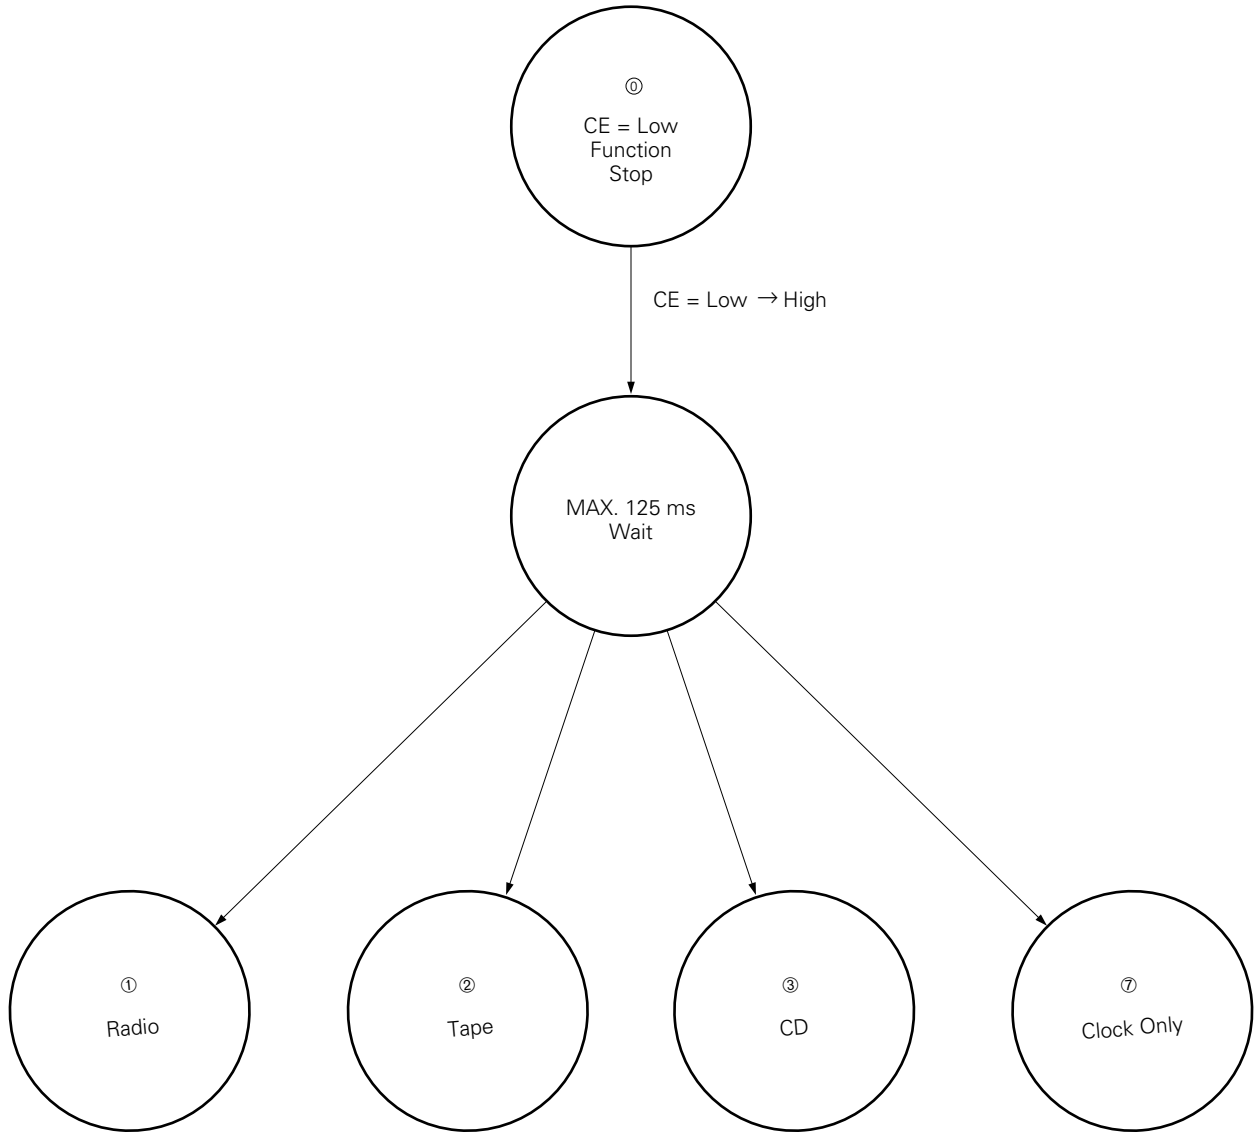

(2) When CE pin High level

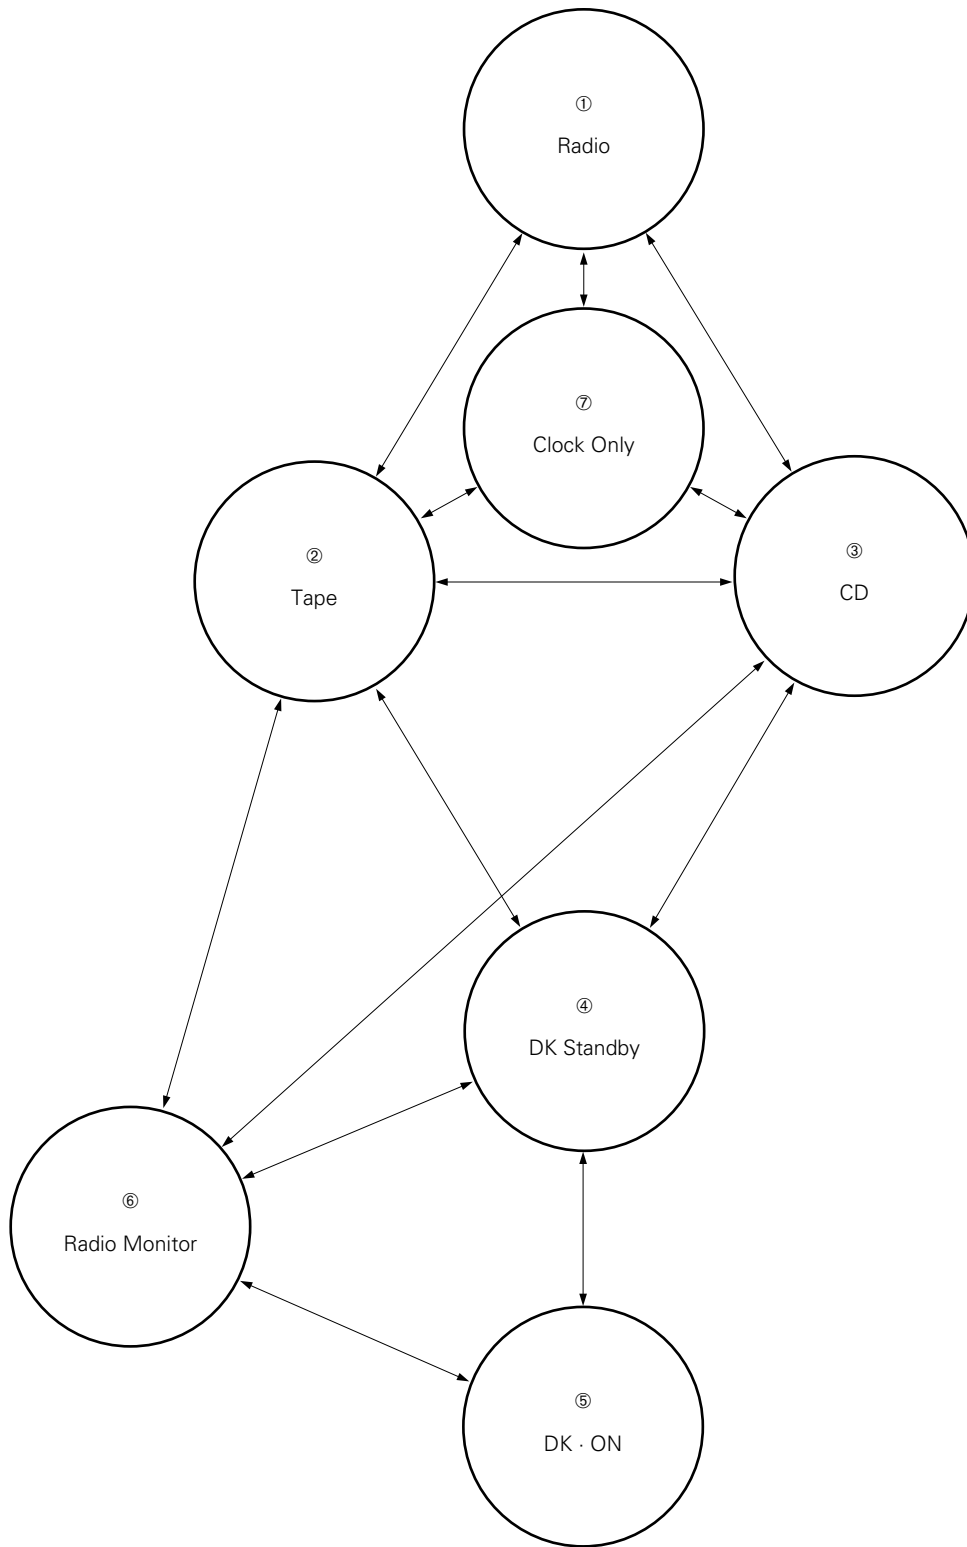



2.3 DESCRIPTION OF EACH MODE

| Mode                          | Description  |
|-------------------------------|--|
| <p>①</p> <p>CE = Low</p>      | <p>Backup mode.</p> <p>When the NOCLK switch is set to no-clock, low consumption current (400 nA max.) backup is possible.</p> <p>When clock is selected, the device is set to the clock count mode. In the clock mode, the maximum consumption current is 500 μA.</p>   |
| <p>①</p> <p>Radio</p>         | <p>When the CE pin is High level and the TPSET and CDSET switches are OFF, the device is set to the radio mode.</p>  |
| <p>②</p> <p>Tape</p>          | <p>When the CE pin is High level and the TPSET switch is ON and the CDSET switch is OFF, the device is set to the tape mode.</p>   |
| <p>③</p> <p>CD</p>            | <p>When the CE pin is High level and the CESET switch is ON, the device is set to the CD mode.</p>   |
| <p>④</p> <p>DK standby</p>    | <p>When the VF band is received in the radio mode and the mode is switched to the tape or CD mode by TPSET or CDSET switch, the device is set to the DK standby mode.</p> <p>The device is also set to the DK standby mode by pressing the <input type="text" value="VF"/> key in the tape or CD modes.</p> <p>In the DK standby mode, VF band tuning operation is enabled.</p>  |
| <p>⑤</p> <p>D • K</p>         | <p>When the DK switch is set to ON in the DK standby mode, the device enters the DK• ON mode.</p> <p>In the DK • ON mode, radio muting (<u>RDMUTE</u> pin) is turned off and audio muting (<u>AMUTE</u> pin) is turned on.</p>   |
| <p>⑥</p> <p>Radio monitor</p> | <p>When the tape mode is set by TPSET switch when the radio monitor mode is ON by <input type="text" value="RDMONI"/> in the radio mode, the device enters the radio monitor mode.</p> <p>The radio monitor mode is also set by pressing the <input type="text" value="RDMONI"/> key in the tape and CD modes.</p> <p>In the radio monitor mode, normal tuning operation is possible.</p> <p>In the radio monitor mode, radio muting (<u>RDMUTE</u> pin) is turned off and audio muting (<u>AMUTE</u> pin) is turned on.</p> |
| <p>⑦</p> <p>Clock</p>         | <p>NOCLK = 0</p> <p>Only clock display is performed.</p> <p>Clock adjustment is also possible.</p> <p>NOCLK = 1</p> <p>Function is disabled.</p> <p>However, since the CE pin is High level, the consumption current is 500 μA TYP.</p>  |

#### 2.4 RADIO ON/OFF BY POWER KEY

The  POWER key is invalid when the CE pin is High level.


Each time the key is pressed, the POWER pin (pin 23) output is inverted.

Therefore, a circuit is configured so that the radio is turned on and off by setting RDON = 0 and turning the RDSET switch on and off by POWER pin.


For details, see **6 "Application Circuits"**.

### 3. DISPLAY


#### 3.1 LCD PANEL

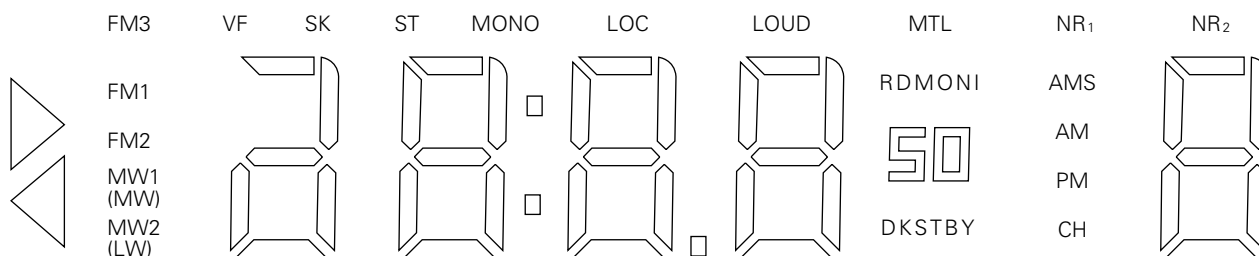


#### 3.2 FONT



#### 3.3 SEGMENT LINES

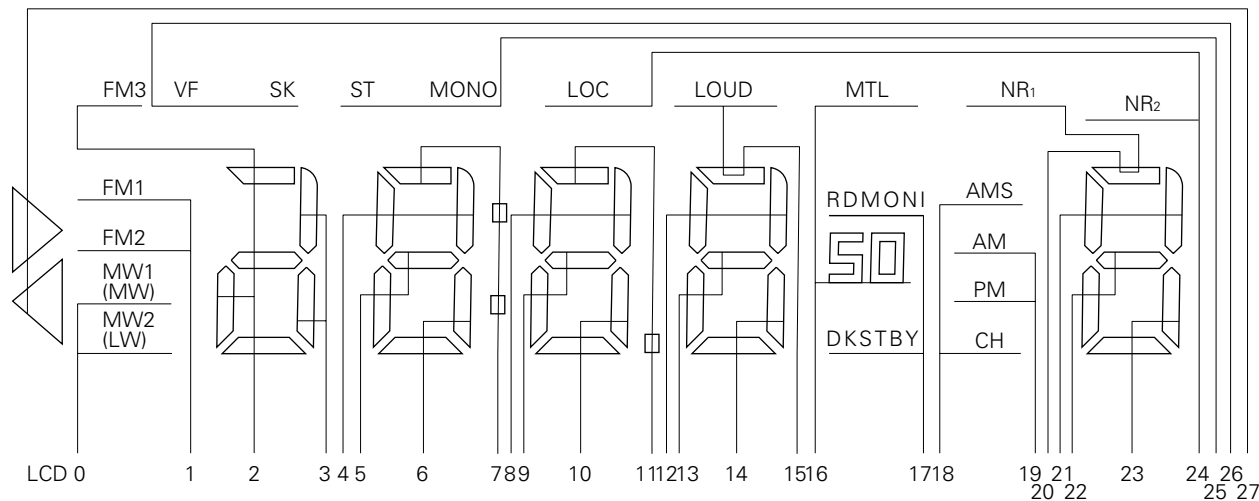


#### 3.4 COMMON LINES

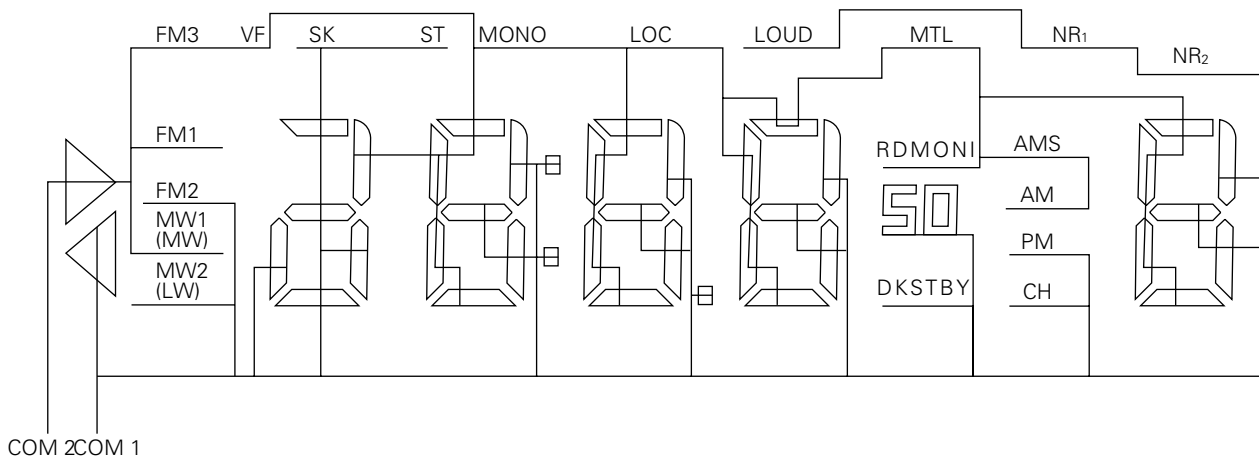



3.5 LCD ASSIGNMENT TABLE

| LCD | COM1            | COM2     |
|-----|-----------------|----------|
| 0   | MW2 (LW)        | MW1 (MW) |
| 1   | FM2             | FM1      |
| 2   | 4a, 4d, 4e, 4g  | FM3      |
| 3   | 4c              | 4b       |
| 4   | 3b              | 3f       |
| 5   | 3g              | 3e       |
| 6   | 3c              | 3d       |
| 7   | COLON ( : )     | 3a       |
| 8   | 2b              | 2f       |
| 9   | 2g              | 2e       |
| 10  | 2c              | 2d       |
| 11  | DPFM ( . )      | 2a       |
| 12  | 1b              | 1f       |
| 13  | 1g              | 1e       |
| 14  | 1c              | 1d       |
| 15  | LOUD            | 1a       |
| 16  | 50              | MTL      |
| 17  | DKSTBY          | RDMONI   |
| 18  | CH              | AMS      |
| 19  | PM              | AM       |
| 20  | NR <sub>1</sub> | Ca       |
| 21  | Cb              | Cf       |
| 22  | Cg              | Ce       |
| 23  | Cc              | Cd       |
| 24  | NR <sub>2</sub> | LOC      |
| 25  | ST              | MONO     |
| 26  | SK              | VF       |
| 27  | ◀               | ▶        |

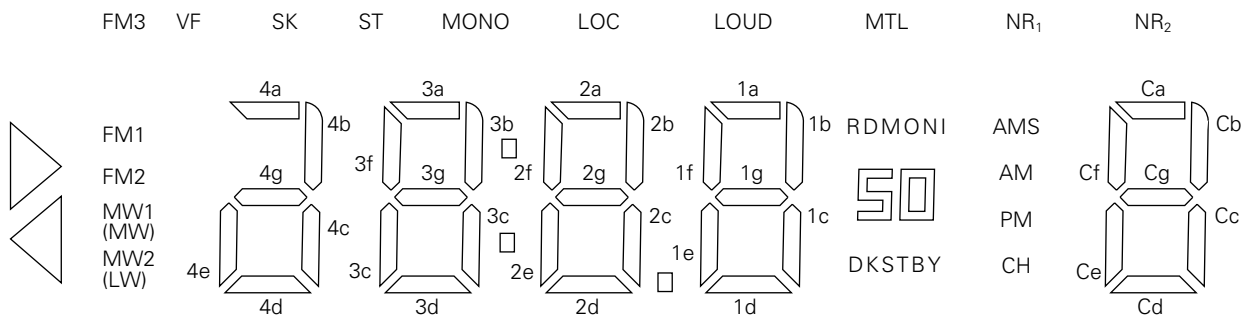

3.6 DESCRIPTION OF DISPLAYS

| Display         | Description  |
|-----------------|--|
| VF              | Indicates that the device is on the VF band.   |
| SK              | Indicates that the SK signal is input.<br>It lights when the SK switch is turned on at the FM and VF bands.  |
| ST              | Indicates that a STEREO signal is input.<br>It lights when the $\overline{ST}$ pin (pin 64) becomes Low on the FM and VF bands.<br>However, it does not light in the MONO mode.  |
| MONO            | Indicates that the device is in the MONORAL mode.<br>When the <b>MONO</b> key is pressed on the FM and VF bands, the display is inverted.<br>High level is output from the MONO/NR <sub>2</sub> pin (pin 18) while this display is lit.<br>It is invalid on the MW and LW bands.   |
| LOC             | Indicates that the device is in the LOCAL mode.<br>When AUTOLOC = 0, when the <b>LOC</b> key is pressed in a radio mode (FM, MW, LW bands), the display is inverted.<br>When AUTOLOC = 1, this display lights during autotuning local search.<br>High level is output from the LOC pin (pin 10) during autotuning while this display is lit.   |
| LOUD            | Indicates that the device is in the LOUDNESS state.<br>When the <b>LOUD</b> key is pressed in the radio, tape, or CD mode, this display is inverted.<br>High level is output from the LOUD pin (pin 19) while this display is lit.   |
| MTL             | Indicates that the device is in the METAL state.<br>When the <b>METAL</b> function key is pressed in the tape mode, this display is inverted.<br>High level is output from the MTL pin (pin 21) while this display is lit.   |
| NR <sub>1</sub> | Indicates that the device is in the NR <sub>1</sub> (Noise Reduction) state.<br>When the device is placed into the NR <sub>1</sub> state by <b>NR</b> function key in the tape mode, this display lights.<br>High level is output from the NR <sub>1</sub> pin (pin 22) while this display is lit.   |
| NR <sub>2</sub> | Indicates that the device is in the NR <sub>2</sub> (Noise Reduction) state.<br>The NR <sub>2</sub> function can be used with the initialize diode ENNR <sub>2</sub> switch.<br>When the device was placed into the NR <sub>2</sub> state by <b>NR</b> function key in the tape mode, this display lights.<br>High level is output from the MONO/NR <sub>2</sub> pin (pin 18) while this display is lit. |
| DKSTBY          | Lights in the DK standby and DK ON modes in the tape/CD mode.  |
| ◀ ▶             | Indicates the direction of tape travel.<br>In the tape mode, this display indicates the tape direction according to the state of the RL switch. If the FF switch is ON, this display flashes. For more information, see the description of each pin.   |
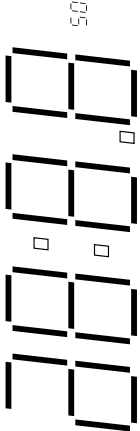
| Display   | Description   |
|---|---|
| FM1<br>FM2<br>FM3<br>MW1 (MW)<br>MW2 (LW)   | Indicates the receiving band in the radio mode.<br><br>In Europe, when the device is switched to LW band, "MW2 (LW)" lights.  |
|    | Displays the receiving frequency, CD, and clock. <ul style="list-style-type: none"> <li>Receiving frequency display<br/>Displayed in the radio mode.<br/>"50" is displayed only on the Europe and South Africa FM bands.<br/>"." (D.P) is displayed as the decimal point on the FM bands.</li> <li>CD display<br/>When the device enters the CD mode, the following is displayed.</li> <li>Clock display<br/>12 hour clock or 24 hour clock can be selected by initialize diode CLKDSP switch.<br/>Flashing of the ":" (colon) display is possible by initialize diode FLASH switch.</li> </ul> |
| AMS   | Indicates that the device is in the AMS (Auto Music Search) state.<br>When the <input type="button" value="AMS"/> function key is pressed in the tape mode, this display is inverted.<br>High level is output from the AMS pin (pin 20) while this display is lit.  |
| AM<br>PM  | 12 hour clock AM and PM display.  |
|  | Indicates the preset memory number and AMS selection number. <ul style="list-style-type: none"> <li>Preset memory number display<br/>In the radio mode, when preset memory write and call are performed, the corresponding preset memory number and "ch" are displayed.<br/>In the memory write mode set by <input type="button" value="ME"/> key, the "ch" display flashes at 1 Hz.<br/>During preset memory scanning by <input type="button" value="PSCAN"/> key, the preset memory number display (Ca to Cg) flashes at 1 Hz.</li> </ul>   |
| RDMONI  | Lights in the radio monitor mode.   |

4. RADIO MUTE OUTPUT TIMING (RDMUTE)


- ① Key ON chattering prevention
- ② Premuting and BEEP output
- ③ Division ratio setting and display contents updating
- ④ Postmuting
- ⑤ Scan time
- ⑥ PLL lock wait time

4.1 RADIO MUTE (RDMUTE PIN) OUTPUT TIMING CHARTS


(1) Manual up/down

(i) 1 channel up/down

(a) AUTO500 switch = 0

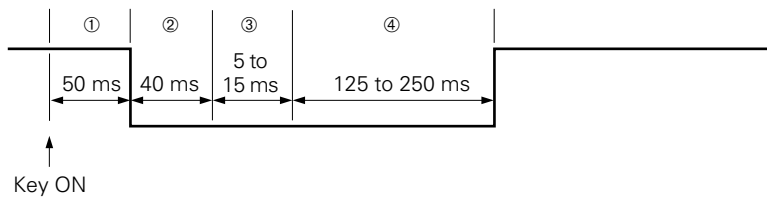


(b) AUTO500 switch = 1

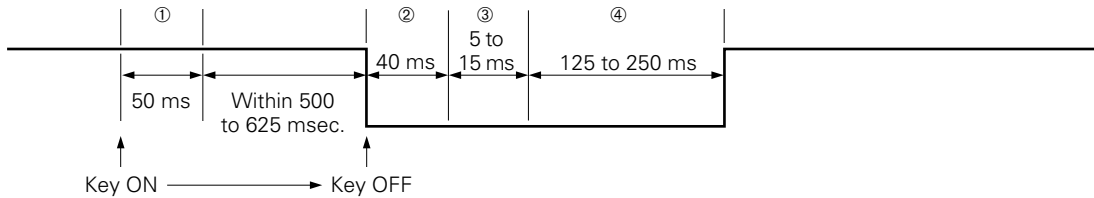

At the band edge (between lowest frequency and highest frequency) of both (a) and (b), time ④ is 625 to 750 ms.

(ii) Continuous up/down

(a) AUTO500 switch = 0

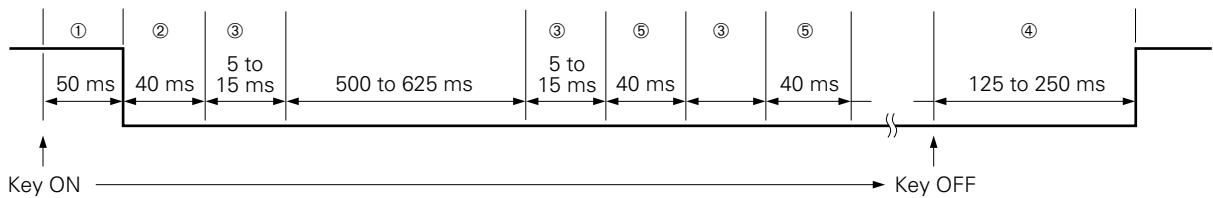


At the band edge, time ⑤ becomes 540 to 665 ms and time ④ becomes 625 to 750 ms.


(b) When AUTO500 switch = 1, continuous up/down is not performed because holding down the key for more than 0.5 seconds sets autotuning.

(2) Auto up/down

(i) SEEK UP, SEEK DWN, SCAN UP, SEEK DWN keys

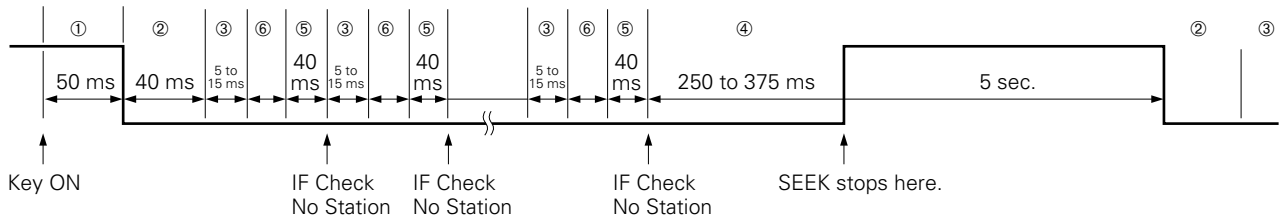

(ii) MAN UP or MAN DWN key held down for more than 0.5 seconds when AUTO500 switch = 1

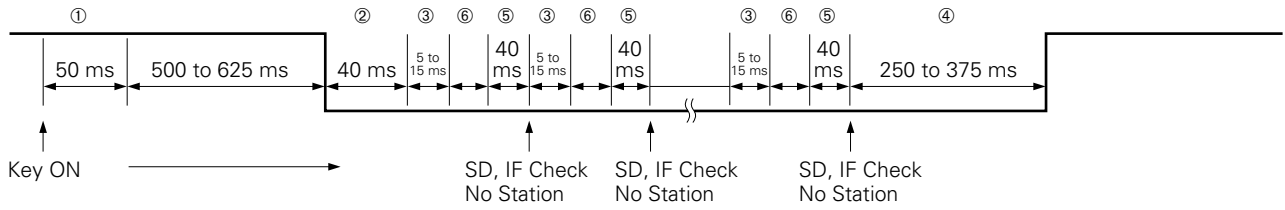


At both (i) and (ii), at the band edge time ⑤ becomes 520 to 695 ms.

IF check is performed twice, once in the FAST mode and once in the SLOW mode.


FAST mode IF check takes approx. 6 ms on the FM, MW, and LW bands and SLOW mode IF check takes approx. 15 ms on the FM band and approx. 25 ms on the MW and LW bands.

(3) Preset memory call

(i) M2S switch = 0

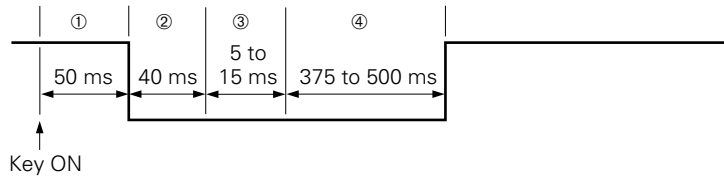


(ii) M2S switch = 1

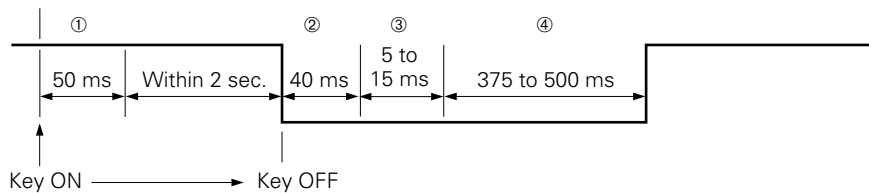




**(4) Preset memory write**

(i) M2S switch = 0

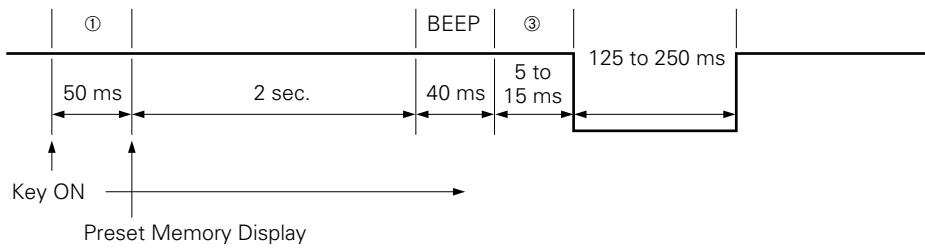


(ii) When M2S switch = 1, muting is not output.

**(5) Preset memory scan**

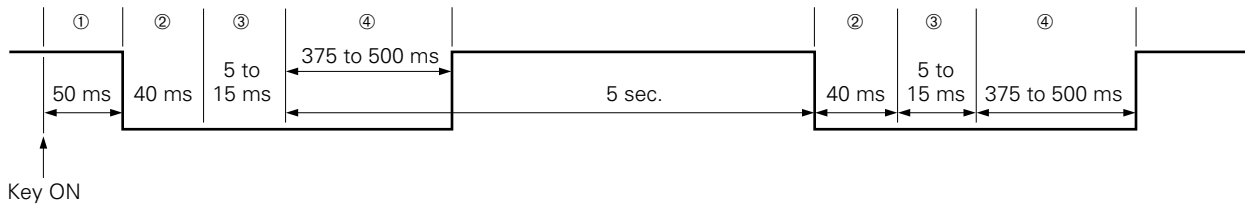


**(6) VF mode**


(i) When VF mode selected with VF key ON

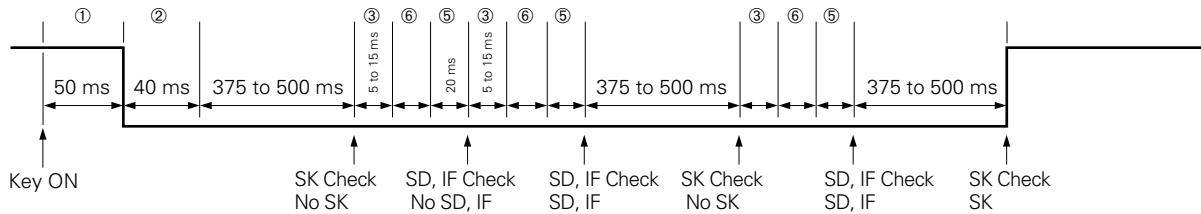

(ii) Seek and scan operation in VF mode

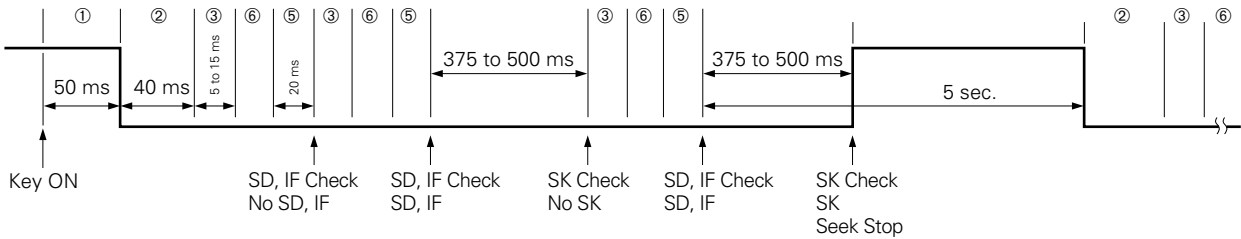


**(7) Band switching**

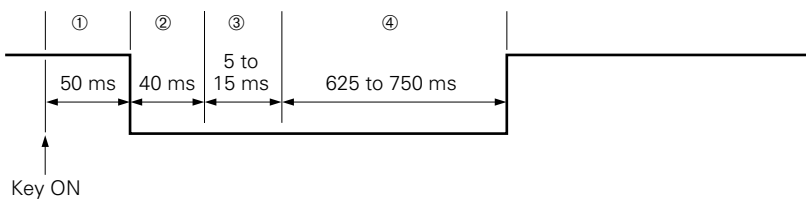


**(8) Radio OFF to ON**


(i) RDSET switch

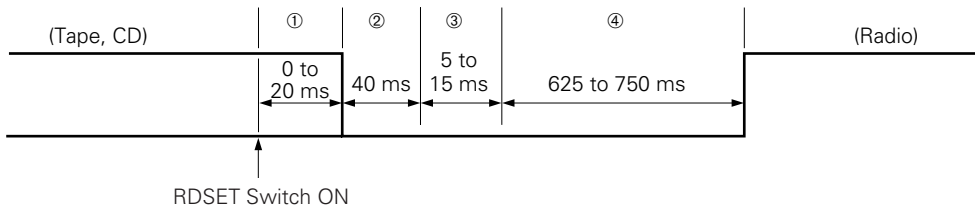


(ii) CE LOW to HIGH by RDON switch = 1

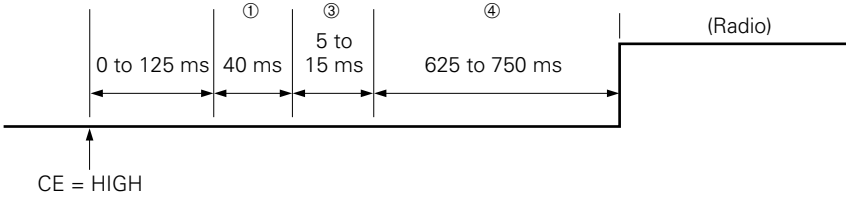

**(9) Tape or CD OFF to ON**

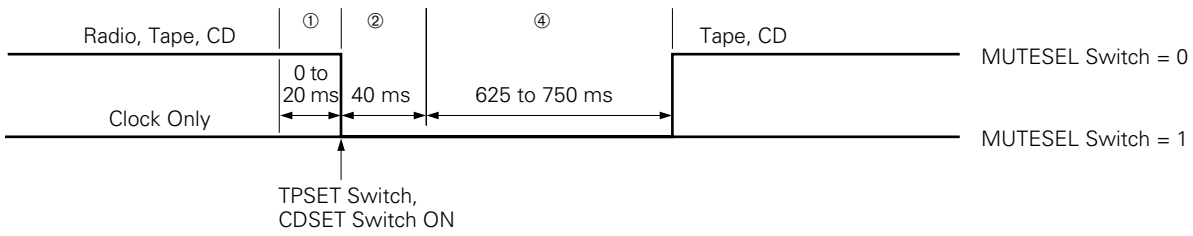


**(10) CE pin High to Low**

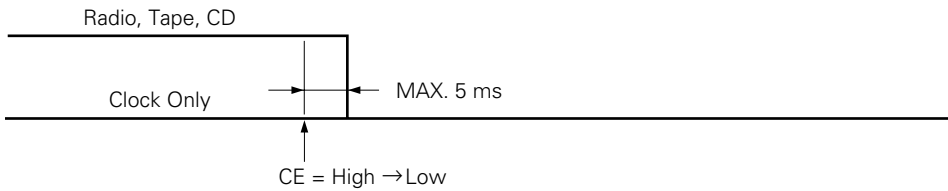


4.2 RADIO MUTE (RDMUTE PIN) AND AUDIO MUTE (AMUTE PIN) OUTPUT TIMING CHARTS

(1) When switched from radio mode to tape or CD mode  
(Other than VF band, other than radio monitor mode)

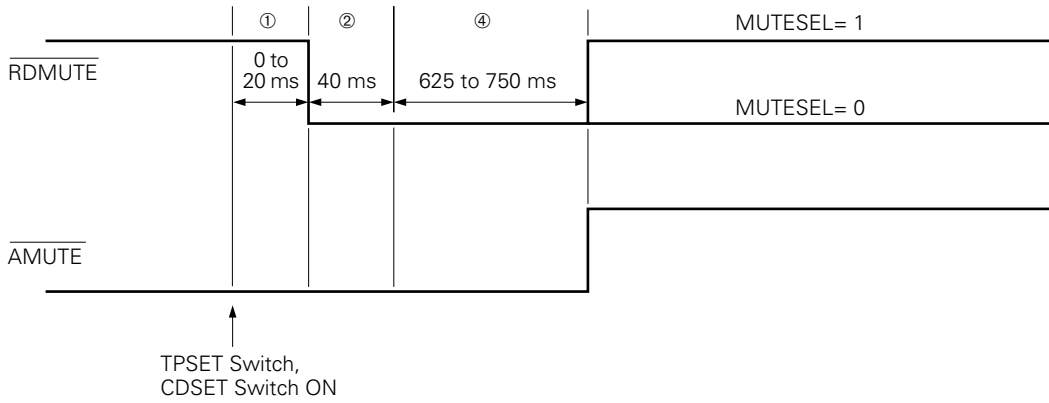


(2) When switched from VF band to tape or CD mode (Set MUTESEL to 0.)

i) When switched when DK = OFF

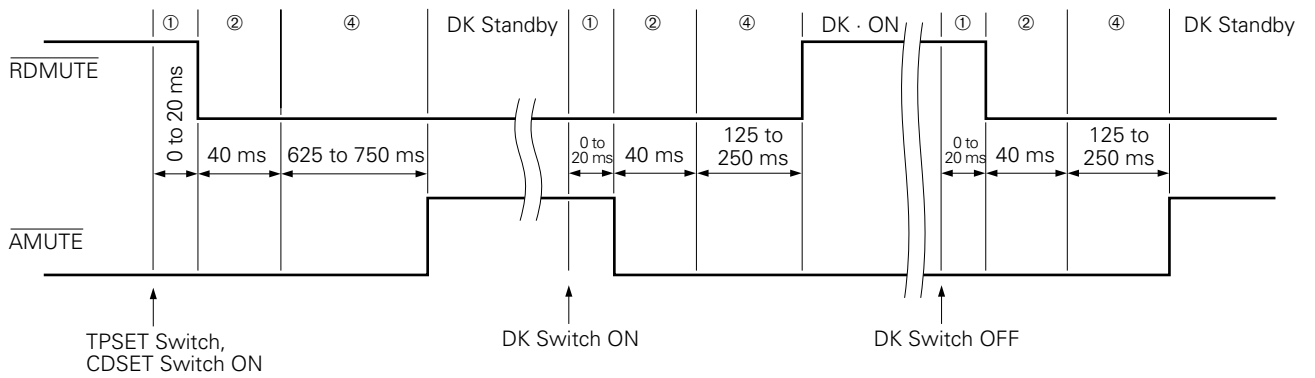


ii) When switched when DK = ON

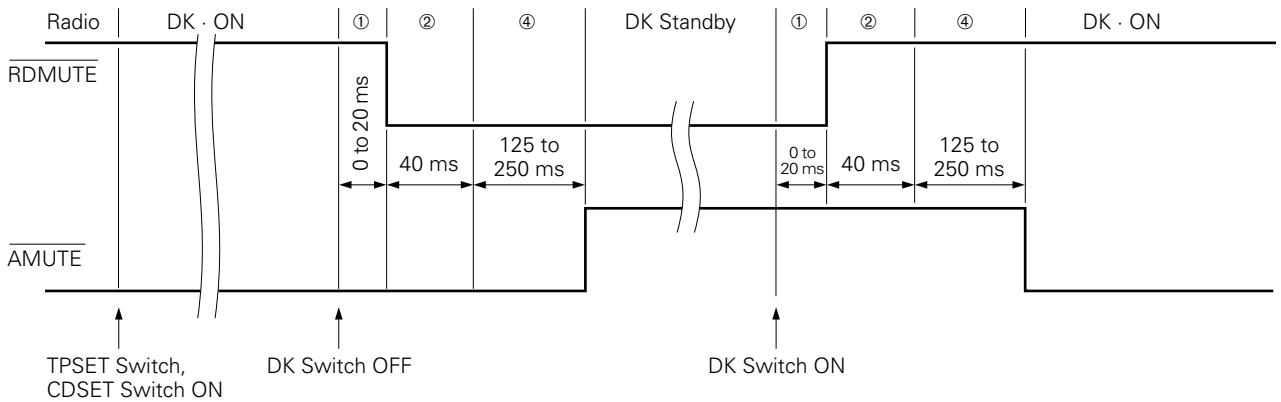


(3) Radio monitor mode (Set MUTESEL to 0.)

i) When switched from radio monitor OFF in radio mode

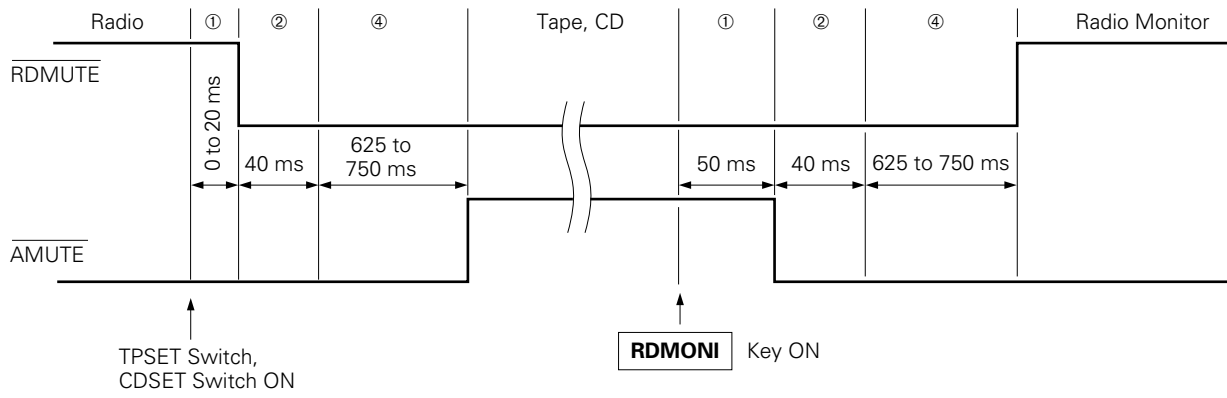


ii) When switched from radio monitor ON in radio mode

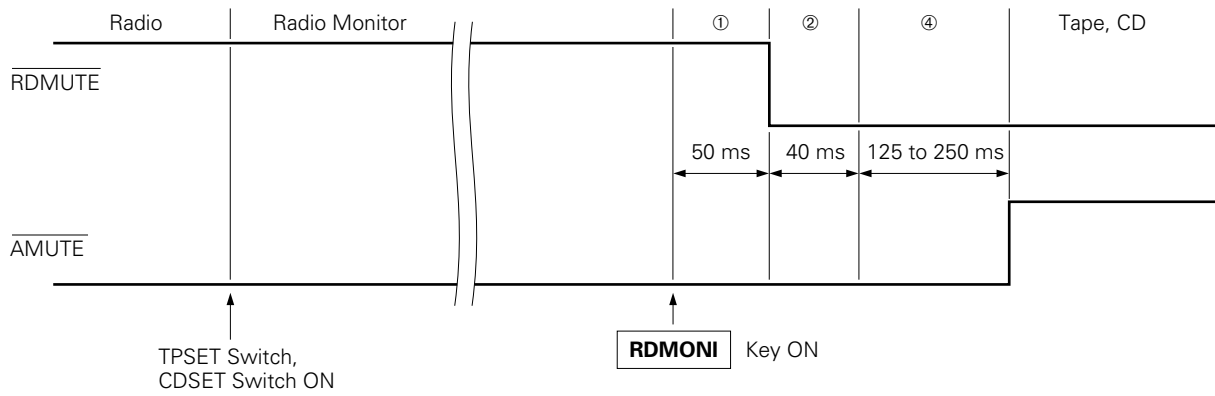


5. PIN I/O CIRCUITS

The I/O circuit of each pin of the  $\mu$ PD1723 is shown below in abbreviated form.


(1) LCD<sub>0</sub>/KS<sub>0</sub> to LCD<sub>27</sub>/PL<sub>3</sub>, CGP, PB<sub>0</sub>/SO to PB<sub>3</sub>, PD<sub>1</sub> to PD<sub>3</sub>, EO<sub>1</sub>, EO<sub>2</sub>

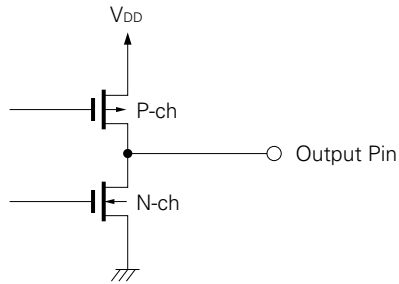


(2)  $\overline{\text{INT}}$ , AD

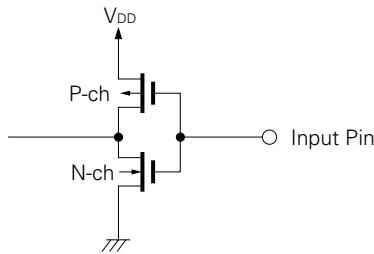


(3) PA<sub>0</sub>/AMIF, PA<sub>1</sub>/FMIF, PA<sub>2</sub>/SI, PA<sub>3</sub>/ $\overline{\text{SCK}}$ , PC<sub>0</sub> to PC<sub>3</sub>

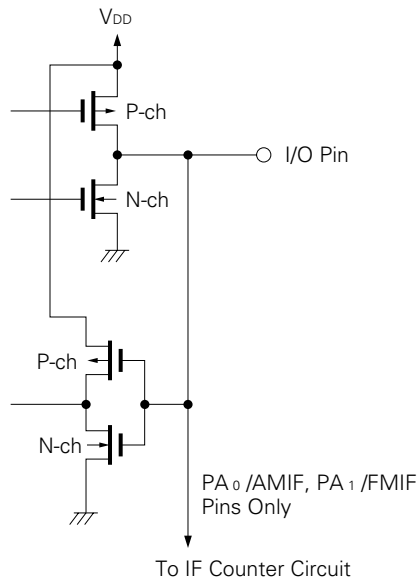


(4) COM<sub>1</sub>, COM<sub>2</sub>

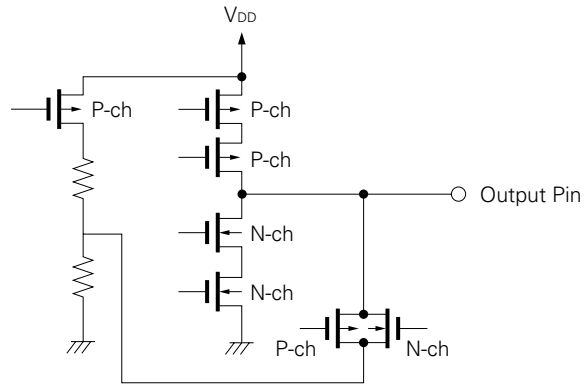


(5) K<sub>0</sub> to K<sub>3</sub>

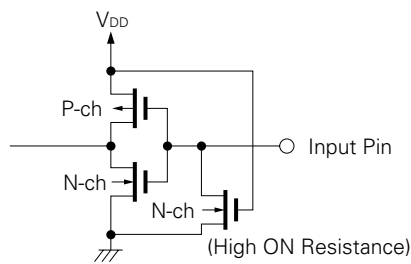

(6) VCOH, VCOL

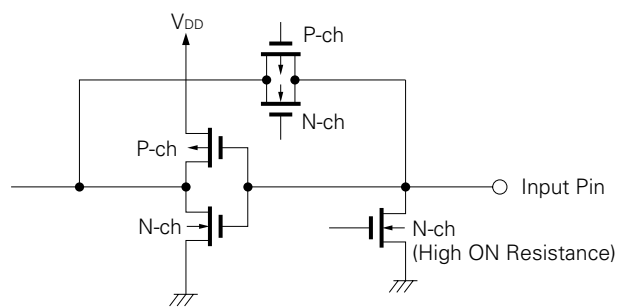


(7) CE

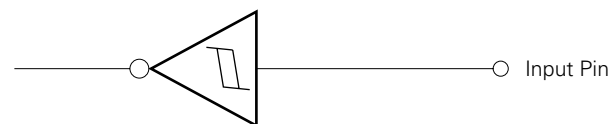

Schmitt Triggered Input with Hysteresis Characteristics


6. APPLICATION CIRCUITS

6.1 POWER ON/OFF (NO CLOCK DISPLAY AT POWER OFF) BY ALTERNATE SWITCH ( )  
 Radio ON by RDON switch = 1 and CE pin Low to High

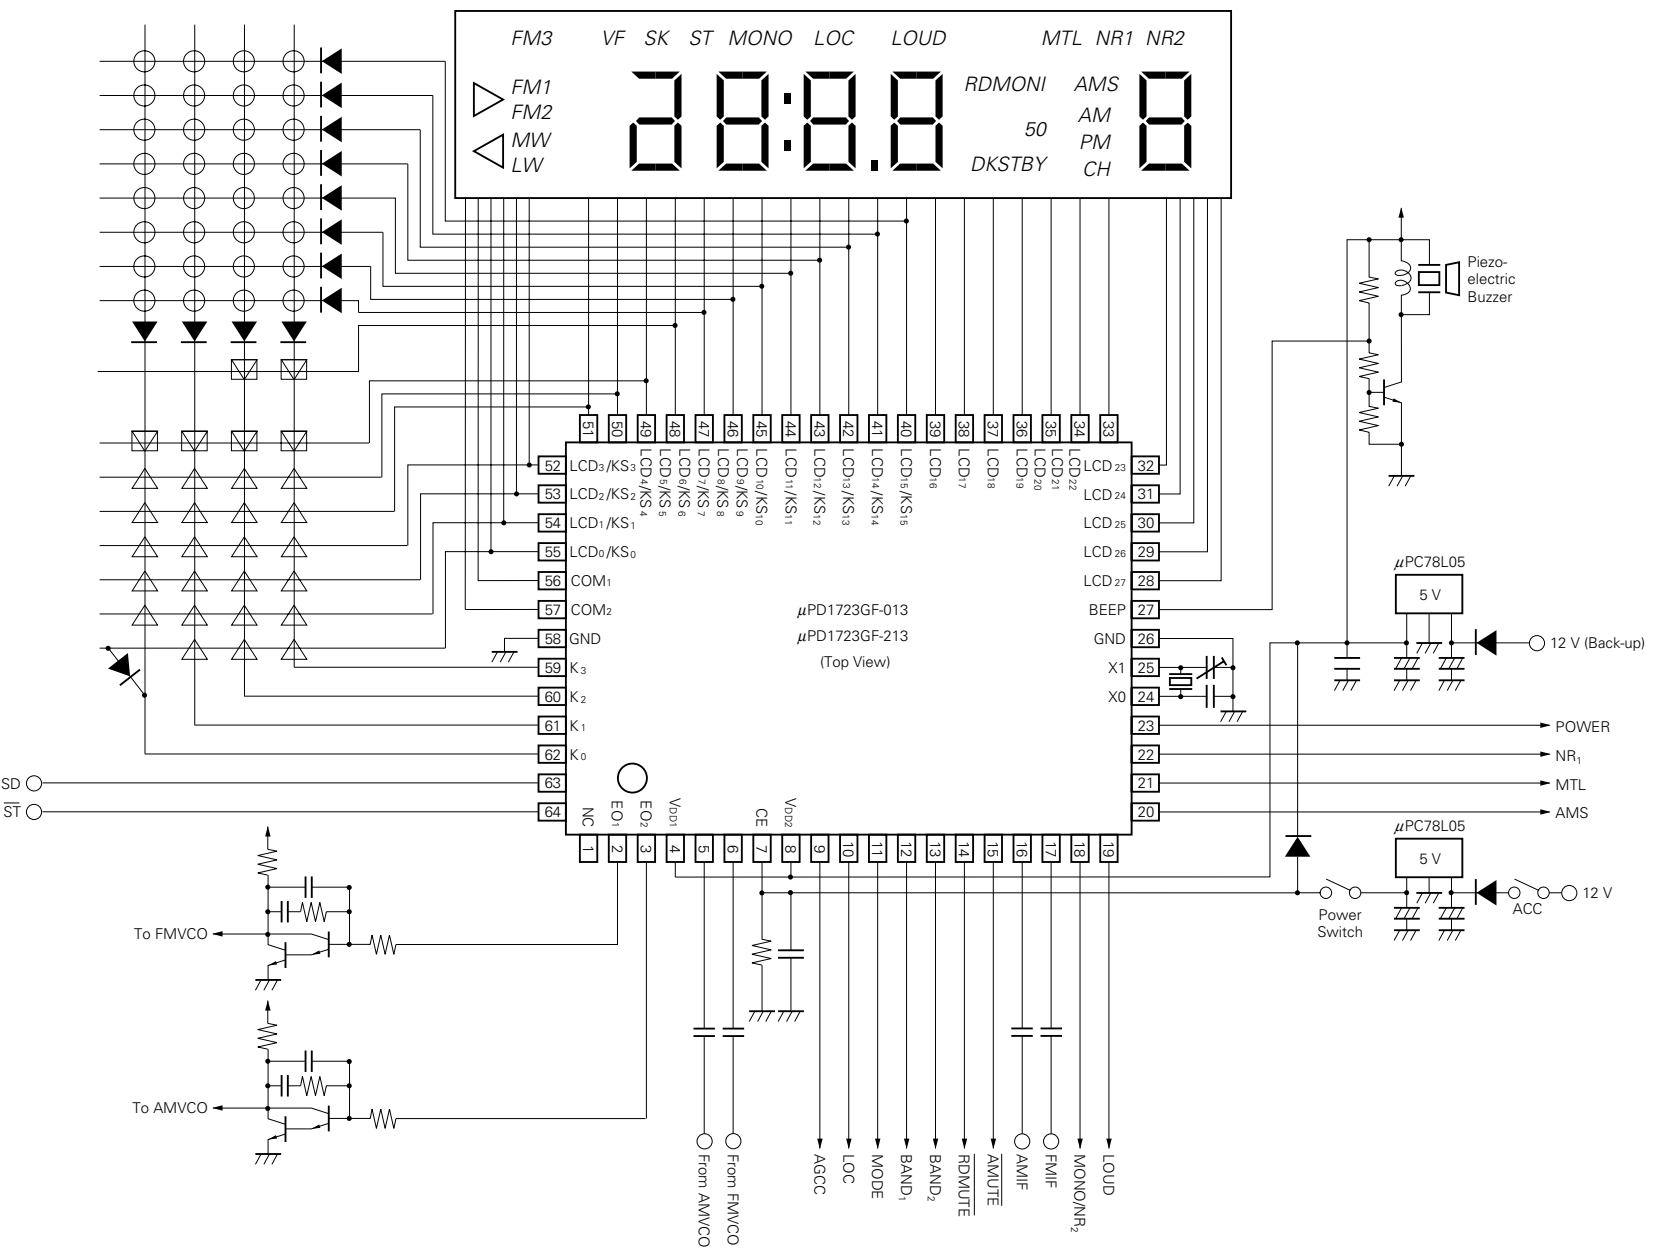

The application circuits and their parameters are for references only and are not intended for use in actual design-in's.


**6.2 POWER ON/OFF (CLOCK DISPLAY AT POWER OFF) BY ALTERNATE SWITCH ( )**  
 By RDSET switch

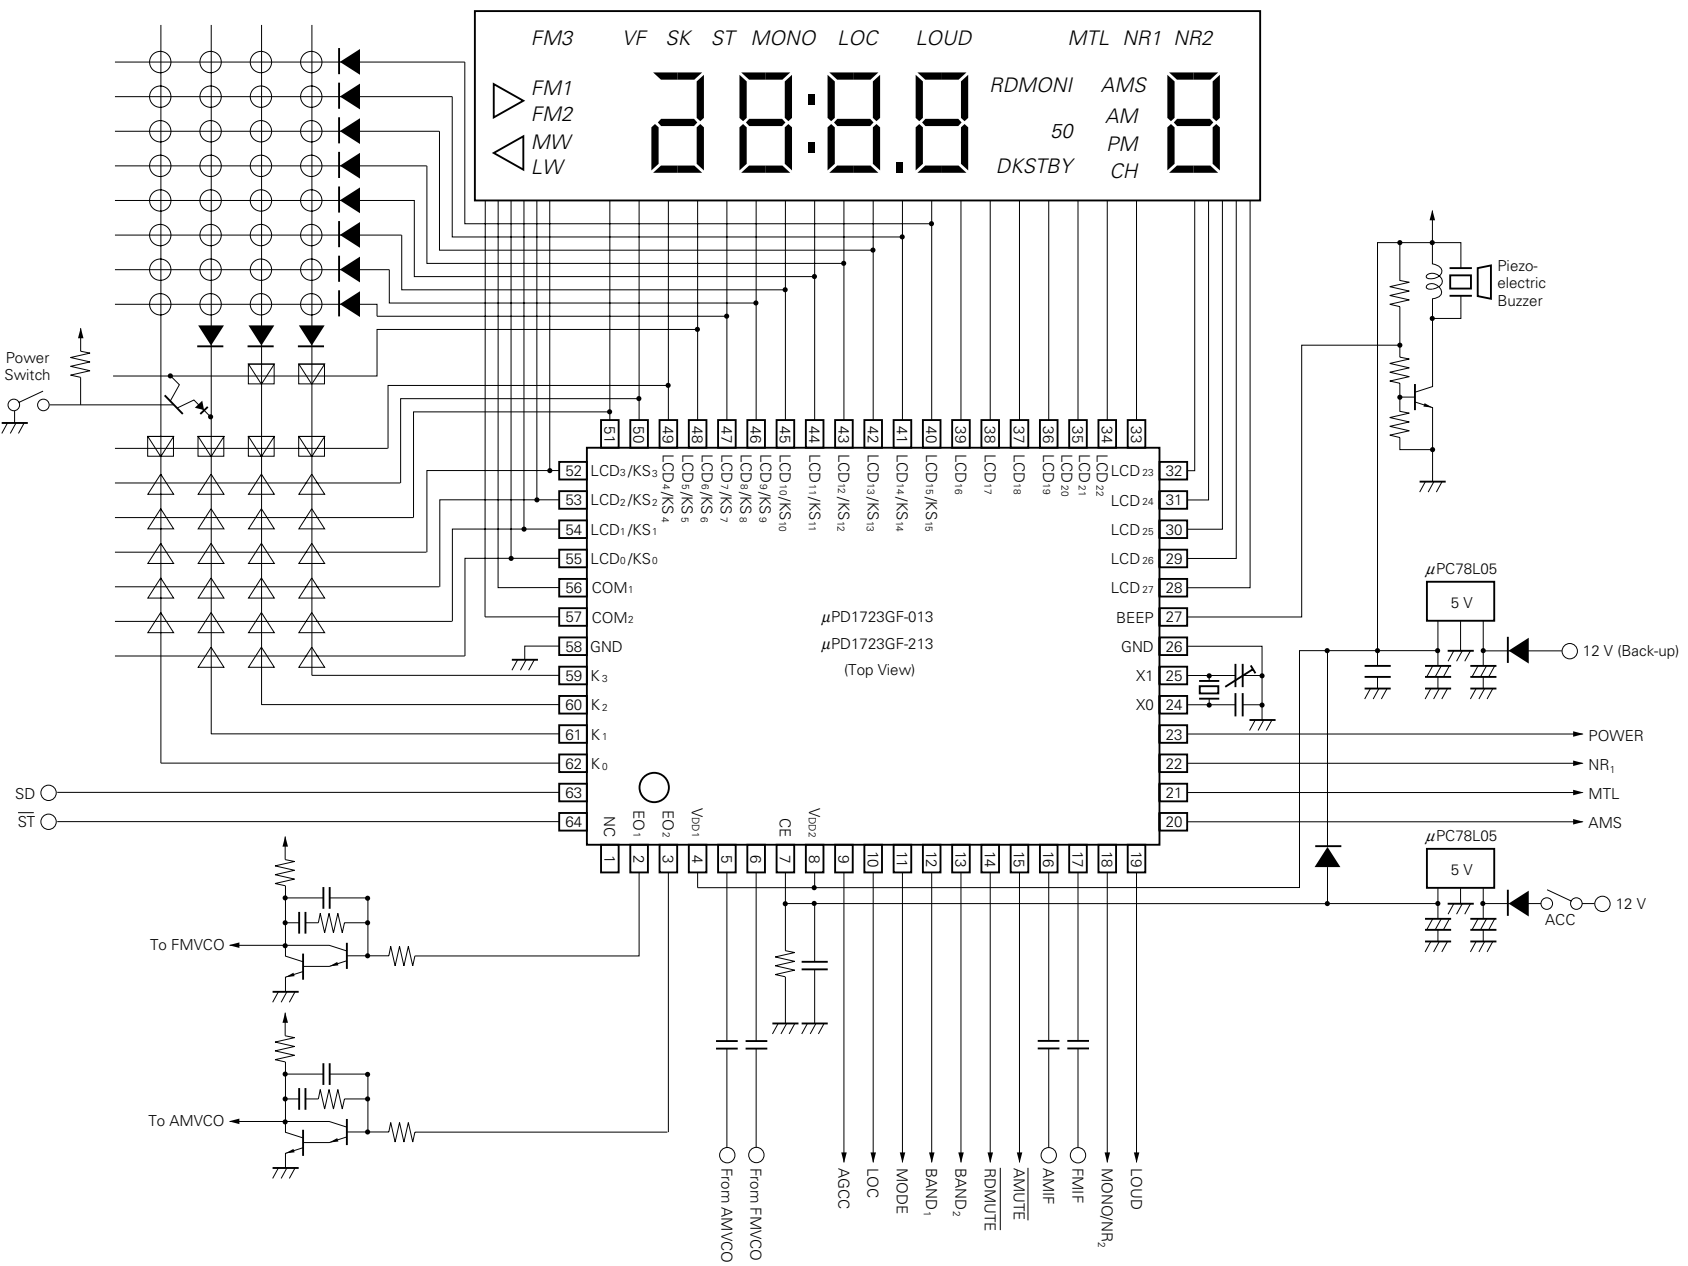

The application circuits and their parameters are for references only and are not intended for use in actual design-in's.



6.3 POWER ON/OFF (CLOCK DISPLAY AT POWER OFF) BY MOMENTARY SWITCH ( )

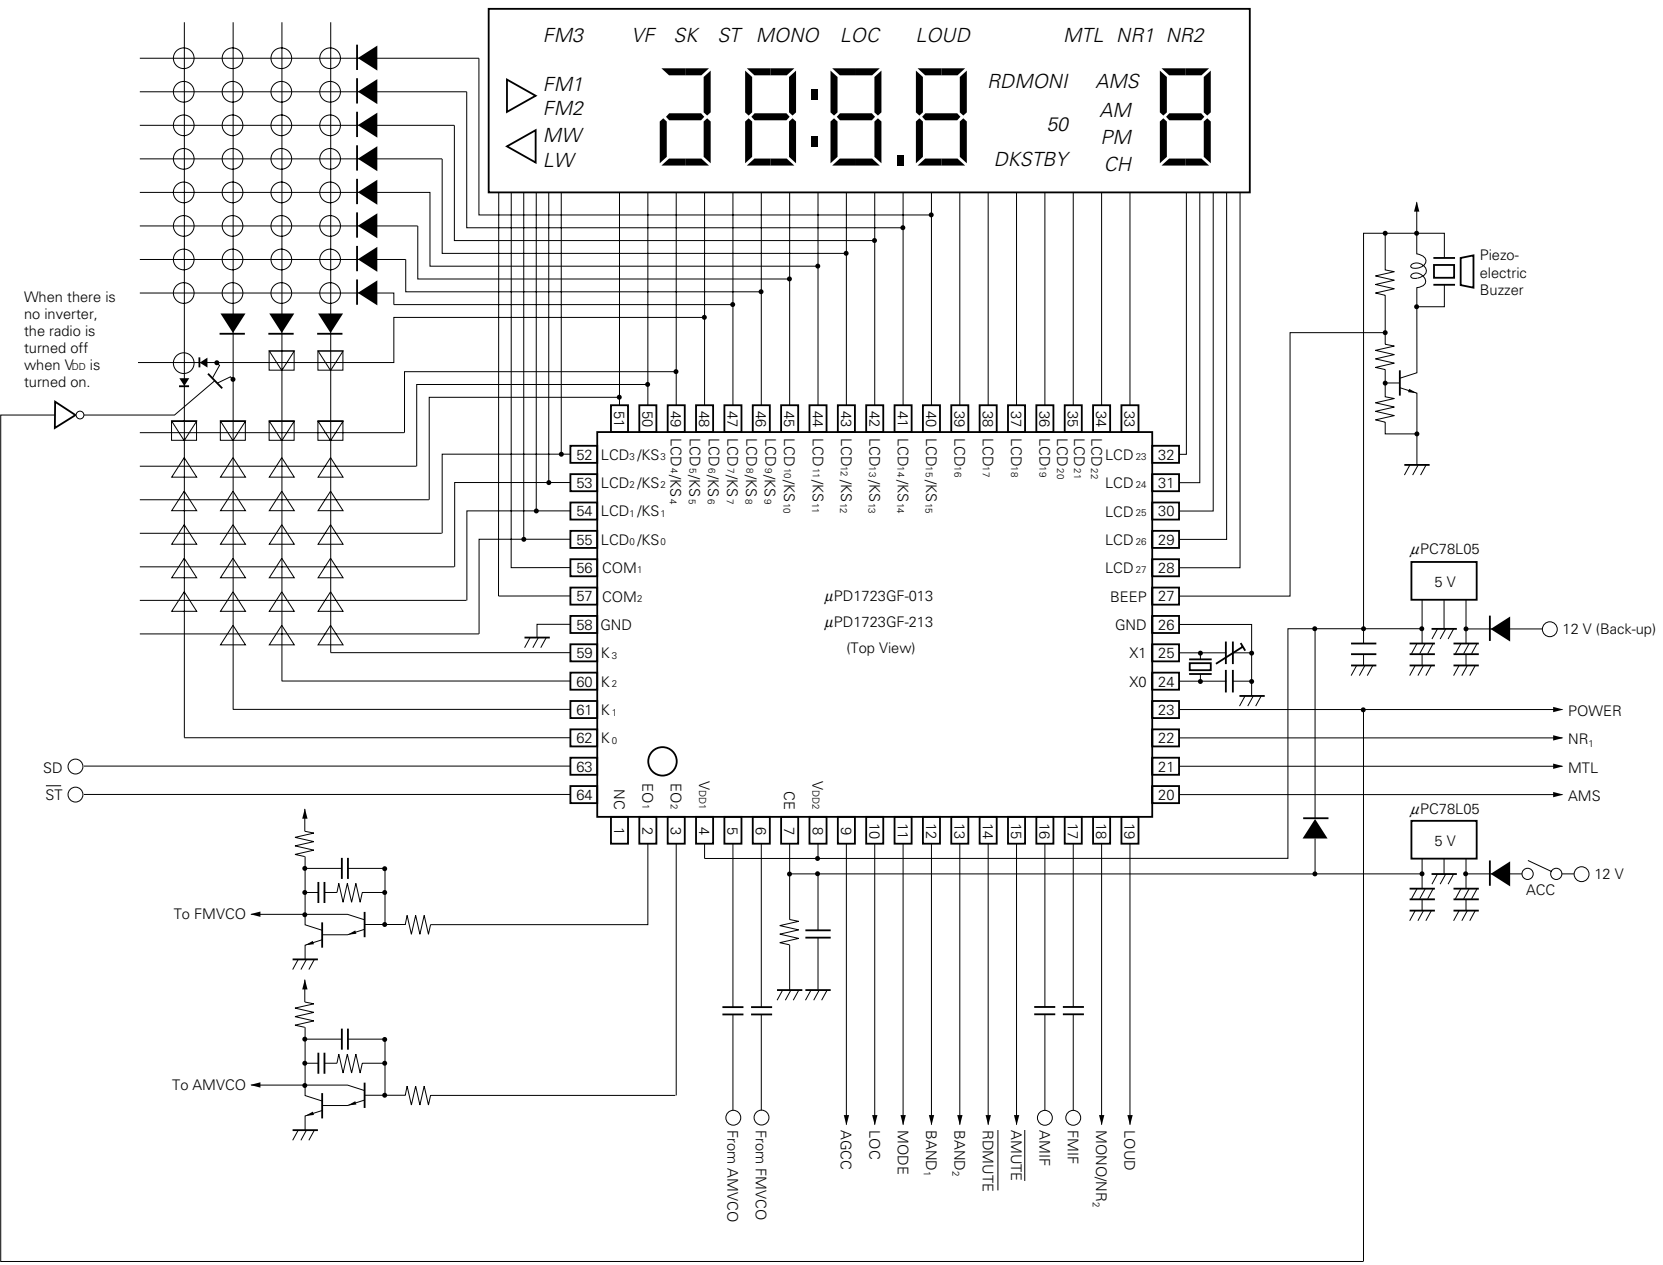

The application circuits and their parameters are for references only and are not intended for use in actual design-in's.

**7. ELECTRICAL SPECIFICATIONS**

**ABSOLUTE MAXIMUM RATINGS**

|                       |                  |                               |    |
|-----------------------|------------------|-------------------------------|----|
| Power Supply Voltage  | V <sub>DD</sub>  | -0.3 to +6.0                  | V  |
| Input Voltage         | V <sub>I</sub>   | -0.3 to +V <sub>DD</sub> +0.3 | V  |
| Output Voltage        | V <sub>O</sub>   | -0.3 to +V <sub>DD</sub> +0.3 | V  |
| Output Sink Current   | I <sub>O</sub>   | 10                            | mA |
| Operating Temperature | T <sub>a</sub>   | -40 to +85                    | °C |
| Storage Temperature   | T <sub>stg</sub> | -55 to +125                   | °C |

**RECOMMENDED OPERATING RANGE**

| CHARACTERISTICS                | SYMBOL            | MIN. | TYP. | MAX.            | UNIT             | CONDITIONS                          |
|--------------------------------|-------------------|------|------|-----------------|------------------|-------------------------------------|
| Power Supply Voltage           | V <sub>DD1</sub>  | 4.5  | 5    | 5.5             | V                | CPU, PLL operating                  |
| Power Supply Voltage           | V <sub>DD2</sub>  | 3.5  | 5    | 5.5             | V                | PLL stopped                         |
| Data Hold Voltage              | V <sub>DR</sub>   | 2.4  |      | 5.5             | V                | X'tal oscillation stopped           |
| Power Supply Voltage Rise Time | T <sub>rise</sub> |      |      | 500             | ms               | V <sub>DD</sub> = Low to High       |
| Input Amplitude                | V <sub>in1</sub>  | 0.3  |      | V <sub>DD</sub> | V <sub>P-P</sub> | V <sub>COL</sub> , V <sub>COH</sub> |
| Output Amplitude               | V <sub>in2</sub>  | 0.1  |      | V <sub>DD</sub> | V <sub>P-P</sub> | AMIF, FMIF                          |
| Operating Temperature          | T <sub>a</sub>    | -40  |      | +85             | °C               |                                     |

**DC CHARACTERISTICS** (T<sub>a</sub> = -40 to +85 °C, V<sub>DD</sub> = 4.5 to 5.5 V)


| CHARACTERISTICS                 | SYMBOL            | MIN.                | TYP.             | MAX.                 | UNIT | CONDITIONS   |
|---------------------------------|-------------------|---------------------|------------------|----------------------|------|--|
| Input Voltage High              | V <sub>IH1</sub>  | 0.7 V <sub>DD</sub> |                  |                      | V    | PORT A, C  |
| Input Voltage High              | V <sub>IH2</sub>  | 0.8 V <sub>DD</sub> |                  |                      | V    | CE, $\overline{\text{INT}}$  |
| Input Voltage High              | V <sub>IH3</sub>  | 0.6 V <sub>DD</sub> |                  |                      | V    | K <sub>3</sub> to K <sub>0</sub>   |
| Input Voltage Low               | V <sub>IL1</sub>  |                     |                  | 0.2 V <sub>DD</sub>  | V    | PORT A, C, CE, $\overline{\text{INT}}$   |
| Input Voltage Low               | V <sub>IL2</sub>  |                     |                  | 0.15 V <sub>DD</sub> | V    | K <sub>3</sub> to K <sub>0</sub>   |
| Output Current High             | I <sub>OH1</sub>  | -0.4                |                  |                      | mA   | PORT A, B, C, D V <sub>OH</sub> = V <sub>DD</sub> - 0.4 V  |
| Output Current High             | I <sub>OH2</sub>  | -0.5                |                  |                      | mA   | EO <sub>1</sub> , EO <sub>2</sub> , CGP, LCD <sub>27</sub> /PL <sub>3</sub> to LCD <sub>24</sub> /PL <sub>0</sub><br>V <sub>OH</sub> = V <sub>DD</sub> - 1 V |
| Output Current High             | I <sub>OH3</sub>  | -200                | -280             |                      | μA   | LCD <sub>0</sub> to LCD <sub>23</sub> V <sub>OL</sub> = V <sub>DD</sub> - 1 V  |
| Output Current Low              | I <sub>OL1</sub>  | 0.6                 |                  |                      | mA   | PORT A, B, C, D, CGP, LCD <sub>27</sub> /PL <sub>3</sub> to LCD <sub>24</sub> /PL <sub>0</sub><br>V <sub>OH</sub> = 0.4 V                                    |
| Output Current Low              | I <sub>OL2</sub>  | 0.5                 |                  |                      | mA   | EO <sub>1</sub> , EO <sub>2</sub> V <sub>OL</sub> = 1 V  |
| Output Current Low              | I <sub>OL3</sub>  | 200                 | 300              |                      | μA   | LCD <sub>0</sub> to LCD <sub>23</sub> V <sub>OL</sub> = 1 V  |
| Input Current High              | I <sub>IH1</sub>  | 15                  | 120              | 200                  | μA   | K <sub>3</sub> to K <sub>0</sub> V <sub>I</sub> = V <sub>DD</sub> = 4.5 V  |
| Input Current High              | I <sub>IH2</sub>  | 100                 |                  |                      | μA   | VCOH, VCOL, XI V <sub>I</sub> = V <sub>DD</sub> = 4.5 V  |
| Output Voltage                  | V <sub>COM1</sub> | 4.8                 | 5.0              |                      | V    | COM <sub>1</sub> , COM <sub>2</sub> V <sub>DD</sub> = 5 V, output open   |
| Output Voltage                  | V <sub>COM2</sub> | 2.3                 | 2.5              | 2.7                  | V    | COM <sub>1</sub> , COM <sub>2</sub> V <sub>DD</sub> = 5 V, output open   |
| Output Voltage                  | V <sub>COM3</sub> | 0                   | 0.2              |                      | V    | COM <sub>1</sub> , COM <sub>2</sub> V <sub>DD</sub> = 5 V, output open   |
| Output off Leakage Current      | I <sub>L</sub>    |                     | 10 <sup>-3</sup> | 1                    | μA   | EO <sub>1</sub> , EO <sub>2</sub> V <sub>O</sub> = V <sub>DD</sub> , T <sub>a</sub> = 25 °C  |
| A/D Converter Resolution        |                   |                     |                  | 6                    | bit  |  |
| A/D Converter Absolute Accuracy |                   |                     | 1                | 1.5                  | LSB  | T <sub>a</sub> = -10 to +50 °C   |
| Supply Current                  | I <sub>DD1</sub>  |                     | 20               |                      | mA   | CPU and PLL operating (f <sub>in</sub> = 150 MHz)<br>V <sub>DD</sub> = 5 V, T <sub>a</sub> = 25 °C   |
| Supply Current                  | I <sub>DD2</sub>  |                     | 0.5              |                      | mA   | PLL stopped, CPU operating<br>V <sub>DD</sub> = 5 V, T <sub>a</sub> = 25 °C  |
| Data Hold Current               | I <sub>DR</sub>   |                     | 3                | 10                   | μA   | X'tal oscillation stopped, T <sub>a</sub> = 25 °C<br>V <sub>DD</sub> = 5 V   |
| AD Input Resistance             | R <sub>I</sub>    | 1                   |                  |                      | MΩ   |  |

**AC CHARACTERISTICS** (T<sub>a</sub> = -40 to +85 °C, V<sub>DD</sub> = 4.5 to 5.5 V)

| CHARACTERISTICS     | SYMBOL           | MIN. | TYP. | MAX. | UNIT | CONDITIONS   |
|---------------------|------------------|------|------|------|------|--|
| Operating Frequency | f <sub>in1</sub> | 10   |      | 200  | MHz  | VCOH pin (positive sine wave input)<br>V <sub>in</sub> = 0.3 V <sub>P-P</sub>                  |
| Operating Frequency | f <sub>in2</sub> | 0.50 |      | 30   | MHz  | VCOL pin (positive sine wave input)<br>V <sub>in</sub> = 0.3 V <sub>P-P</sub>                  |
| Operating Frequency | f <sub>in3</sub> | 1    |      | 20   | MHz  | PA <sub>1</sub> /FMIF pin (positive sine wave input)<br>V <sub>in</sub> = 0.1 V <sub>P-P</sub> |
| Operating Frequency | f <sub>in4</sub> | 0.3  |      | 5    | MHz  | PA <sub>0</sub> /AMIF pin (positive sine wave input)<br>V <sub>in</sub> = 0.1 V <sub>P-P</sub> |

8. PACKAGE DIMENSION

64 PIN PLASTIC QFP (14×20)

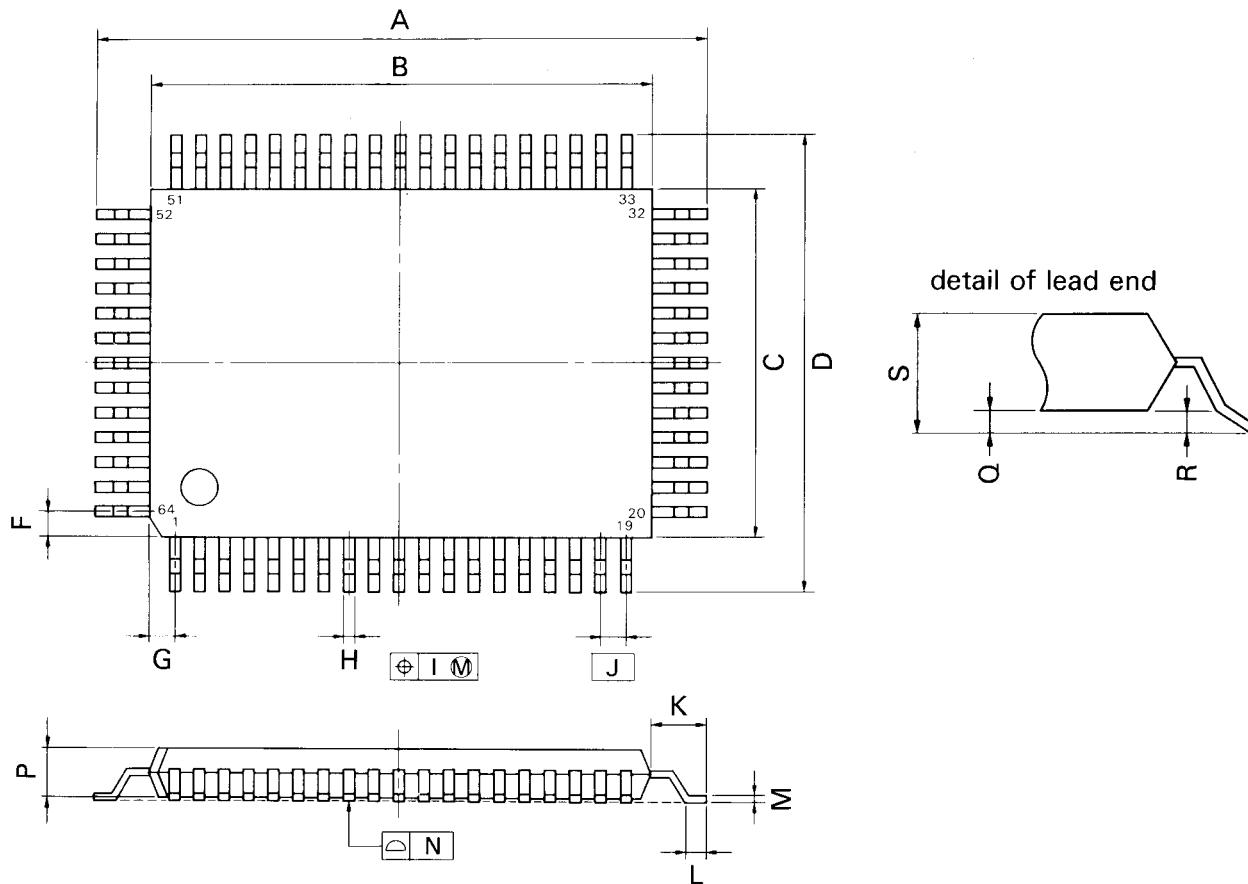


S64GF-100-3B8,3BE

NOTE

Each lead centerline is located within 0.20 mm (0.008 inch) of its true position (T.P.) at maximum material condition.

| ITEM | MILLIMETERS                            | INCHES                                    |
|------|--|---|
| A    | 23.2 <sup>±0.4</sup>                   | 0.913 <sup>+0.017</sup> <sub>-0.016</sub> |
| B    | 20 <sup>±0.2</sup>                     | 0.787 <sup>+0.009</sup> <sub>-0.008</sub> |
| C    | 14 <sup>±0.2</sup>                     | 0.551 <sup>+0.009</sup> <sub>-0.008</sub> |
| D    | 17.2 <sup>±0.4</sup>                   | 0.677 <sup>±0.016</sup>                   |
| F    | 1.0                                    | 0.039                                     |
| G    | 1.0                                    | 0.039                                     |
| H    | 0.40 <sup>±0.10</sup>                  | 0.016 <sup>+0.004</sup> <sub>-0.005</sub> |
| I    | 0.20                                   | 0.008                                     |
| J    | 1.0 (T.P.)                             | 0.039 (T.P.)                              |
| K    | 1.6 <sup>±0.2</sup>                    | 0.063 <sup>±0.008</sup>                   |
| L    | 0.8 <sup>±0.2</sup>                    | 0.031 <sup>+0.008</sup> <sub>-0.008</sub> |
| M    | 0.15 <sup>+0.10</sup> <sub>-0.08</sub> | 0.006 <sup>+0.004</sup> <sub>-0.003</sub> |
| N    | 0.15                                   | 0.006                                     |
| P    | 2.7                                    | 0.106                                     |
| Q    | 0.1 <sup>±0.1</sup>                    | 0.004 <sup>±0.004</sup>                   |
| R    | 0.1 <sup>±0.1</sup>                    | 0.004 <sup>±0.004</sup>                   |
| S    | 3.0 MAX.                               | 0.119 MAX.                                |

64PIN PLASTIC QFP (STRAIGHT) (14×20)

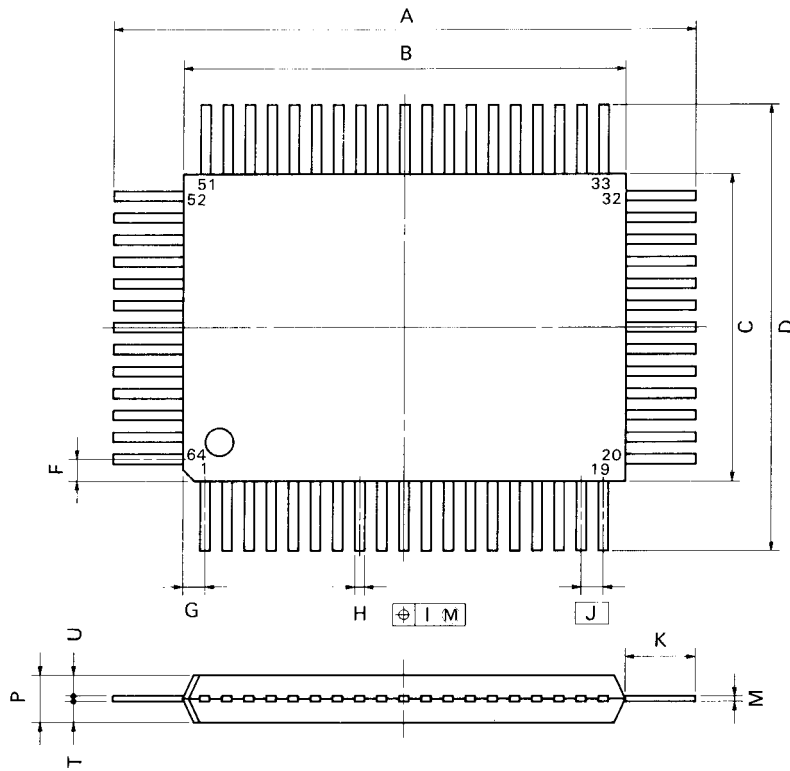

P64GF-100-3KE

**NOTE**

Each lead centerline is located within 0.20 mm (0.008 inch) of its true position (T.P.) at maximum material condition.

| ITEM | MILLIMETERS | INCHES       |
|------|-------------|--------------|
| A    | 24.4 ±0.4   | 0.961 ±0.016 |
| B    | 20.0 ±0.2   | 0.787 ±0.008 |
| C    | 14.0 ±0.2   | 0.551 ±0.008 |
| D    | 18.4 ±0.4   | 0.724 ±0.016 |
| F    | 1.0         | 0.039        |
| G    | 1.0         | 0.039        |
| H    | 0.40 ±0.10  | 0.016 ±0.004 |
| I    | 0.20        | 0.008        |
| J    | 1.0 (T.P.)  | 0.039 (T.P.) |
| K    | 2.2 ±0.2    | 0.087 ±0.008 |
| M    | 0.15 ±0.10  | 0.006 ±0.004 |
| P    | 2.7         | 0.081 ±0.008 |
| T    | 1.0         | 0.039        |
| U    | 1.55        | 0.061        |

**9. RECOMMENDED SOLDERING CONDITIONS**

The following conditions (see table below) must be met when soldering this product.

Please consult with our sales offices in case other soldering process is used, or in case soldering is done under different conditions.

**TYPES OF SURFACE MOUNT DEVICE**

For more details, refer to our document "SMT MANUAL" (IEI-1207)

μPD1723GF-013, μPD1723GF-213

| Soldering process      | Soldering conditions   | SYMBOL  |
|------------------------|--|---------|
| Infrared ray reflow    | Peak package's surface temperature : 230 °C or below,<br>Reflow time : 30 seconds or below (210 °C or higher),<br>Number of reflow process : 1, Exposure limit* : None | IR30-00 |
| VPS                    | Peak package's surface temperature : 215 °C or below,<br>Reflow time : 40 seconds or below (200 °C or higher),<br>Number of reflow process : 1, Exposure limit* : None | VP15-00 |
| Wave soldering         | Solder temperature : 260 °C or below,<br>Flow time : 10 seconds or below,<br>Number of flow process : 1, Exposure limit* : None  | WS60-00 |
| Partial heating method | Terminal temperature : 300 °C or below,<br>Flow time : 10 seconds or below,<br>Exposure limit* : None  |         |

\*: Exposure limit before soldering after dry-pack package is opened.

Storage conditions : 25 °C and relative humidity at 65 % or less.

**Note:** Do not apply more than a single process at once, except for "Partial heating method".

[MEMO]

**[MEMO]**

No part of this document may be copied or reproduced in any form or by any means without the prior written consent of NEC Corporation. NEC Corporation assumes no responsibility for any errors which may appear in this document.

NEC Corporation does not assume any liability for infringement of patents, copyrights or other intellectual property rights of third parties by or arising from use of a device described herein or any other liability arising from use of such device. No license, either express, implied or otherwise, is granted under any patents, copyrights or other intellectual property rights of NEC Corporation or others.

The devices listed in this document are not suitable for use in the field where very high reliability is required including, but not limited to, aerospace equipment, submarine cables, nuclear reactor control systems and life support systems. If customers intend to use NEC devices for above applications or those intend to use "Standard", or "Special" quality grade NEC devices for the applications not intended by NEC, please contact our sales people in advance.

Application examples recommended by NEC Corporation

Standard: Data processing and office equipment, Communication equipment (terminal, mobile), Test and Measurement equipment, Audio and Video equipment, Other consumer products, etc.

Special: Automotive and Transportation equipment, Communication equipment (trunk line), Train and Traffic control devices, Industrial robots, Burning control systems, antidisaster systems, anticrime systems etc.