

TOSHIBA PHOTOCOUPLER PHOTO RELAY

TLP798G

TELECOMMUNICATION

DATA ACQUISITION

MEASUREMENT INSTRUMENTATION

The TOSHIBA TLP798G consists of an aluminum gallium arsenide infrared emitting diode optically coupled to a photo-MOS FET in a six lead plastic DIP package (DIP6).

The TLP798G is a bi-directional switch which can replace mechanical relays in many applications.


- Peak Off-State Voltage : 400 V (MIN.)
- On-State Current : 150 mA (MAX.) (A Connection)
- On-State Resistance : 12 Ω (MAX.) (A Connection)
- Isolation Voltage : 5000 Vrms (MIN.) (A Connection)
- Isolation Thickness : 0.4 mm (MIN.)
- Trigger LED Current (Ta = 25°C)

CLASSIFICATION (Note 1)	Trigger LED Current (mA)		MARKING OF CLASSIFICATION
	@ION = 150 mA		
	Min.	Max.	
(IFT2)	—	2	T2
Standard	—	5	T2, blank

(Note 1) : Application type name for certification test, please use standard product type name, i.e. TLP798G (IFT2) : TLP798G


- BSI Approved : BS EN60065 : 1994, Certificate No. 8318
BS EN60950 : 1992, Certificate No. 8319
- Option (D4) type
TUV Approved : DIN VDE0884 / 06.92,
Certificate No. 9850585

Unit in mm

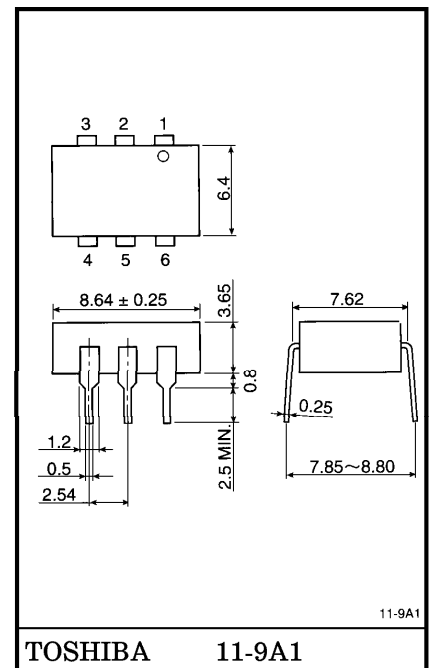


Weight : 0.49 g

PIN CONFIGURATION (TOP VIEW)

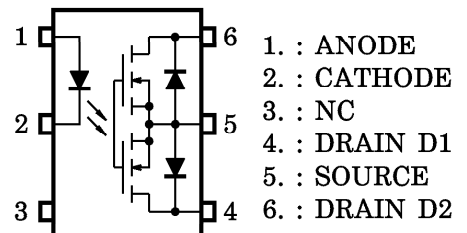

SCHEMATIC

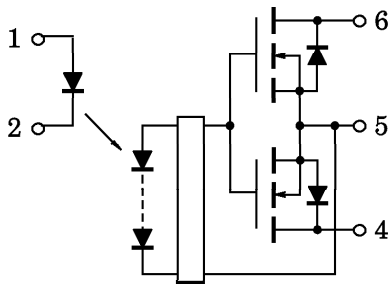

MAXIMUM RATINGS (Ta = 25°C)


CHARACTERISTIC		SYMBOL	RATING	UNIT
LED	Forward Current	I_F	30	mA
	Forward Current Derating (Ta ≥ 25°C)	$\Delta I_F / ^\circ C$	-0.3	mA / °C
	Peak Forward Current (100 μs pulse, 100 pps)	I_{FP}	1	A
	Reverse Voltage	V_R	5	V
	Junction Temperature	T_j	125	°C
DETECTOR	Off-State Output Terminal Voltage	V_{OFF}	400	V
	On-State RMS Current	A Connection	150	mA
		B Connection	200	
		C Connection	300	
	On-State Current Derating (Ta ≥ 25°C)	A Connection	-1.5	mA / °C
		B Connection	-2.0	
		C Connection	-3.0	
Junction temperature	T_j	125	°C	
Storage Temperature Range	T_{stg}	-55~125	°C	
Operating Temperature Range	T_{opr}	-40~85	°C	
Lead Soldering Temperature (10 s)	T_{sol}	260	°C	
Isolation Voltage (AC, 1min., R.H. ≤ 60%)(Note 2)	BV_S	5000	Vrms	

(Note 2) : Device considered a two-terminal device : Pins 1, 2 and 3 shorted together, and pins 4, 5 and 6 shorted together.

RECOMMENDED OPERATING CONDITIONS

CHARACTERISTIC	SYMBOL	MIN.	TYP.	MAX.	UNIT
Supply Voltage	V_{DD}	—	—	320	V
Forward Current	I_F	10	15	20	mA
On-State Current	I_{ON}	—	—	150	mA
Operating Temperature	T_{opr}	-20	—	80	°C

CIRCUIT CONNECTIONS

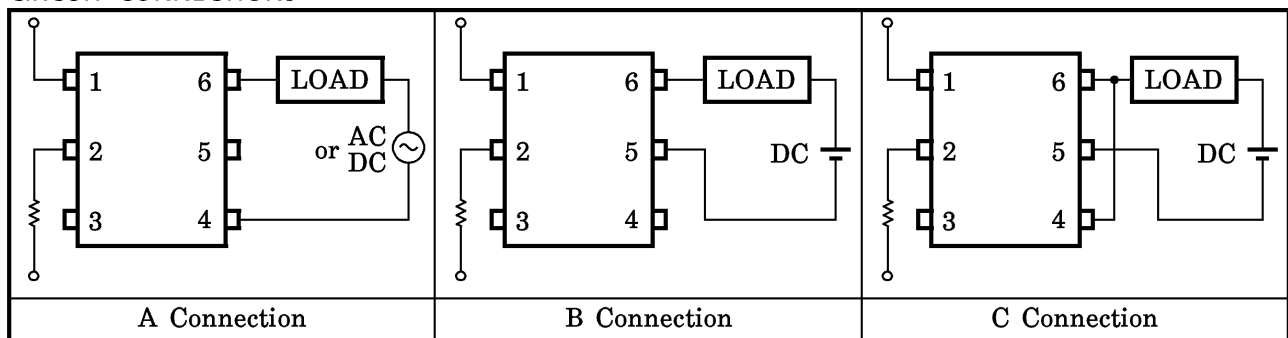

INDIVIDUAL ELECTRICAL CHARACTERISTICS (Ta = 25°C)

CHARACTERISTIC		SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
LED	Forward Voltage	V _F	I _F = 10 mA	1.2	1.4	1.7	V
	Reverse Current	I _R	V _R = 3 V	—	—	10	μA
	Capacitance	C _T	V = 0, f = 1 MHz	—	30	—	pF
DETECTOR	Off-State Current	I _{OFF}	V _{OFF} = 400 V	—	—	1	μA
	Capacitance	C _{OFF}	V = 0, f = 1 MHz	—	150	—	pF

COUPLED ELECTRICAL CHARACTERISTICS (Ta = 25°C)

CHARACTERISTIC		SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Trigger LED Current		I _{FT}	I _{ON} = 150 mA	—	1	5	mA
On-State Resistance	A Connection	R _{ON}	I _{ON} = 150 mA, I _F = 10 mA	—	8	12	Ω
	B Connection		I _{ON} = 200 mA, I _F = 10 mA	—	4	6	
	C Connection		I _{ON} = 300 mA, I _F = 10 mA	—	2	3	



ISOLATION CHARACTERISTICS (Ta = 25°C)






CHARACTERISTIC	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Capacitance Input to Output	C _S	V _S = 0, f = 1 MHz	—	0.8	—	pF
Isolation Resistance	R _S	V _S = 500 V, R.H. ≤ 60%	5 × 10 ¹⁰	10 ¹⁴	—	Ω
Isolation Voltage	BV _S	AC, 1 minute	5000	—	—	V _{rms}
		AC, 1 second (in Oil)	—	10000	—	
		DC, 1 minute (in Oil)	—	10000	—	V _{DC}

SWITCHING CHARACTERISTICS (Ta = 25°C)


CHARACTERISTIC	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Turn-on Time	t _{ON}	V _{DD} = 20 V, R _L = 200 Ω	—	0.3	1.0	ms
Turn-off Time	t _{OFF}	I _F = 10 mA (Note 3)	—	0.2	1.0	

(Note 3) : SWITCHING TIME TEST CIRCUIT

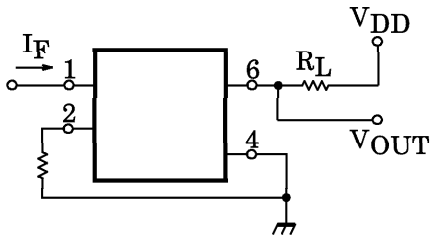


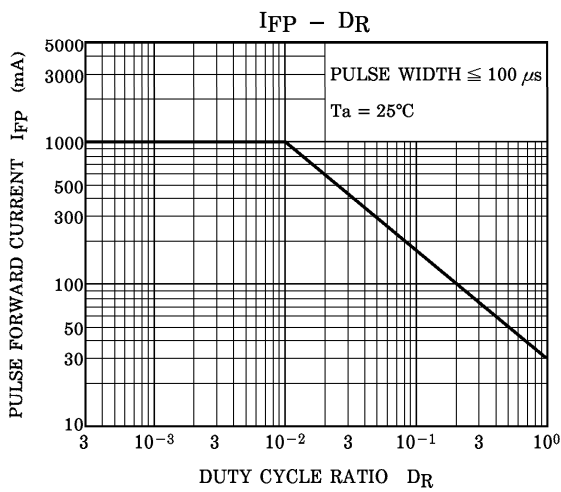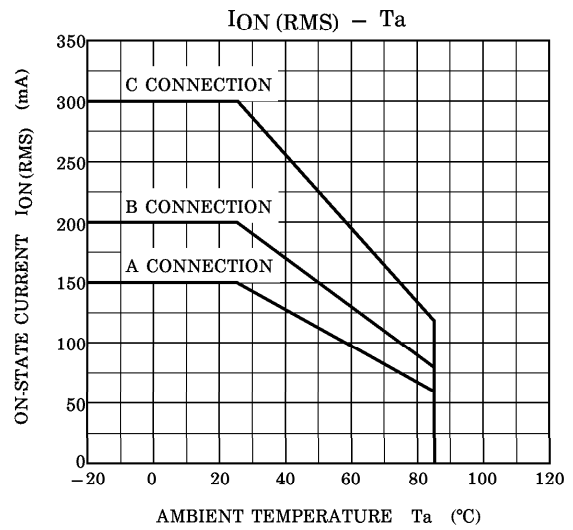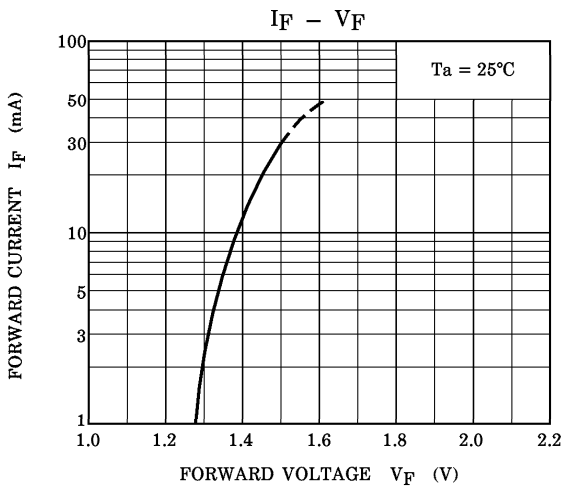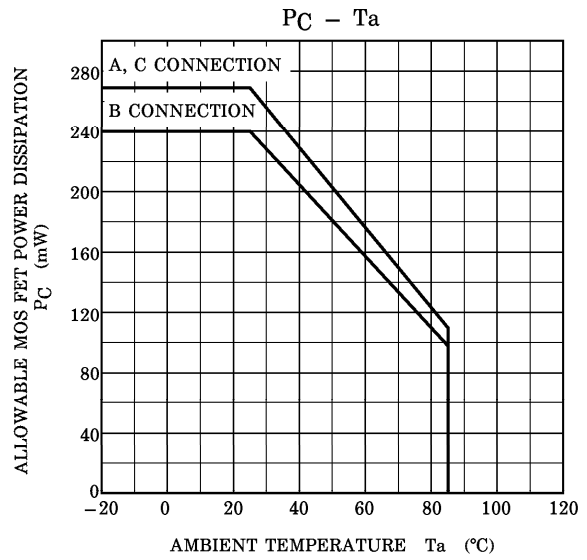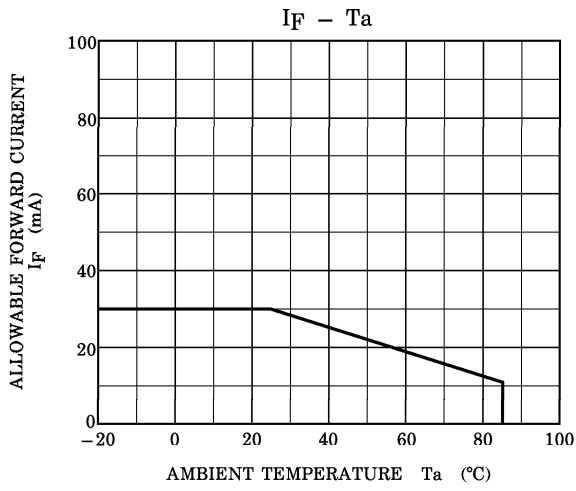


$I_{ON} - I_F$ (A CONNECTION)

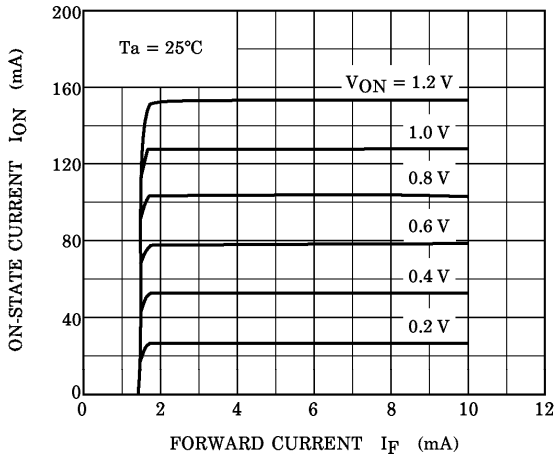


$t_{ON} - I_F$

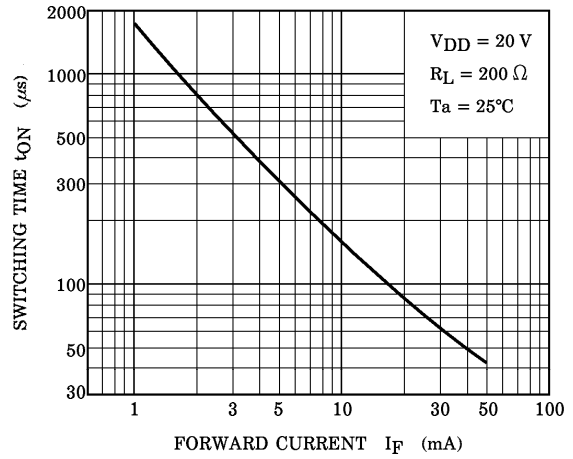


$V_{ON} - I_F$ (A CONNECTION)




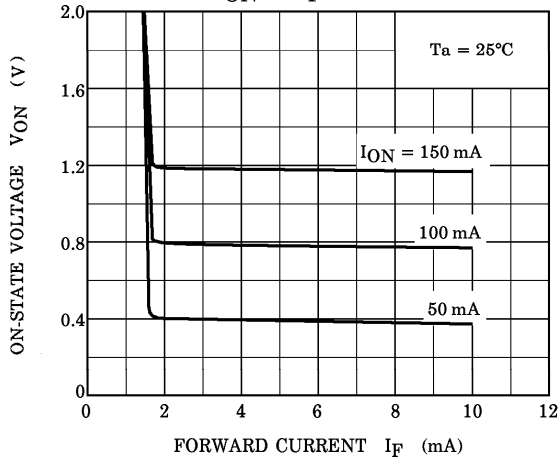


$t_{OFF} - I_F$

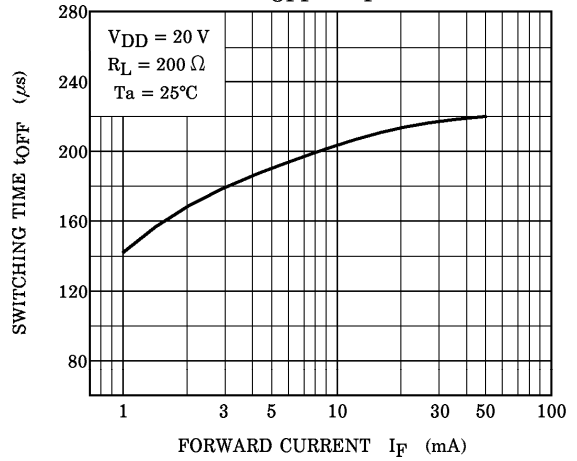

$I_{ON} - V_{ON}$ (A CONNECTION)

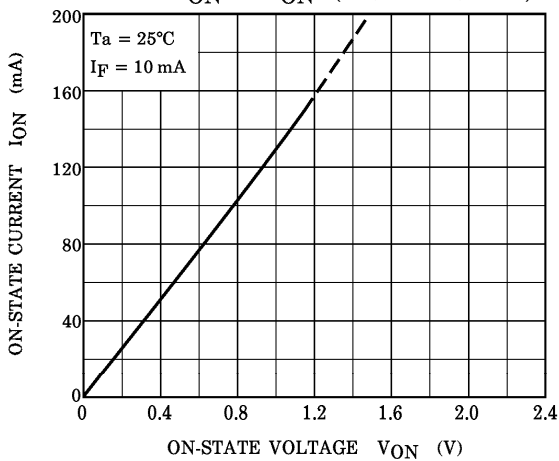

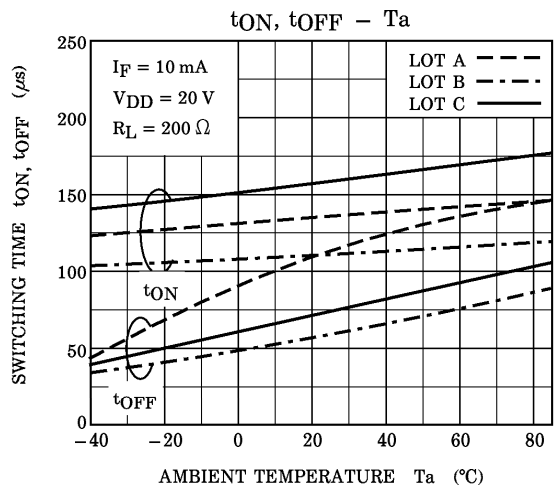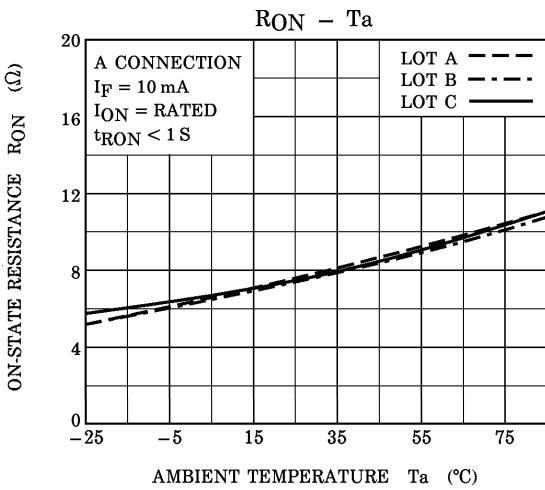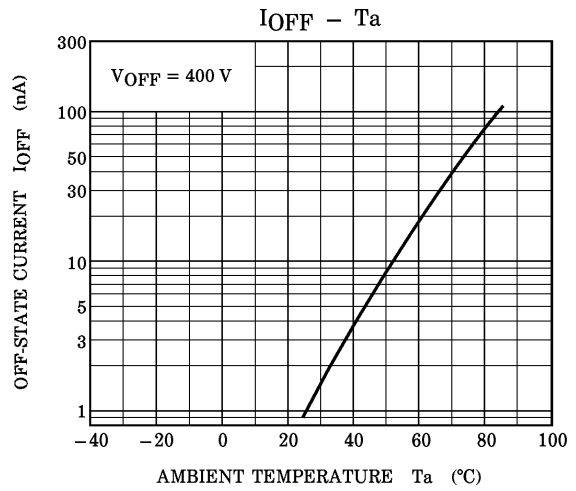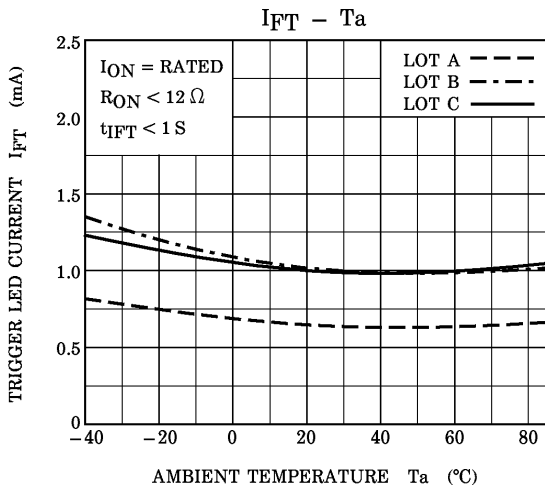

RESTRICTIONS ON PRODUCT USE

000707EBC

- TOSHIBA is continually working to improve the quality and reliability of its products. Nevertheless, semiconductor devices in general can malfunction or fail due to their inherent electrical sensitivity and vulnerability to physical stress. It is the responsibility of the buyer, when utilizing TOSHIBA products, to comply with the standards of safety in making a safe design for the entire system, and to avoid situations in which a malfunction or failure of such TOSHIBA products could cause loss of human life, bodily injury or damage to property. In developing your designs, please ensure that TOSHIBA products are used within specified operating ranges as set forth in the most recent TOSHIBA products specifications. Also, please keep in mind the precautions and conditions set forth in the "Handling Guide for Semiconductor Devices," or "TOSHIBA Semiconductor Reliability Handbook" etc..
- The TOSHIBA products listed in this document are intended for usage in general electronics applications (computer, personal equipment, office equipment, measuring equipment, industrial robotics, domestic appliances, etc.). These TOSHIBA products are neither intended nor warranted for usage in equipment that requires extraordinarily high quality and/or reliability or a malfunction or failure of which may cause loss of human life or bodily injury ("Unintended Usage"). Unintended Usage include atomic energy control instruments, airplane or spaceship instruments, transportation instruments, traffic signal instruments, combustion control instruments, medical instruments, all types of safety devices, etc.. Unintended Usage of TOSHIBA products listed in this document shall be made at the customer's own risk.
- Gallium arsenide (GaAs) is a substance used in the products described in this document. GaAs dust and fumes are toxic. Do not break, cut or pulverize the product, or use chemicals to dissolve them. When disposing of the products, follow the appropriate regulations. Do not dispose of the products with other industrial waste or with domestic garbage.
- The products described in this document are subject to the foreign exchange and foreign trade laws.
- The information contained herein is presented only as a guide for the applications of our products. No responsibility is assumed by TOSHIBA CORPORATION for any infringements of intellectual property or other rights of the third parties which may result from its use. No license is granted by implication or otherwise under any intellectual property or other rights of TOSHIBA CORPORATION or others.
- The information contained herein is subject to change without notice.