

TENTATIVE TOSHIBA BIPOLAR LINEAR INTEGRATED CIRCUIT SILICON MONOLITHIC


TA2150FN**RF AMPLIFIER FOR DIGITAL SERVO CD SYSTEM**

TA2150FN is a 3-beam type PUH compatible RF Amplifier for Digital Servo to be used in the CD system.

In combination with a CMOS single chip processor TC9462F/TC9495F, a CD system can be composed very simply.

FEATURES

- Built-in amplifier for reference (VRO, 2VRO) supply.
- Built-in Auto Laser Power Control circuit.
- Built-in RF amplifier.
- Built-in AGC amplifier.
- Built-in focus error amp and tracking error amp.
- Built-in sub-beam adder signal amplifier.
- Built-in gain change circuit for CD-RW.
- Capable of tracking balance control with TC9462F/TC9495F.
- Capable of RF gain adjustment circuit with TC9462F/TC9495F.
- Built-in signal amplifier for track counter.
- Capable of 4times speed operation.
- 30 pin mini flat package.

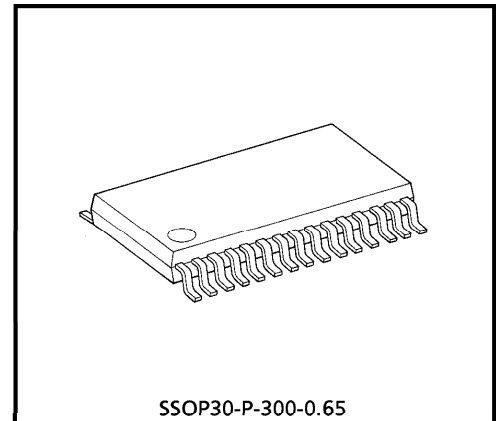

SSOP30-P-300-0.65
Weight : 0.17 g (Typ.)

980910EBA1

- TOSHIBA is continually working to improve the quality and the reliability of its products. Nevertheless, semiconductor devices in general can malfunction or fail due to their inherent electrical sensitivity and vulnerability to physical stress. It is the responsibility of the buyer, when utilizing TOSHIBA products, to observe standards of safety, and to avoid situations in which a malfunction or failure of a TOSHIBA product could cause loss of human life, bodily injury or damage to property. In developing your designs, please ensure that TOSHIBA products are used within specified operating ranges as set forth in the most recent products specifications. Also, please keep in mind the precautions and conditions set forth in the TOSHIBA Semiconductor Reliability Handbook.
- The products described in this document are subject to the foreign exchange and foreign trade laws.
- The information contained herein is presented only as a guide for the applications of our products. No responsibility is assumed by TOSHIBA CORPORATION for any infringements of intellectual property or other rights of the third parties which may result from its use. No license is granted by implication or otherwise under any intellectual property or other rights of TOSHIBA CORPORATION or others.
- The information contained herein is subject to change without notice.


PIN FUNCTION

PIN No.	SYMBOL	I/O	FUNCTION DESCRIPTION	REMARKS																
1	V _{CC}	—	Power supply input terminal.	—																
2	RFGC	I	RF amplitude adjustment control signal input terminal. Controlled by 3-PWM signals. (PWM carrier = 88.2 kHz)	3 signals input. (2VRO, VRO, GND)																
3	GMAD	I	Open loop gain adjustment terminal for AGC amp.	(Note 1)																
4	FNI	I	Main beam I-V amp input terminal.	Connected to pin diode output B + D (through resistor).																
5	FPI	I	Main beam I-V amp input terminal.	Connected to pin diode output A + C (through resistor).																
6	TPI	I	Sub beam I-V amp input terminal.	Connected to pin diode output F.																
7	TNI	I	Sub beam I-V amp input terminal.	Connected to pin diode output E.																
8	MDI	I	Monitor photo diode amp input terminal.	Connected to monitor photo diode.																
9	LDO	O	Laser diode amp input terminal.	Connected to laser diode control circuit.																
10	SEL	I	Laser diode control signal input terminal and APC circuit ON/OFF control signal terminal. <table border="1" style="margin: 10px auto;"> <thead> <tr> <th>SEL LEVEL</th> <th>APC CIRCUIT</th> <th>LDO</th> <th>DETECT FREQUENCY</th> </tr> </thead> <tbody> <tr> <td>GND</td> <td>OFF</td> <td>Connected to V_{CC} through resistor (1 kΩ)</td> <td>Low</td> </tr> <tr> <td>Hiz</td> <td>ON</td> <td>Control signal output</td> <td>Low</td> </tr> <tr> <td>V_{CC}</td> <td>ON</td> <td>Control signal output</td> <td>High</td> </tr> </tbody> </table>	SEL LEVEL	APC CIRCUIT	LDO	DETECT FREQUENCY	GND	OFF	Connected to V _{CC} through resistor (1 kΩ)	Low	Hiz	ON	Control signal output	Low	V _{CC}	ON	Control signal output	High	3 signals input. (V _{CC} , Hiz, GND)
SEL LEVEL	APC CIRCUIT	LDO	DETECT FREQUENCY																	
GND	OFF	Connected to V _{CC} through resistor (1 kΩ)	Low																	
Hiz	ON	Control signal output	Low																	
V _{CC}	ON	Control signal output	High																	
11	TEB	I	Tracking error balance adjustment signal input terminal. Controlled by 3-PWM signal. (PWM carrier = 88.2 kHz)	3 signals input. (2VRO, VRO, GND)																
12	2VRO	O	Reference voltage (2VRO) output terminal. 2VRO = 4.2 V when V _{CC} = 5 V	—																
13	TEN	I	TE amp negative input terminal.	Connected to TEO through feedback resistor.																
14	TEO	O	TE error signal output terminal.	—																
15	SBAD	O	Sub beam adder signal output terminal.	—																
16	FEO	O	Focus error signal output terminal.	—																
17	FEN	I	FE amp negative input terminal.	Connected to FEO through feedback resistor.																
18	SEB	I	RFRP output circuit switching terminal. <table border="1" style="margin: 10px auto;"> <thead> <tr> <th>SEB LEVEL</th> <th>BOTTOM DETECTION</th> <th>PEAK DETECTION</th> </tr> </thead> <tbody> <tr> <td>GND</td> <td>ON</td> <td>ON</td> </tr> <tr> <td>V_{CC}</td> <td>OFF</td> <td>ON</td> </tr> </tbody> </table>	SEB LEVEL	BOTTOM DETECTION	PEAK DETECTION	GND	ON	ON	V _{CC}	OFF	ON	Low (GND) is for normal use.							
SEB LEVEL	BOTTOM DETECTION	PEAK DETECTION																		
GND	ON	ON																		
V _{CC}	OFF	ON																		


PIN FUNCTION

PIN No.	SYMBOL	I/O	FUNCTION DESCRIPTION	REMARKS								
19	VRO	O	Reference signal (VRO) output terminal. VRO = 2.1 V when V _{CC} = 5 V	—								
20	RFRP	O	Track count signal output terminal.	—								
21	BTC	I	Time constant adjustment terminal for bottom detection.	Adjusted by capacitance.								
22	RFCT	O	RFRP signal center level output terminal.	—								
23	PKC	I	Time constant adjustment terminal for peak detection.	Adjusted by capacitance.								
24	RFRPIN	I	Input terminal for track count signal output amp.	—								
25	RFGO	O	Output terminal for RF signal amplitude adjustment amp.	—								
26	GVSW	I	Amp (AGC, FE, TE) gain switching terminal.	Low (GND) is for 5 times gain.								
			<table border="1" style="margin-left: 20px;"> <thead> <tr> <th>GVSW</th> <th>MODE</th> </tr> </thead> <tbody> <tr> <td>GND</td> <td>CD-RW</td> </tr> <tr> <td>Hiz</td> <td>Normal</td> </tr> <tr> <td>V_{CC}</td> <td>Normal</td> </tr> </tbody> </table>		GVSW	MODE	GND	CD-RW	Hiz	Normal	V _{CC}	Normal
			GVSW		MODE							
			GND		CD-RW							
Hiz	Normal											
V _{CC}	Normal											
27	AGCIN	I	Input terminal for RF signal amplitude adjustment amp.	Connected to RFO through capacitance.								
28	RFO	O	Output terminal RF signal amp.	—								
29	GND	—	Ground terminal.	—								
30	RFN2	I	Input terminal for RF signal amp.	Connected to pin-diode output A + B + C + D (through resistor).								

(Note 1) : Pin No.3 (GMAD) is gm adjustment terminal for AGC amp by applying a voltage (between 1.5 V and 4.2 V).
 If Pin No.3 (GMAD) is open, voltage of this terminal is fixed VRO by IC interior.
 Characteristic of frequency (open-loop characteristic) and voltage is as below.

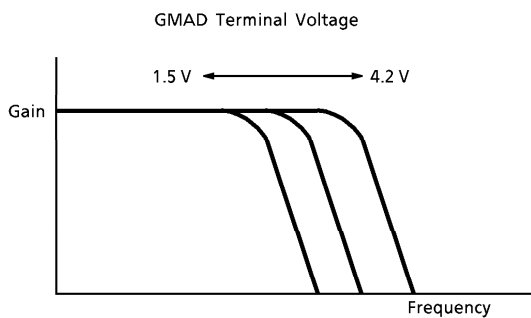


By changing a voltage (Pin No.3) between 1.5 V and 4.2 V, frequency band width is changed.

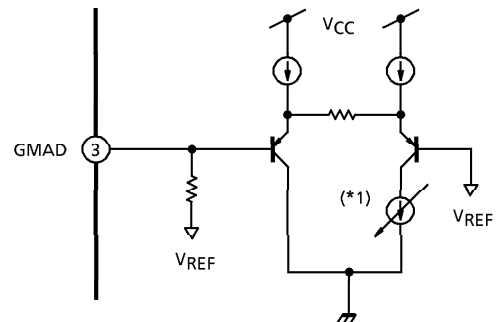




(*1) : Current is changed by 3 pin (GMAD) voltage.

APPLICATION CIRCUIT

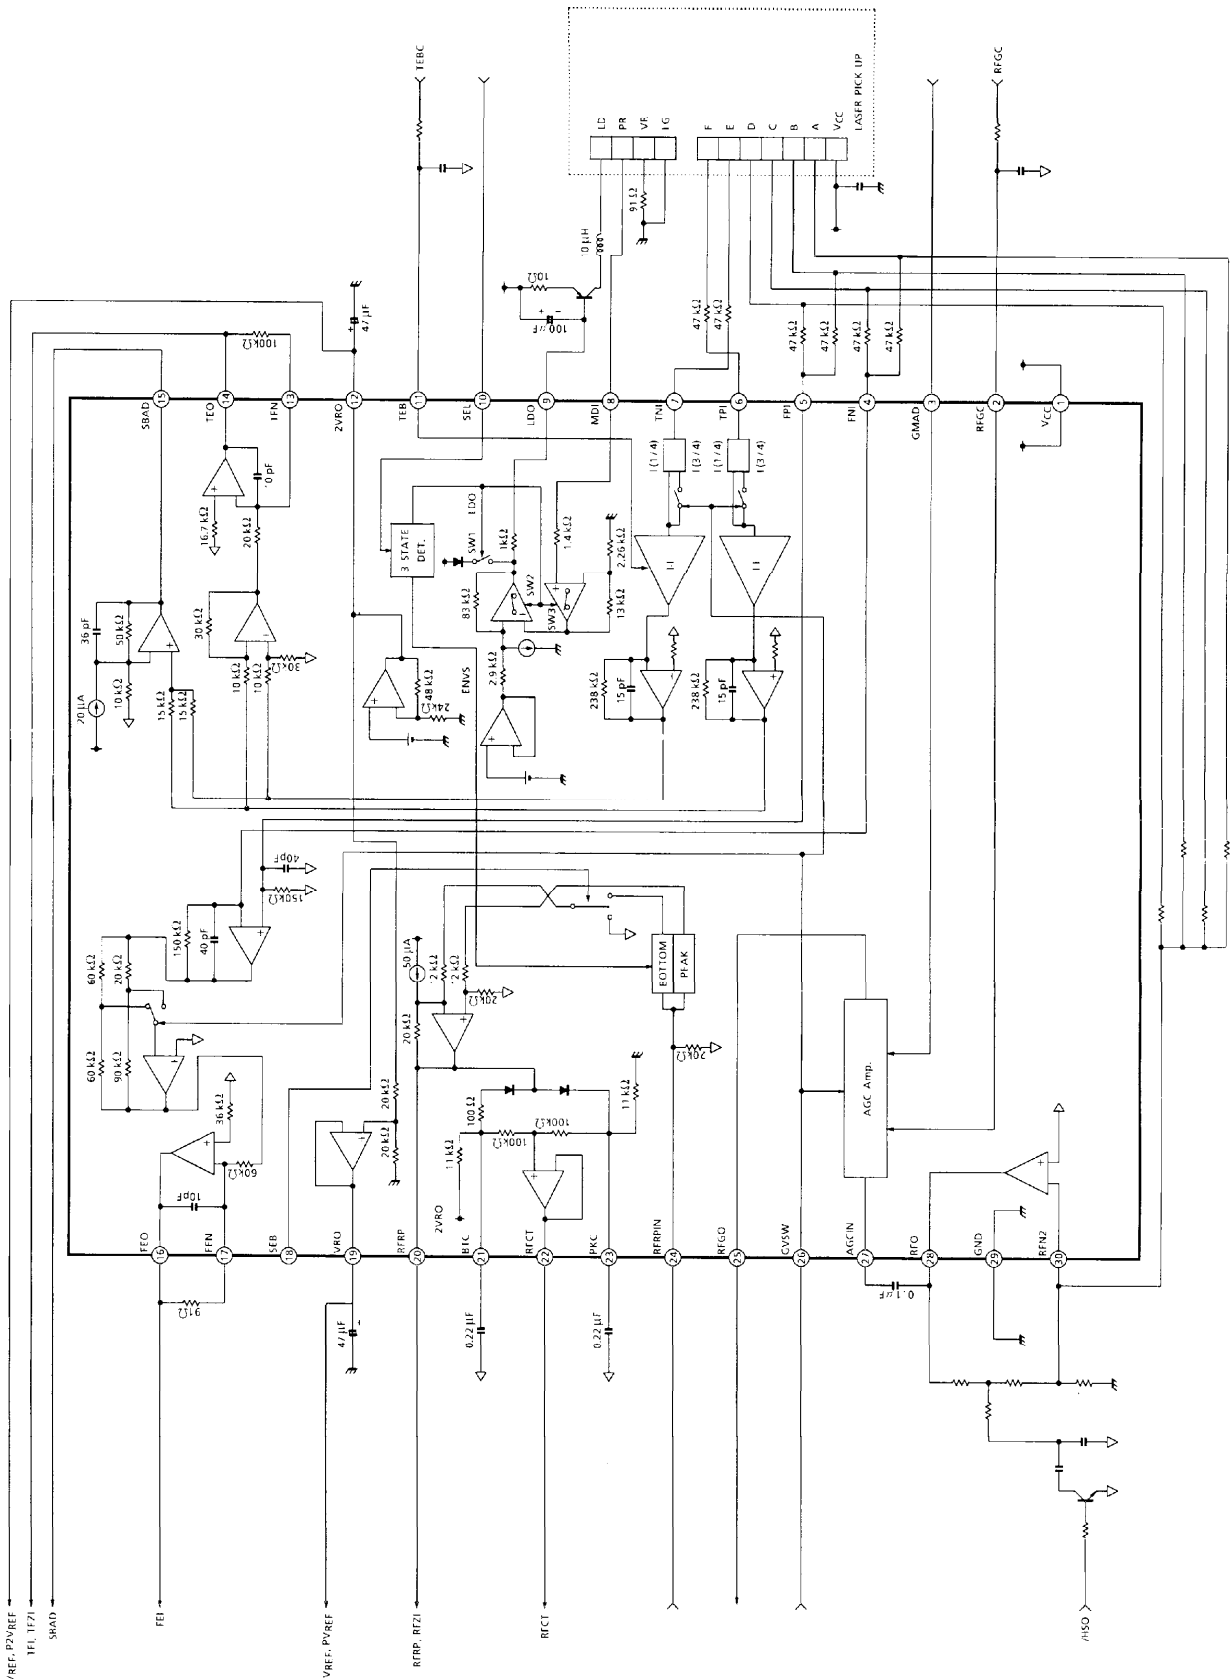

PACKAGE DIMENSIONS
SSOP30-P-300-0.65

Unit : mm

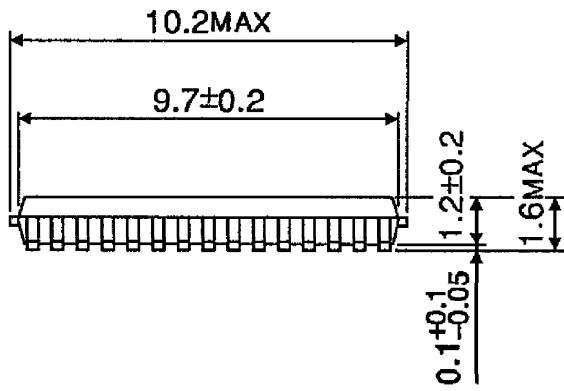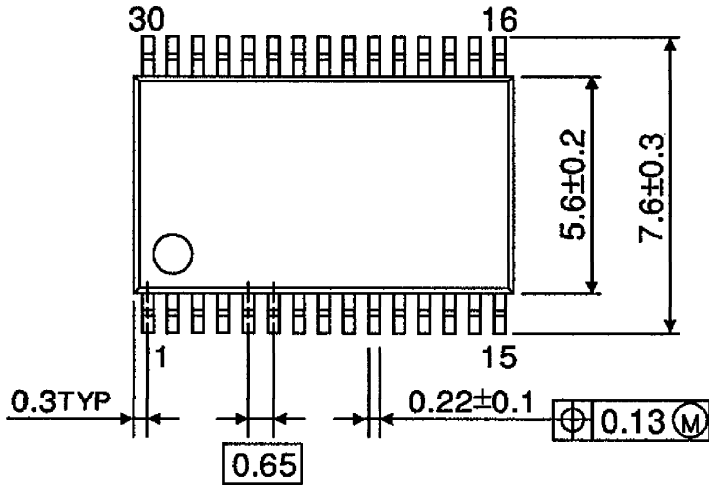

Weight : 0.17 g (Typ.)