


GENERAL DESCRIPTION

This N-Channel enhancement mode field effect transistor is produced using high cell density, DMOS technology. These products have been designed to minimize on-state resistance while provide rugged, reliable, and fast switching performance. This product is particularly suited for low voltage, low current applications such as small servo motor control, power MOSFET gate drivers, and other switching applications.


FEATURES

- ◆ Low On-Resistance: 3Ω
- ◆ Low Threshold: 2V (typ.)
- ◆ Low Input Capacitance: 25pF
- ◆ Fast Switching Speed: 7.5ns
- ◆ Low Input and Output Leakage

PIN CONFIGURATION

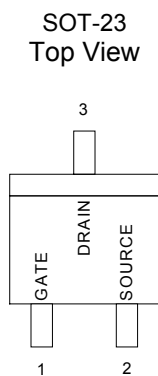

SYMBOL

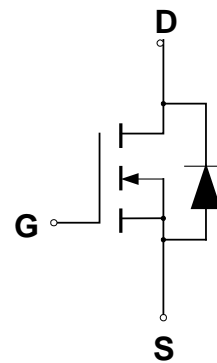

N-Channel MOSFET

ORDERING INFORMATION

Part Number	Package
CMT2N7002E	SOT-23
CMT2N7002EG*	SOT-23

*Note: G : Suffix for Pb Free Product

ABSOLUTE MAXIMUM RATINGS

Rating		Symbol	Value	Unit
Drain Source Voltage		V_{DSS}	60	V
Drain-Gate Voltage ($R_{GS} = 1.0M\Omega$)		V_{DGR}	60	V
Continuous Drain Current ($T_J = 150$)	$T_A = 25$	I_D	240	mA
	$T_A = 70$		190	
Pulsed Drain Current (Note 1)		I_{DM}	1300	mA
Gate-to-Source Voltage		V_{GS}	± 20	V
Total Power Dissipation	$T_A = 25$	P_D	0.35	W
	$T_A = 70$		0.22	
Operating and Storage Temperature Range		T_J, T_{STG}	-55 to 150	
Thermal Resistance - Junction to Ambient		θ_{JA}	357	/W

Note1: Pulse Width limited by maximum junction temperature.

ELECTRICAL CHARACTERISTICS

Unless otherwise specified, $T_J = 25$.







Characteristic	Symbol	CMT2N7002E			Units
		Min	Typ	Max	
Drain-Source Breakdown Voltage ($V_{GS} = 0\text{ V}$, $I_D = 10\ \mu\text{A}$)	$V_{(BR)DSS}$	60	68		V
Zero Gate Voltage Drain Current ($V_{DS} = 60\text{ V}$, $V_{GS} = 0\text{ V}$) ($V_{DS} = 60\text{ V}$, $V_{GS} = 0\text{ V}$, $T_C = 125$)	I_{DSS}			1.0 500	μA μA
Gate Body Leakage ($V_{DS} = 0\text{ V}$, $V_{GS} = \pm 15\text{ V}$)	I_{GSS}			± 10	nA
Gate Threshold Voltage * ($V_{DS} = V_{GS}$, $I_D = 250\ \mu\text{A}$)	$V_{GS(th)}$	1.0	2.0	2.5	V
On-State Drain Current (Note 2) ($V_{DS} = 7.5\text{ V}$, $V_{GS} = 10\text{V}$) ($V_{DS} = 10\text{ V}$, $V_{GS} = 4.5\text{V}$)	$I_{d(on)}$	800 350	1900 450		mA
Static Drain-Source On-Resistance (Note 2) ($V_{GS} = 10\text{ V}$, $I_D = 0.25\text{A}$) ($V_{GS} = 4.5\text{ V}$, $I_D = 0.2\text{A}$)	$R_{DS(on)}$		1.9 3.5	3 4	Ω
Diode Forward On-Voltage ($I_S = 200\text{ mA}$, $V_{GS} = 0\text{V}$)	V_{SD}		0.85	1.2	V
Forward Transconductance ($V_{DS} = 15\text{ V}$, $I_D = 200\text{mA}$) (Note 2)	g_{FS}	150	260		mmhos
Total Gate Charge	$(V_{DS} = 25\text{ V}$, $V_{GS} = 0\text{ V}$, $f = 1.0\text{ MHz}$) (Note 1)	Q_g	0.4	0.6	nC
Gate-Source Charge		Q_{gs}	0.06		nC
Gate-Drain Charge		Q_{gd}	0.06		nC
Input Capacitance	$(V_{DS} = 25\text{ V}$, $V_{GS} = 0\text{ V}$, $f = 1.0\text{ MHz}$) (Note 1)	C_{iss}	21		pF
Output Capacitance		C_{oss}	7		pF
Reverse Transfer Capacitance		C_{rss}	2.5		pF
Turn-On Delay Time (Note 1,3)	$(V_{DD} = 10\text{ V}$, $I_D = 250\text{ mA}$, $V_{GEN} = 10\text{ V}$, $R_G = 10\Omega$, $R_L = 40\Omega$)	$t_{d(on)}$	13	20	ns
Turn-Off Delay Time (Note 1,3)		$t_{d(off)}$	18	25	ns




Note 1: For Design Aid Only, not subject to production testing.

Note 2: Pulse test: $PW \leq 300\mu\text{s}$ duty cycle $\leq 2\%$

Note 3: Switching time is essentially independent of operating temperature.





TYPICAL ELECTRICAL CHARACTERISTICS

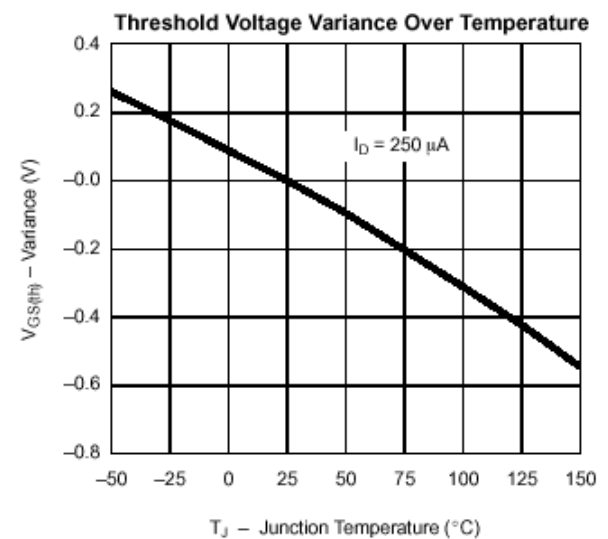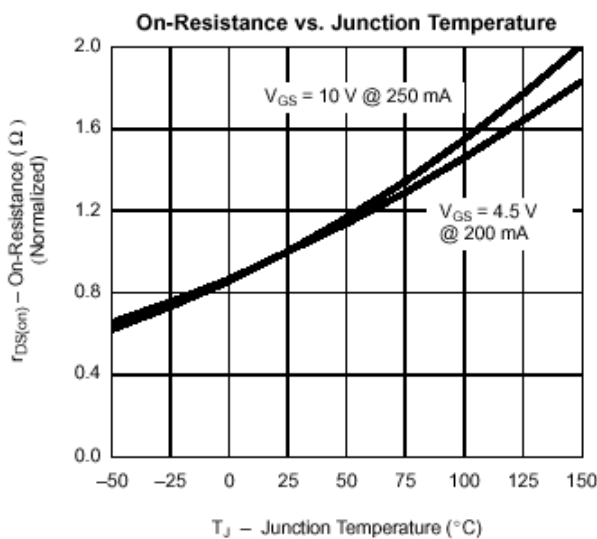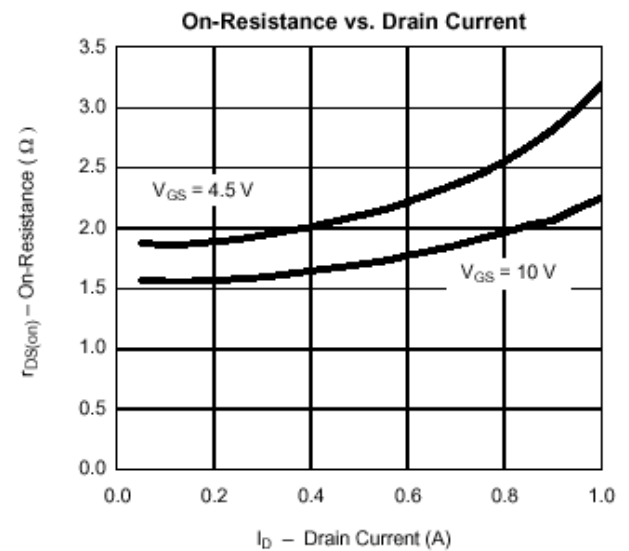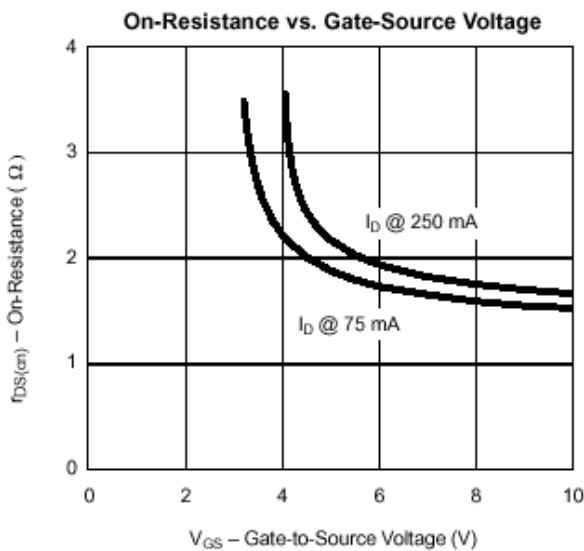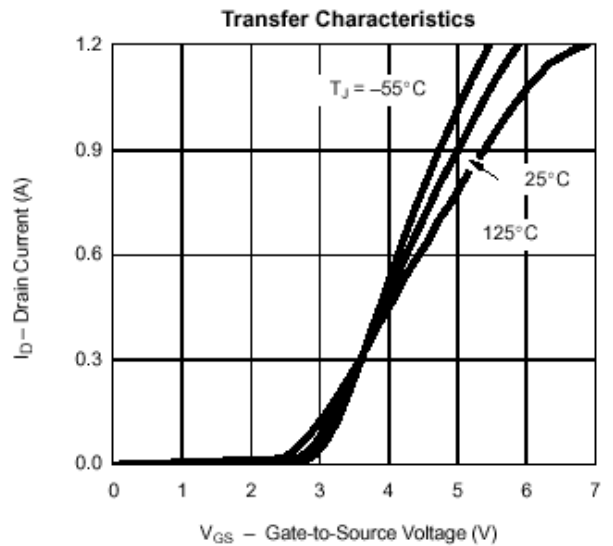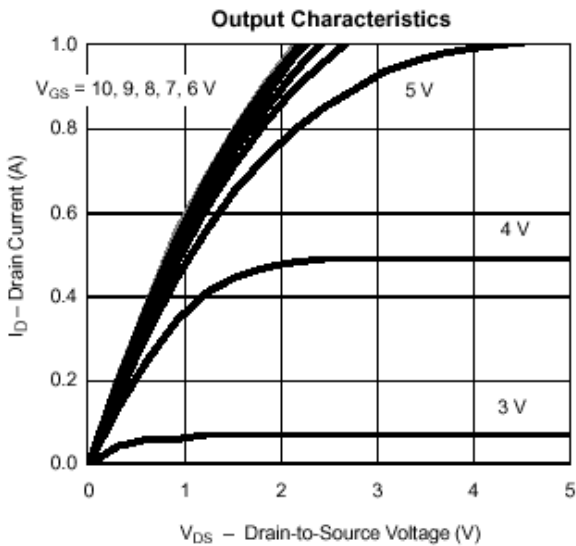

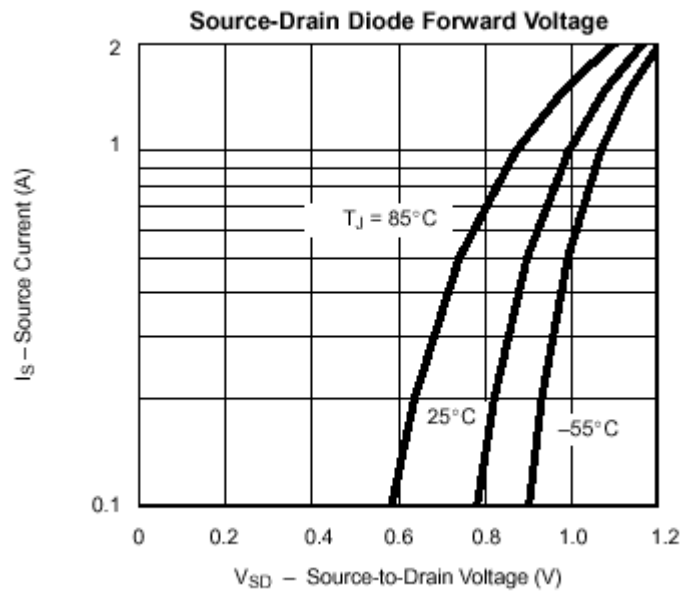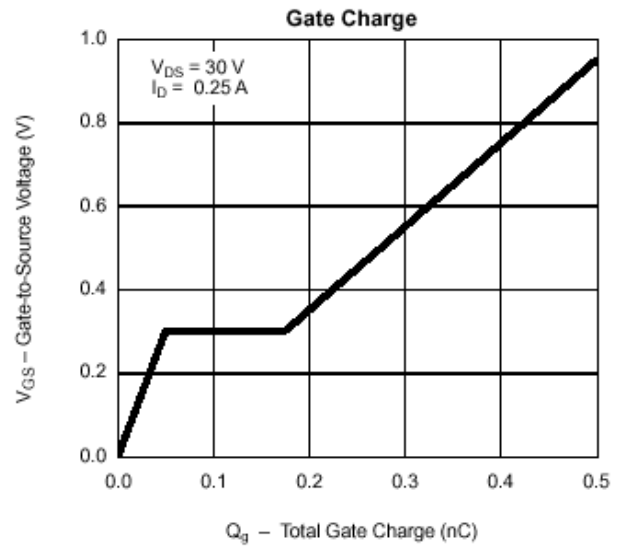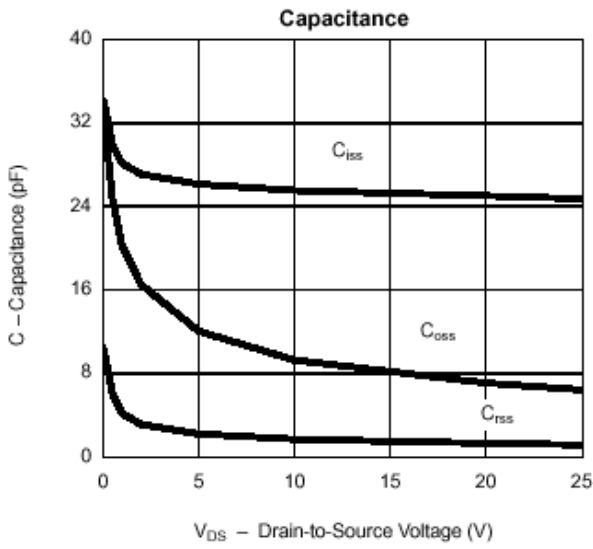

PACKAGE DIMENSION

SOT-23

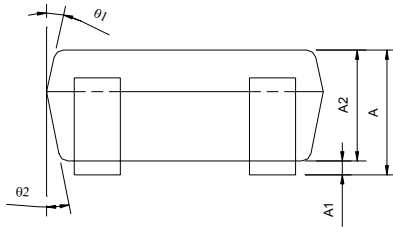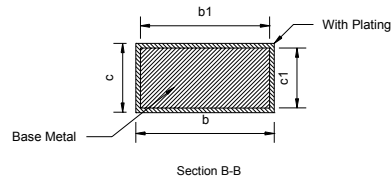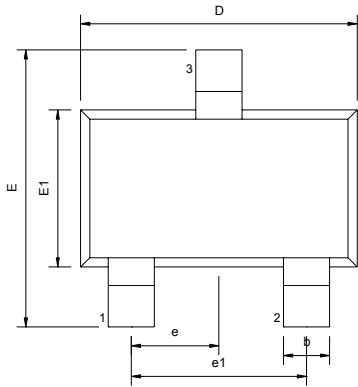

SYMBOLS	DIMENSIONS IN MILLIMETERS			DIMENSIONS IN INCHES		
	MIN	NOM	MAX	MIN	NOM	MAX
A	1.05	---	1.35	0.041	---	0.053
A1	0.05	---	0.15	0.002	---	0.006
A2	1.00	1.10	1.20	0.039	0.043	0.047
b	0.25	---	0.50	0.010	---	0.020
b1	0.25	0.40	0.45	0.010	0.016	0.018
c	0.08	---	0.20	0.003	---	0.008
c1	0.08	0.11	0.15	0.003	0.004	0.006
D	2.70	2.90	3.00	0.106	0.114	0.118
E	2.60	2.80	3.00	0.102	0.110	0.118
E1	1.50	1.60	1.70	0.059	0.063	0.067
L	0.35	0.45	0.55	0.014	0.018	0.022
L1	0.60 REF			0.024 REF		
e	0.95 BSC			0.037 BSC		
e1	1.90 BSC			0.075 BSC		
theta	0°	5°	10°	0°	5°	10°
theta1	3°	5°	7°	3°	5°	7°
theta2	6°	8°	10°	6°	8°	10°

IMPORTANT NOTICE

Champion Microelectronic Corporation (CMC) reserves the right to make changes to its products or to discontinue any integrated circuit product or service without notice, and advises its customers to obtain the latest version of relevant information to verify, before placing orders, that the information being relied on is current.

A few applications using integrated circuit products may involve potential risks of death, personal injury, or severe property or environmental damage. CMC integrated circuit products are not designed, intended, authorized, or warranted to be suitable for use in life-support applications, devices or systems or other critical applications. Use of CMC products in such applications is understood to be fully at the risk of the customer. In order to minimize risks associated with the customer's applications, the customer should provide adequate design and operating safeguards.

HsinChu Headquarter

5F, No. 11, Park Avenue II,
Science-Based Industrial Park,
HsinChu City, Taiwan
TEL: +886-3-567 9979
FAX: +886-3-567 9909

Sales & Marketing

11F, No. 306-3, SEC. 1, Ta Tung Road,
Hsichih, Taipei Hsien 221, Taiwan
TEL: +886-2-8692 1591
FAX: +886-2-8692 1596
