


Typical Applications

- Broadband, Low Noise Gain Blocks
- IF or RF Buffer Amplifiers
- Driver Stage for Power Amplifiers
- Final PA for Low Power Applications
- High Reliability Applications
- Broadband Test Equipment

Product Description

The RF2045 is a general purpose, low cost RF amplifier IC. The device is manufactured on an advanced Gallium Arsenide Heterojunction Bipolar Transistor (HBT) process, and has been designed for use as an easily-cascadable 50Ω gain block. Applications include IF and RF amplification in wireless voice and data communication products operating in frequency bands up to 6000MHz. The device is self-contained with 50Ω input and output impedances and requires only two external DC biasing elements to operate as specified. With a goal of enhanced reliability, the extremely small Micro-X ceramic package offers significantly lower thermal resistance than similar size plastic packages.

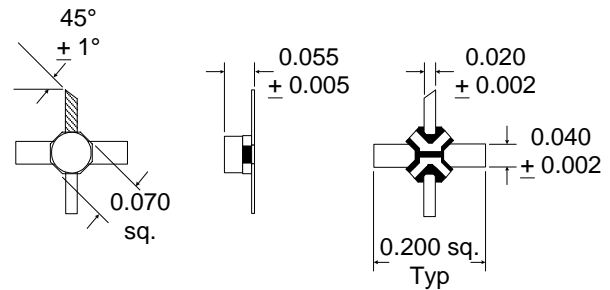

- NOTES:**
1. Shaded lead is pin 1.
 2. Darkened areas are metallization.


4
GENERAL PURPOSE AMPLIFIERS

Optimum Technology Matching® Applied

- | | | |
|-------------------------------------|--|--------------------------------------|
| <input type="checkbox"/> Si BJT | <input checked="" type="checkbox"/> GaAs HBT | <input type="checkbox"/> GaAs MESFET |
| <input type="checkbox"/> Si Bi-CMOS | <input type="checkbox"/> SiGe HBT | <input type="checkbox"/> Si CMOS |

Package Style: Micro-X Ceramic

- Features**
- DC to 6000MHz Operation
 - Internally matched Input and Output
 - 13dB Small Signal Gain
 - +32dBm Output IP3
 - +18dBm Output Power
 - Excellent Gain Flatness

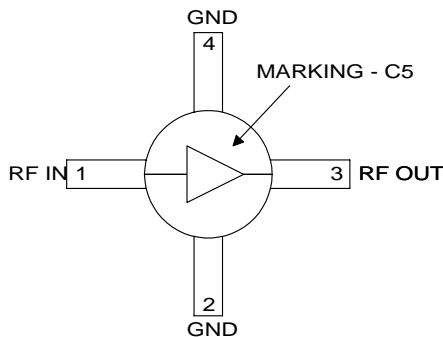

Functional Block Diagram

Ordering Information

RF2045	General Purpose Amplifier
RF2045 PCBA	Fully Assembled Evaluation Board

RF Micro Devices, Inc.
7625 Thorndike Road
Greensboro, NC 27409, USA

Tel (336) 664 1233
Fax (336) 664 0454
<http://www.rfmd.com>

Absolute Maximum Ratings

Parameter	Rating	Unit
Supply Current	120	mA
Input RF Power	+20	dBm
Operating Ambient Temperature	-40 to +85	°C
Storage Temperature	-60 to +150	°C



Caution! ESD sensitive device.

RF Micro Devices believes the furnished information is correct and accurate at the time of this printing. However, RF Micro Devices reserves the right to make changes to its products without notice. RF Micro Devices does not assume responsibility for the use of the described product(s).


4
GENERAL PURPOSE
AMPLIFIERS

Parameter	Specification			Unit	Condition
	Min.	Typ.	Max.		
Overall					T=25 °C, I _{CC} =65mA
Frequency Range		DC to 6000		MHz	
3dB Bandwidth		6		GHz	
Gain	11	13.8		dB	Freq=100MHz
		13.7		dB	Freq=1000MHz
		13.6		dB	Freq=2000MHz
		13.4		dB	Freq=3000MHz
		13		dB	Freq=4000MHz
Gain Flatness		±0.2		dB	100MHz to 2000MHz
Noise Figure		5.0		dB	Freq=1000MHz
Input VSWR		1.7:1			In a 50Ω system, DC to 4000MHz
Output VSWR		1.7:1			In a 50Ω system, DC to 4000MHz
Output IP ₃		+33		dBm	Freq=1000MHz±50kHz, P _{TONE} =-10dBm
Output P _{1dB}		+17.8		dBm	Freq=1000MHz
Reverse Isolation		18.4		dB	Freq=2000MHz
Thermal					I _{CC} =65mA, P _{DISS} =310mW
Theta _{JC}		173		°C/W	
Maximum junction temperature		142		°C	
Mean Time Between Failures		1.5x10 ³		years	T _{AMB} =+85°C
Mean Time Between Failures		3.7x10 ⁵		years	T _{AMB} =+25°C
Mean Time Between Failures		2.0x10 ⁹		years	T _{AMB} =-40°C
Power Supply					With 22Ω bias resistor
Device Operating Voltage	4.6	5.0	5.6	V	At pin 3 with I _{CC} =65mA
Operating Current		65		mA	

Pin	Function	Description	Interface Schematic
1	RF IN	RF input pin. This pin is NOT internally DC blocked. A DC blocking capacitor, suitable for the frequency of operation, should be used in most applications. DC coupling of the input is not allowed, because this will override the internal feedback loop and cause temperature instability.	
2	GND	Ground connection. Keep traces physically short and connect immediately to ground plane for best performance.	
3	RF OUT	RF output and bias pin. Biasing is accomplished with an external series resistor and choke inductor to V_{CC} . The resistor is selected to set the DC current into this pin to a desired level. The resistor value is determined by the following equation: $R = \frac{(V_{SUPPLY} - V_{DEVICE})}{I_{CC}}$ <p>Care should also be taken in the resistor selection to ensure that the current into the part never exceeds 120mA over the planned operating temperature. This means that a resistor between the supply and this pin is always required, even if a supply near 5.0V is available, to provide DC feedback to prevent thermal runaway. Because DC is present on this pin, a DC blocking capacitor, suitable for the frequency of operation, should be used in most applications. The supply side of the bias network should also be well bypassed.</p>	
4	GND	Same as pin 2.	


4
GENERAL PURPOSE
AMPLIFIERS

Application Schematic

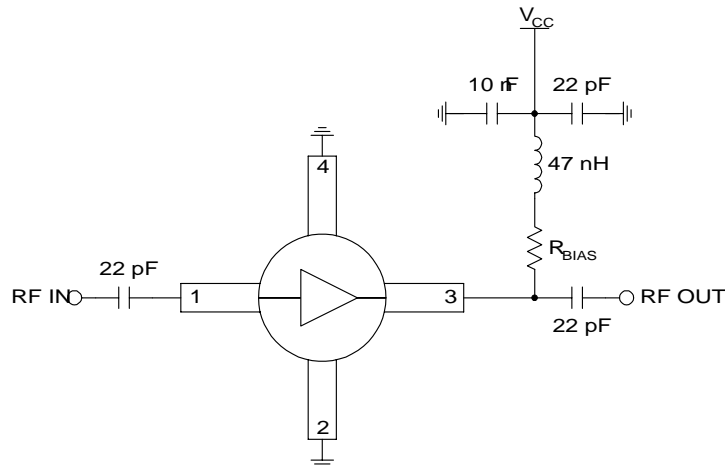

Evaluation Board Schematic

(Download [Bill of Materials](http://www.rfmd.com) from www.rfmd.com.)

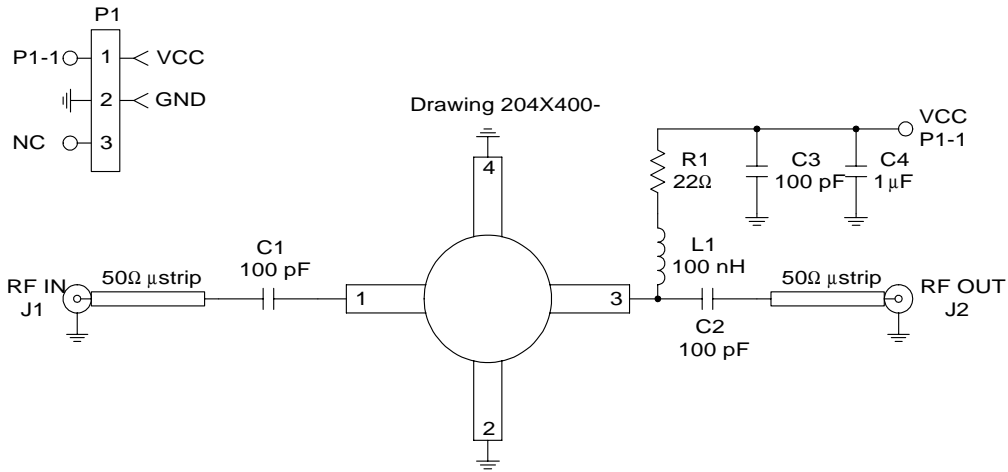

Evaluation Board Layout Board Size 1.195" x 1.000"

