
AHA3411 StarLite

33 MBYTES/SEC SIMULTANEOUS COMPRESSOR/DECOMPRESSOR IC

AHA3411 is a high speed lossless compression coprocessor IC for the hardcopy systems on many standard platforms, including the PCI Bus. The device is targeted for over 30 ppm printers or 50 ppm copiers at 1200 dpi.

Simultaneous compression and decompression, flexible interfaces and advanced banding support make this a unique solution for high performance Raster Image Processing (RIP) controller designs. Advanced banding support handles blank, uncompressed and compressed bands during decompression mode. Scan line and record length counters accommodate various print resolutions and band buffer sizes.

Software simulation and an analysis of the algorithm for printer and copier images of various complexity are available for evaluation.



NOTE: YYWWD = DATE CODE; LLLLL = LOT NUMBER

FEATURES

PERFORMANCE:

- 33 MBytes/sec compression/decompression rates
- 132 MBytes/sec burst data rate over a 32-bit data bus
- 33 MBytes/sec synchronous optional 8-bit video in and video out ports
- Simultaneous compression and decompression at full bandwidth
- Average 15 to 1 compression ratio for 1200 dpi bitmap image data
- Advanced banding support

FLEXIBILITY:

- Big Endian or Little Endian; 32 or 16-bit bus width and data bit/byte reordering for duplex printing support
- Programmable Record Length, Record Count and Scan Length Registers may be prearmed
- Scan line length up to 2K bytes
- Interfaces directly with various Motorola 68xxx and Cold FIRE and Intel i960 processors
- Pass-through mode passes raw data through compression and decompression engines

SYSTEM INTERFACE:


- Single chip compression/decompression solution—no external SRAM required
- Four internal 16 × 32-bit FIFOs
- Maskable interrupts
- Tristatable outputs to facilitate board level testing **OTHERS**:
- Low power modes
- Optional counter checks errors in decompression
- Software emulation program available
- 128 pin quad flat package

APPLICATIONS

- Digital copiers
- Printer controllers
- Multifunction printers and copiers



Figure 1: AHA3411 Block Diagram

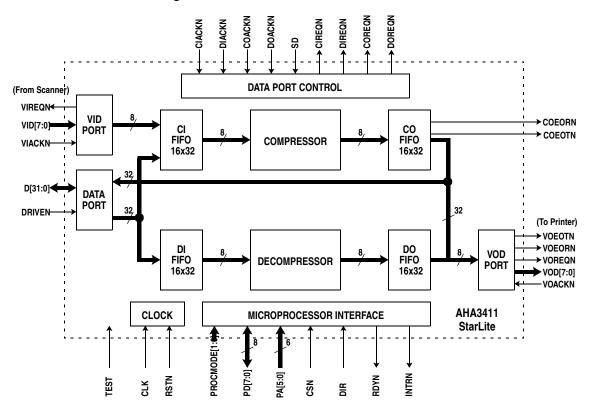

FUNCTIONAL DESCRIPTION

The coprocessor device has three external high speed synchronous data ports each capable of transferring once every 33 MHz clock. These are a 32-bit bidirectional data port, an 8-bit Video Input Data (VID) port and a Video Output Data (VOD) port. The data port is capable of transferring up to 132 MBytes/sec. The VID and VOD are capable of up to 33 MBytes/sec each.

The device accepts uncompressed data through the data port or optionally through the 8-bit VID port into its Compression In FIFO (CI FIFO). Compressed data is available through the data port via the Compressed Output FIFO (CO FIFO). The sustained data rate through the compression engine is 33 MBytes/sec.

Decompression data is accepted through the data port, buffered in the Decompression Input FIFO (DI FIFO), and decompressed. The output data is made available on the data port via the Decompression Output FIFO (DO FIFO) or optionally on the 8-bit Video Output port. The decompression engine runs on the 33 MHz clock and is capable of processing an uncompressed byte every clock, i.e. 33 MBytes/sec.

The four FIFOs are organized as 16×32 each. For data transfers through the three ports, the "effective" FIFO widths differ according to their data bus widths.

Data transfer for compression or decompression is synchronous over the three data ports functioning as DMA masters. To initiate a transfer into or out of the Video ports, the device asserts VxREQN, the external device responds with VxACKN and begins to transfer data over the VID or VOD busses on each succeeding rising edge of the clock until VxREQN is deasserted. The data port relies on the FIFO Threshold settings to determine the transfer.

SYSTEM APPLICATION

The device is intended for memory intensive applications, such as digital copiers or printers. These applications require the simultaneous compression and decompression capability of the device. Copiers use this feature to feed the compressed bit maps through the decompressor to the printer engine while another process uses the compressor to input and compress scanned images. Movement for both processes is typically controlled by a DMA controller that is programmed by the local microprocessor.

StarLite IMAGE COMPRESSION RESULTS - 1200 x 1200 DPI


Uncompressed file size = 16 MBytes; Image dimensions = $10200 \times 13200 \text{ pels}$

FONTS - Simple Text

the total energy density is proportional to the implicate represent. For extrading near we have dE	the total energy density is proportional to the amplitude opened. For a constituy wave or how dE	the total energy density is proportional to the amplitude reported. The conventing wave we have d.E.
$\frac{dx}{dx} = \mu \omega L_1 \cos (\kappa x - \omega x)$	$\frac{dE}{dx} = \mu \omega^2 Z_{\phi} \cos^2(kx - mt)$	$\frac{dE}{dx} = \mu \omega^{\dagger} Z_{\odot} \cos^{2}(kx - \omega t)$
the total energy density in proportional to the amplitude asymmet. Fur a transfling water we have	FOR DOTTE ET ACTION, NEWLY STAFF THAT PROMISE WHO HE. SEE 1994 HOUNTY STAFF TO THE THAT THE STAFF EMPIRICAL EXPONENT OF THE STAFF THAT HE STAFF	FOR SCTS STANDARD WANTED AND TRAVELLING YOU'VE for tread energy density to proportional in the amplitude squared. For a terraling ware we spro-
$\frac{dE}{dx} = \mu \omega^2 Z_4 \cos^2(kx - \omega t)$	$\frac{dE}{dx} = \mu \omega^2 Z_0 \cos^2(kx - \omega \epsilon)$	$\frac{dE}{dx} = \mu \omega^{1} Z_{0} \cos^{2}(kx - \omega t)$
So SAE shedop work and travelling works, the total energy density is proportional to she	For both similing warm and travelling vacus. He need energy dented in proportional to Au	For both standing warm and standing warm, six total energy density is propositional as the
nepřitede squared. For a travelling wave we have $\frac{dE}{dx} = \mu \cos^2 \mathbf{Z}_{\phi} \cos^2 (kx - \omega_d)$	employer spacet. For a transiting ware to have $\frac{dE}{dx} = \mu \cos^2 Z_z \cos^2 (kx - \omega t).$	amplitude equated. For a functing were we have $\frac{dE}{dx} = \mu \cos^{3}(Z_{ij} \cos x^{2}(kx - \omega x))$
For both standing waves and providing waves, the total energy density is proportional to the emplitude squared. For a travelling wave we have		For both statisting wines and incoding warms, the total energy density is proportional to the explicate operand. For a trivialize more we have
$\frac{dE}{ds} = \mu \omega^{2} Z_{\psi} \cos^{2}(kx - \omega t)$	$\frac{dE}{dx} = \mu m^2 Z_0 \cos^2(kx - mr)$	$\frac{dE}{dx} = \mu \omega^2 Z_0 \cos^2(kx - \omega r)$
For both shouling never and traveling warms, the total energy density is propertional to the capitals spared. For a travilley was no ten	For short manning recease and considering sectors, the first energy density is proportional to the augitude expense. The a travelling years we have	For both standing secure and sounding secure, the total energy density is proportional to the acplitude spaced. For a breaking were we have
$\frac{dE}{dx} = \mu \omega^2 Z_0 \cos^2(kx - \omega t)$	$\frac{dE}{dx} = \mu \omega^{3} Z_{p} \cos^{3}(kx - \omega t)$	$\frac{dE}{dx} = \mu \operatorname{m}^{2} \mathbf{Z}_{0} \cos^{2}(kx - \omega t)$
For both standing waves and travelling source, the total energy density is proportional to the amplitude squared. For a travelling source we have $\frac{dE}{dx} = \mu \omega^2 Z_0 \cos^2(kx - \omega r)$	For both standing winns, and assembling manus, the both energy density in proportional to that the section of passes. For a controlling function have $\frac{dE}{dx} = \mu \otimes {}^{\dagger} Z_{\pm} \cos {}^{\dagger} (kx - \omega_{\delta})$	For both strating mores and true-filing various the scall deepy disastly is proportional as the samples of a part of the scall department. For a travelling more we have $\frac{dE}{dx} = \mu \Omega \Delta^2 Z_{\infty} \cos^3(kx - \omega z)$
For both standing report and travelling segres.	fix For both shading wares and instelling eases,	d'x For hely elevelra monta and knowling monte.
the sotal energy density is propositional to the amplitude squared. For a travelling wave we has	the trial energy density to propertional to the or confitted squares. For a travelling more we has	the lotal energy density is popuration in the or intplicate squeed. For a transforg wave sections
$\frac{dE}{dx} = \mu \omega^2 Z_s \cos^3(kx - \omega \epsilon)$	$\frac{dE}{dx} = \mu m^2 Z_{+} \cos^2(kx - \omega r)$	$\frac{dE}{dx} = \mu \omega^2 Z_{\psi} \cos^2(kx - \omega t)$
, the best enemely source and contribute source. In our copy cast is practice in the complicates separated. For a travelling waves we have dE		Pur both standing worse and standing waves, the total energy depity is proportional to the amplitude acquard. For a transling wave we have
$\frac{dE}{dx} = \mu \omega^2 Z_0 \cos^2(kx - \omega t)$	$\frac{dE}{dx} = \mu m^2 Z_c \cos^2(kx - m)$	$\frac{dE}{dx} = \mu \omega^{3} Z_{0} \cos^{3}(kx - \omega t)$
For both stability waves and tracelling waves, the real energy density is proportional to the amplitude equared. For a tracelling state we have $\frac{dE}{dx} = \mu \omega^2 Z_\mu \cos \tau^2 (kx - \omega t)$	The treatment and transformer upon the transformer data of transf	For horizontally name and counting terms, the soul case in density is proportional to the spanned. For a transfer term we have $\frac{dE}{dx} = \mu \varpi^2 Z_{\pm} \cos^2(kx - \omega t)$
We both standing waves and travelling waves, the total carryy density is preparation to the accelerate appeals appeals appeal of $Z_{\rm F}$ and covering wave we have $\frac{dE}{dx} = \mu \omega^2 Z_{\rm F} \cos^2(kx - mz)$	For both modify waves and considing tunes, the total energy details in programmed in the contributed values of the a terrifold wave to have $\frac{dE}{dX} = \pm 48^{5}Z_{ij} < \cos^{2}(kx - 497)$	For both Manking waves and appelling waves, the total energy density is proportional to the standard southeaft southeaft. For a manifelp wave to had $\frac{dE}{d\lambda} = \mu \varpi^2 Z_\phi \cos^2(kx - \omega r)$

Output File Size = 783,848 Compression Ratio = 21.5

MATH - Simple Text and Lineart




Output File Size = 79,245 Compression Ratio = 212.4

MP - Text and Simple Graphics




Output File Size = 86,525 Compression Ratio = 194.5

BENCH2 - Text and Graphics with Pictorials




Output File Size = 424,995 Compression Ratio = 39.6

BALLS - Complex Graphics with Pictorials



Output File Size = 3,665,167 Compression Ratio = 4.6

COMPRESSOR/DECOMPRESSOR FOR MID-RANGE MULTIFUNCTION COPIER/PRINTER APPLICATIONS - AN EXAMPLE



ABOUT AHA

Comtech AHA Corporation (AHA) develops and markets superior integrated circuits, boards, and intellectual property core technology for communications systems architects worldwide. AHA has been setting the standard in Forward Error Correction and Lossless Data Compression technology for many years and provides flexible, cost-effective solutions for today's growing bandwidth and reliability challenges. Comtech AHA Corporation is a wholly owned subsidiary of Comtech Telecommuncations Corp. (NASDAQ: CMTL). For more information, visit www.aha.com.

ORDERING INFORMATION

PART NUMBER	DESCRIPTION
AHA3411A-033 PQC	33 MBytes/sec Simultaneous Compressor/Decompressor IC



A subsidiary of Comtech Telecommunications Corporation