

Photointerrupters(Transmissive)

KODENSHI

LG - 205

The LG - 205 photointerrupter combine high output GaAs IRED with photo IC.

The sensor makes possible easy development of objectdetecting systems with high performance, high reliability and small equipment size.

FEATURES


- Built - in amplifier
- Open collector output

APPLICATIONS

- Floppy disk drives
- Copiers
- Facsimiles

DIMENSIONS

(Unit : mm)

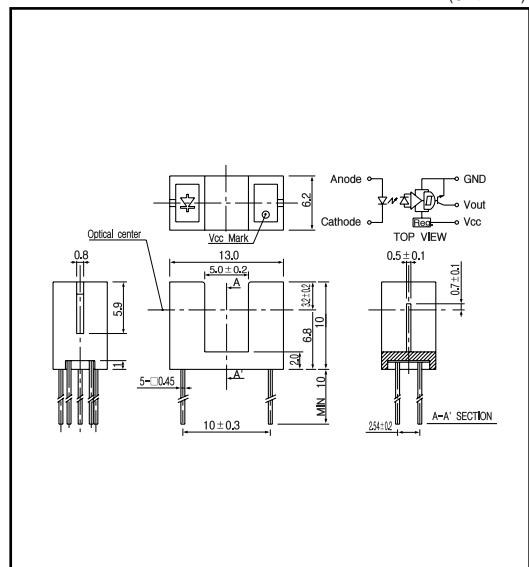

MAXIMUM RATINGS

(Ta=25 °C)

	Item	Symbol	Rating	Unit
Input	Power dissipation	P _D	100	mW
	Reverse voltage	V _R	5	V
	Forward current	I _F	60	mA
Output	Supply voltage	V _{CC}	17	V
	Low level output current	I _{OL}	30	mA
	Power dissipation	P	200	mW
Operating temp.		Toopr.	-20 ~ +85	
Storage temp.		Tstg.	-30 ~ +85	
Soldering temp.*1		Tsol.	260	

*1. For MAX. 5 seconds at the position of 1mm from the package

ELECTRO-OPTICAL CHARACTERISTICS






(Ta=25 °C)

	Item	Symbol	Conditions	Min.	Typ.	Max.	Unit.
Input	Forward voltage	V _F			1.2	1.4	V
	Reverse current	I _R	V _R =5V			10	µA
	Peak wavelength	p			940		nm
Output	Operating supply voltage range	V _{CC}		4.5		16.5	V
	Low level output voltage	V _{OL}	I _{OL} =16mA, V _{CC} =5V, I=0		0.3	0.4	V
	High level output voltage ^{*2}	V _{OH}	I _O =12mA, V _{CC} =5V, R=10K	4.5			V
Transm - ission	Low level supply current	I _{CCL}	V _{CC} =5V, I=0		3	10	mA
	High level supply current	I _{CH}	V _{CC} =5V, I=12mA		3	10	mA
	L _f H threshold input current	I _{PLH}	V _{CC} =5V		5	12	mA
Hysteresis		I _{PHL} /I _{PLH}	V _{CC} =5V	0.5	0.80	0.95	-
L _f H propagation time ^{*3}		t _{PLH}	V _{CC} =5V, I=18mA		1	5	usec.
H _f L propagation time ^{*3}		t _{PHL}	R _L =3.3K		3	15	


*2, *3. refer to measurement diagram as right side.

Photointerrupters(Transmissive)

LG - 205

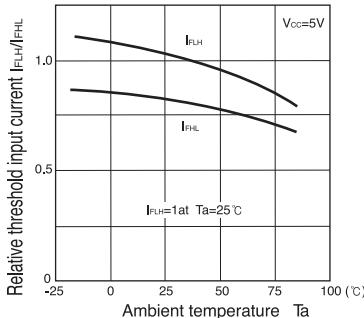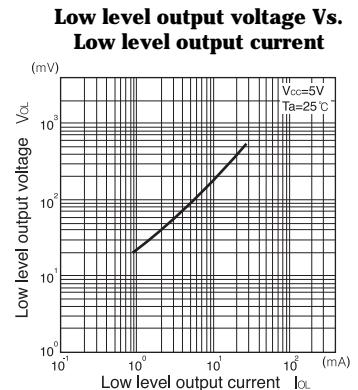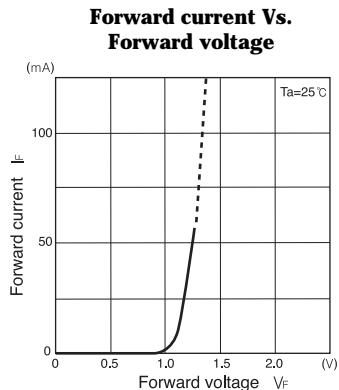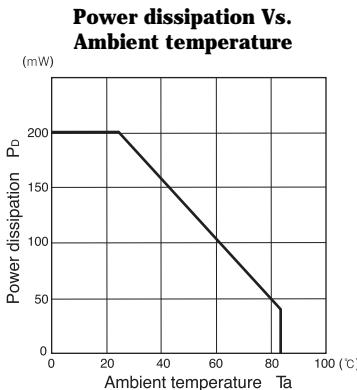

Measurement of high level output voltage



Measurement of propagation time

