

# □ MN1A7T0200

Type	MN1A7T0200		
ROM (x8-bit / x16-bit / x32-bit)	Max. 16 M in total		
RAM (x8-bit / x16-bit / x32-bit)	External ROM and RAM		
Package	FLGA152-C-1111 *Lead-free		
Minimum Instruction Execution Time	100 ns (at 2.3 V to 2.7 V, 20 MHz)		
Interrupts	<ul style="list-style-type: none"> <li>• RESET • IRQ0 to 5 • NMI • Timer 0 to 9 underflow • Timer 8 to 9 compare capture A</li> <li>• Timer 8 to 9 compare capture B • Serial ch.0 to 2 transmission • Serial ch.0 to 2 reception</li> <li>• Serial ch.0 to 2 in communication state • Serial ch.0 to 2 modem status • Serial ch.0 to 2 character</li> <li>• Serial ch.3 to 4 transmission • Serial ch.3 to 4 reception • WDT • A/D conversion finish</li> </ul>		
Timer Counter	<p>Timer counter 0: 16-bit × 1 (interval timer, event count, interrupt, A/D conversion trigger)            Clock source ..... PS0 underflow; PS1 underflow; external clock            Interrupt source ..... timer counter 0 underflow</p> <p>Timer counter 1 to 6: 16-bit × 1 (interval timer, event count, timer output, interrupt)            Clock source ..... PS0 underflow; PS1 underflow; external clock            Interrupt source ..... timer counter 1, 2, 3, 4, 5 or 6 underflow</p> <p>Timer counter 7: 16-bit × 1 (interval timer, event count, timer output, interrupt)            Clock source ..... PS0 underflow; PS1 underflow; external clock input; timer 6 cascade input            Interrupt source ..... timer counter 7 underflow</p> <p>*: timer counter 6 or 7 can be changed in configuration into a 32-bit timer counter.</p> <p>Timer counter 8: 16-bit × 1            (interval timer, event count, output compare, PWM output, one-shot output, input capture, interrupt)            Clock source ..... PS0 underflow; PS1 underflow; external clock input            Interrupt source ..... timer counter 8 underflow; coincidence with compare capture A or at capture;            coincidence with compare capture B or at capture</p> <p>Timer counter 9: 16-bit × 1 (interval timer, event count, output compare, PWM output, one-shot output)            Clock source ..... PS0 underflow; PS1 underflow; external clock input            Interrupt source ..... timer counter 9 underflow; coincidence with compare capture A or at capture;            coincidence with compare capture B or at capture</p> <p>Pre-scaler counters: 2 lines</p>		
Serial Interface	<p>Serial 0, 1, 2 (UART): 5-, 6-, 7-, 8-bit × 3            Clock source ..... baud rate generator; IOCLKH; external clock</p> <p>Serial 3, 4 (SSI): 4- to 16-bit × 2            Clock source ..... IOCLKH; external clock</p>		
I/O Pins	I/O	40	• Common use
A/D Inputs	10-bit × 8-ch.		
PWM	16-bit × 2-ch.		
ICR	16-bit × 2-ch.		
OCR	16-bit × 2-ch.		


**Electrical Characteristics**

**A/D Characteristic**

Parameter	Symbol	Condition	Limit			Unit
			min	typ	max	
Resolution					10	Bits
A/D conversion absolute error		VREFH = 3.0 V VREFL = 0.0 V A/D conversion clock = 6 MHz			± 5	LSB
A/D conversion relative error					± 5	LSB
A/D conversion time			2.0		24	μs

(Ta = 25°C, AVDD = 3.0 V, AVSS = 0 V)

**Pin Assignment**

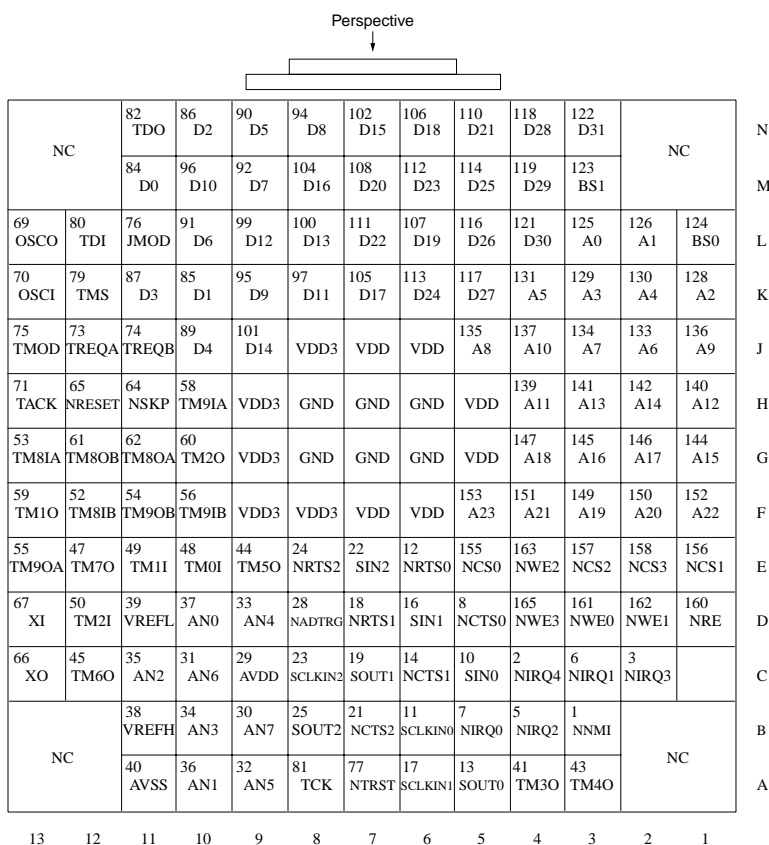

FLGA152-C-1111 \*Lead-free

**Support Tool**

<b>In-circuit Emulator</b>	Advice (YDC product) (applicable to 16- or 8-bit bus mode), UniSTAC (Sophia Systems Co.,Ltd. product)
<b>On-board Development Tools</b>	Multi-ICE (ARM product), JEENI (Embedded Performance Inc. product, TOYO Corporation dealings), Logic Analyzer (Agilent Technologies product) NEXTiCE for ARM7(Computex Co., Ltd. product)
<b>ROM Emulator</b>	PARTNER-ETII (KMC product) NEXTiCE for ARM7(Computex Co., Ltd. product)

## Request for your special attention and precautions in using the technical information and semiconductors described in this material

- (1) An export permit needs to be obtained from the competent authorities of the Japanese Government if any of the products or technologies described in this material and controlled under the "Foreign Exchange and Foreign Trade Law" is to be exported or taken out of Japan.
- (2) The technical information described in this material is limited to showing representative characteristics and applied circuits examples of the products. It neither warrants non-infringement of intellectual property right or any other rights owned by our company or a third party, nor grants any license.
- (3) We are not liable for the infringement of rights owned by a third party arising out of the use of the product or technologies as described in this material.
- (4) The products described in this material are intended to be used for standard applications or general electronic equipment (such as office equipment, communications equipment, measuring instruments and household appliances).  
Consult our sales staff in advance for information on the following applications:
  - Special applications (such as for airplanes, aerospace, automobiles, traffic control equipment, combustion equipment, life support systems and safety devices) in which exceptional quality and reliability are required, or if the failure or malfunction of the products may directly jeopardize life or harm the human body.
  - Any applications other than the standard applications intended.
- (5) The products and product specifications described in this material are subject to change without notice for modification and/or improvement. At the final stage of your design, purchasing, or use of the products, therefore, ask for the most up-to-date Product Standards in advance to make sure that the latest specifications satisfy your requirements.
- (6) When designing your equipment, comply with the guaranteed values, in particular those of maximum rating, the range of operating power supply voltage, and heat radiation characteristics. Otherwise, we will not be liable for any defect which may arise later in your equipment.  
Even when the products are used within the guaranteed values, take into the consideration of incidence of break down and failure mode, possible to occur to semiconductor products. Measures on the systems such as redundant design, arresting the spread of fire or preventing glitch are recommended in order to prevent physical injury, fire, social damages, for example, by using the products.
- (7) When using products for which damp-proof packing is required, observe the conditions (including shelf life and amount of time let standing of unsealed items) agreed upon when specification sheets are individually exchanged.
- (8) This material may be not reprinted or reproduced whether wholly or partially, without the prior written permission of Matsushita Electric Industrial Co., Ltd.