


2OUTPUT LOW DROPOUT VOLTAGE REGULATOR

■GENERAL DESCRIPTION

The NJM2892 is a 2ch low dropout voltage regulator with ON/OFF Control in SOT-23 package.

It is suitable for camcorder, IC decoder, camera and other portable items.

■PACKAGE OUTLINE




NJM2892F1

■FEATURES

- High Ripple Rejection 70dB typ. at $f=1\text{kHz}$
- Low Noise 45 μV_{rms} typ.
- Output capacitor with 1.0 μF ceramic capacitor at $V_o \geq 2.7\text{V}$
- Output Current $I_o(\text{max.})=100\text{mA} \times 2\text{ch}$
- High Precision Output $\pm 1.0\%$
- Low Dropout Voltage 0.1V typ. at $I_o=60\text{mA}$
- ON/OFF Control
- Internal Thermal Overload Protection
- Internal Short Circuit Current Limit
- Bipolar Technology
- Package Outline SOT-23-6

■PIN CONFIGURATION




NJM2892F1

PIN FUNCTION

1. $V_{\text{OUT}2}$	4. CONTROL1
2. GND	5. V_{IN}
3. $V_{\text{OUT}1}$	6. CONTROL2

■EQUIVALENT CIRCUIT

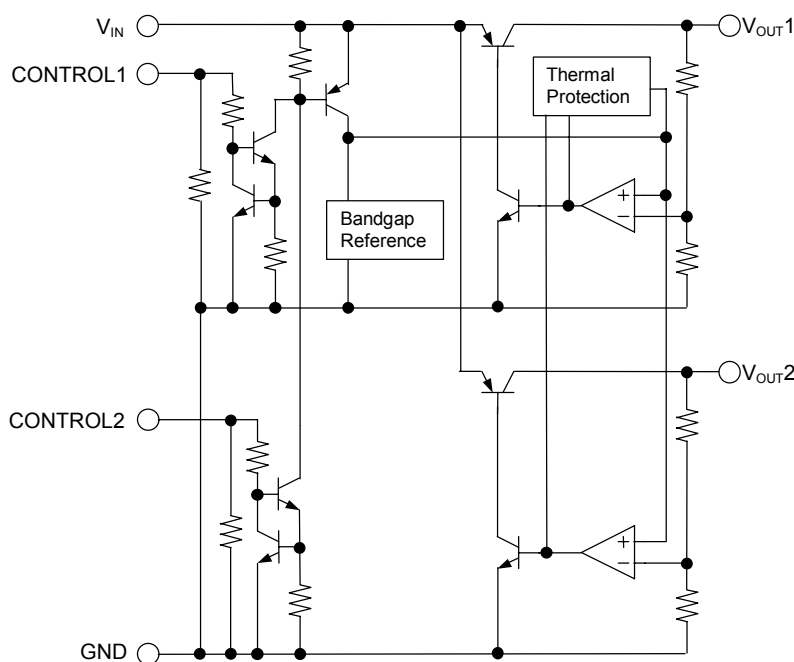

■ABSOLUTE MAXIMUM RATINGS (Ta=25°C)

PARAMETER	SYMBOL	RATINGS	UNIT
Input Voltage	V_{IN}	+14	V
Control Voltage	V_{CONT}	+14(note1)	V
Power Dissipation	P_D	200	mW
Operating Temperature	T_{opr}	-40 to +85	°C
Storage Temperature	T_{stg}	-40 to +125	°C

(note1) When input voltage is less than +14V, the absolute maximum control voltage is equal to the input voltage.

■ELECTRICAL CHARACTERISTICS

($V_{IN}=V_o+1V$, $C_{IN}=0.1\mu F$, $C_o=1.0\mu F$: $V_o\geq 2.7V$ ($C_o=2.2\mu F$: $V_o\leq 2.6V$), $T_a=25^\circ C$)


PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Output Voltage	V_o	$I_o=30mA$	-1.0%	-	+1.0%	V
Quiescent Current1	I_{Q1}	$V_{CONT1}=V_{IN}$, $V_{CONT2}=0V$ or $V_{CONT2}=V_{IN}$, $V_{CONT1}=0V$ $I_o=0mA$, expect I_{cont}	-	140	220	μA
Quiescent Current2	I_{Q2}	$V_{CONT1}=V_{CONT2}=V_{IN}$ $I_o=0mA$, expect I_{cont}	-	240	370	μA
Quiescent Current at Control OFF	$I_{Q(OFF)}$	$V_{CONT}=0V$	-	-	100	nA
Output Current	I_o	$V_o=0.3V$	100	130	-	mA
Line Regulation	$\Delta V_o/\Delta V_{IN}$	$V_{IN}=V_o+1V$ to V_o+6V , $I_o=30mA$	-	-	0.10	%/V
Load Regulation	$\Delta V_o/\Delta I_o$	$I_o=0$ to $60mA$	-	-	0.03	%/mA
Dropout Voltage	ΔV_{I-O}	$I_o=60mA$	-	0.10	0.18	V
Ripple Rejection	RR	$e_{in}=200mV_{rms}$, $f=1kHz$, $I_o=10mA$, $V_o=3V$	-	70	-	dB
Average Temperature Coefficient of Output Voltage	$\Delta V_o/\Delta T_a$	$T_a=0\sim 85^\circ C$, $I_o=10mA$	-	± 50	-	ppm/°C
Output Noise Voltage	V_{NO}	$f=10Hz$ to $80kHz$, $I_o=10mA$, $V_o=3V$	-	45	-	μV_{rms}
Control Voltage for ON-state	$V_{CONT(ON)}$		1.6	-	-	V
Control Voltage for OFF-state	$V_{CONT(OFF)}$		-	-	0.6	V

(note2) Please confirm the specification separately because some parameters depend on output voltage.

■OUTPUT VOLTAGE RANK LIST

Device Name	VOUT	
	CH1	CH2
NJM2892F1-2121	2.1V	2.1V
NJM2892F1-0303	3.0V	3.0V
NJM2892F1-0521	5.0V	2.1V

■TEST CIRCUIT

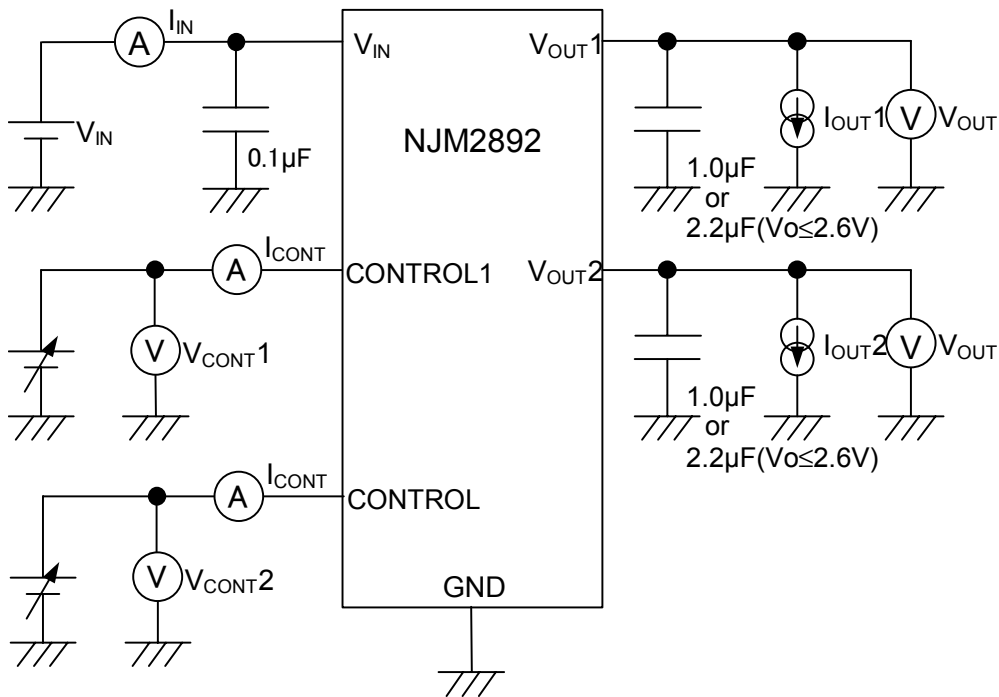


■TYPICAL APPLICATION


(1) In the case where ON/OFF Control is not required:

Connect control terminal to VIN terminal

In case a resistance "R" is used, the quiescent current will be decreased. However, the but minimum operating voltage will be increase as well. Please refer to a figure of Output Voltage vs. Control Voltage.

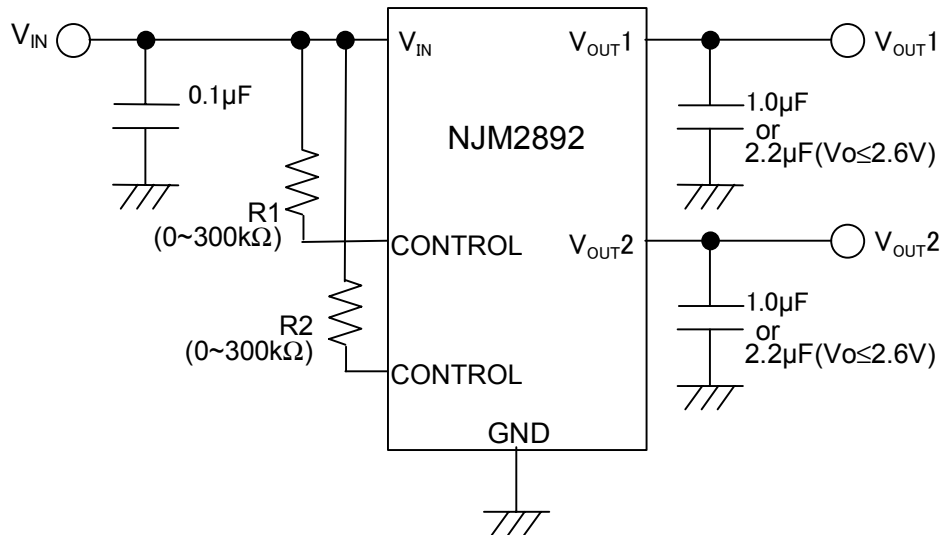

(2) In use of ON/OFF Control:

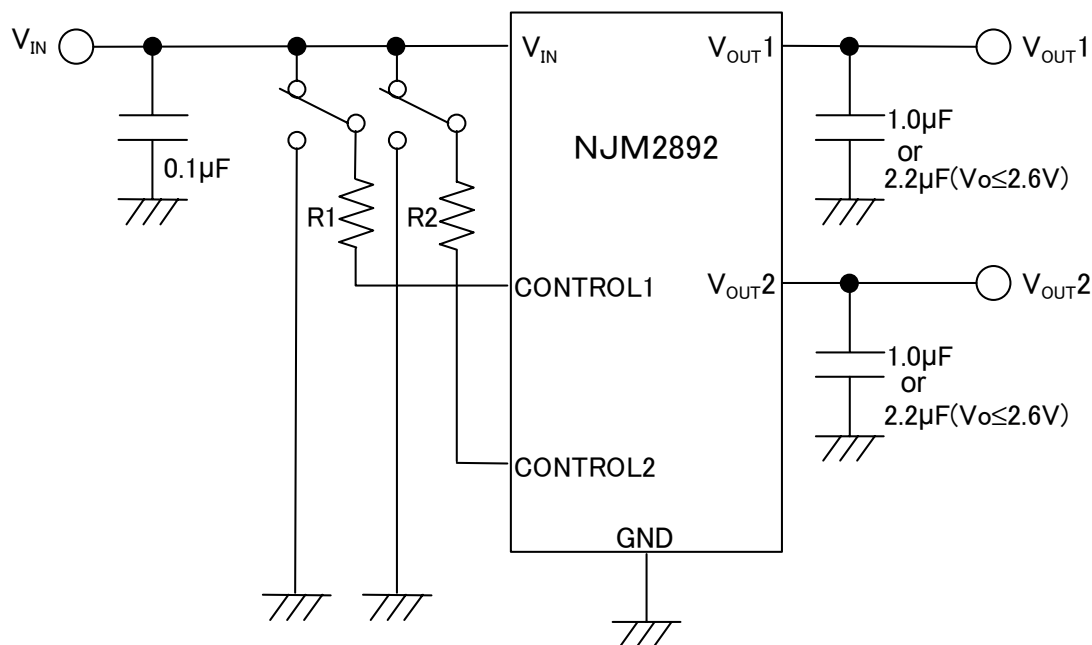

In case the control terminal is "H", the output is enabled.
The control terminal is "L" or "open", the output is disabled.

[CAUTION]

The specifications on this databook are only given for information, without any guarantee as regards either mistakes or omissions. The application circuits in this databook are described only to show representative usages of the product and not intended for the guarantee or permission of any right including the industrial rights.