



## LDP24A


### TRANSIENT PROTECTION LOAD DUMP

#### FEATURES

- TRANSIENT VOLTAGE SUPPRESSOR DIODE ESPECIALLY DESIGNED FOR LOAD DUMP PROTECTION
- COMPLIANT WITH MAIN STANDARDS SUCH AS:  
ISO / DTR 7637

#### DESCRIPTION

Transient voltage suppressor diodes especially useful in protecting integrated circuits, MOS, hybrids and other overvoltages sensitive semiconductors and components.

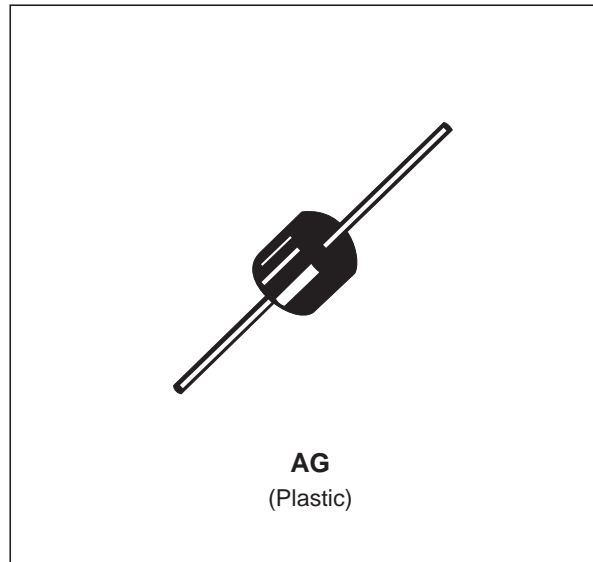

#### ABSOLUTE RATINGS (limiting values)

Symbol	Parameter		Value	Unit
$V_{PP}$	Peak pulse load dump overvoltage See note 1	$T_{amb} = 85^{\circ}C$	100	V
P	Power dissipation on infinite heatsink	$T_{amb} = 100^{\circ}C$	5	W
$I_{FSM}$	Non repetitive surge peak forward current.	$T_j$ initial = $25^{\circ}C$ $t_p = 10$ ms	500	A
$T_{stg}$	Storage temperature range.		- 65 to + 175	$^{\circ}C$
$T_j$	Maximum operating temperature		175	$^{\circ}C$
$T_L$	Maximum lead temperature for soldering during 10 sec at 4 mm from case.		230	$^{\circ}C$


#### THERMAL RESISTANCES

Symbol	Parameter	Value	Unit
$R_{th(j-a)}$	Junction ambient thermal resistance on infinite heatsink $L_{lead} = 10$ mm	15	$^{\circ}C/W$

**Note 1:** For surges greater than the maximum values, the diode will present a short-circuit Anode - Cathode.


**ELECTRICAL CHARACTERISTICS**

Symbol	Parameter
$V_{RM}$	Stand-off voltage.
$V_{BR}$	Breakdown voltage.
$V_{CL}$	Clamping voltage.
$I_{PP}$	Peak pulse current.
$\alpha T$	Temperature coefficient of $V_{BR}$ .
C	Capacitance
$I_{RM}$	Leakage current at $V_{RM}$
$V_F$	Peak forward voltage drop ( $I_{FM} = 10A$ ) $V_F = 0.9$ Volt Typ.

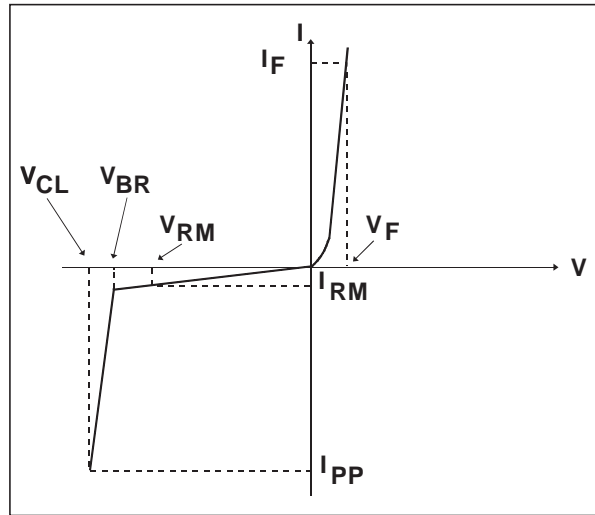


Symbol	Test Conditions	Min.	Typ.	Max.	Unit
$I_{pp}$	Pulse duration: 300ms			30	A
$I_{RM}$	$T_L = 25^\circ C$ $T_L = 85^\circ C$			50 300	$\mu A$ $\mu A$
$V_{BR}$	$T_L = 25^\circ C$ $I_R = 1mA$	25		32	V
$V_{CL}$	$T_L = 85^\circ C$ see table1			40	V
$\alpha T$				10	$10^{-4}/^\circ C$
C	$F = 1MHz$ $V_R = 0V$		8000		pF


**LOAD DUMP TEST GENERATOR CIRCUIT (SCHAFFNER NSG 506 C). Issued from ISO / DTR 7637.**

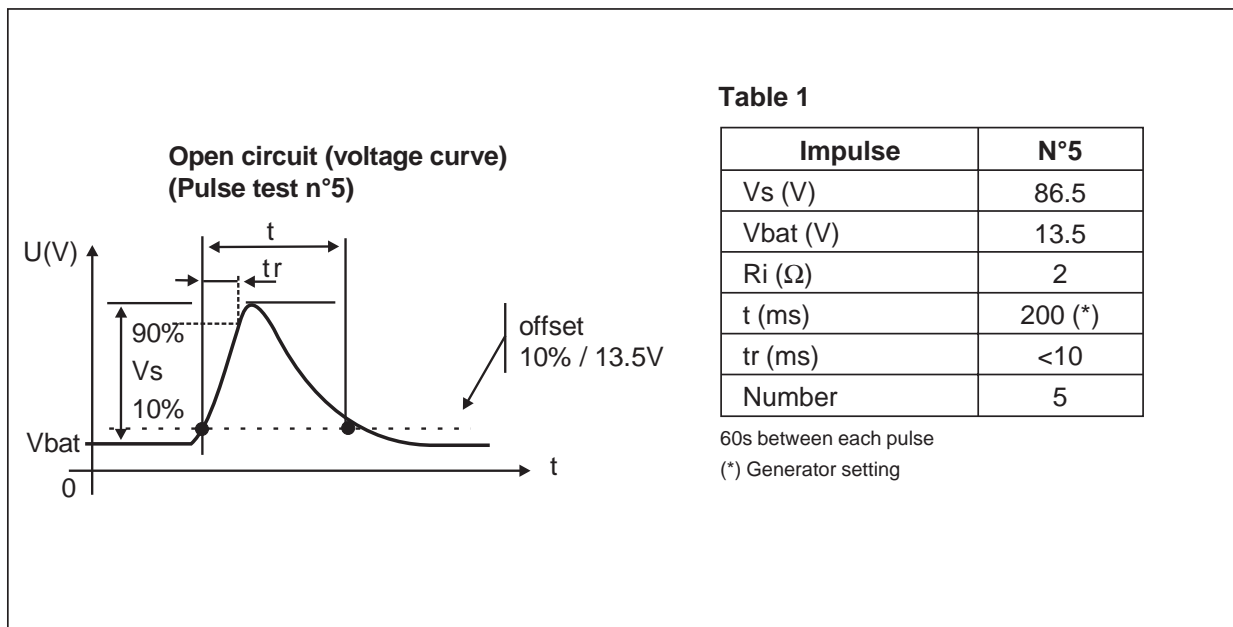


**Fig. 1:** Peak pulse power versus exponential pulse duration ( $T_j$  initial=85°C).

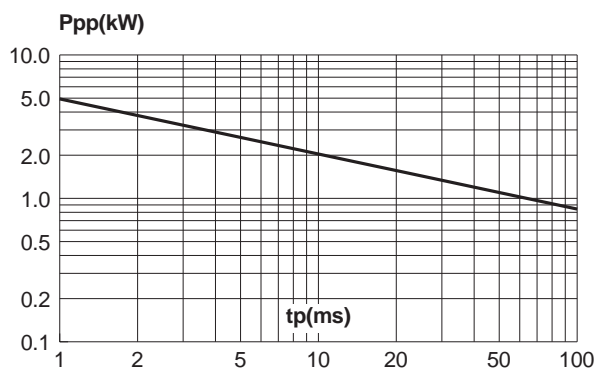


**Fig. 2 :** Peak pulse current versus exponential pulse duration ( $T_j$  initial=85°C).

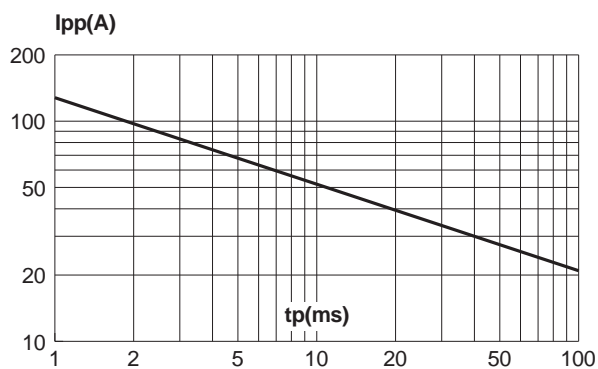


**Fig. 3:** Relative variation of peak pulse power versus junction temperature.

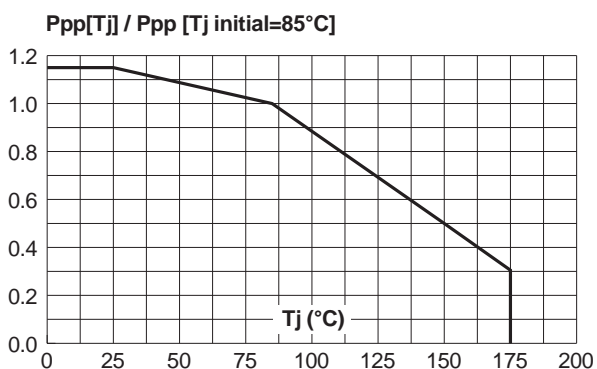


**Fig. 4:** Continuous power dissipation versus ambient temperature.

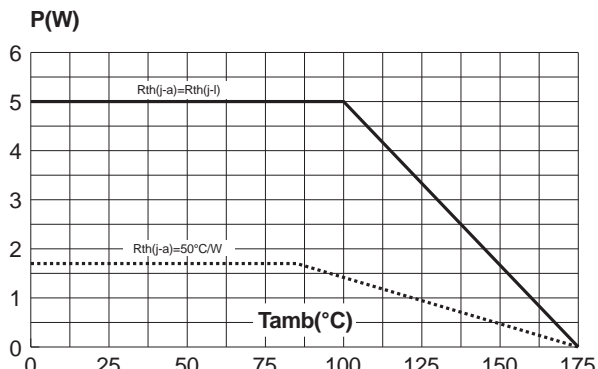

**Fig. 5:** Variation of thermal impedance junction to ambient versus pulse duration (printed circuit board FR4,  $\epsilon(\text{Cu})=35\mu\text{m}$ ,  $\text{SCu}=1\text{cm}^2$ ).

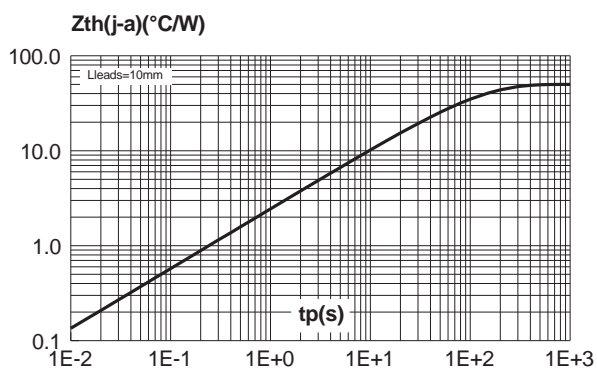


**Fig. 6 :** Peak forward voltage drop versus peak forward current (typical values).

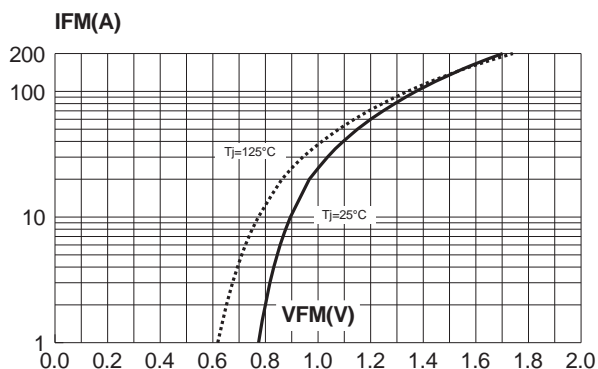


## LDP24A


**Fig. 7:** Non repetitive surge peak forward current versus sinusoidal pulse duration and corresponding value of  $I^2t$ .

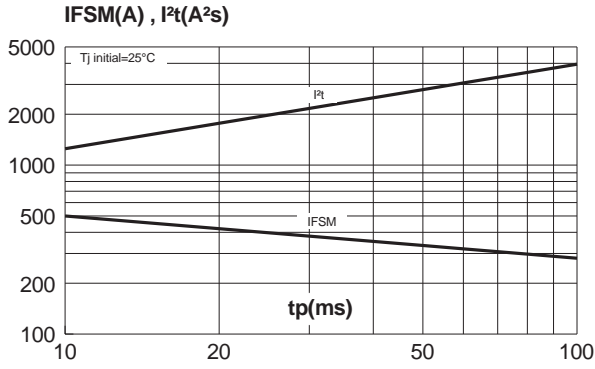


**Fig. 8:** Junction capacitance versus reverse applied voltage.

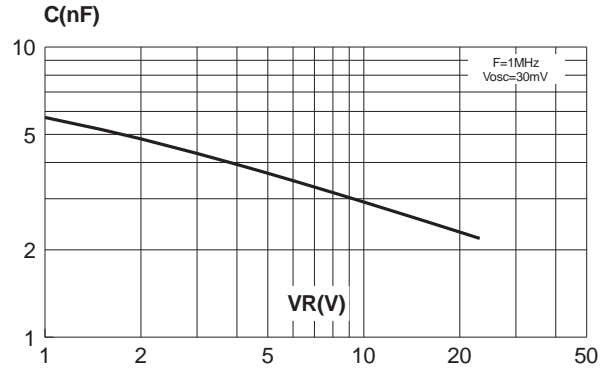

## ORDER CODE

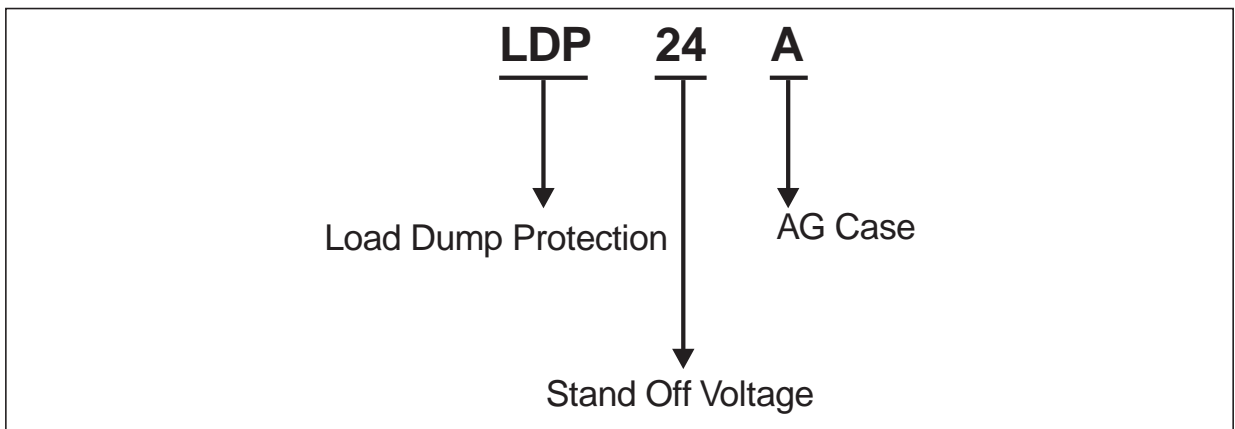

**PACKAGE MECHANICAL DATA**  
AG (Plastic)

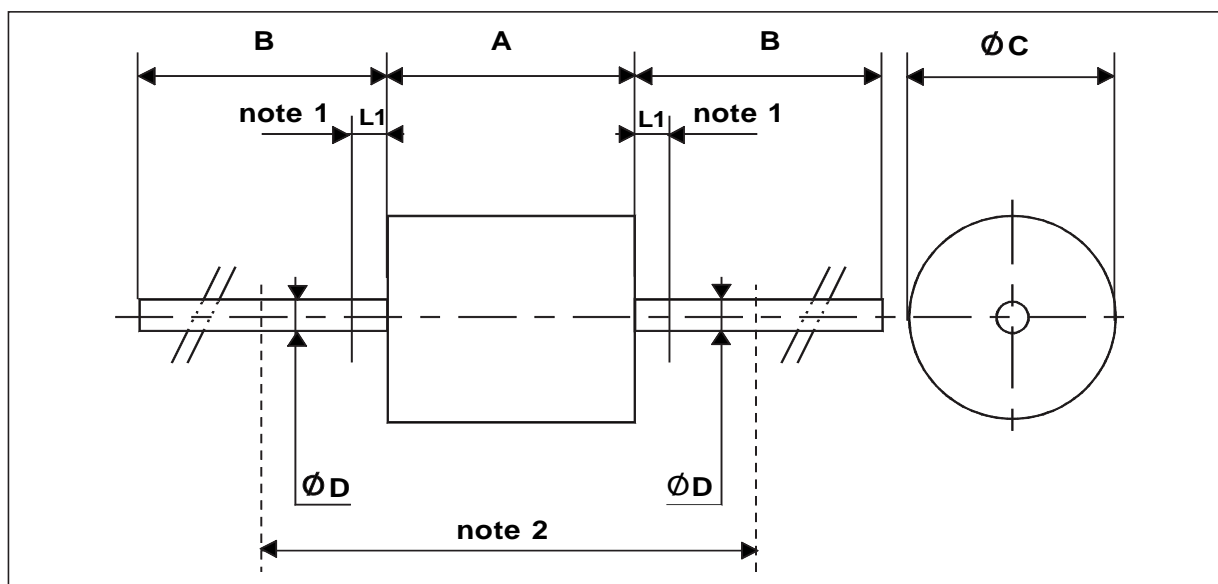

REF.	DIMENSIONS				NOTES
	Millimeters		Inches		
	Min.	Max.	Min.	Max.	
A		9		0.354	1- The lead is not controlled within zone L1. 2- The minimum axial length within which the device may be placed bent at right angles is 0.79" (20 mm).
B	20		0.787		
Ø C		8		0.315	
Ø D	1.35	1.45	0.053	0.057	
L1		1.27		0.050	

Type	Marking	Package	Weight	Base qty	Delivery mode
LDP24A	LDP24A	AG	2.16g	100	Ammopack
LDP24ARL	LDP24A	AG	2.16g	1000	Tape & Reel

- Resin meets UL94-V0

Information furnished is believed to be accurate and reliable. However, STMicroelectronics assumes no responsibility for the consequences of use of such information nor for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of STMicroelectronics. Specifications mentioned in this publication are subject to change without notice. This publication supersedes and replaces all information previously supplied. STMicroelectronics products are not authorized for use as critical components in life support devices or systems without express written approval of STMicroelectronics.

The ST logo is a registered trademark of STMicroelectronics

© 2000 STMicroelectronics - Printed in Italy - All rights reserved.

STMicroelectronics GROUP OF COMPANIES

Australia - Brazil - China - Finland - France - Germany - Hong Kong - India - Italy - Japan - Malaysia  
Malta - Morocco - Singapore - Spain - Sweden - Switzerland - United Kingdom - U.S.A.

<http://www.st.com>