



# SAW Components

Data Sheet B3896





SAW Components

B3896

Low-Loss Filter

169,0 MHz

Data Sheet


Ceramic package DCC12A

Features

- Low-loss IF-filter for WCDMA base stations
- Usable bandwidth 4,0 MHz
- Ceramic SMD package

Terminals


- Gold plated

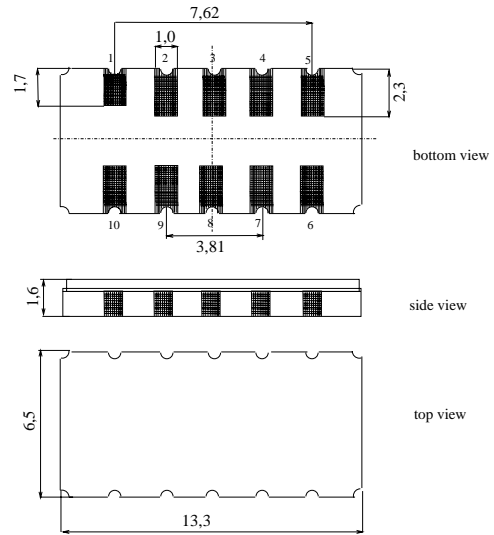

Dimensions in mm, approx. weight 0,4

Pin configuration

- |            |                 |
|------------|-----------------|
| 1, 10      | Balanced Input  |
| 5, 6       | Balanced Output |
| 3, 8       | Ground          |
| 2, 4, 7, 9 | Case ground     |

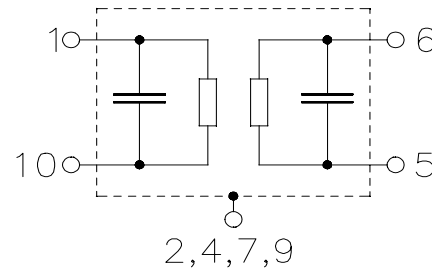

Type	Ordering code	Marking and Package according to	Packing according to
B3896	B39171-B3896-H510	C61157-A7-A94	F61074-V8163-Z000

Electrostatic Sensitive Device (ESD)

Maximum ratings

Operable temperature range	$T_A$	-40 / +85	°C	
Storage temperature range	$T_{stg}$	-40 / +85	°C	
DC voltage	$V_{DC}$	0	V	
Source power	$P_s$	10	dBm	average over 1 ms
Source power	$P_s$	20	dBm	peak < 1 $\mu$ s in passband



**SAW Components**

**B3896**

**Low-Loss Filter**

**169,0 MHz**

**Data Sheet**

**Characteristics**

Operating temperature range:  $T_A = -40 \dots 85 \text{ }^\circ\text{C}$   
 Terminating source impedance:  $Z_S = 200 \text{ } \Omega$  balanced and matching network  
 Terminating load impedance:  $Z_L = 200 \text{ } \Omega$  balanced and matching network  
 Group delay aperture: 150 kHz

		min.	typ.	max.	
<b>Nominal frequency</b>	$f_N$	—	169,0	—	MHz
<b>Minimum insertion attenuation</b>	$\alpha_{\min}$	—	8,5	10,5	dB
<b>Amplitude ripple (p-p)</b>	$\Delta\alpha$				
	$f_N \pm 2,0 \text{ MHz}$	—	0,5	0,9	dB
<b>Group delay ripple (p-p)</b>	$\Delta\tau$				
	$f_N \pm 2,0 \text{ MHz}$	—	100	150	ns
<b>Absolute group delay</b>	$\tau$				
mean value within $f_N \pm 2,0 \text{ MHz}$		1150	1175	1200	ns
<b>VSWR<sup>1)</sup></b>					
	$f_N \pm 2,0 \text{ MHz}$	—	1,6:1	2,2:1	
<b>Relative attenuation (relative to <math>\alpha_{\min}</math>)</b>	$\alpha_{\text{rel}}$				
	$f_N \pm 3,0 \text{ MHz} \dots f_N \pm 3,5 \text{ MHz}$	9	14	—	dB
	$f_N \pm 3,5 \text{ MHz} \dots f_N \pm 5,0 \text{ MHz}$	23	30	—	dB
	$f_N - 11,0 \text{ MHz} \dots f_N - 5,0 \text{ MHz}$	44	48	—	dB
	22 MHz ... 158,0 MHz	50	55	—	dB
	$f_N + 5,0 \text{ MHz} \dots f_N + 13,0 \text{ MHz}$	40	44	—	dB
	$f_N + 13,0 \text{ MHz} \dots f_N + 23,0 \text{ MHz}$	47	50	—	dB
	192,0 MHz ... 500 MHz	50	60	—	dB
	500,0 MHz ... 2,5 GHz	40	50	—	dB
<b>Adjacent channel selectivity<sup>2)</sup></b>	<b>ACS</b>				
	first adjacent channel	23	30	—	dB
	second adjacent channel	49	51	—	dB

1) VSWR only guaranteed for the temperature range  $-25 \dots 85 \text{ }^\circ\text{C}$

2) Adjacent channels centered at 169 MHz+ k\*5 MHz (k=-2,-1,1,2), Suppression of HPSK signal with 3,84 MHz bandwidth



**SAW Components**

**B3896**

**Low-Loss Filter**

**169,0 MHz**


**Data Sheet**

<b>Impedance</b> at $f_N$ (without matching)					
Input: $Z_{IN} = R_{IN} \parallel C_{IN}$		—	0,23 $\parallel$ 19	—	k $\Omega$ $\parallel$ pF
Output: $Z_{OUT} = R_{OUT} \parallel C_{OUT}$		—	1,14 $\parallel$ 5,6	—	k $\Omega$ $\parallel$ pF
<b>Temperature coefficient of frequency</b>	$TC_f$	—	-18	—	ppm/K

**Matching network to 200  $\Omega$  input balanced and 200  $\Omega$  output balanced:**

4:1 transformer is only required for measurement in a 50  $\Omega$  environment

(Element values depend upon PCB layout)

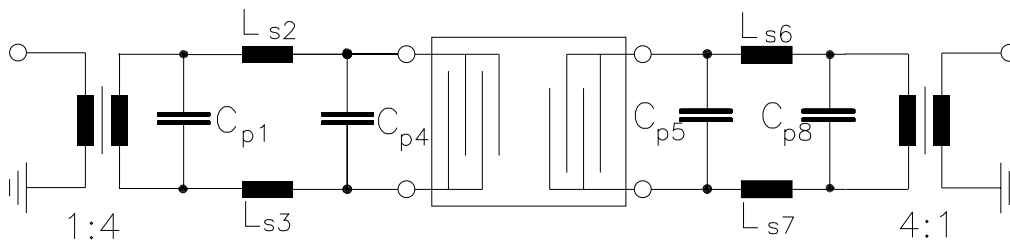

$C_{p1} = 22 \text{ pF}$

$L_{s2} = 27 \text{ nH}$

$L_{s3} = 27 \text{ nH}$

$C_{p4} = 5,6 \text{ pF}$

$C_{p5} = 1,2 \text{ pF}$

$L_{s6} = 82 \text{ nH}$


$L_{s7} = 82 \text{ nH}$

$C_{p8} = 15 \text{ pF}$




Data Sheet

Normalized transfer function

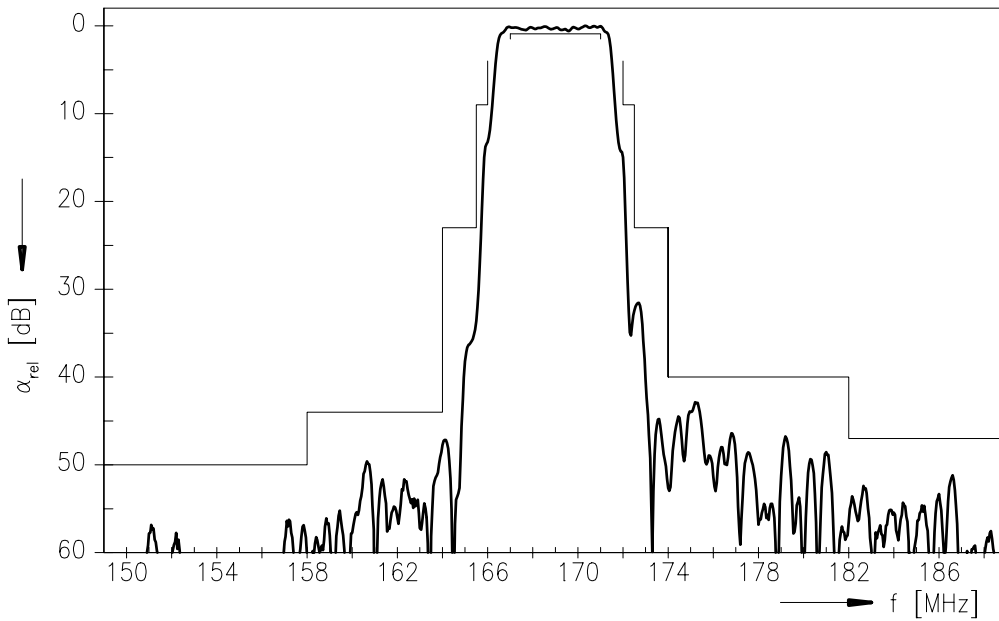

Normalized transfer function (pass band)

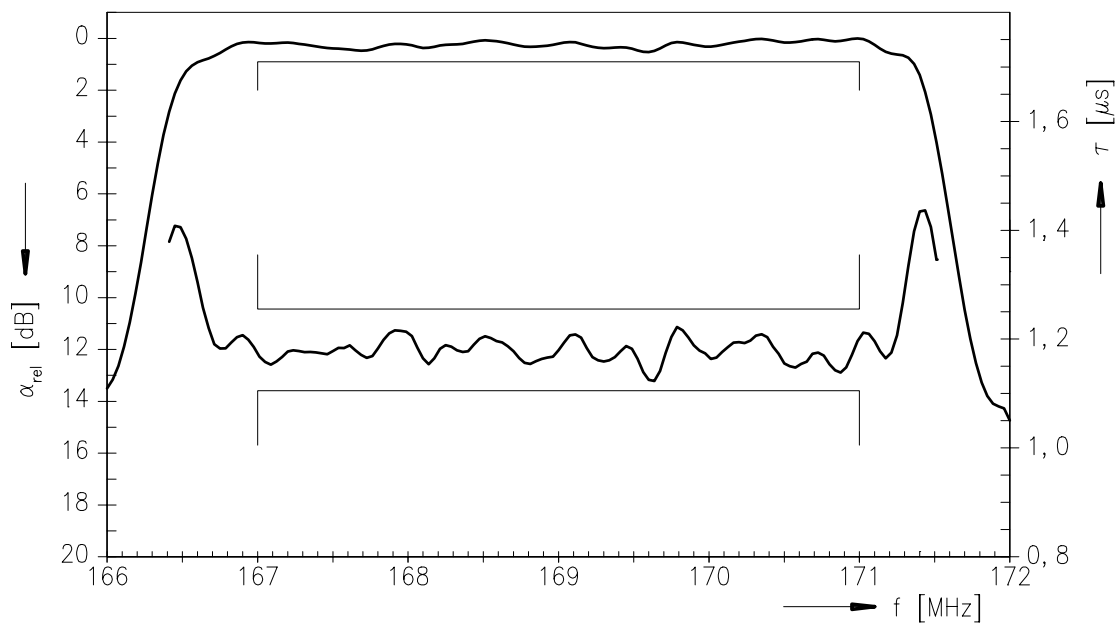



**SAW Components**

**B3896**

**Low-Loss Filter**

**169,0 MHz**

Data Sheet

**Published by EPCOS AG**

**Surface Acoustic Wave Components Division, SAW MC**

**P.O. Box 80 17 09, 81617 Munich, GERMANY**

© EPCOS AG 2003. Reproduction, publication and dissemination of this brochure and the information contained therein without EPCOS' prior express consent is prohibited.

Purchase orders are subject to the General Conditions for the Supply of Products and Services of the Electrical and Electronics Industry recommended by the ZVEI (German Electrical and Electronic Manufacturers' Association), unless otherwise agreed.

This brochure replaces the previous edition.

For questions on technology, prices and delivery please contact the Sales Offices of EPCOS AG or the international Representatives.

Due to technical requirements components may contain dangerous substances. For information on the type in question please also contact one of our Sales Offices.