



# YMF781

## APL-1 Automobile sound PLayer-1

---

### ■ Overview

YMF781 (APL-1: hereinafter described as APL-1) is an LSI, integrating synthesizer, ADPCM decoder and a CPU for control in one chip.

Various sounds used in common automobiles, motor cycles, and electric appliances, such as alarm sound, operation sound, and melody sound, and pseudo engine sound for an electric car can be generated with a little CPU load.

A control CPU incorporated enables APL-1 control by a simple command (API) from the external host CPU.

**Note: For API, refer to the APL-1 API specifications.**

### ■ Features


- CPU is incorporated and enabling controls for synthesizer and other functions by the simple commands.
- Stereo hybrid synthesizer that can generate up to 64 voices simultaneously.
- Time change low pass filter function by AL (Analog Lite) synthesizer is built in.
- ADPCM and PCM stream playback is possible.
- The default tone for FM and Wave Table synthesizer is built in ROM, and registration of a tone to SRAM is possible.
- Speaker amplifier and equalizer circuit is built in.
- Stereo / monaural analog output terminal is equipped.
- Two control circuits for LED lighting are built in.  
The synchronization with contents and compulsive control are also possible.
- The inspection function is built in as an external memory interface function.
- APL-1 control interface  
Three interfaces are provided: Clock Sync Serial, Asynchronous Serial (UART) and Command Port (Mode, which identify commands by the changes of bus.)
- Power down function is built in.
- Input and output port  
Some terminals can be used as an Input/Output port, which can be controlled from the host CPU.
- Malfunction prevention function owing to the electrostatic noise and electromagnetic noise is built in.
- Core power supply 3.3V (3.0V to 3.6V)
- I/O power supply 3.3V and 5.0V are changed. 3.3V (3.0V to 3.6V) 5.0V(4.75V to 5.25V)
- Speaker amplifier power supply 3.3V (3.0V to 3.6V)
- 100pin plastic SQFP, pin lead plating with Pd-free (YMF781-SZ)

---

YAMAHA CORPORATION

|                           |
|---------------------------|
| YMF781 CATALOG            |
| CATALOG No.: LSI-4MF781A3 |
| 2004.10                   |

## Terminal Assignment

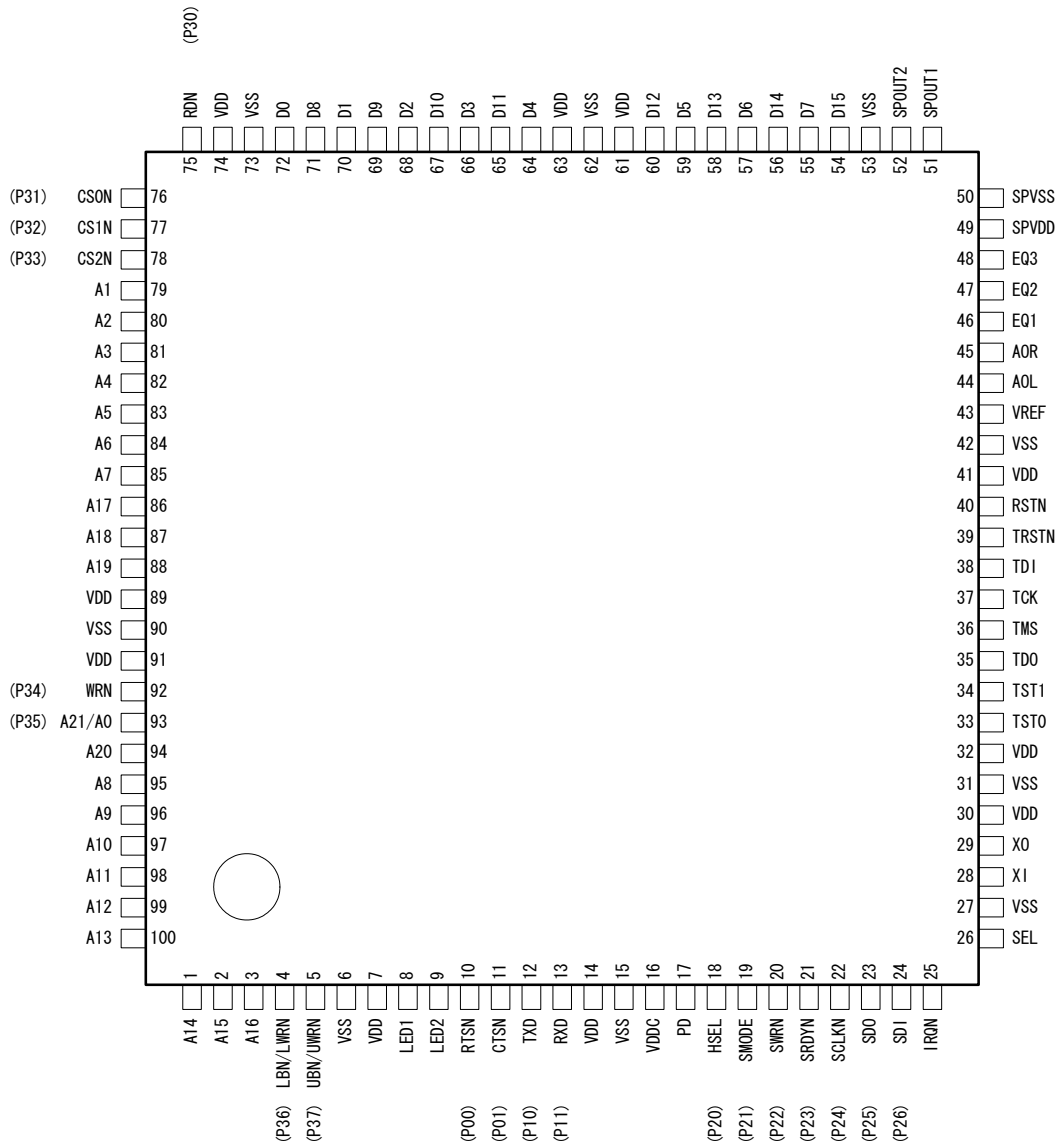

< 100 pin SQFP Top View >

## ■ Terminal Functions

| No. | Terminal Name (Port) | I/O (Output Type) | Functions  |
|-----|----------------------|-------------------|--|
| 1   | A14                  | O (4mA)           | External memory Address bus 14   |
| 2   | A15                  | O (4mA)           | External memory Address bus 15   |
| 3   | A16                  | O (4mA)           | External memory Address bus 16   |
| 4   | LBN/LWRN (P36)       | O (4mA)           | External memory Low byte enable  |
| 5   | UBN/UWRN (P37)       | O (4mA)           | External memory Upper byte enable  |
| 6   | VSS                  | -                 | Ground   |
| 7   | VDD                  | -                 | Power Supply (3.3V)  |
| 8   | LED1                 | O (4mA)           | LED output 1   |
| 9   | LED2                 | O (4mA)           | LED output 2   |
| 10  | RTSN (P00)           | O (4mA)           | Asynchronous Serial (UART) transmission request output VDDC is used      |
| 11  | CTSN (P01)           | Ish               | Asynchronous Serial (UART) transmission request input VDDC is used       |
| 12  | TXD (P10)            | O (4mA)           | Asynchronous Serial (UART) transmission output VDDC is used              |
| 13  | RXD (P11)            | Ish               | Asynchronous Serial (UART) reception input VDDC is used                  |
| 14  | VDD                  | -                 | Power supply (3.3V)  |
| 15  | VSS                  | -                 | Ground   |
| 16  | VDDC                 | -                 | Power supply (3.3V/5.0V)   |
| 17  | PD                   | Ish               | Power-down VDDC is used  |
| 18  | HSEL (P20)           | Ish               | Serial interface selection (Asynchronous / clock sync) VDDC is used      |
| 19  | SMODE (P21)          | Ish               | Clock sync serial mode selection (MSB/LSB first) VDDC is used            |
| 20  | SWRN (P22)           | Ish               | Clock sync serial write enable VDDC is used                              |
| 21  | SRDYN (P23)          | Ish/O (4mA)       | Clock sync serial ready VDDC is used                                     |
| 22  | SCLKN (P24)          | Ish               | Clock sync serial clock VDDC is used                                     |
| 23  | SDO (P25)            | Ish/O (4mA)       | Clock sync serial data output VDDC is used                               |
| 24  | SDI (P26)            | Ish               | Clock sync serial data input VDDC is used                                |
| 25  | IRQN                 | O (4mA)           | Interrupt output VDDC is used  |
| 26  | SEL                  | Ish               | Port selection (clock sync serial / port2) VDDC is used                  |
| 27  | VSS                  | -                 | Ground   |
| 28  | XI                   | I                 | X'tal connection   |
| 29  | XO                   | O                 | X'tal connection   |
| 30  | VDD                  | -                 | Power supply (3.3V)  |
| 31  | VSS                  | -                 | Ground   |
| 32  | VDD                  | -                 | Power supply (3.3V)  |
| 33  | TST0                 | Ish               | Test input terminal Normally, connect to the ground and use.             |
| 34  | TST1                 | Ish               | Test input terminal Normally, connect to the ground and use.             |
| 35  | TDO                  | O                 | Test output terminal Normally, use without connection.                   |
| 36  | TMS                  | Ish               | Test input terminal Normally, connect to the power supply (VDD) and use. |
| 37  | TCK                  | Ish               | Test input terminal Normally, connect to the power supply (VDD) and use. |
| 38  | TDI                  | Ish               | Test input terminal Normally, connect to the power supply (VDD) and use. |
| 39  | TRSTN                | Ish               | Test input terminal normally, connect to the Ground and use.             |
| 40  | RSTN                 | Ish               | Hardware reset   |
| 41  | VDD                  | -                 | Power supply (3.3V)  |
| 42  | VSS                  | -                 | Ground   |
| 43  | VREF                 | A-                | Analog Reference Signal  |
| 44  | AOL                  | AO                | Analog Lch output or Lch+Rch output (monaural)                           |
| 45  | AOR                  | AO                | Analog Rch output  |
| 46  | EQ1                  | A-                | Equalizer terminal 1   |
| 47  | EQ2                  | A-                | Equalizer terminal 2   |
| 48  | EQ3                  | A-                | Equalizer terminal 3   |
| 49  | SPVDD                | -                 | Power supply for exclusive use of speaker (3.3V)                         |
| 50  | SPVSS                | -                 | Ground for exclusive use of speaker                                      |

Note1: O: CMOS output terminal, I: CMOS input terminal, Ish: Schmitt CMOS input terminal, A: Analog terminal

Note2: The current value of the ( ) in the I/O (output type) indicates the output drive capability of its terminal.

Note3: The power supply, VDDC can be switched to 3.3V or 5.0V.

Note4: For the terminals without the description of "VDDC is used" in the table, VDD (only 3.3V) is used to drive it.

| No. | Terminal Name (Port) | I/O (Output Type) | Function                         |
|-----|----------------------|-------------------|----------------------------------|
| 51  | SPOUT1               | AO                | Speaker connection terminal 1    |
| 52  | SPOUT2               | AO                | Speaker connection terminal 2    |
| 53  | VSS                  | -                 | Ground                           |
| 54  | D15                  | Ish/O (2mA)       | External memory Data Bus 15      |
| 55  | D7                   | Ish/O (2mA)       | External memory Data Bus 7       |
| 56  | D14                  | Ish/O (2mA)       | External memory Data Bus 14      |
| 57  | D6                   | Ish/O (2mA)       | External memory Data Bus 6       |
| 58  | D13                  | Ish/O (2mA)       | External memory Data Bus 13      |
| 59  | D5                   | Ish/O (2mA)       | External memory Data Bus 5       |
| 60  | D12                  | Ish/O (2mA)       | External memory Data Bus 12      |
| 61  | VDD                  | -                 | Power Supply (3.3V)              |
| 62  | VSS                  | -                 | Ground                           |
| 63  | VDD                  | -                 | Power Supply (3.3V)              |
| 64  | D4                   | Ish/O (2mA)       | External memory Data Bus 4       |
| 65  | D11                  | Ish/O (2mA)       | External memory Data Bus 11      |
| 66  | D3                   | Ish/O (2mA)       | External memory Data Bus 3       |
| 67  | D10                  | Ish/O (2mA)       | External memory Data Bus 10      |
| 68  | D2                   | Ish/O (2mA)       | External memory Data Bus 2       |
| 69  | D9                   | Ish/O (2mA)       | External memory Data Bus 9       |
| 70  | D1                   | Ish/O (2mA)       | External memory Data Bus 1       |
| 71  | D8                   | Ish/O (2mA)       | External memory Data Bus 8       |
| 72  | D0                   | Ish/O (2mA)       | External memory Data Bus 0       |
| 73  | VSS                  | -                 | Ground                           |
| 74  | VDD                  | -                 | Power Supply (3.3V)              |
| 75  | RDN (P30)            | O (4mA)           | External memory Read Enable      |
| 76  | CS0N (P31)           | O (4mA)           | External memory Chip Select 0    |
| 77  | CS1N (P32)           | O (4mA)           | External memory Chip Select 1    |
| 78  | CS2N (P33)           | O (4mA)           | External memory Chip Select 2    |
| 79  | A1                   | O (4mA)           | External memory Address Bus 1    |
| 80  | A2                   | O (4mA)           | External memory Address Bus 2    |
| 81  | A3                   | O (4mA)           | External memory Address Bus 3    |
| 82  | A4                   | O (4mA)           | External memory Address Bus 4    |
| 83  | A5                   | O (4mA)           | External memory Address Bus 5    |
| 84  | A6                   | O (4mA)           | External memory Address Bus 6    |
| 85  | A7                   | O (4mA)           | External memory Address Bus 7    |
| 86  | A17                  | O (4mA)           | External memory Address Bus 17   |
| 87  | A18                  | O (4mA)           | External memory Address Bus 18   |
| 88  | A19                  | O (4mA)           | External memory Address Bus 19   |
| 89  | VDD                  | -                 | Power Supply (3.3V)              |
| 90  | VSS                  | -                 | Ground                           |
| 91  | VDD                  | -                 | Power Supply (3.3V)              |
| 92  | WRN (P34)            | O (4mA)           | External memory Write Enable     |
| 93  | A21/A0 (P35)         | O (4mA)           | External memory Address Bus 21/0 |
| 94  | A20                  | O (4mA)           | External memory Address Bus 20   |
| 95  | A8                   | O (4mA)           | External memory Address Bus 8    |
| 96  | A9                   | O (4mA)           | External memory Address Bus 9    |
| 97  | A10                  | O (4mA)           | External memory Address Bus 10   |
| 98  | A11                  | O (4mA)           | External memory Address Bus 11   |
| 99  | A12                  | O (4mA)           | External memory Address Bus 12   |
| 100 | A13                  | O (4mA)           | External memory Address Bus 13   |

Note1: O: CMOS output terminal, I: CMOS input terminal, Ish: Schmitt CMOS input terminal, A: Analog terminal

Note2: The current value of the ( ) in the I/O (output type) indicates the output drive capability of its terminal.

Note3: The power supply, VDDC can be switched to 3.3V or 5.0V.

Note4: For the terminals without the description of "VDDC is used" in the table, VDD (only 3.3V) is used to drive it.

## ■ Overview of the Operation

APL-1 includes the Synthesizer Core, the CPU for control and its peripheral circuit.

The CPU controls most of the controls such as Synthesizer Core and Input/Output Port.

Since the Synthesizer Core controls are all controlled by the built-in CPU, sound contents can be played by a simple command from the external.


The sound contents are stored in the external ROM.

Since the sound contents support formats in SMAF, SMAF/Phrase and SMAF/Audio, ROM data can be created by the development tool dedicated for APL-1.

The firmware in the built-in CPU is stored in the external ROM and can be updated by the exchange of ROM, or by the download via the APL-1 Control Interface.



Likewise, for the sound contents, it can be updated by the exchange of ROM, or by the download via the APL-1 Control Interface.

APL-1 Control Interface: Clock Sync Serial, Asynchronous Serial (UART), is incorporated and can be selected by the terminal. (Mode 1)

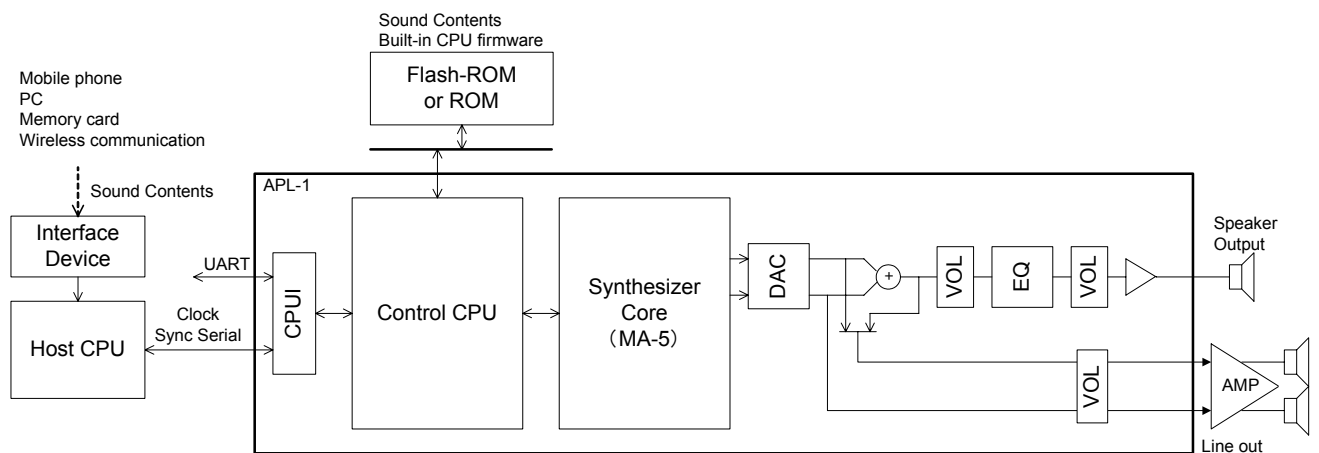


Note: A configuration diagram, which mode 1 is selected as an APL-1 Control Interface, is shown.

The download of the sound contents and the update of the APL-1 firmware are normally performed via the host CPU. When it is difficult to mount a download function in host CPU, the download of sound contents and the update of the firmware can be performed directly by using the asynchronous serial (UART). However, the connection destination is restricted to PC Asynchronous Serial (UART).

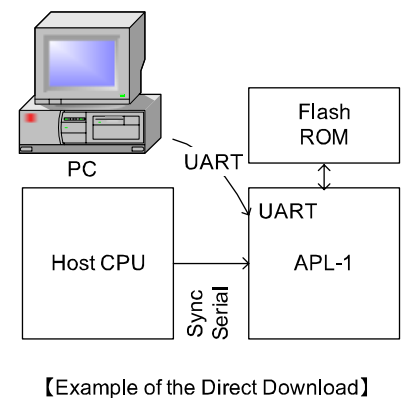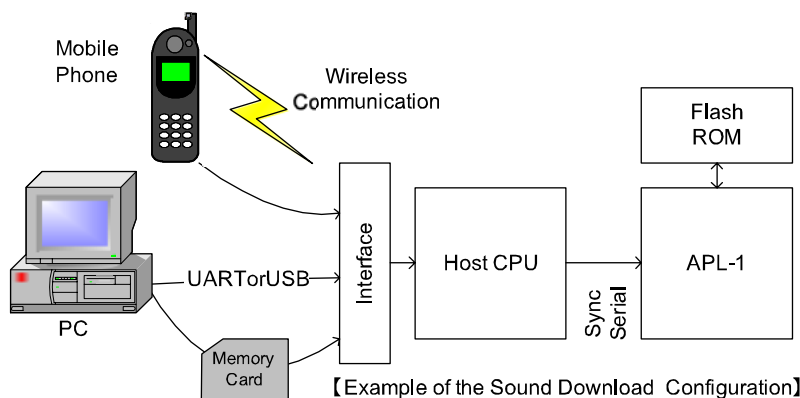

## ■ Block Diagram

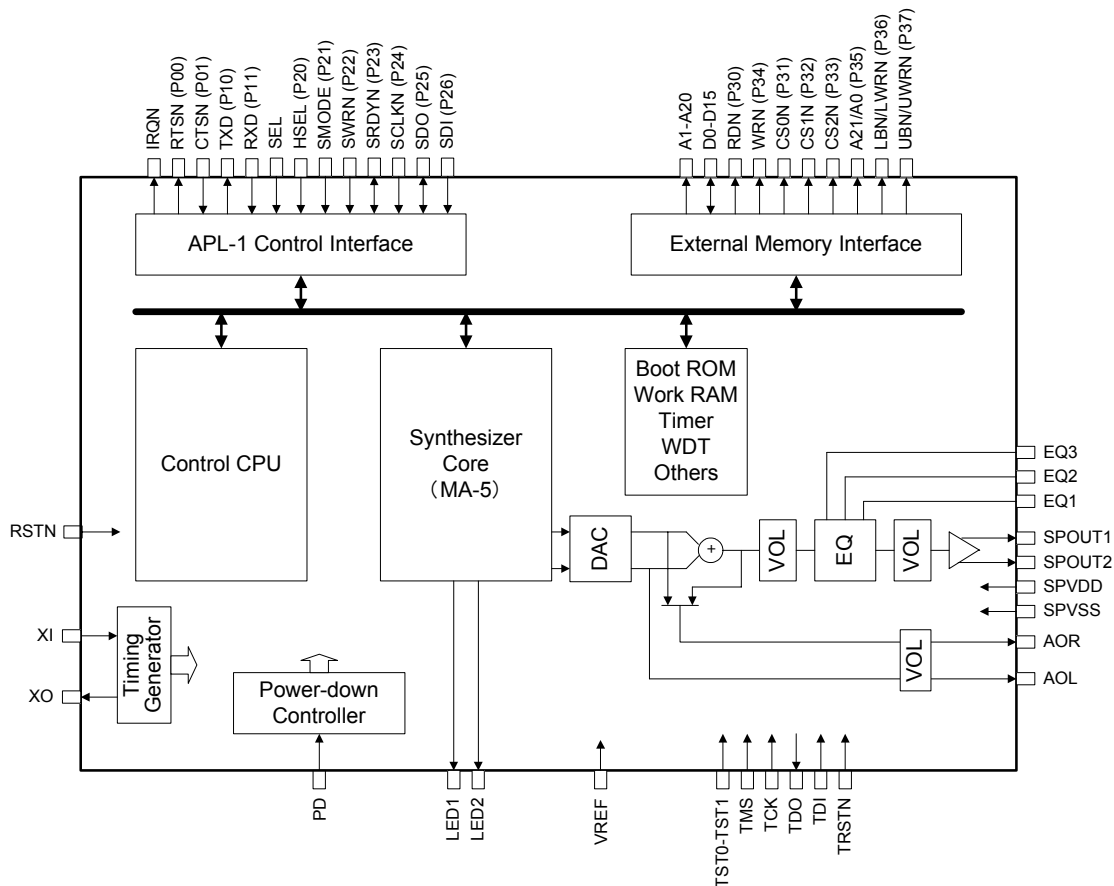

## ■ Overview of the block

The overview function of each block and the flow of a signal are explained.

### Control CPU

The Control CPU controls APL-1 in all as well as the Synthesizer Core controls such as a sequencer function.

### Synthesizer Core

Hybrid Synthesizer Core equivalent to MA-5, which is a synthesizer LSI for mobile phone. The synthesizer performs play of the sound contents, LED controls, etc.

### External Memory Interface

The interface connects APL-1 to the external memory. Accessible memory space is up to 8MByte. (CS0N:4MByte + CS1N:2MByte + CS2N:2MByte.) SRAM with the specification of byte access is necessary. From P30-P37 can be used as the output port when only one external ROM is used.

### APL-1 Control Interface

APL-1 is controlled through the APL-1 Control Interface. Mode 1 and Mode 2 can be selected according to the settings of SEL terminal. In Mode 1, Clock Sync Serial and Asynchronous Serial (UART) can be switched and used by the HSEL terminal. In Mode 2, Asynchronous Serial (UART) and command port (A mode, which identify command by the change of data that inputted into P20-P26) can be used at the same time. P01 and P11 can be used as input port, and P00 and P10 can be used as output port, depending on the settings.

### Timing Generator

Clocks used in the APL-1 are generated.

### Power-down Controller

The controller controls APL-1 in the power-saving mode.

### Boot ROM, Work RAM, Timer, WDT, etc.

The peripheral devices of the Control CPU in the APL-1.

## ■ Electrical Characteristics

### ● Absolute Maximum Ratings

| Item   | Symbol     | Min. | Max.      | Unit |
|--|------------|------|-----------|------|
| SPVDD terminal - Power supply Voltage<br>(Speaker Amplifier section) | SPVDD      | -0.3 | 6.0       | V    |
| VDD terminal - Power supply Voltage                                  | VDD        | -0.3 | 4.2       | V    |
| VDDC terminal - Power supply Voltage                                 | VDDC       | -0.3 | 7.0       | V    |
| SPOUT1, SPOUT2 terminal - Supplied voltage                           | $V_{INSP}$ | -0.3 | SPVDD+0.3 | V    |
| Analog Input Voltage   | $V_{INA}$  | -0.3 | VDD+0.3   | V    |
| Digital Input Voltage (1) (*1)                                       | $V_{IND1}$ | -0.3 | VDDC+0.3  | V    |
| Digital Input Voltage (2) (*2)                                       | $V_{IND2}$ | -0.3 | VDD+0.3   | V    |
| Storage Temperature  | $T_{STG}$  | -50  | 125       | °C   |

Conditions: VSS = SPVSS = 0V

(\*1) Relevant terminals: RXD, CTSN, PD, HSEL, SMODE, SWRN, SCLKN, SDI, and SEL  
(When Port is used: P01, P11, and P20-P26)

(\*2) Relevant terminals: Other input terminals

### ● Recommended Operating Conditions

| Item   | Symbol   | Min. | Typ. | Max. | Unit |
|--|----------|------|------|------|------|
| SPVDD Operating Voltage<br>(Speaker Amplifier section) | SPVDD    | 3.0  | 3.3  | 3.6  | V    |
| VDD Operating Voltage                                  | VDD      | 3.0  | 3.3  | 3.6  | V    |
| VDDC Operating Voltage<br>(compatible with 3.3V/5.0V)  | VDDC     | 3.0  | 3.3  | 3.6  | V    |
|  |          | 4.75 | 5.0  | 5.25 | V    |
| Operating Ambient Temperature                          | $T_{OP}$ | -40  | 25   | 85   | °C   |

Conditions: VSS = SPVSS = 0V

### ● Consumption Current

| Item   | Condition                  | Min. | Typ. | Max. | Unit          |
|--|----------------------------|------|------|------|---------------|
| Normal operating Condition   | VDD + VDDC                 |      | 50   | 80   | mA            |
|  | SPVDD when in no output    |      | 4    |      | mA            |
|  | when in 8ohm, 330mW Output |      | 187  |      | mA            |
| Stand-by 1 Mode  | VDD + VDDC                 |      | 25   | 40   | mA            |
| Stand-by 2 Mode  | VDD + VDDC                 |      | 5    | 10   | mA            |
| Shutdown Mode ( $T_{OP} = 25^{\circ}\text{C}$ )<br>( $T_{OP} = 85^{\circ}\text{C}$ ) | VDD + VDDC + SPVDD (*1)    |      | 6    | 10   | $\mu\text{A}$ |
|  |                            |      |      | 50   | $\mu\text{A}$ |

Conditions:  $T_{OP} = -40$  to  $85^{\circ}\text{C}$ , VDD= 3.0 to 3.6V, VDDC= 3.0 to 3.6V or 4.75 to 5.25V, Capacitor load=50pF

(\*1): VDD=VDDC=SPVDD=3.30V, and for Input terminals,  $V_{IL}=VSS$ ,  $V_{IH}=VDD$  or VDDC

### ● DC Characteristics

| Item                              | Symbol    | Condition                  | Min.               | Typ.               | Max.               | Unit          |
|-----------------------------------|-----------|----------------------------|--------------------|--------------------|--------------------|---------------|
| Input voltage "H" level (1) (*1)  | $V_{IH1}$ |                            | $0.70 \times VDDC$ |                    |                    | V             |
| Input voltage "L" level (1) (*1)  | $V_{IL1}$ |                            |                    |                    | $0.30 \times VDDC$ | V             |
| Schmitt Width (1) (*1)            | $V_{SW1}$ |                            |                    | $0.15 \times VDDC$ |                    | V             |
| Input voltage "H" level (2) (*2)  | $V_{IH2}$ |                            | $0.70 \times VDD$  |                    |                    | V             |
| Input voltage "L" level (2) (*2)  | $V_{IL2}$ |                            |                    |                    | $0.30 \times VDD$  | V             |
| Schmitt Width (2) (*2)            | $V_{SW2}$ |                            |                    | $0.15 \times VDD$  |                    | V             |
| Output voltage "H" level(1) (*1)  | $V_{OH1}$ | $I_{OH} = -2\text{mA}$     | $0.8 \times VDDC$  |                    |                    | V             |
| Output voltage "L" level (1) (*1) | $V_{OL1}$ | $I_{OL} = +4\text{mA}$     |                    |                    | $0.2 \times VDDC$  | V             |
| Output voltage "H" level (2) (*2) | $V_{OH2}$ | $I_{OH} = -2\text{mA}(*3)$ | $0.8 \times VDD$   |                    |                    | V             |
| Output voltage "L" level (2) (*2) | $V_{OL2}$ | $I_{OL} = +4\text{mA}(*3)$ |                    |                    | $0.2 \times VDD$   | V             |
| Input Leak Current                | IL        |                            | -10                |                    | 10                 | $\mu\text{A}$ |
| Input Capacitance                 | CI        |                            |                    |                    | 15                 | pF            |

Conditions:  $T_{OP} = -40$  to  $85^{\circ}\text{C}$ , VDD= 3.0 to 3.6V, VDDC= 3.0 to 3.6V or 4.75 to 5.25V, Capacitor load=50pF

(\*1) Relevant terminals: RXD, CTSN, PD, HSEL, SMODE, SWRN, SCLKN, SDI, and SEL  
(when Port is used: P01, P11, and P20-P26)

(\*2) Relevant terminals: Other Input Terminals

(\*3) Except for D0 to D15 terminal:  $I_{OH} = -1\text{mA}$ ,  $I_{OL} = +2\text{mA}$

## ● AC Characteristics

Input/Output level measurement conditions:  $V_{IH} = 0.75 \times VDD$  or  $0.75 \times VDDC$   
(unless otherwise specified)  $V_{IL} = 0.25 \times VDD$  or  $0.25 \times VDDC$   
 $V_{OH} = 0.75 \times VDD$  or  $0.75 \times VDDC$   
 $V_{OL} = 0.25 \times VDD$  or  $0.25 \times VDDC$


### ▪ Reset and Clock Timing

RSTN, XI, and other input signals

| Item   | Symbol           | Min. | Typ.   | Max. | Unit    |
|--|------------------|------|--------|------|---------|
| RSTN "L" pulse width<br>(When in power-up and in shut-down-cancel)<br>(When power supply and clock is in stable) | $T_{RSTW}$       | 20   |        |      | ms      |
|  |                  | 100  |        |      | $\mu s$ |
| RSTN (undefined→L) set-up time   | $T_{RSTS}$       | 0    |        |      | $\mu s$ |
| VDD→VDDC power up time difference  | $T_{VSKW}$       | 0    |        | 3    | ms      |
| XI Frequency   | $1 / T_{XFREQ}$  |      | 6.144  |      | MHz     |
| XI Rising time and Falling time  | $T_{XR}, T_{XF}$ |      |        | 20   | ns      |
| XI High time   | $T_{XH}$         | 60   |        |      | ns      |
| XI Low time  | $T_{XL}$         | 60   |        |      | ns      |
| XI Input delay time  | $T_{XIIN}$       |      |        | 1    | ms      |
| XI Input time  | $T_{XIINW}$      | 1    |        |      | ms      |
| Internal clock frequency   | $1/T_{CW}$       |      | 18.432 |      | MHz     |
| Input signals except XI Rising time and Falling time   | $T_R, T_F$       |      |        | 15   | ns      |


Conditions:  $T_{OP} = -40$  to  $85^\circ C$ ,  $VDD = 3.0$  to  $3.6V$ ,  $VDDC = 3.0$  to  $3.6V$  or  $4.75$  to  $5.25V$ , Capacitor load=50pF

- Clock input to the XI terminal is necessary during the reset.
- Be sure to power VDD first when independent power supply is used for the supply of VDD and VDDC.

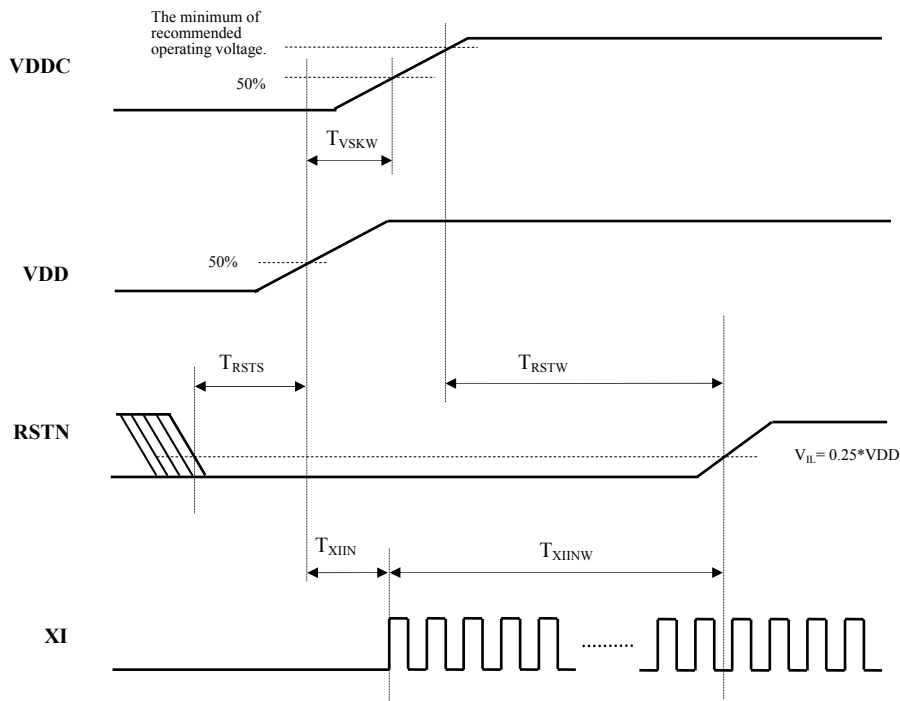

The reset width is defined from a point that VDDC reaches to the minimum of recommended operating voltage. RSTN input must be "L" level at the point where VDD reaches to 50%.



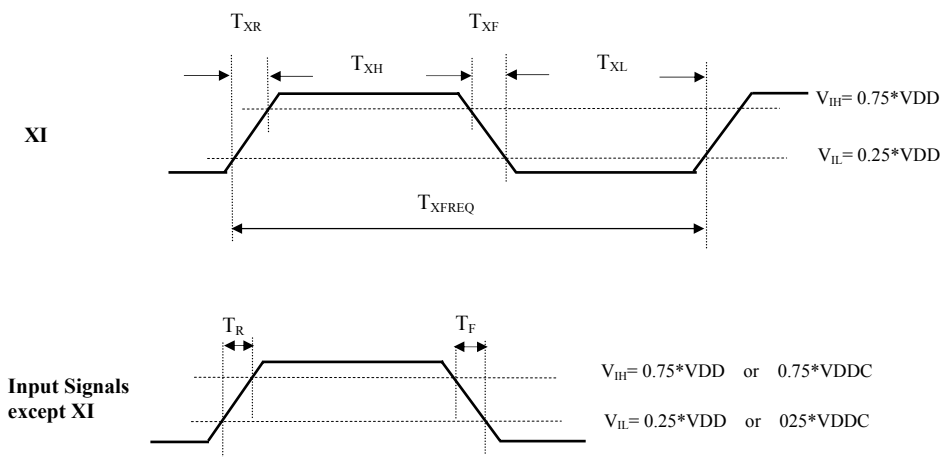


### ▪ Clock Sync Serial Interface

| Item                                    | Symbol          | Min. | Typ. | Max. | Unit |
|---|-----------------|------|------|------|------|
| SCLKN frequency (Serial transfer speed) | $1 / T_{SFREQ}$ |      | 1    | 2    | MHz  |
| SCLKN High time                         | $T_{SH}$        | 220  |      |      | ns   |
| SCLKN Low time                          | $T_{SL}$        | 220  |      |      | ns   |
| SDI set-up time                         | $T_{SIS}$       | 0    |      |      | ns   |
| SDI hold time                           | $T_{SIH}$       | 75   |      |      | ns   |
| SDO output delay time                   | $T_{SOD}$       |      |      | 200  | ns   |
| SDO output hold time (*1)               | $T_{SOH}$       | 110  |      |      | ns   |
| SRDYN output delay time (L→H) (*2)      | $T_{SRDD}$      |      |      | 300  | ns   |

Conditions:  $T_{OP} = -40$  to  $85^{\circ}C$ ,  $V_{DD} = 3.0$  to  $3.6V$ ,  $V_{DDC} = 3.0$  to  $3.6V$  or  $4.75$  to  $5.25V$ , Capacitor load =  $50pF$

(\*1) The last SDO output data is held until the next SCLKN falling edge is detected.

(\*2) Time to the High level in synchronization with SCLKN, when the first 1 bit is transmitted or received.  
 The falling timing depends on the transmit/receive process of the internal Control CPU.

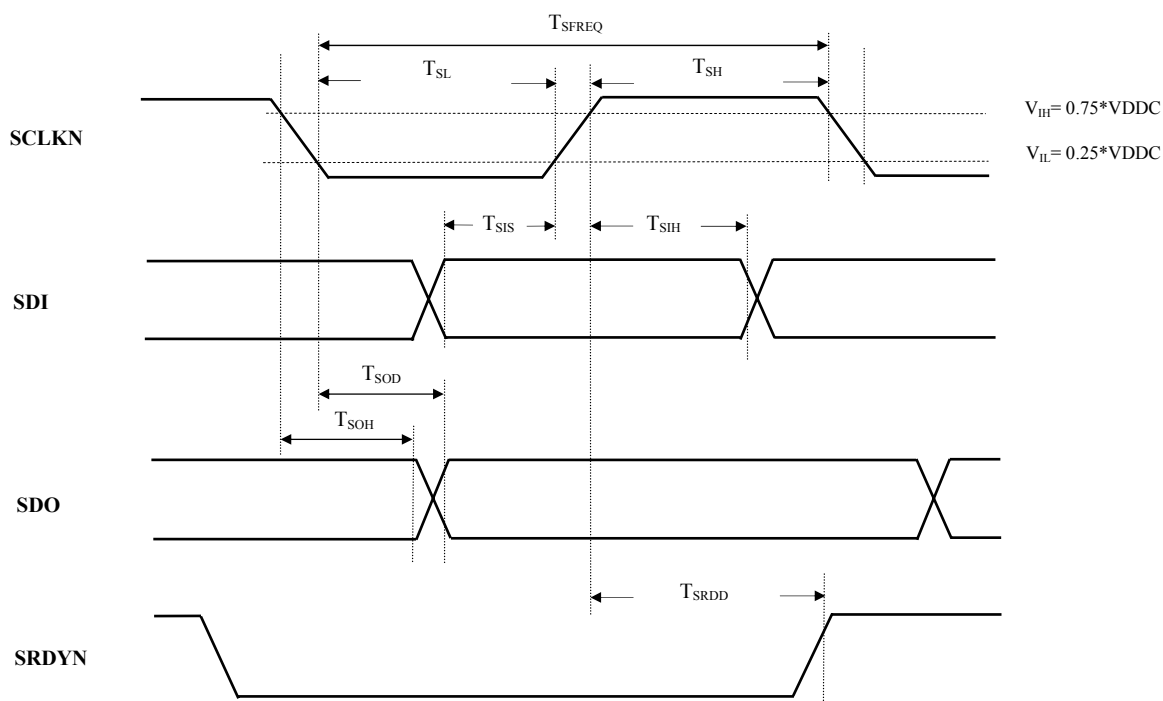

**Asynchronous Serial Interface (UART)**


| Item   | Symbol        | Min. | Typ. | Max. | Unit |
|--|---------------|------|------|------|------|
| Transfer Frequency (Baud rate: fixed to x16) | $1 / T_{RXD}$ | 9    |      | 144  | kHz  |
| RXD allowable frequency error (*1)           |               | -2   |      | +2   | %    |

Conditions:  $T_{OP} = -40$  to  $85^{\circ}\text{C}$ ,  $V_{DD} = 3.0$  to  $3.6\text{V}$ ,  $V_{DDC} = 3.0$  to  $3.6\text{V}$  or  $4.75$  to  $5.25\text{V}$ , Capacitor load=50pF  
 (\*1) In the case of 10 bits including the start bit and the stop bit.

**External Memory Interface**

| Item                                  | Symbol     | Min. | Typ. | Max. | Unit |
|---------------------------------------|------------|------|------|------|------|
| Data (D) Set-up time                  | $T_{DS}$   | 10   |      |      | ns   |
| Data (D) Hold time                    | $T_{DH}$   | 10   |      |      | ns   |
| Address (A) Output Delay time         | $T_{AD}$   |      |      | 40   | ns   |
| Control Signal Output Delay time (*1) | $T_{CTLD}$ |      |      | 40   | ns   |
| Data (D) Output Delay time            | $T_{DD}$   |      |      | 80   | ns   |
| Data (D) Output turn-on time          | $T_{DT}$   |      |      | 20   | ns   |

Conditions:  $T_{OP} = -40$  to  $85^{\circ}\text{C}$ ,  $V_{DD} = 3.0$  to  $3.6\text{V}$ ,  $V_{DDC} = 3.0$  to  $3.6\text{V}$  or  $4.75$  to  $5.25\text{V}$ , Capacitor load=50pF  
 (\*1) LBN/LWRN, UBN/UWRN, WRN, RDN, and CS\*N

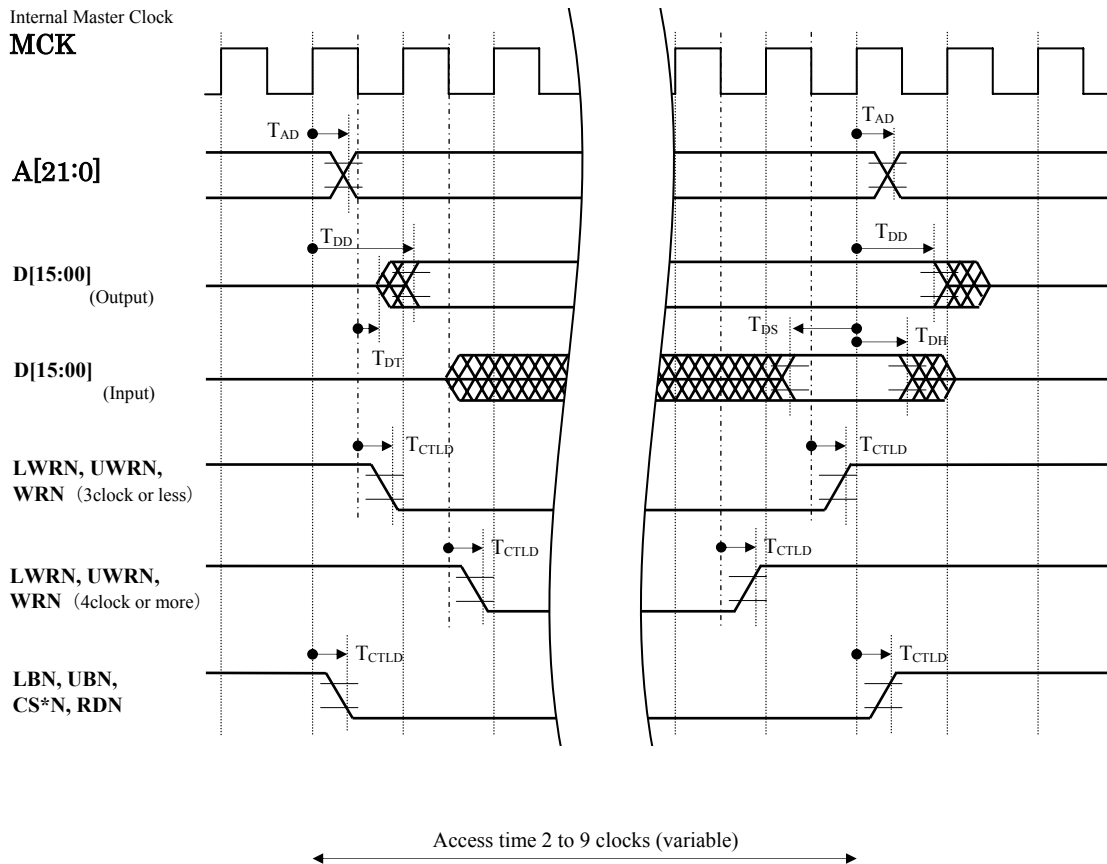

※Note that the output timing of LWRN, UWRN, and WRN differs in the access time of 3 clocks or less and that of 4 clocks or more.

## ● Analog Characteristics

Conditions:  $T_{op}=25^{\circ}\text{C}$ ,  $V_{DD}=3.30\text{V}$ ,  $SPV_{DD}=3.30\text{V}$

### •SP Amplifier

| Item  | Min. | Typ.                         | Max. | Unit             |
|---|------|------------------------------|------|------------------|
| Gain Settings (Fixed)   |      | $\pm 2$                      |      | times            |
| Minimum load resistance (RL)  |      | 8                            |      | $\Omega$         |
| Maximum Output Voltage Width (RL=8 $\Omega$ )                       |      | 5.5                          |      | V <sub>p-p</sub> |
| Maximum Output Power (RL=8 $\Omega$ , THD+N $\leq$ 1.0%)            |      | 480                          |      | mW               |
| THD + N (RL=8 $\Omega$ , f=1kHz, 330mW output)                      |      | 0.03                         |      | %                |
| Quiescent noise (A-filter: weighing filter)                         |      | -90                          |      | dBV              |
| PSRR (f=1kHz)   |      | 90                           |      | dB               |
| Amplitude Center voltage  |      | 0.5 $\times$ V <sub>DD</sub> |      | V                |
| Differential Output Voltage   |      | 10                           | 50   | mV               |
| Connectable maximum load capacitance to SPOUT1, SPOUT2 terminal (*) |      |                              | 1000 | pF               |

(\*): MAX 1000pF can be connected to the SPOUT1 terminal and the SPOUT2 terminal.

### •EQ Amplifier

| Item                              | Min. | Typ. | Max. | Unit             |
|-----------------------------------|------|------|------|------------------|
| Possible Gain Setting Range       |      |      | 30   | dB               |
| Maximum Output Voltage Amplitude  |      | 3.0  |      | V <sub>p-p</sub> |
| THD + N (f=1kHz)                  |      |      | 0.05 | %                |
| Quiescent noise (A-filter)        |      | -90  |      | dBV              |
| Input Impedance                   | 10   |      |      | M $\Omega$       |
| Feedback resistor between EQ2-EQ3 | 20   |      |      | k $\Omega$       |

### •SP Volume

| Item                 | Min. | Typ. | Max. | Unit |
|----------------------|------|------|------|------|
| Volume Setting Range | -30  |      | 0    | dB   |
| Volume Step Width    |      | 1    |      | dB   |
| THD + N (f=1kHz)     |      |      | 0.05 | %    |

### •EQ Volume

| Item                             | Min. | Typ. | Max. | Unit             |
|----------------------------------|------|------|------|------------------|
| Volume Setting Range             | -30  |      | 0    | dB               |
| Volume Step Width                |      | 1    |      | dB               |
| Quiescent noise (A-filter)       |      | -90  |      | dBV              |
| Maximum Output Current           | 132  |      |      | $\mu$ A          |
| Maximum Output Voltage Amplitude |      | 1.65 |      | V <sub>p-p</sub> |
| Output Impedance                 |      | 300  | 600  | $\Omega$         |

### •HP Volume

| Item                             | Min. | Typ. | Max. | Unit             |
|----------------------------------|------|------|------|------------------|
| Volume Setting Range             | -30  |      | 0    | dB               |
| Volume Step Width                |      | 1    |      | dB               |
| Quiescent noise (A-filter)       |      | -90  |      | dBV              |
| Maximum Output Current           | 132  |      |      | $\mu$ A          |
| Maximum Output Voltage Amplitude |      | 1.65 |      | V <sub>p-p</sub> |
| Output Impedance                 |      | 300  | 600  | $\Omega$         |

### •VREF

| Item         | Min. | Typ.                         | Max. | Unit |
|--------------|------|------------------------------|------|------|
| VREF Voltage |      | 0.5 $\times$ V <sub>DD</sub> |      | V    |

### •DAC


| Item  | Min.     | Typ. | Max. | Unit             |
|---|----------|------|------|------------------|
| Resolution                                  |          | 16   |      | Bit              |
| Full scale Output Voltage                   |          | 1.65 |      | V <sub>p-p</sub> |
| THD+N (f= 1kHz)                             |          |      | 0.5  | %                |
| Quiescent noise (A-filter)                  |          | -85  | 80   | dBV              |
| Frequency Characteristics (f=50Hz to 20kHz) | -3.0 (*) |      | +0.5 | dB               |

(\*) A drop of the high range response owing to the aperture effect.

MEMO

## ■ Package Outline

C-PK100SP-1

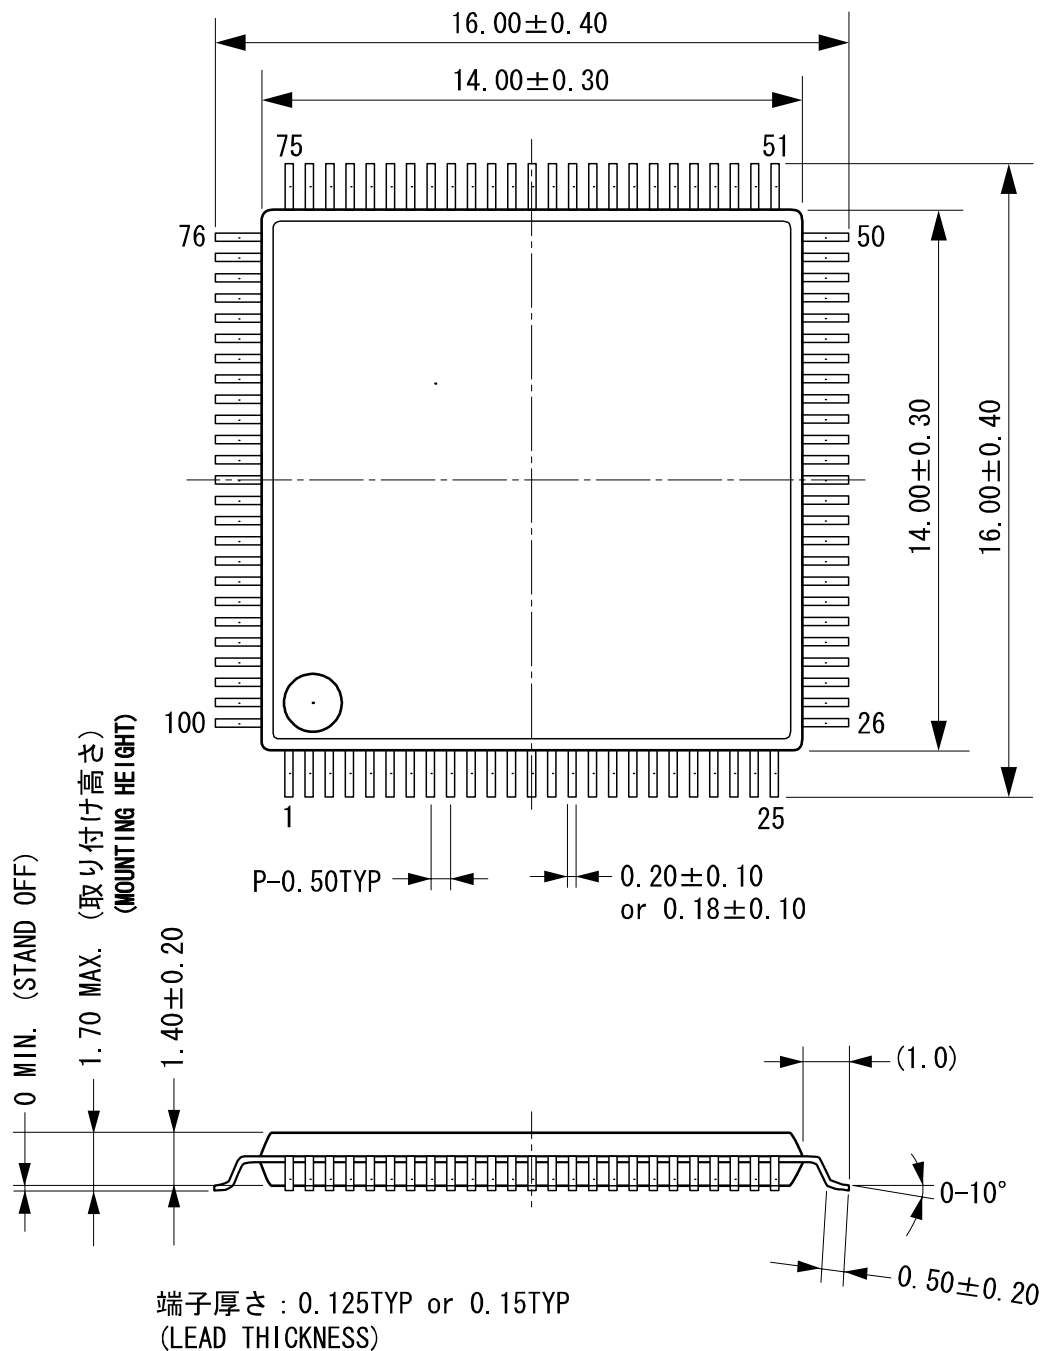

モールドコーナ形状は、この図面と若干異なるタイプもあります。  
カッコ内の寸法値は参考値です。  
モールド外形寸法はバリを含みません。  
単位 : mm

The shape of the molded corner may slightly differ from the shape in this diagram.  
The figure in the parentheses ( ) should be used as a reference.  
Plastic body dimensions do not include resin burr.  
UNIT: mm

注) 表面実装LSIは、保管条件、及び半田付けについての特別な配慮が必要です。  
詳しくはヤマハ代理店までお問い合わせください。

Note: The storage and soldering of LSIs for surface mounting need special consideration.  
For detailed information, please contact your local Yamaha agent.

### IMPORTANT NOTICE

1. YAMAHA RESERVES THE RIGHT TO MAKE CHANGES TO ITS PRODUCTS AND TO THIS DOCUMENT WITHOUT NOTICE. THE INFORMATION CONTAINED IN THIS DOCUMENT HAS BEEN CAREFULLY CHECKED AND IS BELIEVED. HOWEVER, YAMAHA SHALL ASSUME NO RESPONSIBILITIES FOR INACCURACIES AND MAKE NO COMMITMENT TO UPDATE OR TO KEEP CURRENT THE INFORMATION CONTAINED IN THIS DOCUMENT.
2. THESE YAMAHA PRODUCTS ARE DESIGNED ONLY FOR COMMERCIAL AND NORMAL INDUSTRIAL APPLICATIONS, AND ARE NOT SUITABLE FOR OTHER USES, SUCH AS MEDICAL LIFE SUPPORT EQUIPMENT, NUCLEAR FACILITIES, CRITICAL CARE EQUIPMENT OR ANY OTHER APPLICATION THE FAILURE OF WHICH COULD LEAD TO DEATH, PERSONAL INJURY OR ENVIRONMENTAL OR PROPERTY DAMAGE. USE OF THE PRODUCTS IN ANY SUCH APPLICATION IS AT THE CUSTOMER'S OWN RISK AND EXPENSE.
3. YAMAHA SHALL ASSUME NO LIABILITY FOR INCIDENTAL, CONSEQUENTIAL OR SPECIAL DAMAGES OR INJURY THAT MAY RESULT FROM MISAPPLICATION OR IMPROPER USE OR OPERATION OF THE PRODUCT.
4. YAMAHA MAKES NO WARRANTY OR REPRESENTATION THAT THE PRODUCTS ARE SUBJECT TO INTELLECTUAL PROPERTY LICENSE FROM YAMAHA OR ANY THIRD PARTY, AND YAMAHA MAKES NO WARRANTY OR REPRESENTATION OF NON-INFRINGEMENT WITH RESPECT TO THE PRODUCTS. YAMAHA SPECIFICALLY EXCLUDES ANY LIABILITY TO THE CUSTOMER OR ANY THIRD PARTY ARISING FROM OR RELATED TO THE PRODUCTS INFRINGEMENT OF ANY THIRD PARTY'S INTELLECTUAL PROPERTY RIGHTS, INCLUDING THE PATENT, COPYRIGHT, TRADEMARK OR TRADE SECRET RIGHTS OF ANY THIRD PARTY.
5. EXAMPLES OF USE DESCRIBED HEREIN ARE MERELY TO INDICATE THE CHARACTERISTICS AND PERFORMANCE OF PRODUCTS. YAMAHA SHALL ASSUME NO RESPONSIBILITY FOR ANY INTELLECTUAL PROPERTY CLAIMS OR OTHER PROBLEMS THAT MAY RESULT FROM APPLICATIONS BASED ON THE EXAMPLES DESCRIBED HEREIN. YAMAHA MAKES NO WARRANTY WITH RESPECT TO THE PRODUCTS, EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR USE AND TITLE.
6. YAMAHA MAKES EVERY EFFORT TO IMPROVE THE QUALITY AND RELIABILITY OF ITS PRODUCTS. HOWEVER, ALL SEMICONDUCTOR PRODUCTS FAIL WITH SOME PROBABILITY. THEREFORE, YAMAHA REQUIRES THAT SUFFICIENT CARE BE GIVEN TO ENSURING SAFE DESIGN IN CUSTOMER PRODUCTS SUCH AS REDUNDANT DESIGN, ANTI-CONFLAGRATION DESIGN, AND DESIGN FOR PREVENTING MALFUNCTION IN ORDER TO PREVENT ACCIDENTS RESULTING IN INJURY OR DEATH, FIRE OR OTHER SOCIAL DAMAGE FROM OCCURRING AS A RESULT OF PRODUCT FAILURE.
7. INFORMATION DESCRIBED IN THIS DOCUMENT: APPLICATION CIRCUITS AND ITS CONSTANTS AND CALCULATION FORMULAS, PROGRAMS AND CONTROL PROCEDURES ARE PROVIDED FOR THE PURPOSE OF EXPLAINING TYPICAL OPERATION AND USAGE. THEREFORE, PLEASE EVALUATE THE DESIGN SUFFICIENTLY AS WHOLE SYSTEM UNDER THE CONSIDERATION OF VARIOUS EXTERNAL OR ENVIRONMENTAL CONDITIONS AND DETERMINE THEIR APPLICATION AT THE CUSTOMER'S OWN RISK. YAMAHA SHALL ASSUME NO RESPONSIBILITY FOR CLAIMS, DAMAGES, COSTS AND EXPENSES CAUSED BY THE CUSTOMER OR ANY THIRD PARTY, OWING TO THE USE OF THE ABOVE INFORMATION.

**Notice** The specifications of this product are subject to improvement changes without prior notice.

AGENT

### YAMAHA CORPORATION

Address inquiries to:  
Semiconductor Sales & Marketing Department

- Head Office 203, Matsunokijima, Toyooka-mura  
Iwata-gun, Shizuoka-ken, 438-0192, Japan  
Tel. +81-539-62-4918 Fax. +81-539-62-5054
- Tokyo Office 2-17-11, Takanawa, Minato-ku,  
Tokyo, 108-8568, Japan  
Tel. +81-3-5488-5431 Fax. +81-3-5488-5088
- Osaka Office 3-12-12, Minami Senba, Chuo-ku,  
Osaka City, Osaka, 542-0081, Japan  
Tel. +81-6-6252-6221 Fax. +81-6-6252-6229