



SAW Components

Data Sheet B4218





SAW Components

B4218

Low-Loss Filter for Mobile Communication

1865,0 & 1895,0 MHz


Data Sheet



Ceramic package QCC8D

Features

- Low-loss 2-in-1 RF filter for mobile telephone PCS systems, transmit path
- Device with two integrated Tx-filter
- Usable passband of Tx-filter 1 30 MHz
- Usable passband of Tx-filter 2 30 MHz
- No matching network required for operation at 50 Ω
- Package for **Surface Mounted Technology (SMT)**

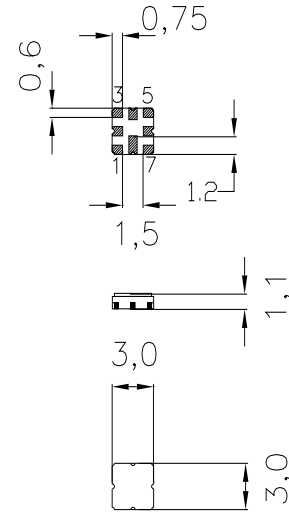


Dimensions in mm, approx. weight 0,037 g

Terminals

- Ni, gold-plated

Pin configuration

- 1 Input Tx-filter 1
- 7 Output Tx-filter 1
- 2,6 To be grounded
- 3 Input Tx-filter 2
- 5 Output Tx-filter 2
- 4,8 Case-ground, to be grounded



| Type | Ordering code | Marking and Package according to | Packing according to |
|-------|-------------------|----------------------------------|----------------------|
| B4218 | B39192-B4218-U810 | C61157-A7-A72 | F61074-V8101-Z000 |

Electrostatic Sensitive Device (ESD)

Maximum ratings

| | | | | |
|-------------------------------------|-----------|------------|-----|---|
| Operable temperature range | T | - 40 /+ 85 | °C | source and load impedance 50 Ω continuous wave |
| Storage temperature range | T_{stg} | - 40 /+ 85 | °C | |
| DC voltage | V_{DC} | 3 | V | |
| Input power max. 1850...1910 MHz | P_{IN} | 10 | dBm | |
| | | | | |



Characteristics of Tx-filter 1

Operating temperature range: $T = -30$ to $+85$ °C
 Terminating source impedance: $Z_S = 50 \Omega$
 Terminating load impedance: $Z_L = 50 \Omega$

| | | | min. | typ. | max. | |
|--------------------------------------|----------------|-----------------------|------|--------|------|-----|
| Center frequency | f_c | | — | 1865,0 | — | MHz |
| Maximum insertion attenuation | α_{max} | | | | | |
| | | 1850,0 ... 1880,0 MHz | — | 1,8 | 2,5 | dB |
| Amplitude ripple (p-p) | $\Delta\alpha$ | | | | | |
| | | 1850,0 ... 1880,0 MHz | — | 0,7 | 1,4 | dB |
| Input return loss | | | | | | |
| | | 1850,0 ... 1880,0 MHz | 9,0 | 10,0 | — | dB |
| Output return loss | | | | | | |
| | | 1850,0 ... 1880,0 MHz | 9,0 | 10,0 | — | dB |
| Attenuation | α | | | | | |
| | | 10,0 ... 1570,0 MHz | 25,0 | 29,0 | — | dB |
| | | 1570,0 ... 1580,0 MHz | 30,0 | 32,0 | — | dB |
| | | 1580,0 ... 1780,0 MHz | 29,0 | 32,0 | — | dB |
| | | 1780,0 ... 1800,0 MHz | 25,0 | 30,0 | — | dB |
| | | 1800,0 ... 1805,0 MHz | 20,0 | 26,0 | — | dB |
| | | 1930,0 ... 1960,0 MHz | 38,0 | 45,0 | — | dB |
| | | 1960,0 ... 2400,0 MHz | 32,0 | 35,0 | — | dB |
| | | 2400,0 ... 3000,0 MHz | 22,0 | 32,0 | — | dB |
| | | 3000,0 ... 4000,0 MHz | 15,0 | 19,0 | — | dB |
| | | 5550,0 ... 5640,0 MHz | 0,0 | 5,0 | — | dB |
| Rx band suppression | α | | | | | |
| | | 1930,0 ... 1960,0 MHz | 38,0 | 45,0 | — | dB |
| LO suppression | α | | | | | |
| | | 2113,0 ... 2174,0 MHz | 32,0 | 35,0 | — | dB |




Characteristics of Tx-filter 2

Operating temperature range: $T = -30$ to $+85$ °C
 Terminating source impedance: $Z_S = 50 \Omega$
 Terminating load impedance: $Z_L = 50 \Omega$


| | | | min. | typ. | max. | |
|--------------------------------------|----------------|-----------------------|------|--------|------|-----|
| Center frequency | f_c | | — | 1895,0 | — | MHz |
| Maximum insertion attenuation | α_{max} | | | | | |
| | | 1880,0 ... 1910,0 MHz | — | 1,8 | 2,5 | dB |
| Amplitude ripple (p-p) | $\Delta\alpha$ | | | | | |
| | | 1880,0 ... 1910,0 MHz | — | 0,7 | 1,4 | dB |
| Input return loss | | | | | | |
| | | 1880,0 ... 1910,0 MHz | 9,0 | 10,0 | — | dB |
| Output return loss | | | | | | |
| | | 1880,0 ... 1910,0 MHz | 9,0 | 10,0 | — | dB |
| Attenuation | α | | | | | |
| | | 10,0 ... 1570,0 MHz | 25,0 | 29,0 | — | dB |
| | | 1570,0 ... 1580,0 MHz | 30,0 | 32,0 | — | dB |
| | | 1580,0 ... 1780,0 MHz | 29,0 | 32,0 | — | dB |
| | | 1780,0 ... 1800,0 MHz | 25,0 | 30,0 | — | dB |
| | | 1800,0 ... 1830,0 MHz | 22,0 | 29,0 | — | dB |
| | | 1960,0 ... 1990,0 MHz | 38,0 | 45,0 | — | dB |
| | | 1990,0 ... 2400,0 MHz | 32,0 | 35,0 | — | dB |
| | | 2400,0 ... 3000,0 MHz | 22,0 | 30,0 | — | dB |
| | | 3000,0 ... 4000,0 MHz | 15,0 | 19,0 | — | dB |
| | | 5640,0 ... 5730,0 MHz | 0,0 | 5,0 | — | dB |
| Rx band suppression | α | | | | | |
| | | 1960,0 ... 1990,0 MHz | 38,0 | 45,0 | — | dB |
| LO suppression | α | | | | | |
| | | 2113,0 ... 2174,0 MHz | 32,0 | 35,0 | — | dB |



Transfer function Tx-filter 1

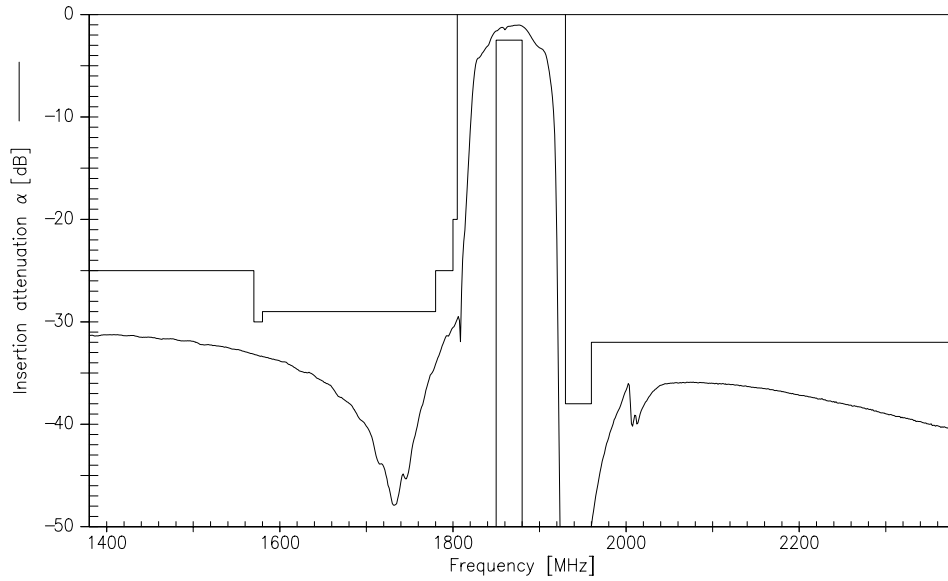


Transfer function Tx-filter 1(wideband)

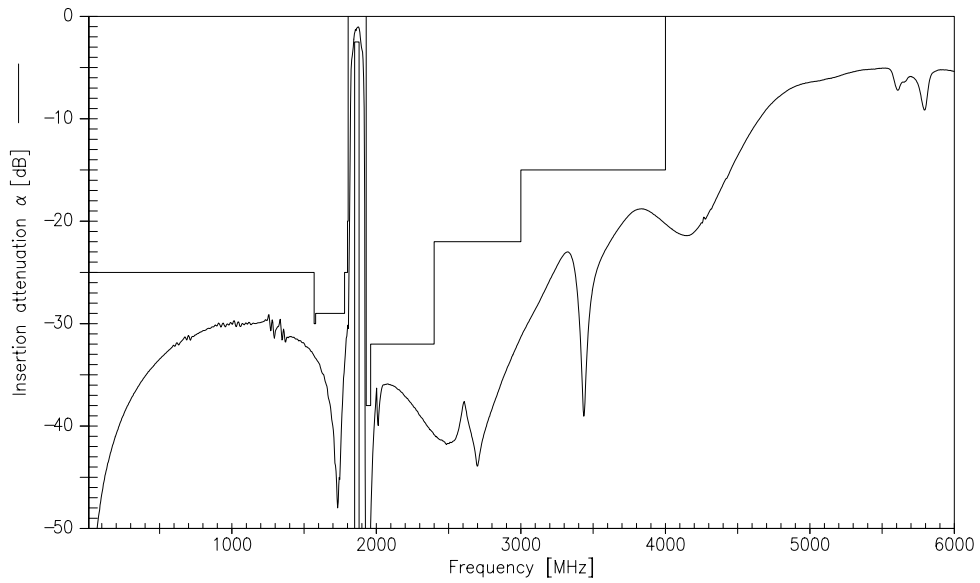




Transfer function Tx-filter 2


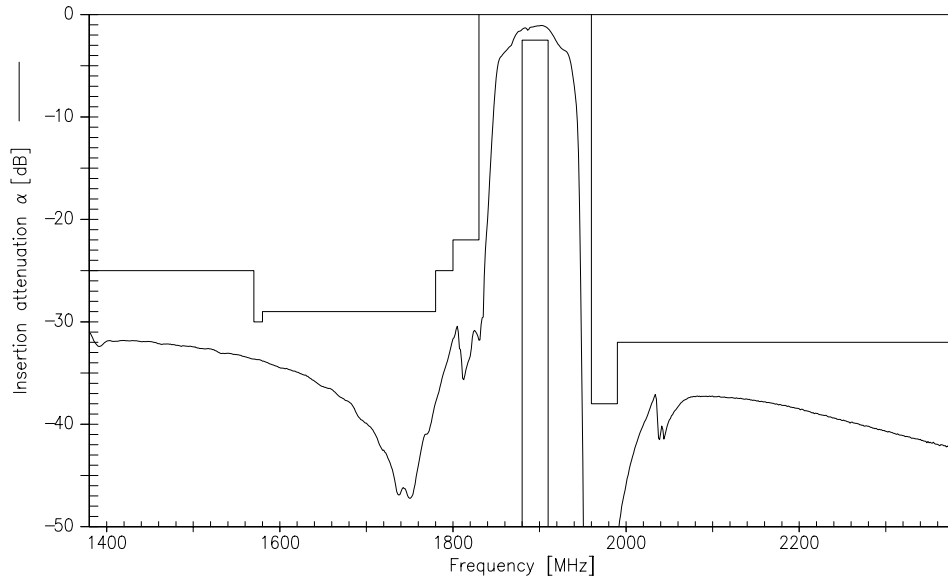


Transfer function Tx-filter 2(wideband)


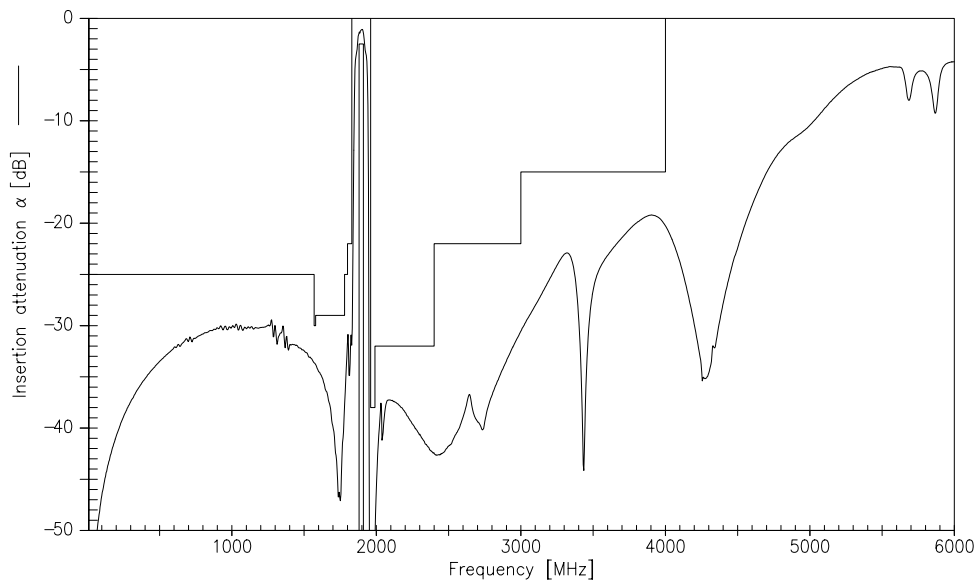




Reflection functions of Tx-filter 1

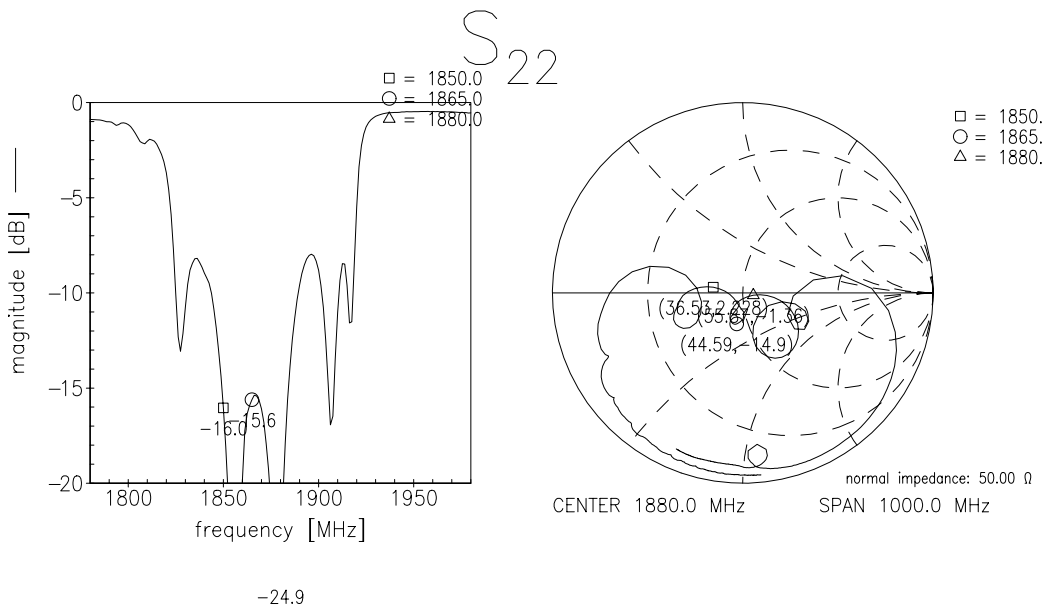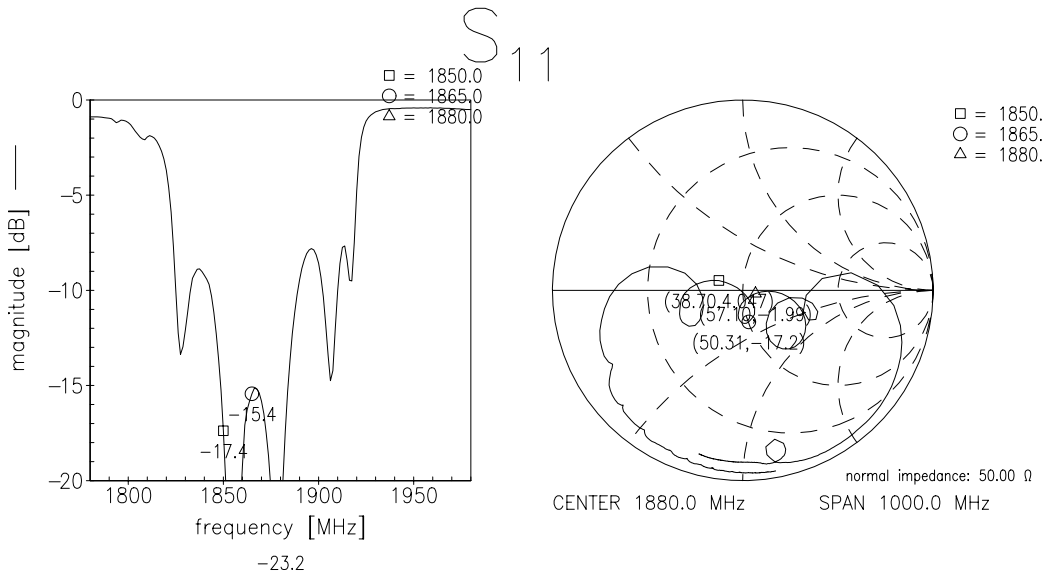

Reflection functions of Tx-filter 2

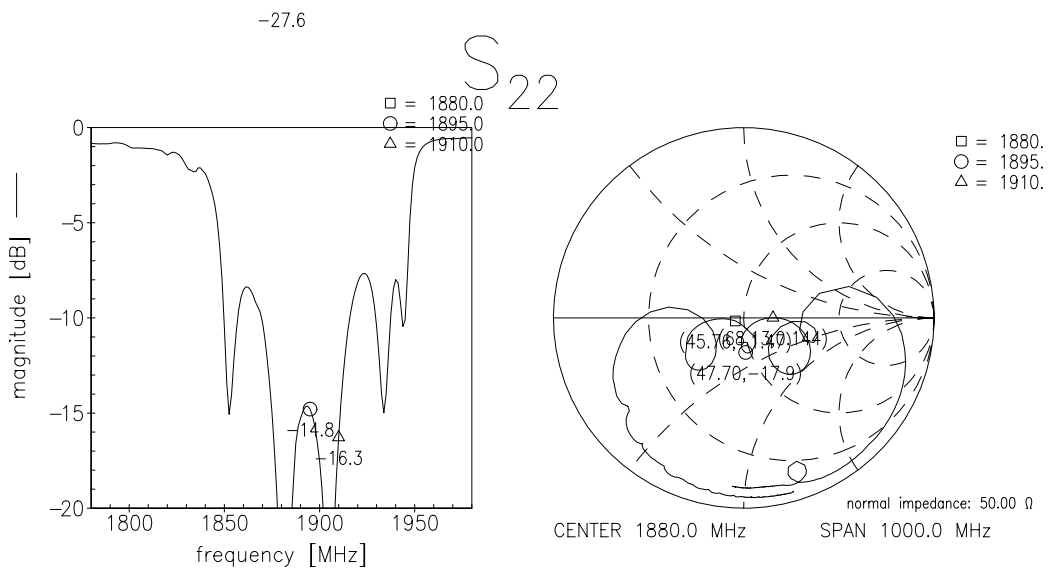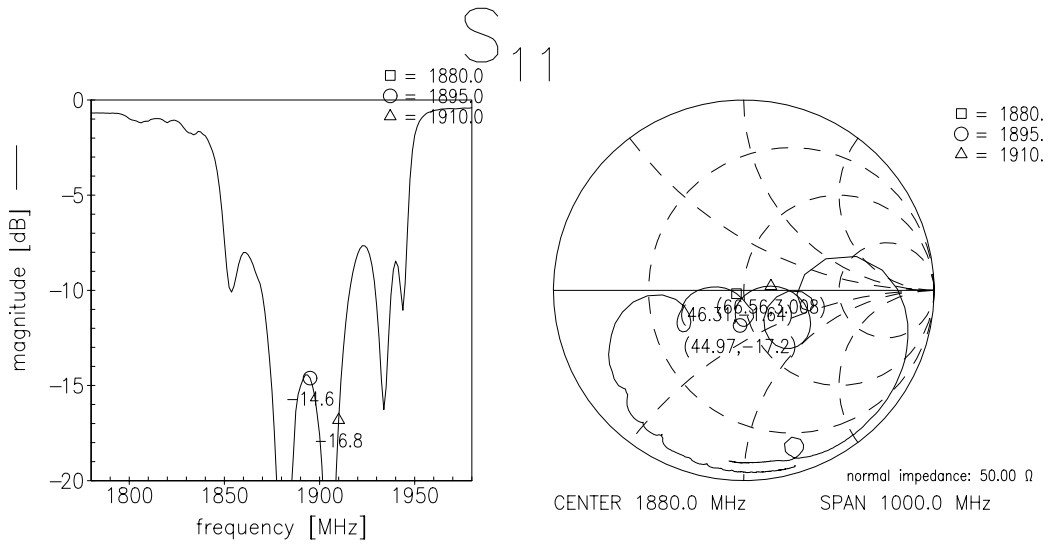



SAW Components

B4218

Low-Loss Filter for Mobile Communication

1865,0 & 1895,0 MHz

Data Sheet



Published by EPCOS AG

Surface Acoustic Wave Components Division, SAW MC WT

P.O. Box 80 17 09, D-81617 München

© EPCOS AG 2000. All Rights Reserved. Reproduction, publication and dissemination of this brochure and the information contained therein without EPCOS' prior express consent is prohibited.

The information contained in this brochure describes the type of component and shall not be considered as guaranteed characteristics. Purchase orders are subject to the General Conditions for the Supply of Products and Services of the Electrical and Electronics Industry recommended by the ZVEI (German Electrical and Electronic Manufacturers' Association), unless otherwise agreed.

This brochure replaces the previous edition.

For questions on technology, prices and delivery please contact the Sales Offices of EPCOS AG or the international Representatives.

Due to technical requirements components may contain dangerous substances. For information on the type in question please also contact one of our Sales Offices.