

Large Current Positive Voltage Regulators

■ GENERAL DESCRIPTION

The XC6203 series are highly precise, low power consumption, positive voltage regulators manufactured using CMOS and laser trimming technologies.

The series provides large currents with a significantly small dropout voltage.

The XC6203P consists of a driver transistor, a current limiter, a precision reference voltage and an error amplifier. The XC6203E is also available but without the current limiter function. Output voltage is selectable in 100mV increments between a voltage of 1.8V and 6.0V.

SOT-23 (150mW), SOT-89 (500mW), SOT-223 (1200mW) and TO-92 (300mW) package are available.


■ APPLICATIONS

- Battery powered equipment
- Reference voltage sources
- Cameras, video cameras
- CD-ROMs, DVDs
- Palmtops
- Portable audio video equipment


■ FEATURES

- Maximum Output Current** : More than 400mA (3.3V)
- Maximum Operating Voltage** : 8.0V
- Output Voltage Range** : 1.8V ~ 6.0V (selectable in 100mV increments)
- Highly Accurate** : $\pm 2\%$
- Low Power Consumption** : 8.0 μ A (TYP.)
- Line Regulation** : 0.2% / V (TYP.)
- Output Voltage Temperature Characteristics** : ± 100 ppm/ $^{\circ}$ C (TYP.)
- Operational Temperature Range** : -40° C ~ 85° C
- Dropout Voltage** : 150mV @ 100mA,
300mV @ 200mA
- Ultra Small Packages** : SOT-23, SOT-89,
SOT-223, TO-92


■ TYPICAL APPLICATION CIRCUIT

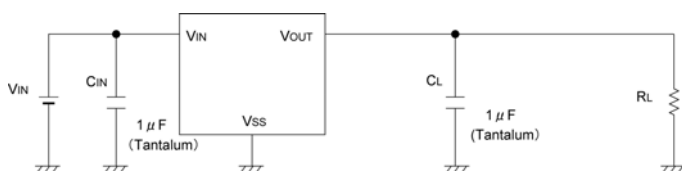

■ TYPICAL PERFORMANCE CHARACTERISTICS

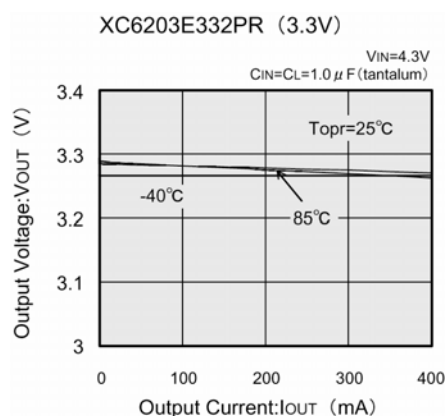

PIN CONFIGURATION

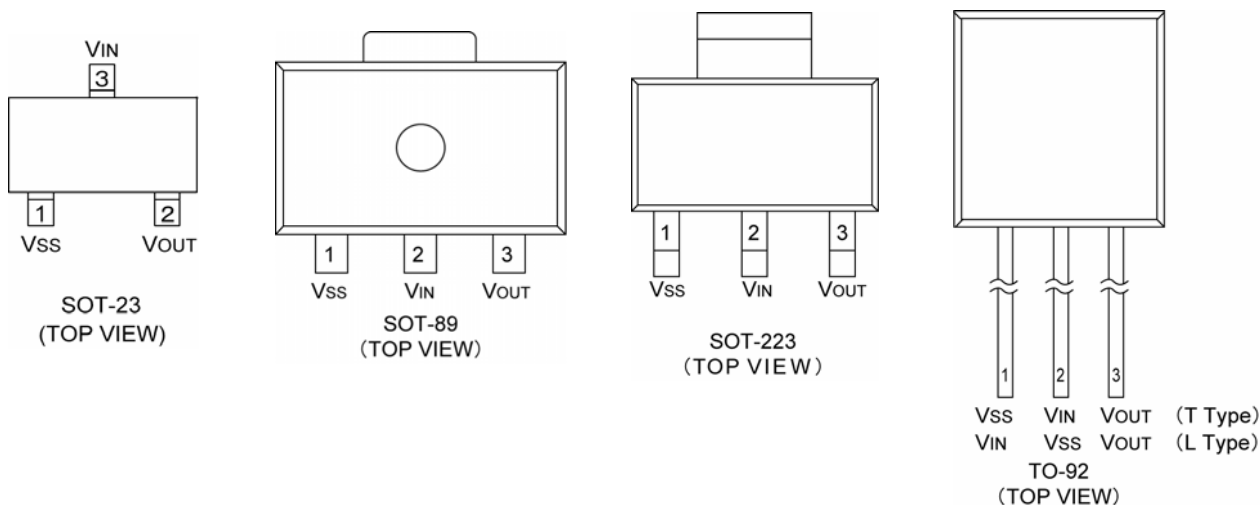

PIN ASSIGNMENT

PIN NUMBER			PIN NAME	FUNCTION
SOT-23	SOT-89/SOT-223/TO-92 (T)	TO-92(L)		
1	1	2	VSS	Ground
3	2	1	VIN	Power Input
2	3	3	VOUT	Output


PRODUCT CLASSIFICATION

Ordering Information

XC6203 ①②③④⑤⑥

DESIGNATOR	DESCRIPTION	SYMBOL	DESCRIPTION
①	Type of Regulator	P	: Current limiter circuit built-in
		E	: No current limiter circuit built-in
② ③ ④	Output Voltage	18~60, A	: e.g. 252:2.5V, Accuracy $\pm 2\%$ 28A:2.85V, Accuracy $\pm 2\%$ * * "A" indicates voltage of 50mV increments
⑤	Package	M	: SOT-23
		P	: SOT-89
		F	: SOT-223
		T	: TO-92 (Standard)
		L	: TO-92 (Custom pin configuration)
⑥	Device Orientation	R	: Embossed tape, standard feed
		L	: Embossed tape, reverse feed
		H	: Paper type (TO-92)
		B	: Bag (TO-92)

BLOCK DIAGRAMS

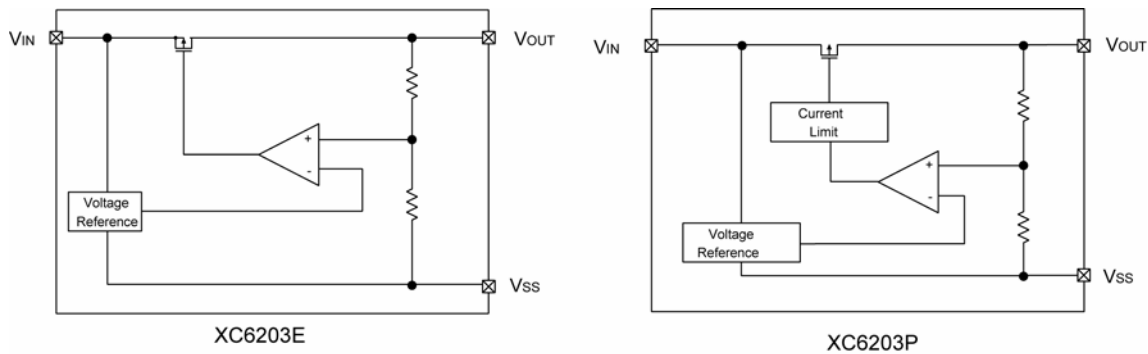

ABSOLUTE MAXIMUM RATINGS

$T_a = 25^{\circ}\text{C}$

PARAMETER		SYMBOL	RATINGS	UNITS
Input Voltage		V_{IN}	12	V
Output Current		I_{OUT}	500	mA
Output Voltage		V_{OUT}	$V_{SS}-0.3 \sim V_{IN}+0.3$	V
Power Dissipation	SOT-23	P_d	150	mW
	SOT-89		500	
	SOT-223		1,200 ^(*)	
	TO-92		300	
Operating Temperature Range		T_{opr}	$-40 \sim +85$	$^{\circ}\text{C}$
Storage Temperature Range		T_{stg}	$-55 \sim +125$	$^{\circ}\text{C}$

*: Circuits board mounting: Double-sided board

ELECTRICAL CHARACTERISTICS

XC6203X182

$V_{OUT(T)} = 1.8V$ (*1)

$T_a = 25^\circ C$

PARAMETER	SYMBOL	CONDITIONS	MIN.	TYP.	MAX.	UNITS
Output Voltage	$V_{OUT(E)}$ (*2)	$V_{IN} = 2.8V$ $I_{OUT} = 40mA$	1.764	1.800	1.836	V
Maximum Output Current	I_{OUTmax}	$V_{IN} = 2.8V$ $V_{OUT} \geq V_{OUT(E)} \times 0.90$	400	-	-	mA
Load Regulation	ΔV_{OUT}	$V_{IN} = 2.8V$ $1mA \leq I_{OUT} \leq 200mA$	-	40	100	mV
Dropout Voltage (*3)	V_{dif1}	$I_{OUT} = 100mA$	-	200	300	mV
	V_{dif2}	$I_{OUT} = 200mA$	-	400	600	
Supply Current	I_{SS}	$V_{IN} = 2.8V$	-	8.0	16.0	μA
Line Regulation	$\frac{\Delta V_{OUT}}{\Delta V_{IN} \cdot \Delta V_{OUT}}$	$I_{OUT} = 40mA$ $2.8V \leq V_{IN} \leq 8.0V$	-	0.2	0.3	%/V
Input Voltage	V_{IN}		-	-	8	V
Output Voltage Temperature Characteristics	$\frac{\Delta V_{OUT}}{\Delta T_{opr} \cdot V_{OUT}}$	$I_{OUT} = 40mA$ $-40^\circ C \leq T_{opr} \leq 85^\circ C$	-	± 100	-	ppm/ $^\circ C$
Short-Circuit Current (XC6203P Series Only)	I_{lim}	$V_{IN} = 2.8V$ $V_{OUT} = 0V$	-	60	-	mA

NOTE:

*1: $V_{OUT(T)}$ = Specified output voltage.

*2: $V_{OUT(E)}$ = Effective output voltage

(i.e. the output voltage when " $V_{OUT(T)} + 1.0V$ " is provided at the V_{IN} pin while maintaining a certain I_{OUT} value).

*3: $V_{dif} = V_{IN1} - V_{OUT1}$

*4: V_{OUT1} = A voltage equal to 98% of the output voltage when " $V_{OUT(T)} + 1.0V$ " is input.

*5: V_{IN1} = The input voltage when V_{OUT1} appears as input voltage is gradually decreased.

XC6203X252

$V_{OUT(T)} = 2.5V$ (*1)

$T_a = 25^\circ C$

PARAMETER	SYMBOL	CONDITIONS	MIN.	TYP.	MAX.	UNITS
Output Voltage	$V_{OUT(E)}$ (*2)	$V_{IN} = 3.5V$ $I_{OUT} = 40mA$	2.450	2.500	2.550	V
Maximum Output Current	I_{OUTmax}	$V_{IN} = 3.5V$ $V_{OUT} \geq V_{OUT(E)} \times 0.93$	400	-	-	mA
Load Regulation	ΔV_{OUT}	$V_{IN} = 3.5V$ $1mA \leq I_{OUT} \leq 200mA$	-	40	100	mV
Dropout Voltage (*3)	V_{dif1}	$I_{OUT} = 100mA$	-	170	250	mV
	V_{dif2}	$I_{OUT} = 200mA$	-	320	500	
Supply Current	I_{SS}	$V_{IN} = 3.5V$	-	8.0	16.0	μA
Line Regulation	$\frac{\Delta V_{OUT}}{\Delta V_{IN} \cdot \Delta V_{OUT}}$	$I_{OUT} = 40mA$ $3.5V \leq V_{IN} \leq 8.0V$	-	0.2	0.3	%/V
Input Voltage	V_{IN}		-	-	8	V
Output Voltage Temperature Characteristics	$\frac{\Delta V_{OUT}}{\Delta T_{opr} \cdot V_{OUT}}$	$I_{OUT} = 40mA$ $-40^\circ C \leq T_{opr} \leq 85^\circ C$	-	± 100	-	ppm/ $^\circ C$
Short-Circuit Current (XC6203P Series Only)	I_{lim}	$V_{IN} = 3.5V$ $V_{OUT} = 0V$	-	60	-	mA

NOTE:

*1: $V_{OUT(T)}$ = Specified output voltage.

*2: $V_{OUT(E)}$ = Effective output voltage

(i.e. the output voltage when " $V_{OUT(T)} + 1.0V$ " is provided at the V_{IN} pin while maintaining a certain I_{OUT} value).

*3: $V_{dif} = V_{IN1} - V_{OUT1}$

*4: V_{OUT1} = A voltage equal to 98% of the output voltage when " $V_{OUT(T)} + 1.0V$ " is input.

*5: V_{IN1} = The input voltage when V_{OUT1} appears as input voltage is gradually decreased.

ELECTRICAL CHARACTERISTICS (Continued)

XC6203X302

$V_{OUT(T)} = 3.0V$ (*1)

$T_a = 25^\circ C$

PARAMETER	SYMBOL	CONDITIONS	MIN.	TYP.	MAX.	UNITS
Output Voltage	$V_{OUT(E)}$ (*2)	$V_{IN}=4V$ $I_{OUT}=40mA$	2.940	3.000	3.060	V
Maximum Output Current	I_{OUTmax}	$V_{IN}=4V$ $V_{OUT} \geq V_{OUT(E)} \times 0.96$	400	-	-	mA
Load Regulation	ΔV_{OUT}	$V_{IN}=4V$ $1mA \leq I_{OUT} \leq 200mA$	-	40	100	mV
Dropout Voltage (*3)	V_{dif1}	$I_{OUT}=100mA$	-	150	220	mV
	V_{dif2}	$I_{OUT}=200mA$	-	300	420	
Supply Current	I_{SS}	$V_{IN}=4V$	-	8.0	16.0	μA
Line Regulation	$\frac{\Delta V_{OUT}}{\Delta V_{IN} \cdot \Delta V_{OUT}}$	$I_{OUT}=40mA$ $4V \leq V_{IN} \leq 8.0V$	-	0.2	0.3	%/V
Input Voltage	V_{IN}		-	-	8.0	V
Output Voltage Temperature Characteristics	$\frac{\Delta V_{OUT}}{\Delta T_{opr} \cdot V_{OUT}}$	$I_{OUT}=40mA$ $-40^\circ C \leq T_{opr} \leq 85^\circ C$	-	± 100	-	ppm/ $^\circ C$
Short-Circuit Current (XC6203P Series Only)	I_{lim}	$V_{IN}=4V$ $V_{OUT}=0V$	-	60	-	mA

NOTE:

*1: $V_{OUT(T)}$ = Specified output voltage.

*2: $V_{OUT(E)}$ = Effective output voltage

(i.e. the output voltage when " $V_{OUT(T)}+1.0V$ " is provided at the V_{IN} pin while maintaining a certain I_{OUT} value).

*3: $V_{dif} = V_{IN1} - V_{OUT1}$

*4: V_{OUT1} = A voltage equal to 98% of the output voltage when " $V_{OUT(T)} + 1.0V$ " is input.

*5: V_{IN1} = The input voltage when V_{OUT1} appears as input voltage is gradually decreased.

XC6203X332

$V_{OUT(T)} = 3.3V$ (*1)

$T_a = 25^\circ C$

PARAMETER	SYMBOL	CONDITIONS	MIN.	TYP.	MAX.	UNITS
Output Voltage	$V_{OUT(E)}$ (*2)	$V_{IN}=4.3V$ $I_{OUT}=40mA$	2.940	3.300	3.366	V
Maximum Output Current	I_{OUTmax}	$V_{IN}=4.3V$ $V_{OUT} \geq V_{OUT(E)} \times 0.96$	400	-	-	mA
Load Regulation	ΔV_{OUT}	$V_{IN}=4.3V$ $1mA \leq I_{OUT} \leq 200mA$	-	40	100	mV
Dropout Voltage (*3)	V_{dif1}	$I_{OUT}=100mA$	-	150	220	mV
	V_{dif2}	$I_{OUT}=200mA$	-	300	420	
Supply Current	I_{SS}	$V_{IN}=4.3V$	-	8.0	16.0	μA
Line Regulation	$\frac{\Delta V_{OUT}}{\Delta V_{IN} \cdot \Delta V_{OUT}}$	$I_{OUT}=40mA$ $4.3V \leq V_{IN} \leq 8.0V$	-	0.2	0.3	%/V
Input Voltage	V_{IN}		-	-	8	V
Output Voltage Temperature Characteristics	$\frac{\Delta V_{OUT}}{\Delta T_{opr} \cdot V_{OUT}}$	$I_{OUT}=40mA$ $-40^\circ C \leq T_{opr} \leq 85^\circ C$	-	± 100	-	ppm/ $^\circ C$
Short-Circuit Current (XC6203P Series Only)	I_{lim}	$V_{IN}=4.3V$ $V_{OUT}=0V$	-	60	-	mA

NOTE:

*1: $V_{OUT(T)}$ = Specified output voltage.

*2: $V_{OUT(E)}$ = Effective output voltage

(i.e. the output voltage when " $V_{OUT(T)}+1.0V$ " is provided at the V_{IN} pin while maintaining a certain I_{OUT} value).

*3: $V_{dif} = V_{IN1} - V_{OUT1}$

*4: V_{OUT1} = A voltage equal to 98% of the output voltage when " $V_{OUT(T)} + 1.0V$ " is input.

*5: V_{IN1} = The input voltage when V_{OUT1} appears as input voltage is gradually decreased.

ELECTRICAL CHARACTERISTICS (Continued)

XC6203X502

$V_{OUT(T)} = 5.0V$ (*1)

$T_a = 25^{\circ}C$

PARAMETER	SYMBOL	CONDITIONS	MIN.	TYP.	MAX.	UNITS
Output Voltage	$V_{OUT(E)}$ (*2)	$V_{IN}=6.0V$ $I_{OUT}=40mA$	4.900	5.000	5.100	V
Maximum Output Current	I_{OUTmax}	$V_{IN}=6.0V$ $V_{OUT} \geq V_{OUT(E)} \times 0.96$	400	-	-	mA
Load Regulation	ΔV_{OUT}	$V_{IN}=6.0V$ $1mA \leq I_{OUT} \leq 200mA$	-	40	100	mV
Dropout Voltage (*3)	V_{dif1}	$I_{OUT}=100mA$	-	100	180	mV
	V_{dif2}	$I_{OUT}=200mA$	-	200	320	
Supply Current	I_{SS}	$V_{IN}=6.0V$	-	10.0	20.0	μA
Line Regulation	$\frac{\Delta V_{OUT}}{\Delta V_{IN} \cdot V_{OUT}}$	$I_{OUT}=40mA$ $6.0V \leq V_{IN} \leq 8.0V$	-	0.2	0.3	%/V
Input Voltage	V_{IN}		-	-	8.0	V
Output Voltage Temperature Characteristics	$\frac{\Delta V_{OUT}}{\Delta T_{opr} \cdot V_{OUT}}$	$I_{OUT}=40mA$ $-40^{\circ}C \leq T_{opr} \leq 85^{\circ}C$	-	± 100	-	ppm/ $^{\circ}C$
Short-Circuit Current (XC6203P Series Only)	I_{lim}	$V_{IN}=6.0V$ $V_{OUT}=0V$	-	60	-	mA

NOTE:

*1: $V_{OUT(T)}$ = Specified output voltage.

*2: $V_{OUT(E)}$ = Effective output voltage


(i.e. the output voltage when " $V_{OUT(T)}+1.0V$ " is provided at the V_{IN} pin while maintaining a certain I_{OUT} value).

*3: $V_{dif} = V_{IN1} - V_{OUT1}$

*4: V_{OUT1} = A voltage equal to 98% of the output voltage when " $V_{OUT(T)} + 1.0V$ " is input.

*5: V_{IN1} = The input voltage when V_{OUT1} appears as input voltage is gradually decreased.


TYPICAL APPLICATION CIRCUIT

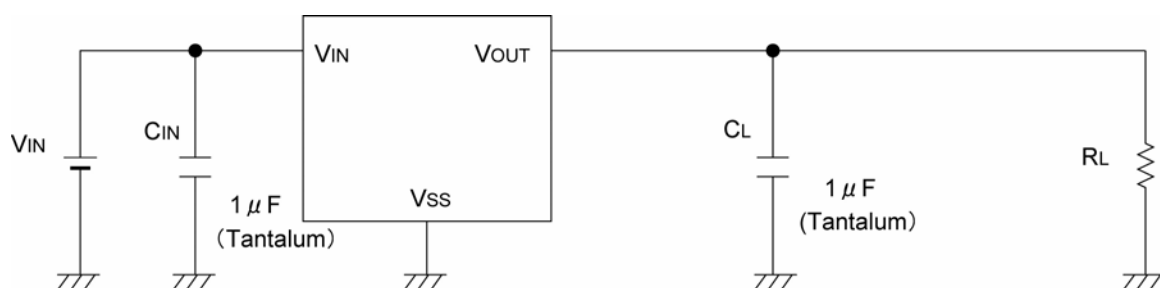


TYPICAL PERFORMANCE CHARACTERISTICS

●XC6203P182


(1) Output Voltage vs. Output Current

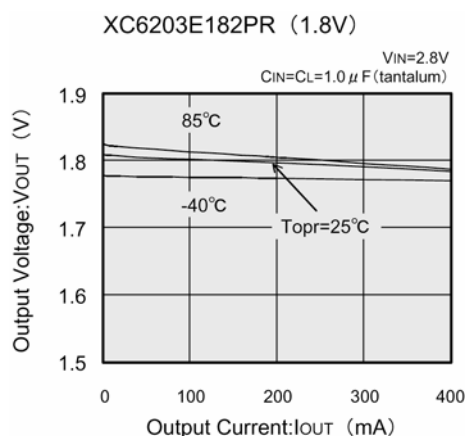


(2) Output Voltage vs. Input Voltage

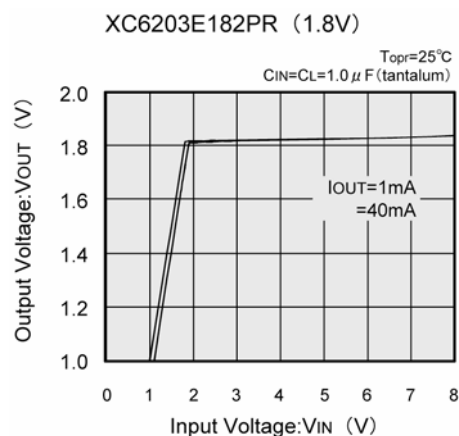


(3) Dropout Voltage vs. Output Current

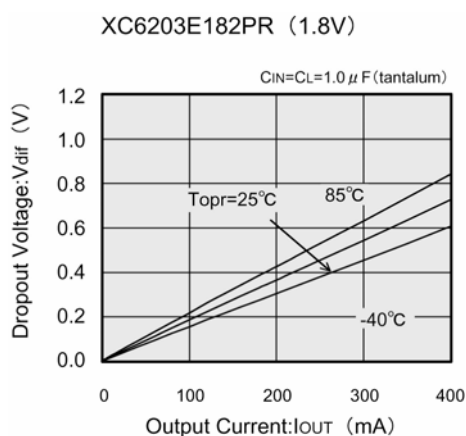


(4) Supply Current vs. Input Voltage

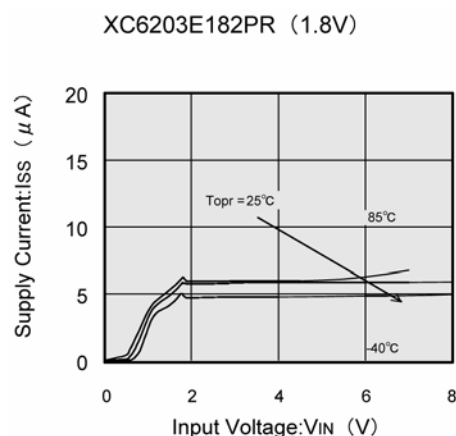

(5) Output Voltage vs. Ambient Temperature

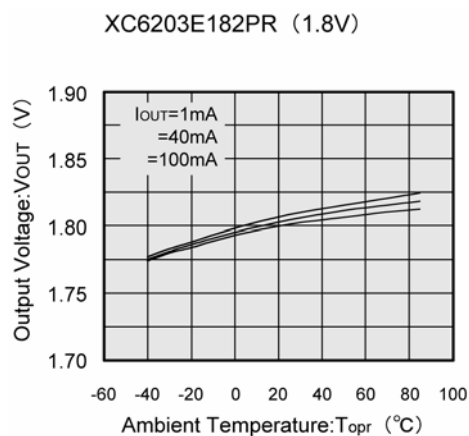


(6) Supply Current vs. Ambient Temperature

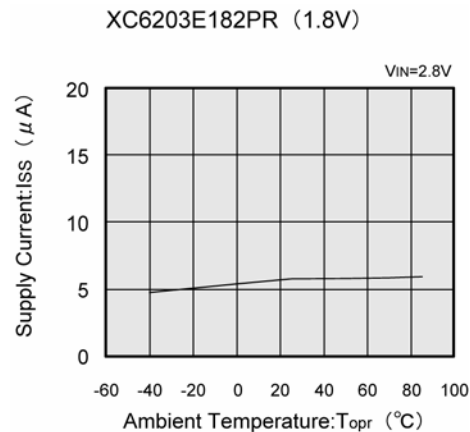



TYPICAL PERFORMANCE CHARACTERISTICS (Continued)

●XC6203P182 (Continued)



(7) Input Transient Response

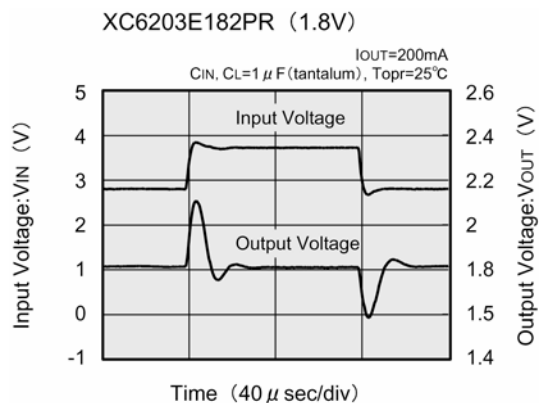

(8) Load Transient Response

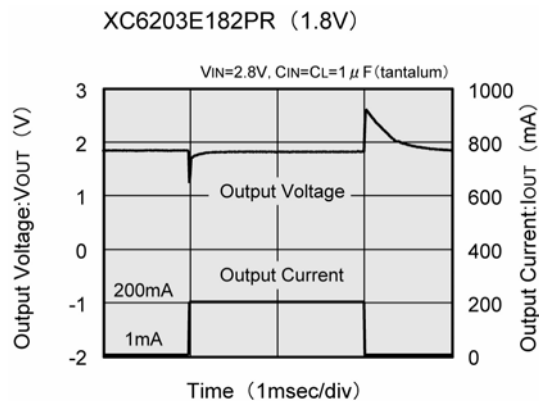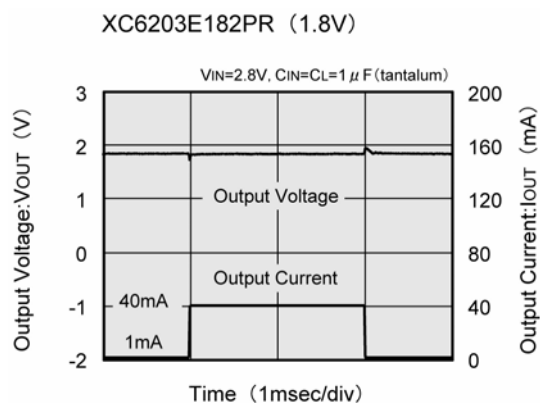


(9) Ripple Rejection Rate

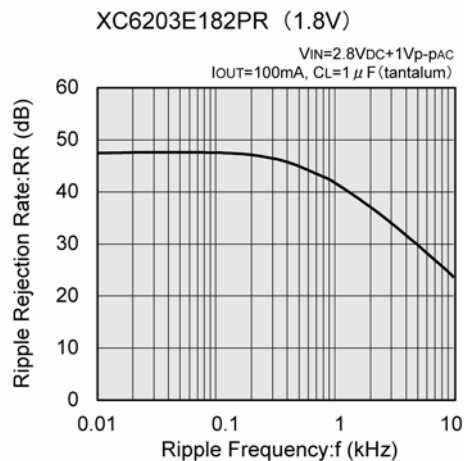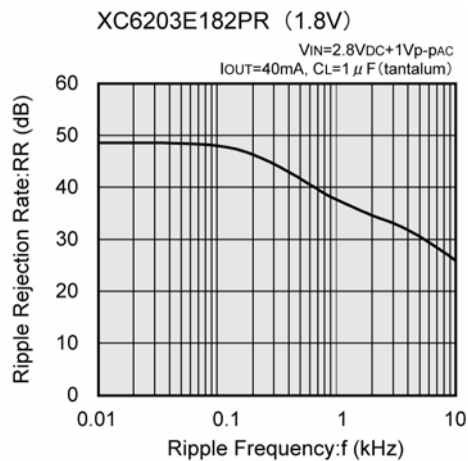


■ TYPICAL PERFORMANCE CHARACTERISTICS (Continued)

● XC6203E252PR


(1) Output Voltage vs. Output Current

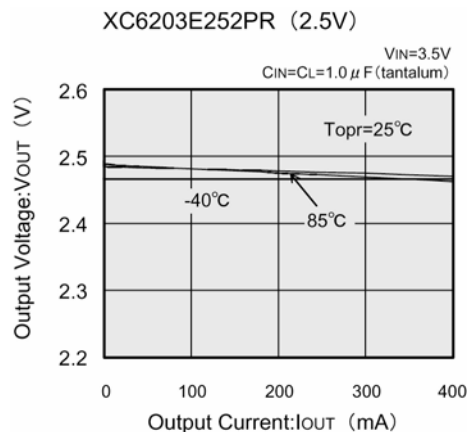


(2) Output Voltage vs. Input Voltage

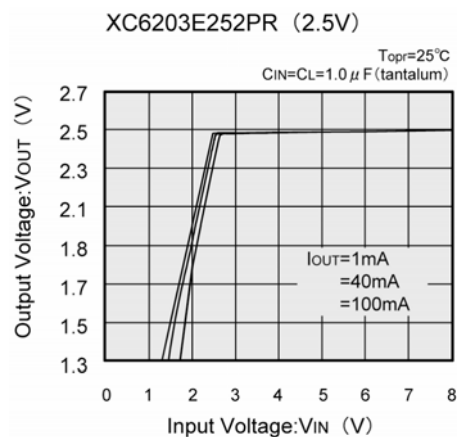


(3) Dropout Voltage vs. Output Current

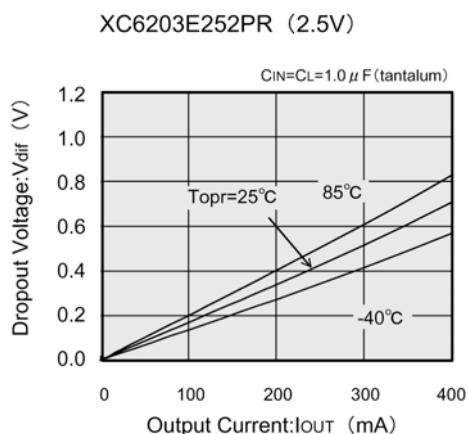


(4) Supply Current vs. Input Voltage

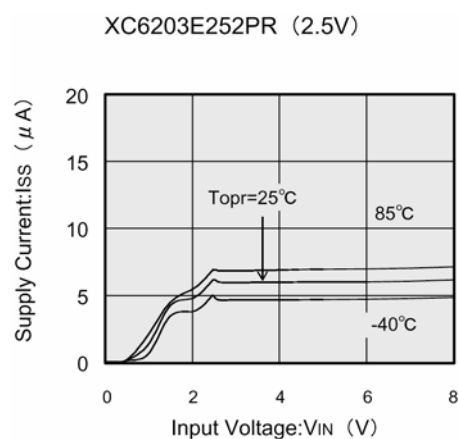

(5) Output Voltage vs. Ambient Temperature

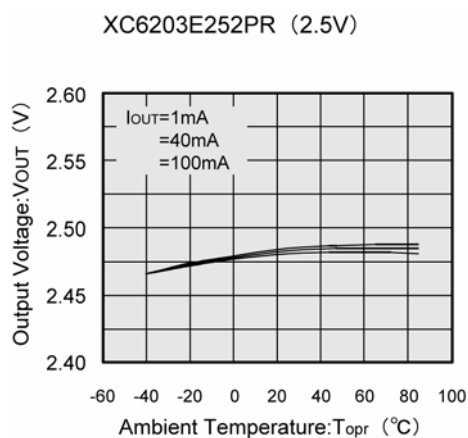



(6) Supply Current vs. Ambient Temperature

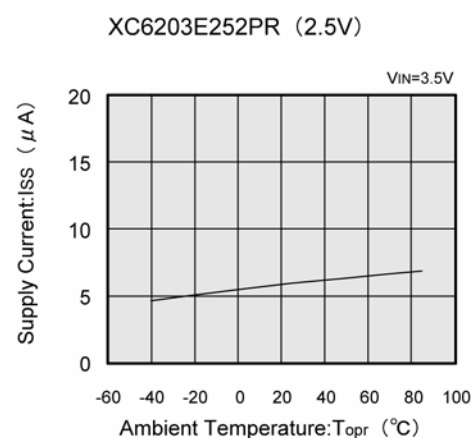



TYPICAL PERFORMANCE CHARACTERISTICS (Continued)

●XC6203E252PR (Continued)



(7) Input Transient Response

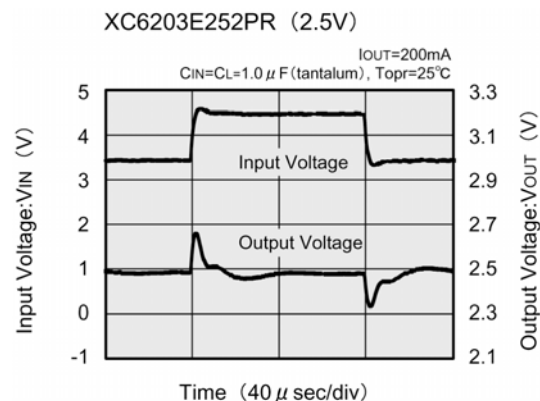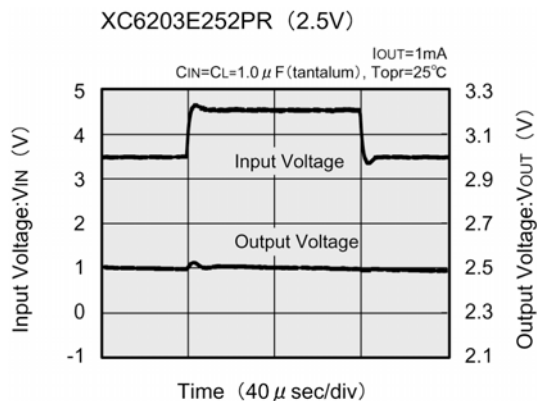

(8) Load Transient Response

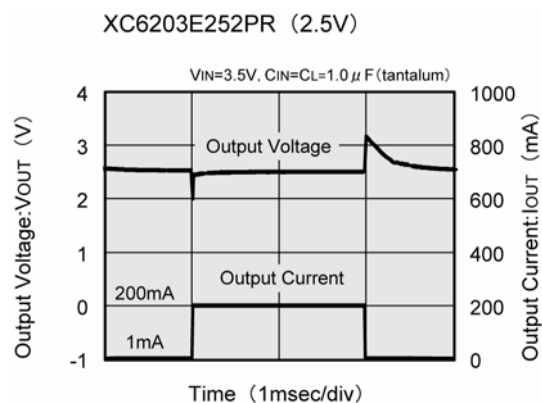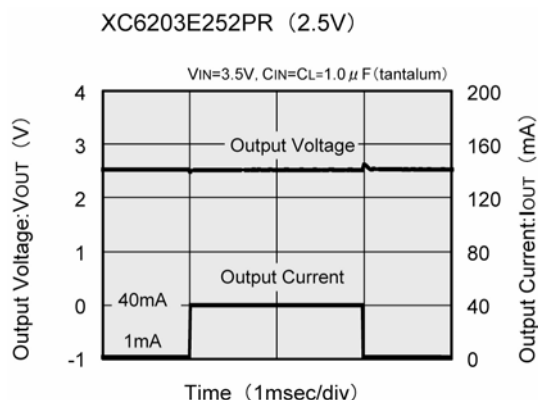


(9) Ripple Rejection Rate

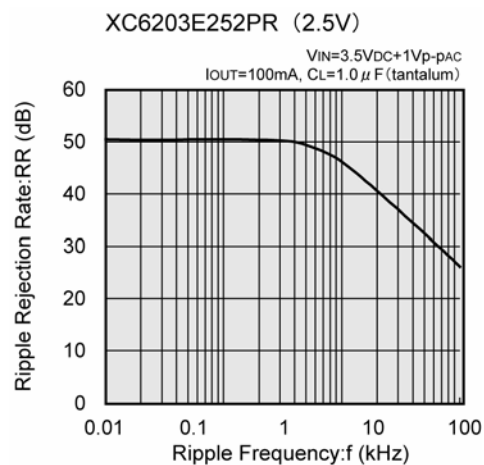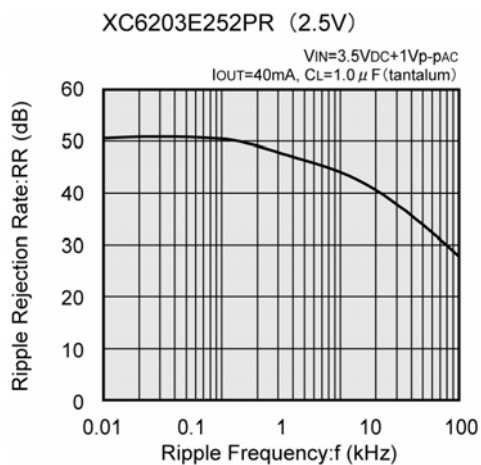


■ TYPICAL PERFORMANCE CHARACTERISTICS (Continued)

● XC6203E332PR


(1) Output Voltage vs. Output Current

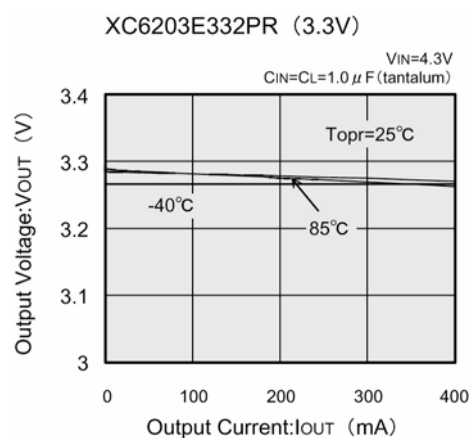


(2) Output Voltage vs. Input Voltage

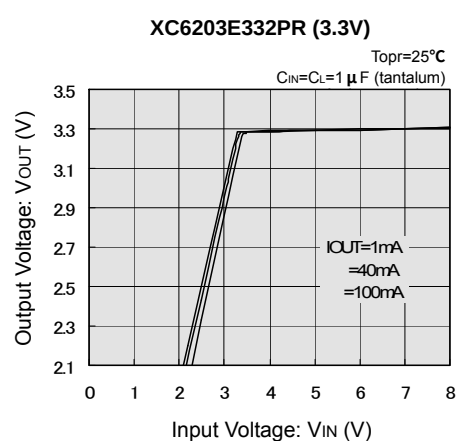


(3) Dropout Voltage vs. Output Current

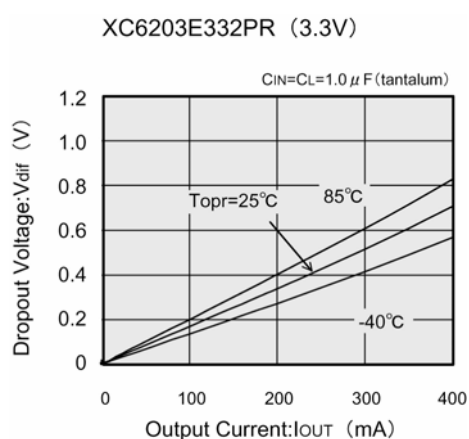


(4) Supply Current vs. Input Voltage

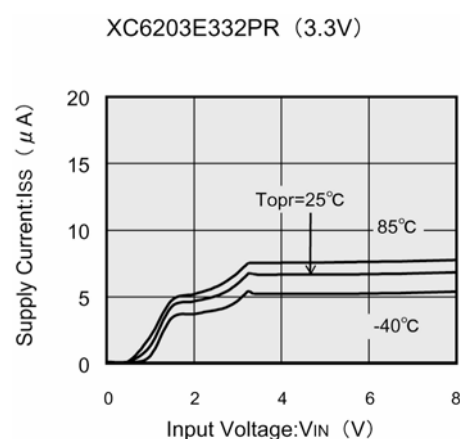

(5) Output Voltage vs. Ambient Temperature

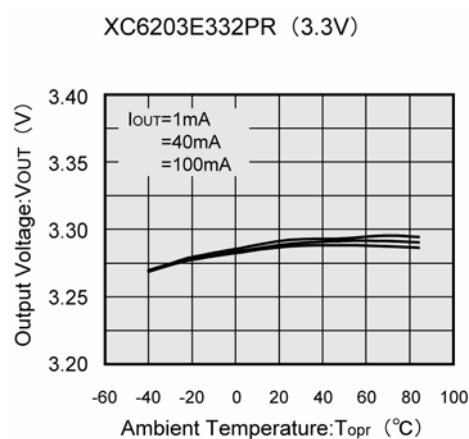



(6) Supply Current vs. Ambient Temperature

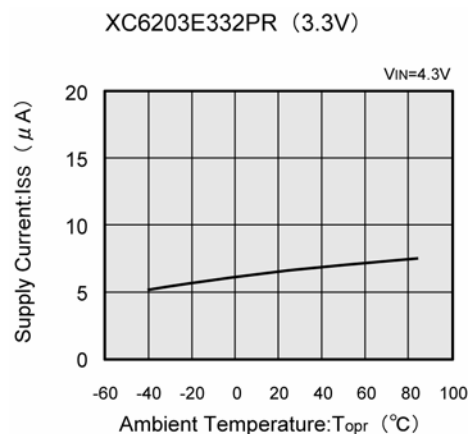



TYPICAL PERFORMANCE CHARACTERISTICS (Continued)

●XC6203E332PR (Continued)



(7) Input Transient Response

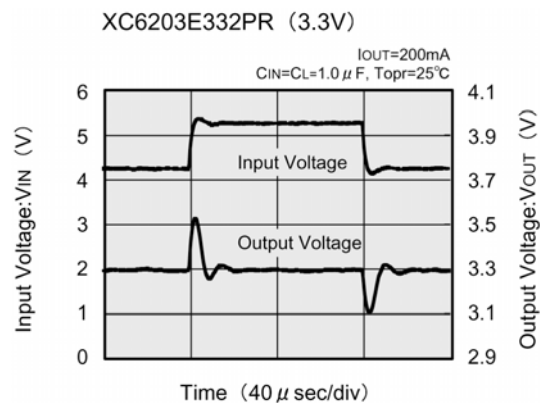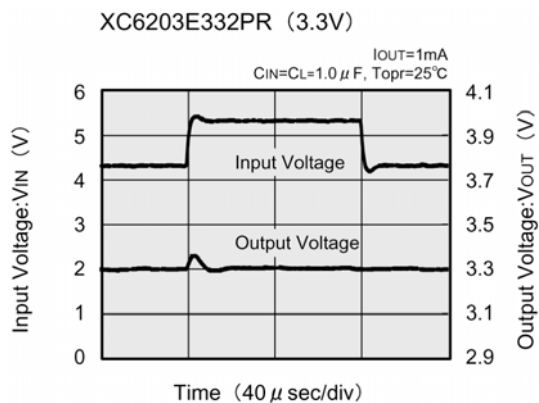

(8) Load Transient Response

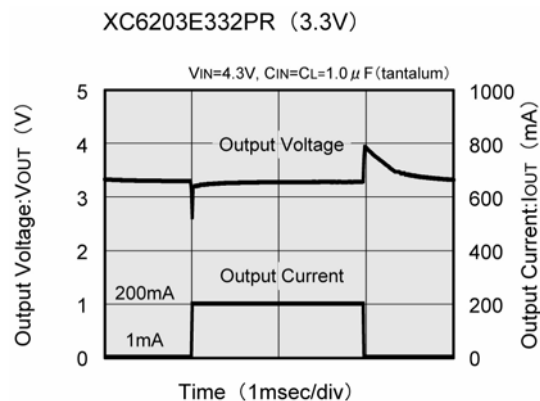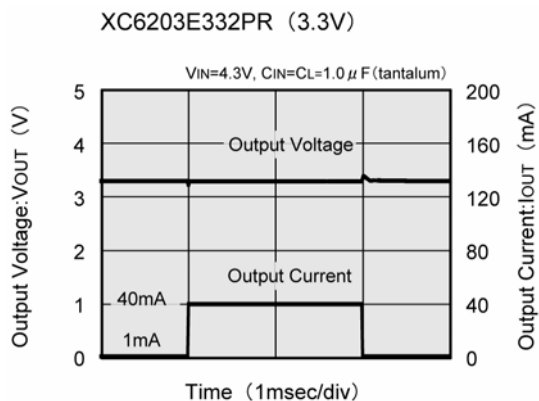


(9) Ripple Rejection Rate

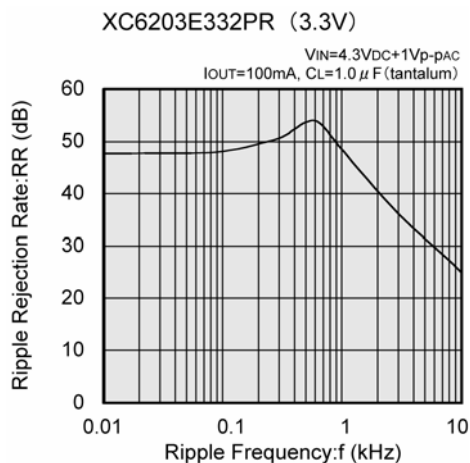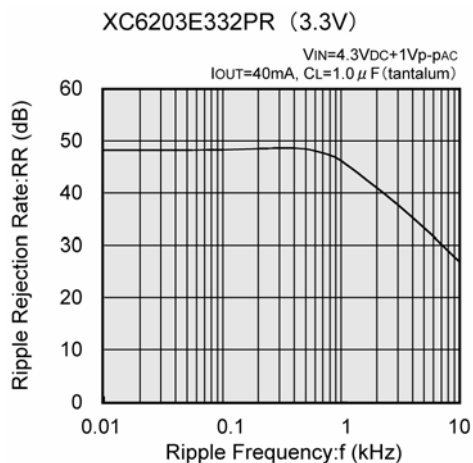


TYPICAL PERFORMANCE CHARACTERISTICS (Continued)

●XC6203E502PR


(1) Output Voltage vs. Output Current

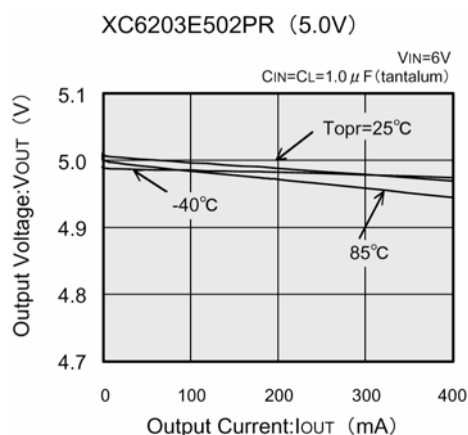


(2) Output Voltage vs. Input Voltage

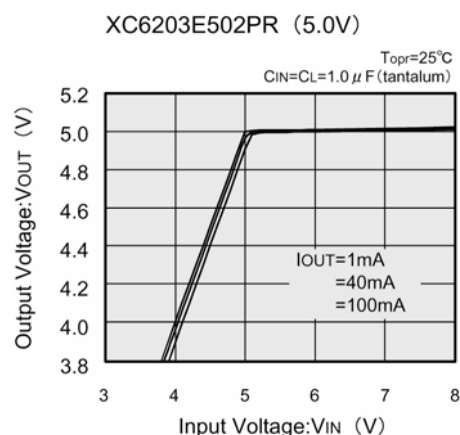


(3) Dropout Voltage vs. Output Current

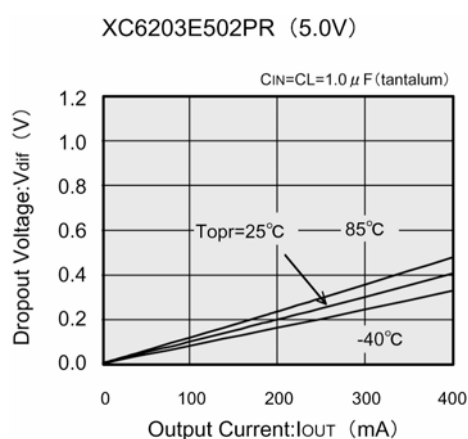


(4) Supply Current vs. Input Voltage

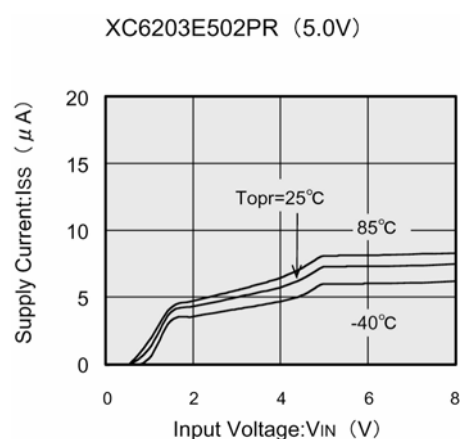

(5) Output Voltage vs. Ambient Temperature

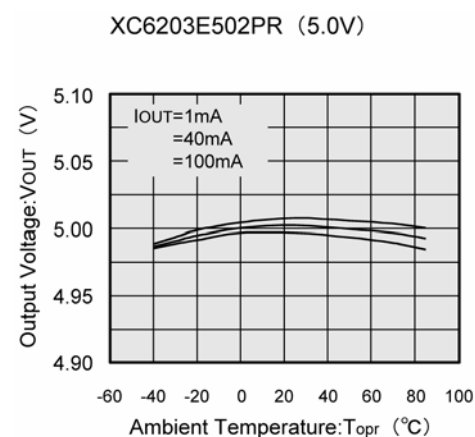



(6) Supply Current vs. Ambient Temperature

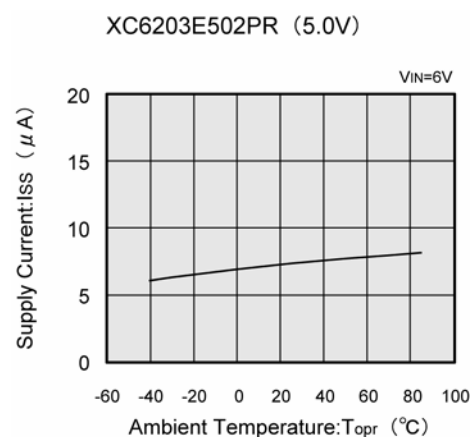



TYPICAL PERFORMANCE CHARACTERISTICS (Continued)

●XC6203E502PR (Continued)



(7) Input Transient Response

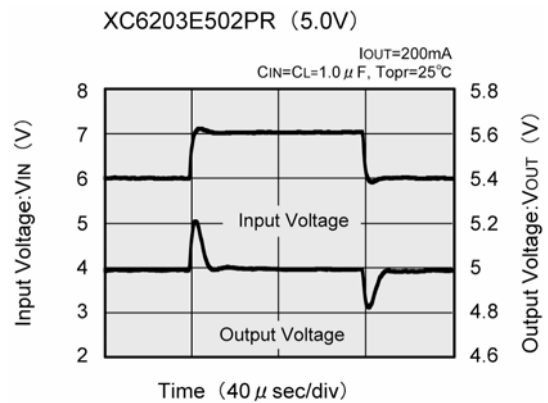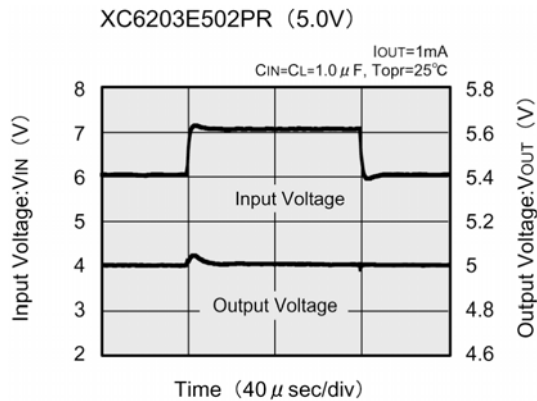

(8) Load Transient Response

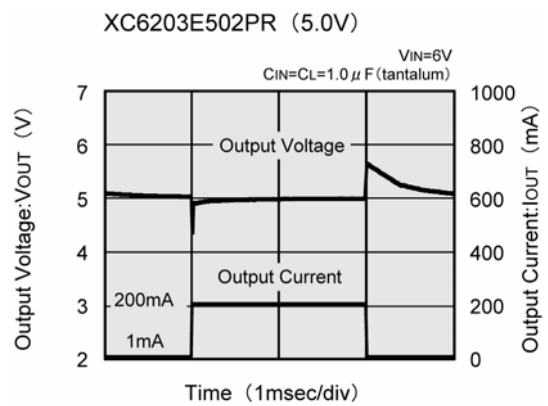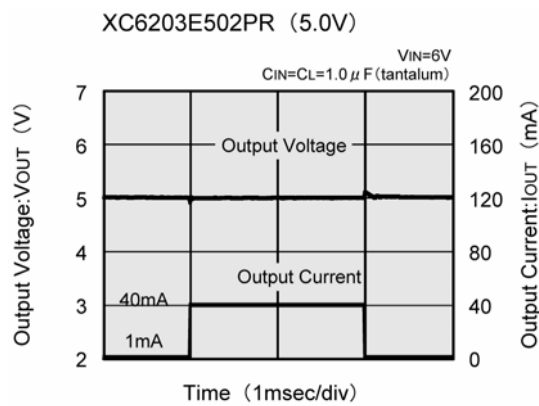





(9) Ripple Rejection Rate

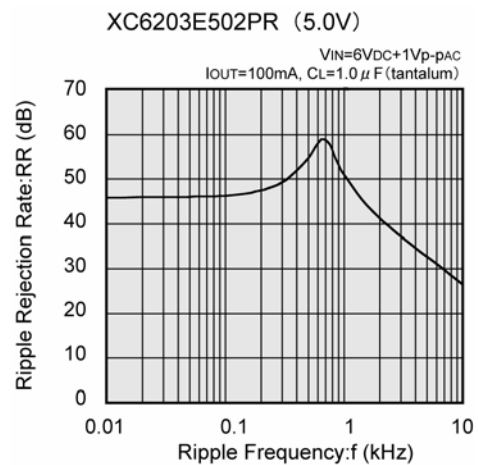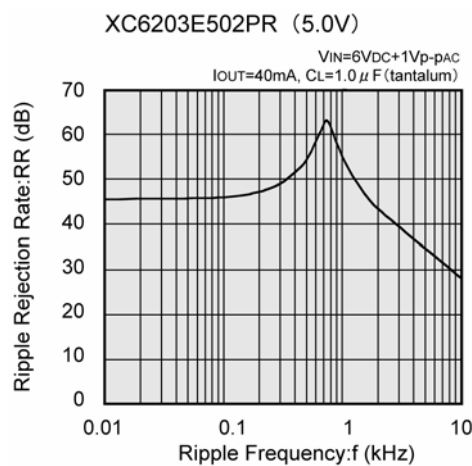

■ TYPICAL PERFORMANCE CHARACTERISTICS (Continued)


● XC6203E502PR (Continued)

(10) Output Voltage vs. Output Current

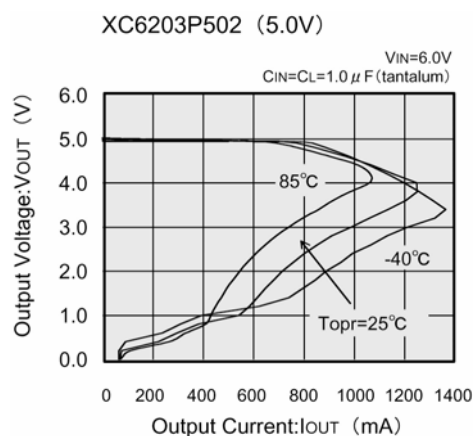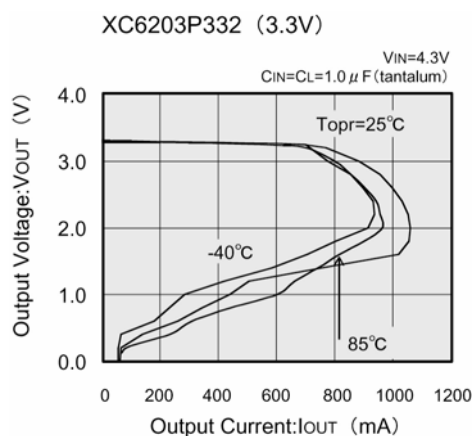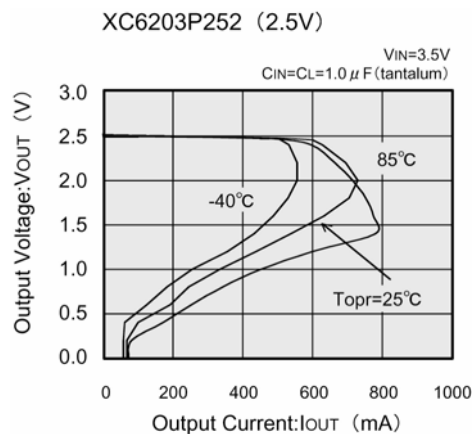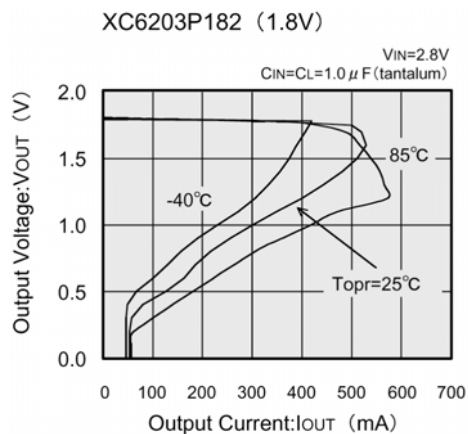


PACKAGING INFORMATION

●SOT-89

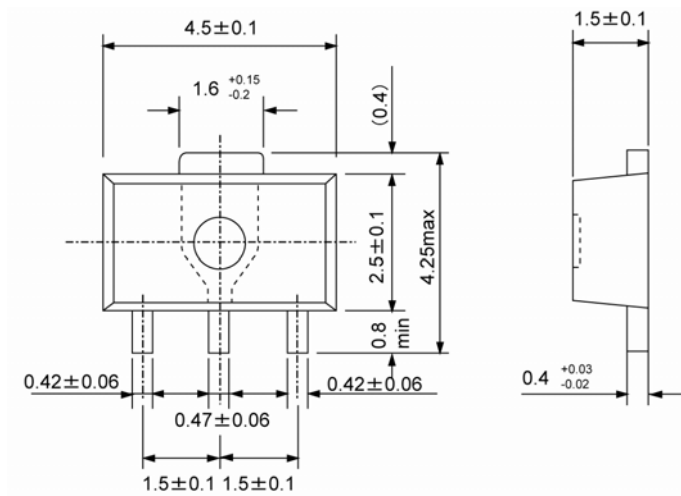


●SOT-23

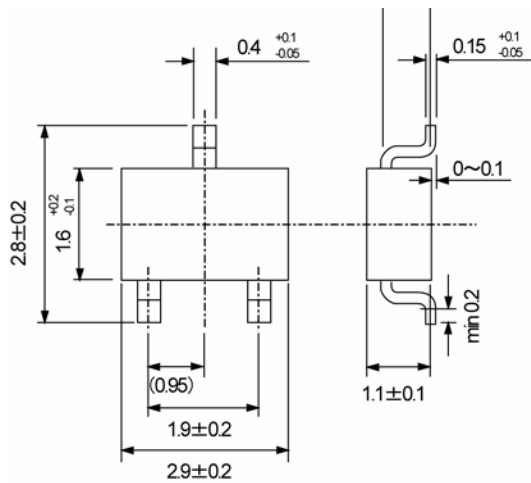


■ PACKAGING INFORMATION (Continued)

● SOT-223



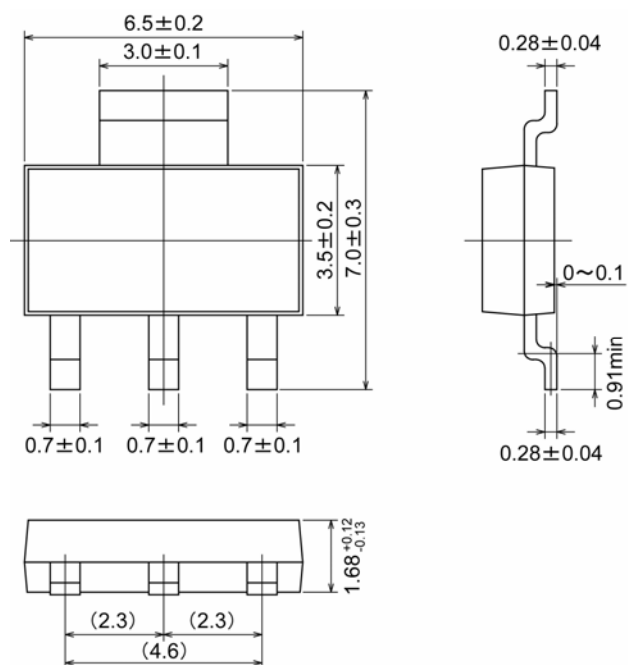


● TO-92

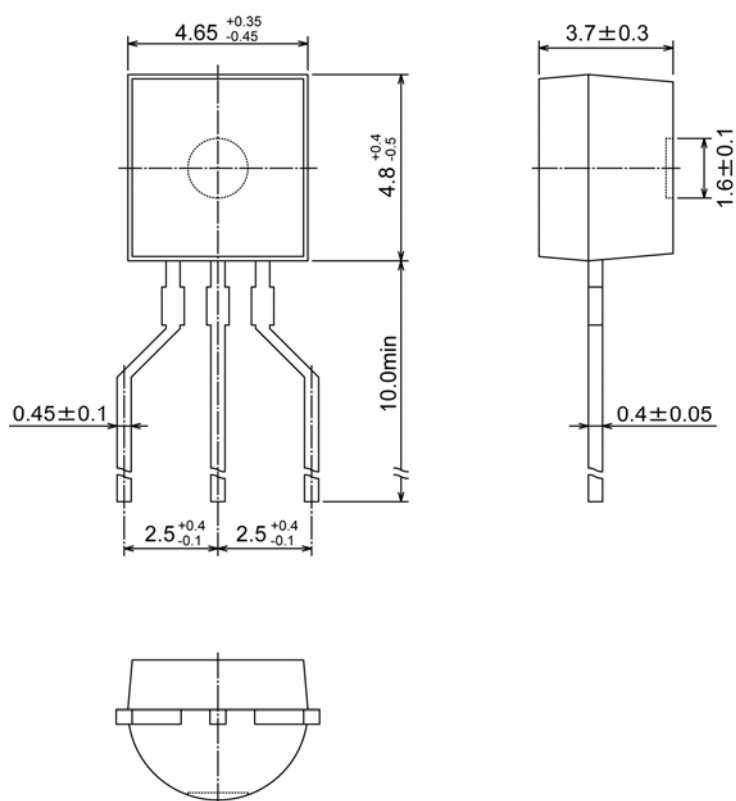

MARKING RULE

●SOT-23, SOT-89, SOT-223

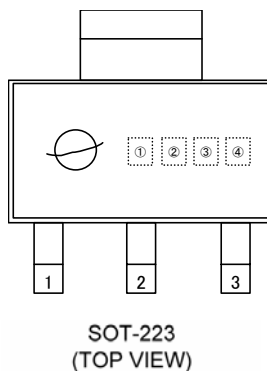

①Represents product series

MARK	PRODUCT SERIES
3	XC6203xxxxx

②Represents type of regulator

MARK			PRODUCT SERIES
VOLTAGE=0.1~3.0V	VOLTAGE=3.1~6.0V	VOLTAGE=2.85V	
5	6	7	XC6203Pxxxxx
2	3	4	XC6203Exxxxx

③Represents output voltage


MARK	OUTPUT VOLTAGE (V)			MARK	OUTPUT VOLTAGE (V)		
0	—	3.1	—	F	—	4.6	—
1	—	3.2	—	H	—	4.7	—
2	—	3.3	—	K	1.8	4.8	—
3	—	3.4	—	L	1.9	4.9	—
4	—	3.5	—	M	2.0	5.0	—
5	—	3.6	—	N	2.1	5.1	—
6	—	3.7	—	P	2.2	5.2	—
7	—	3.8	—	R	2.3	5.3	—
8	—	3.9	—	S	2.4	5.4	—
9	—	4.0	—	T	2.5	5.5	—
A	—	4.1	—	U	2.6	5.6	—
B	—	4.2	—	V	2.7	5.7	—
C	—	4.3	—	X	2.8	5.8	2.85
D	—	4.4	—	Y	2.9	5.9	—
E	—	4.5	—	Z	3.0	6.0	—

④Represents production lot number

0~9, A to Z or inverted characters of 0 to 9 and A to Z repeated (G, I, J, O, Q, W excepted)

■ MARKING RULE (Continued)

● TO-92

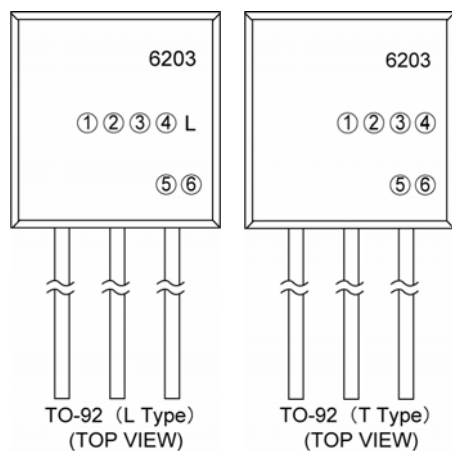

① Represents type of regulator

MARK	PRODUCT SERIES
P	XC6203Pxxxxx
E	XC6203Exxxxx

②③④ Represents output voltage and voltage accuracy

MARK			VOLTAGE (V)	VOLTAGE ACCURACY (%)	PRODUCT SERIES
②	③	④			
3	3	2	3.3	±2	XC6203x332xx
5	0	1	5.0	±1	XC6203x501xx
2	8	A	2.85	±2	XC6203x28Axx

⑤ Represents least significant digit of the production year

MARK	PRODUCTION SERIES
3	2003
4	2004

⑥ Represents production lot number

0 to 9, A to Z repeated (G, I, J, O, Q, W excepted)

Note: No character inversion used

1. The products and product specifications contained herein are subject to change without notice to improve performance characteristics. Consult us, or our representatives before use, to confirm that the information in this catalog is up to date.
2. We assume no responsibility for any infringement of patents, patent rights, or other rights arising from the use of any information and circuitry in this catalog.
3. Please ensure suitable shipping controls (including fail-safe designs and aging protection) are in force for equipment employing products listed in this catalog.
4. The products in this catalog are not developed, designed, or approved for use with such equipment whose failure of malfunction can be reasonably expected to directly endanger the life of, or cause significant injury to, the user.
(e.g. Atomic energy; aerospace; transport; combustion and associated safety equipment thereof.)
5. Please use the products listed in this catalog within the specified ranges.
Should you wish to use the products under conditions exceeding the specifications, please consult us or our representatives.
6. We assume no responsibility for damage or loss due to abnormal use.
7. All rights reserved. No part of this catalog may be copied or reproduced without the prior permission of Torex Semiconductor Ltd.

TOREX SEMICONDUCTOR LTD.