


# Ultrafast Recovery Modules

## UFT200, 201 & 202

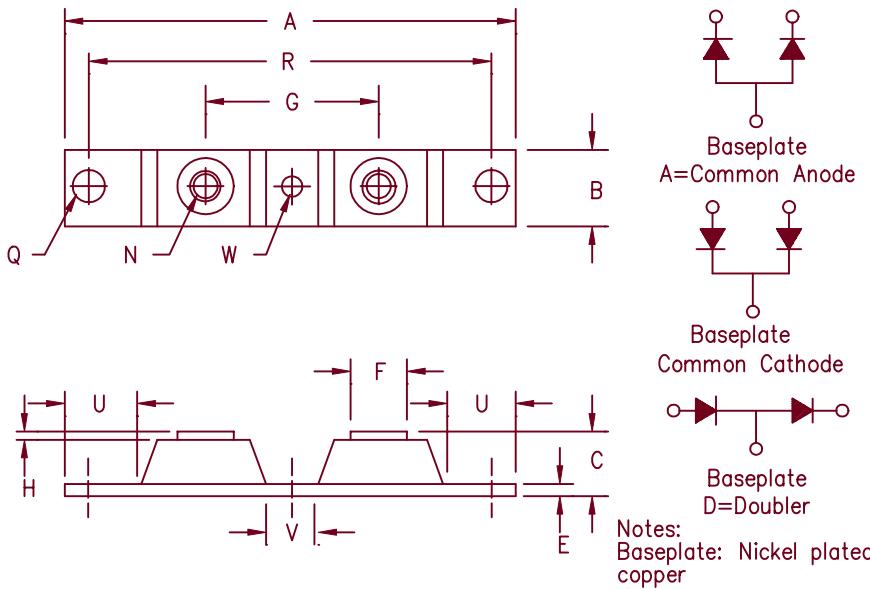

Dim. Inches		Millimeters		
Min.	Max.	Min.	Max.	Notes
A	---	3.630	---	92.20
B	0.700	0.800	17.78	20.32
C	---	0.630	---	16.00
E	0.120	0.130	3.05	3.30
F	0.490	0.510	12.45	12.95
G	1.375	BSC	34.92	BSC
H	0.010	---	0.25	---
N	---	---	---	---
Q	0.275	0.290	6.99	7.37
R	3.150	BSC	80.01	BSC
U	0.600	---	15.24	---
V	0.312	0.340	7.92	8.64
W	0.180	0.195	4.57	4.95
				Dia.

Microsemi Catalog Number	Working Reverse Voltage	Peak Reverse Voltage	Repetitive Peak Reverse Voltage
UFT20005*	50V	50V	50V
UFT20010*	100V	100V	100V
UFT20015*	150V	150V	150V
UFT20020*	200V	200V	200V
UFT20120*	300V	300V	300V
UFT20140*	400V	400V	400V
UFT20150*	500V	500V	500V
UFT20260*	600V	600V	600V
UFT20270*	700V	700V	700V
UFT20280*	800V	800V	800V

Add Suffix A for Common Anode, D for Doubler

- Ultra Fast Recovery
- 175°C Junction Temperature
- V<sub>RRM</sub> 50 to 800 Volts
- High surge capacity
- 2 X 100 Amp current rating

### Electrical Characteristics

	UFT200	UFT201	UFT202	
Average forward current per pkg	I <sub>F(AV)</sub> 200A	I <sub>F(AV)</sub> 200A	I <sub>F(AV)</sub> 200A	Square Wave
Average forward current per leg	I <sub>F(AV)</sub> 100A	I <sub>F(AV)</sub> 100A	I <sub>F(AV)</sub> 100A	Square Wave
Case Temperature	T <sub>C</sub> 135°C	T <sub>C</sub> 120°C	T <sub>C</sub> 115°C	R <sub>θJC</sub> = 0.5°C/W
Maximum surge current per leg	I <sub>FSM</sub> 1500A	I <sub>FSM</sub> 1400A	I <sub>FSM</sub> 1200A	8.3ms, half sine, T <sub>J</sub> = 175°C
Max peak forward voltage per leg	V <sub>FM</sub> .975V	V <sub>FM</sub> 1.25V	V <sub>FM</sub> 1.35V	I <sub>FM</sub> = 100A: T <sub>J</sub> = 25°C*
Max reverse recovery time per leg	t <sub>rr</sub> 50ns	t <sub>rr</sub> 70ns	t <sub>rr</sub> 90ns	1/2A, 1A, 1/4A, T <sub>J</sub> = 25°C
Max peak reverse current per leg	I <sub>RM</sub> 6.0mA	I <sub>RM</sub> 6.0mA	I <sub>RM</sub> 6.0mA	V <sub>RRM</sub> , T <sub>J</sub> = 125°C
Max peak reverse current per leg	I <sub>RM</sub> 50μA	I <sub>RM</sub> 50μA	I <sub>RM</sub> 50μA	V <sub>RRM</sub> , T <sub>J</sub> = 25°C
Typical Junction capacitance	C <sub>J</sub> 575pF	C <sub>J</sub> 300pF	C <sub>J</sub> 275pF	V <sub>R</sub> = 10V, T <sub>J</sub> = 25°C

\*Pulse test: Pulse width 300 usec, Duty cycle 2%

### Thermal and Mechanical Characteristics

Storage temp range	T <sub>STG</sub>	-55°C to 175°C
Operating junction temp range	T <sub>J</sub>	-55°C to 175°C
Max thermal resistance per leg	R <sub>θJC</sub>	0.5°C/W Junction to case
Max thermal resistance per pkg	R <sub>θJC</sub>	0.25°C/W Junction to case
Typical thermal resistance	R <sub>θCS</sub>	0.08°C/W Case to sink
Terminal Torque		35–50 inch pounds
Mounting base torque – (outside holes)		30–40 inch pounds
Mounting base torque – (center hole)		8–10 inch pounds
center bolt must be torqued first		
Weight		2.8 ounces (75 grams) typical

# UFT200

Figure 1  
Typical Forward Characteristics – Per Leg

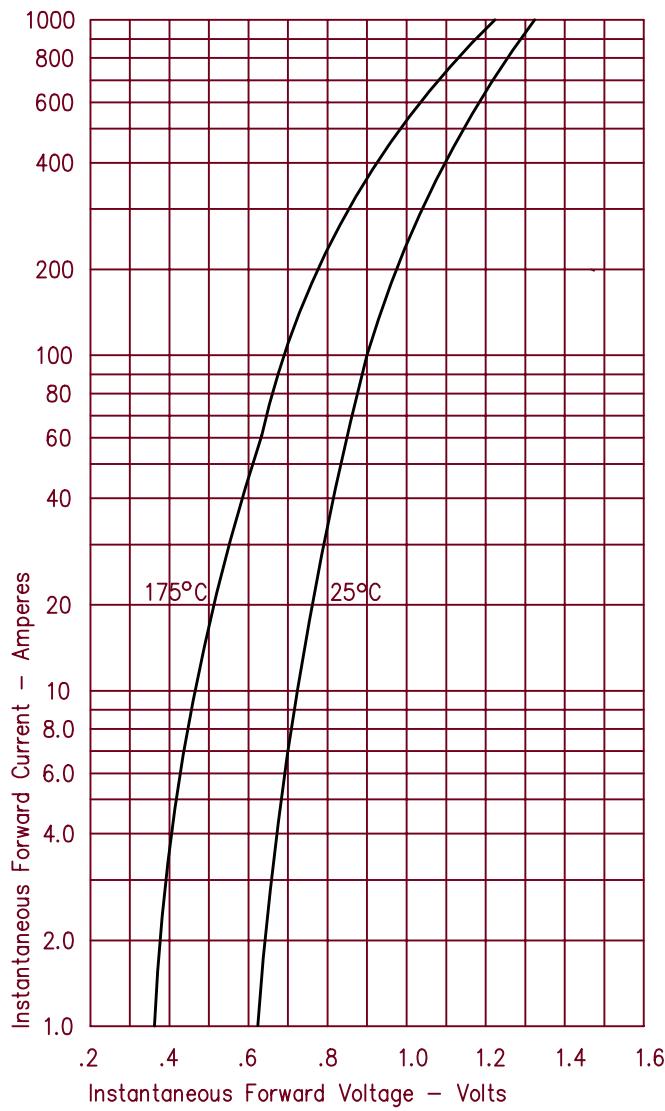


Figure 2  
Typical Reverse Characteristics – Per Leg

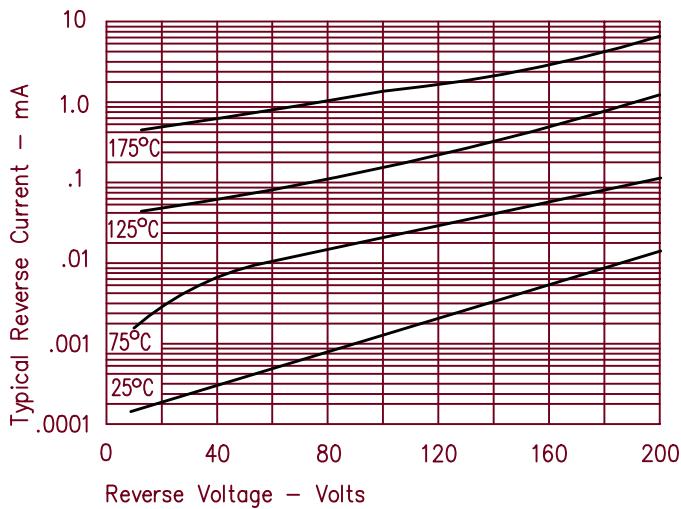


Figure 3  
Typical Junction Capacitance – Per Leg

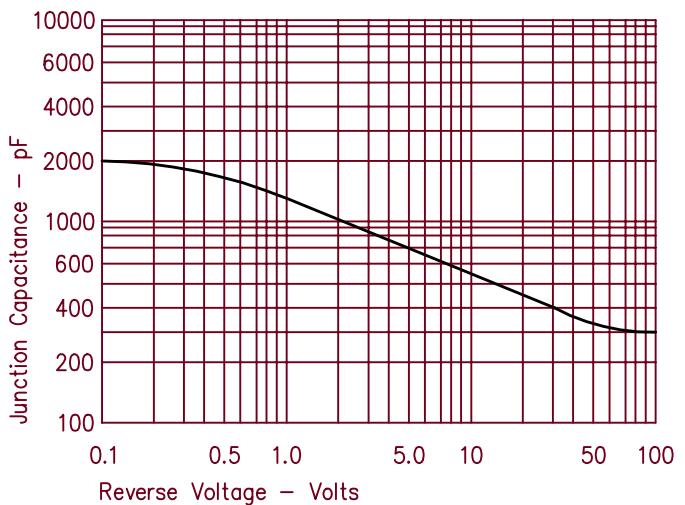


Figure 4  
Forward Current Derating – Per Leg


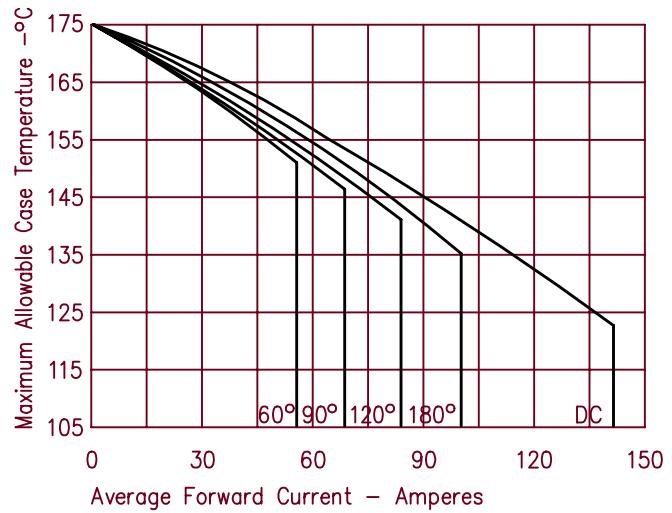


Figure 5  
Maximum Forward Power Dissipation – Per Leg

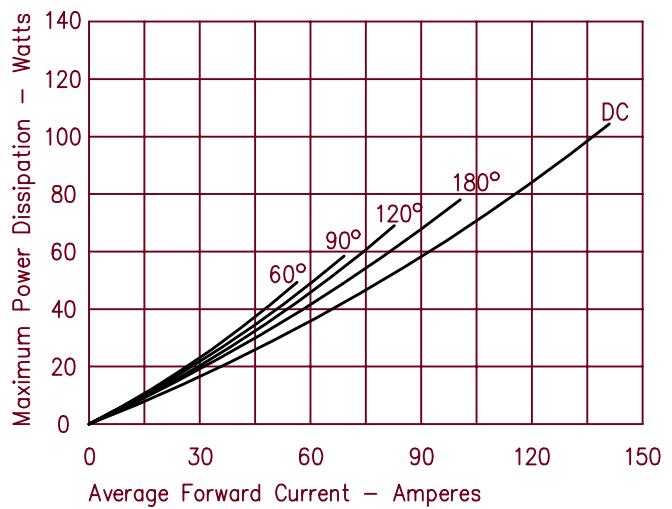

# UFT201

Figure 1  
Typical Forward Characteristics – Per Leg

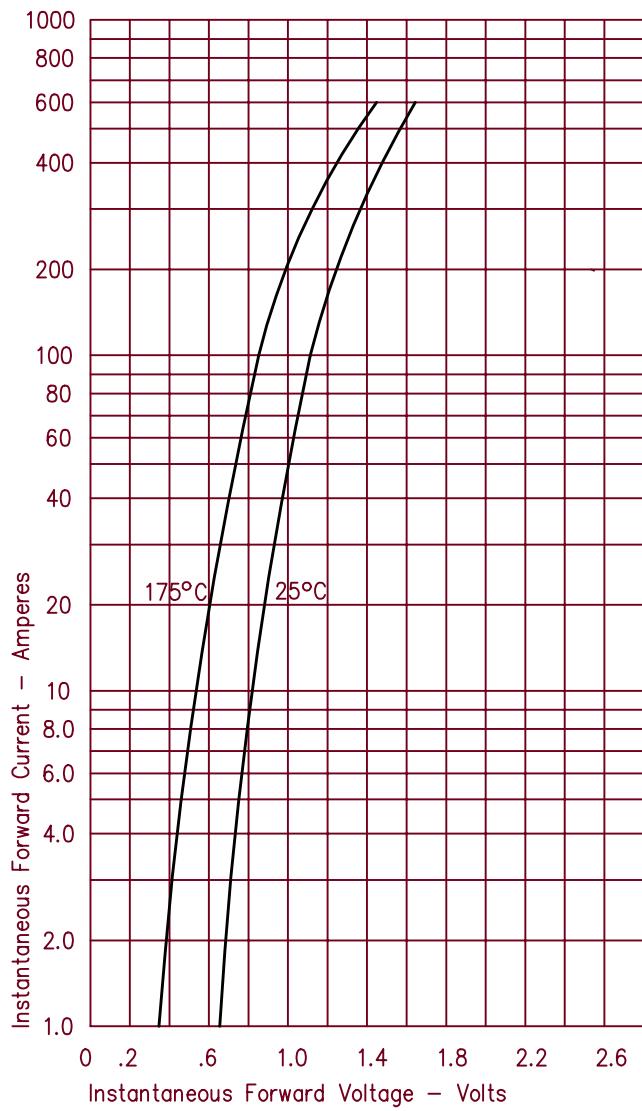


Figure 2  
Typical Reverse Characteristics – Per Leg

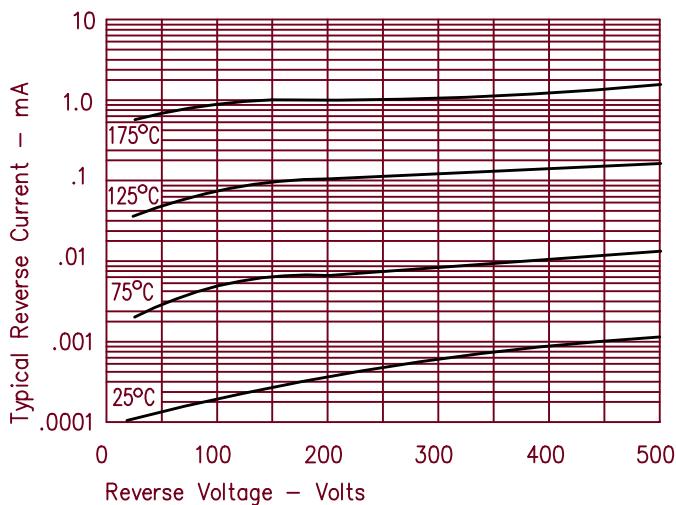


Figure 3  
Typical Junction Capacitance – Per Leg

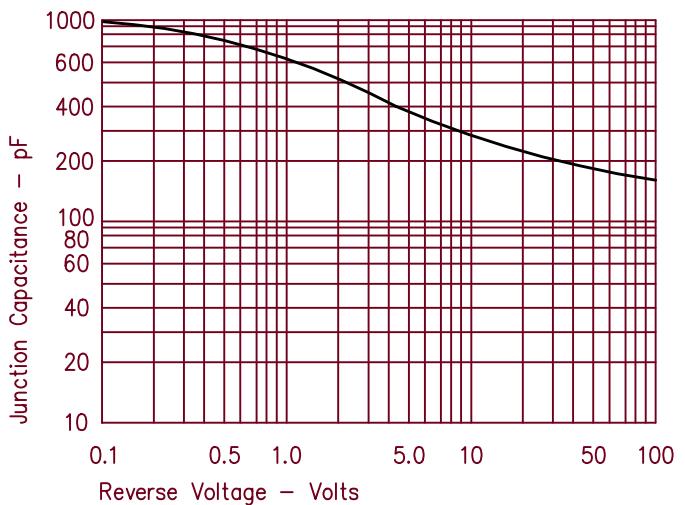


Figure 4  
Forward Current Derating – Per Leg


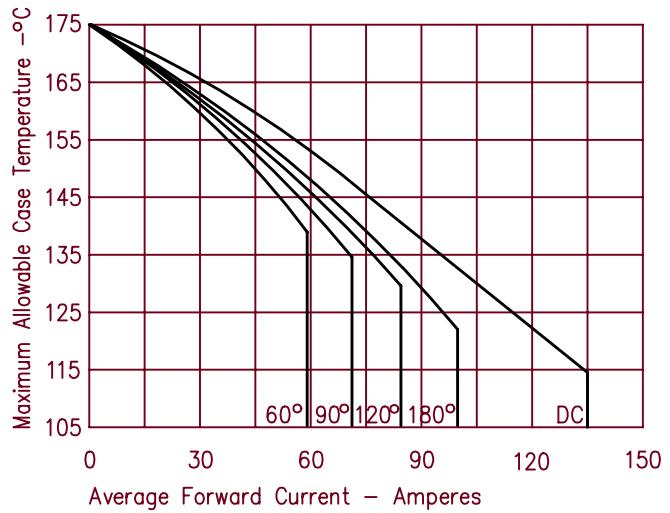


Figure 5  
Maximum Forward Power Dissipation – Per Leg

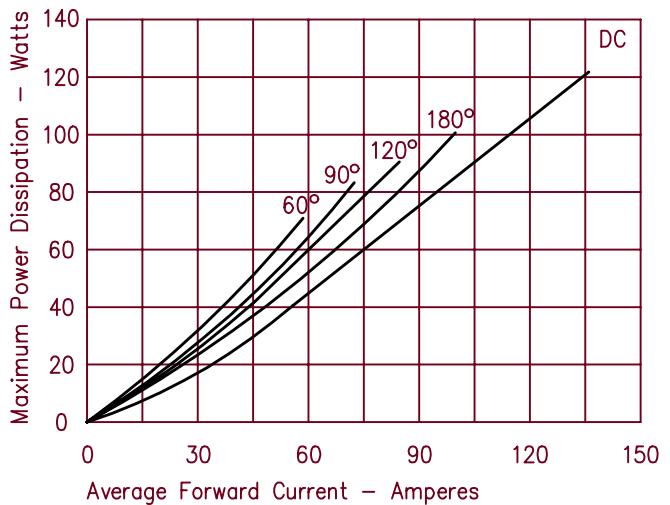

# UFT202

Figure 1  
Typical Forward Characteristics – Per Leg

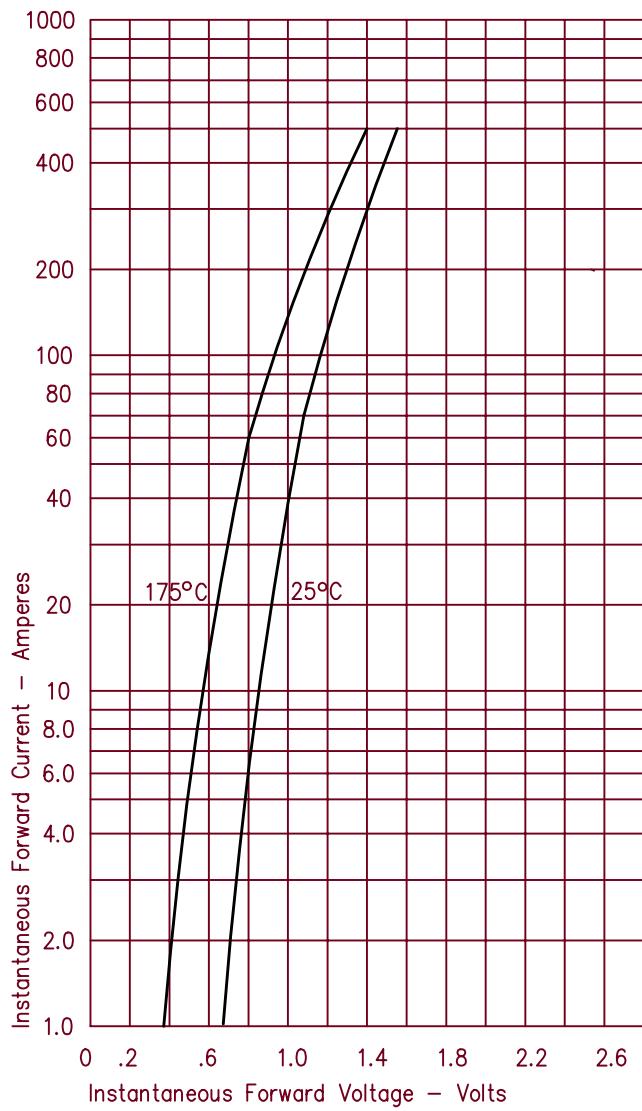


Figure 2  
Typical Reverse Characteristics – Per Leg

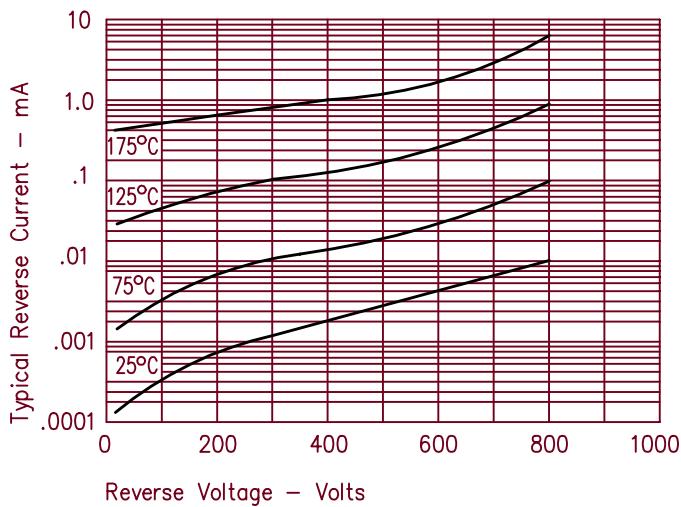


Figure 3  
Typical Junction Capacitance – Per Leg

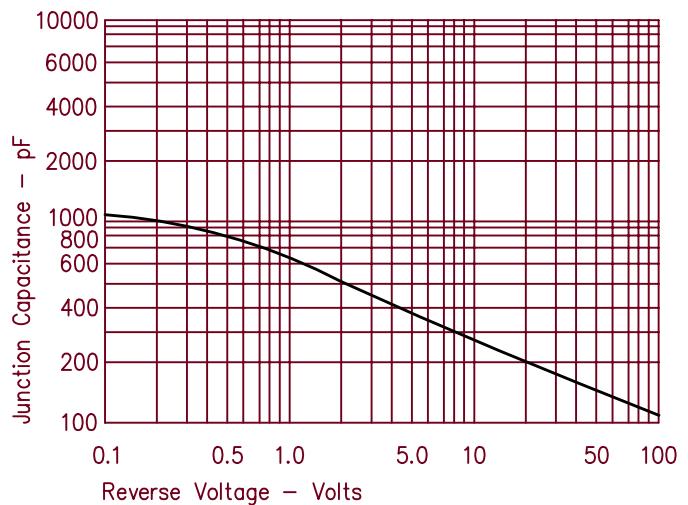


Figure 4  
Forward Current Derating – Per Leg

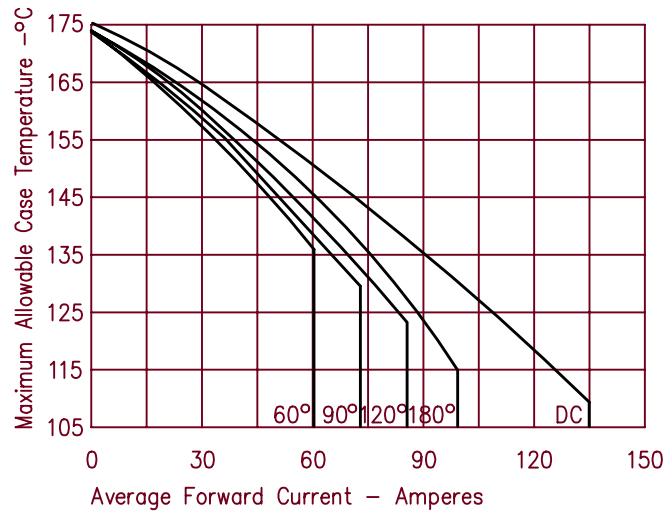


Figure 5  
Maximum Forward Power Dissipation – Per Leg

