

M32173T-PTC

Converter for In-circuit Connection (for 32172, 32173 Group)

Function

This converter is used exclusively for debugging with the emulator M32100T5-SDI-E, M32100T3-SDI-E, M32100T2-SDI-E or M32100T-SDI-E (Discontinued product) when the target is an M3217xFxxFP of M32R Family 32172 and 32173 Group MCUs and is connected in-circuit with the emulator. It allows debugging such as real-time tracing. It is not only for debugging but also for evaluation by mounting on the target system.

Attaching Procedure

When debugging


- (1) Mount the NQPACK144SD on the foot pattern on the target system.
- (2) On top of (1), mount YQPACK144SD.
- (3) Screw down the YQPACK144SD with YQ-GUIDE's.
- (4) Connect the JTAG cables on the probe of the emulator to M32173T-PTC.
- (5) Connect YQPACK144SD and M32173T-PTC.

During board-mounted evaluation


On NQPACK144SD mounted on the target system, first put an MCU (M3217xFxxFP), and then the HQPACK144SD (option).

(1) For debugging

Interface cables of the probe




(2) For board-based evaluation

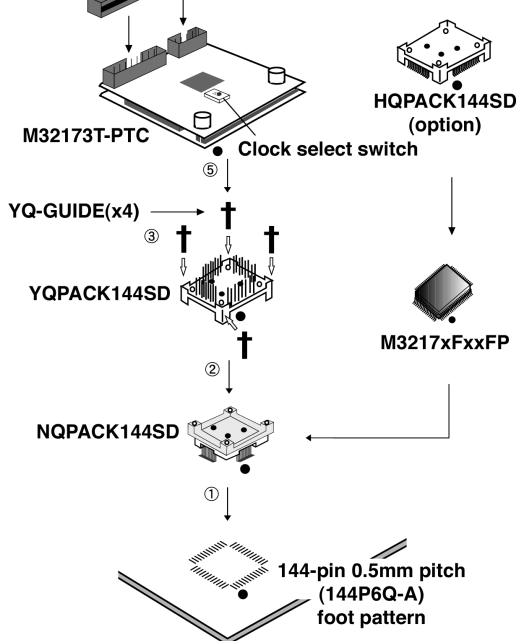


*. ①~⑤ show the connecting procedure.
*. No. 1 pin

External View and Dimensions

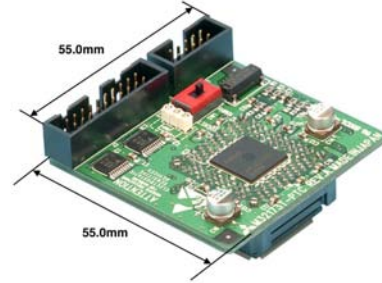

(Side view)

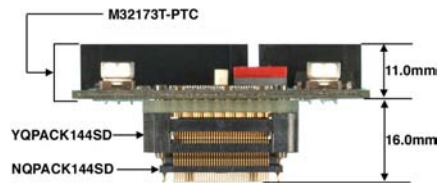


Package Components

- M32173T-PTC converter
- YQPACK144SD (made by Tokyo Eletech Co., Ltd.)
- NQPACK144SD (made by Tokyo Eletech Co., Ltd.)
- YQ-GUIDE (× 4)
- Phillips screw driver (made by Tokyo Eletech Co., Ltd.)
- User's manual

*Required components to connect to the target system are included with this product package. Each component made by Tokyo Eletech Co., Ltd. is optionally available alone from Tokyo Eletech Co., Ltd. See Appendix G "Contact Addresses for Partner Products".

Recommended Foot Pattern (Unit: mm)

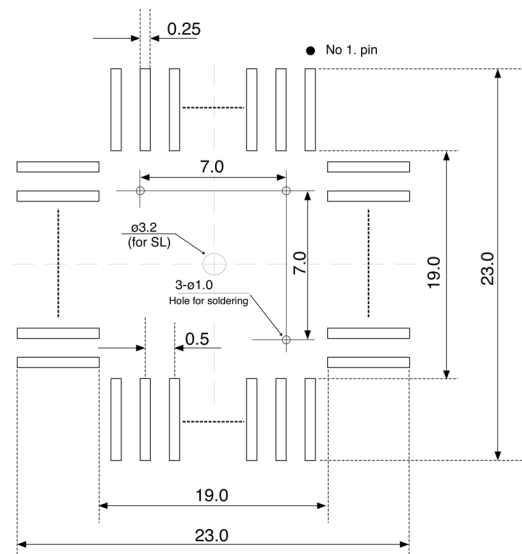

[Ordering Information] See Appendix H "Ordering Information".