

# Agilent 4294A

## Precision Impedance Analyzer

### Data Sheet

#### Specifications

Specifications describe the instrument's warranted performance over the temperature range of 0 °C to 40 °C (except as noted). Supplemental performance characteristics are intended to provide information that is useful in applying the instrument by given non-warranted performance parameters. These are denoted as SPC (supplemental performance characteristics), typical, or nominal. Warm-up time must be greater than or equal to 30 minutes after power on for all specifications.

#### Basic Characteristics

##### Measurement Parameter

---

Impedance Parameters	$ Z $ - $\theta$ , R-X, Ls-Rs, Ls-Q, Cs-Rs, Cs-Q, Cs-D, $ Y $ - $\theta$ , G-B, Lp-G, Lp-Q, Cp-G, Cp-Q, Cp-D, Complex Z-Y, $ Z $ -Ls, $ Z $ -Cs, $ Z $ -Lp, $ Z $ -Cp, $ Z $ -Rs, $ Z $ -Q, $ Z $ -D, Lp-Rp, Cp-Rp
----------------------	--

---

##### Measurement Terminal

---

Configuration	Four-terminal pair configuration
Connector type	Four BNC (female) connectors. Can be converted to one port terminal using the Agilent 42942A Terminal Adapter (7-mm port) or 42941A Impedance Probe (3.5-mm port).

---

#### Source Characteristics

##### Frequency

---

Range	40 Hz to 110 MHz
-------	------------------

---

Resolution	1 mHz
------------	-------

---

Accuracy

without Option 4294A-1D5	$\pm 20$ ppm (at $23 \pm 5$ °C) $\pm 40$ ppm (at 0 to 55 °C)
with Option 4294A-1D5	$\pm 0.13$ ppm (at 0 to 55 °C)

**Voltage Signal Level**

Range	5 mVrms to 1 Vrms
Resolution	1 mV

Accuracy

at four-terminal pair port of the 4294A or 7-mm port of the 42942A	$\pm[(10 + 0.05 \times f)\% + 1 \text{ mV}]$ (at $23 \pm 5$ °C)
at measurement port of the 42941A, 16048G/H	$\pm[(15 + 0.1 \times f)\% + 1 \text{ mV}]$ (at $23 \pm 5$ °C)

NOTE

*f*: frequency [MHz].

These characteristics apply when OPEN is connected to each port.

Test signal level should be  $\leq 0.5$  Vrms when the measured impedance is  $\leq 50 \Omega$ .

Beyond  $23 \pm 5$  °C of temperature, test signal level setting accuracy is twice as bad as described.

**Current Signal Level**

Range	200 $\mu$ Arms to 20 mArms
Resolution	20 $\mu$ A

Accuracy

at four-terminal pair port of the 4294A	
at $\leq 15$ MHz	$+ [10\% + 50 \mu\text{A}], - [(10 + 0.2 \times f)\% + 50 \mu\text{A}]$ (at $23 \pm 5$ °C, typical)
at $> 15$ MHz	$\pm [(10 + 0.3 \times f)\% + 50 \mu\text{A}]$ (at $23 \pm 5$ °C, typical)
at 7-mm port of the 42942A	
at $\leq 5$ MHz	$+ [10\% + 50 \mu\text{A}], - [(10 + 1 \times f)\% + 50 \mu\text{A}]$ (at $23 \pm 5$ °C, typical)
at $> 5$ MHz	$\pm [(10 + 0.3 \times f)\% + 50 \mu\text{A}]$ (at $23 \pm 5$ °C, typical)

at measurement port of the  
42941A, 16048G/H

at ≤5 MHz	$\pm[10\% + 50 \mu\text{A}], -[(15 + 1.5 \times f)\% + 50 \mu\text{A}]$ (at 23 ±5 °C, typical)
at >5 MHz	$\pm[(20 + 0.3 \times f)\% + 50 \mu\text{A}]$ (at 23 ±5 °C, typical)

**NOTE**

*f*: frequency [MHz].

These characteristics apply when SHORT is connected to each port.

Test signal level should be ≤20 mArms when the measured impedance is ≤50 Ω.

**Signal Level Monitor**

Voltage range	(Same as the voltage signal level setting range)
Voltage monitor accuracy	
at four-terminal pair port of the 4294A or 7-mm port of the 42942A	$\pm(10 + 0.05 \times f + 100/Z_X)[\%]$ (at 23 ±5 °C, typical)
at measurement port of the 42941A, 16048G/H	$\pm(10 + 0.15 \times f + 100/Z_X)[\%]$ (at 23 ±5 °C, typical)
Current range	(Same as the current signal level setting range)
Current monitor accuracy	
at four-terminal pair port of the 4294A or 7-mm port of the 42942A	$\pm(10 + 0.3 \times f + Z_X/100)[\%]$ (at 23 ±5 °C, typical)
at measurement port of the 42941A, 16048G/H	$\pm(10 + 0.4 \times f + Z_X/100)[\%]$ (at 23 ±5 °C, typical)

**NOTE**

*f*: frequency [MHz],  $Z_X$  impedance measurement value [Ω].

Beyond 23 ±5 °C, the test signal level monitor accuracy is twice as bad as described.

**Output Impedance**

Output impedance	25 Ω (nominal)
------------------	----------------

## DC Bias Function

### DC voltage bias

Range	0 to $\pm 40$ V (see Figure 1)
Resolution	1 mV
Accuracy	$\pm[0.1\% + (5 + 30 \times  I_{mon} )]$ mV] (at $23 \pm 5$ °C) $\pm[0.2\% + (10 + 30 \times  I_{mon} )]$ mV] (beyond $23 \pm 5$ °C)

### DC current bias

Range	0 to $\pm 100$ mA (see Figure 1)
Resolution	40 $\mu$ A
Accuracy	$\pm[2\% + (0.2 +  V_{mon} /20)]$ mA] (at $23 \pm 5$ °C) $\pm[4\% + (0.4 +  V_{mon} /20)]$ mA] (beyond $23 \pm 5$ °C)

### DC voltage bias at constant voltage mode

Range	0 to $\pm 40$ V (see Figure 1)
Resolution	1 mV
Accuracy	$\pm[0.5\% + (5 + Z_d \times  I_{mon} )]$ mV] (at $23 \pm 5$ °C, typical) $\pm[1.0\% + (10 + Z_d \times  I_{mon} )]$ mV] (beyond $23 \pm 5$ °C, typical)

### DC current bias at constant current mode

Range	0 to $\pm 100$ mA (see Figure 1)
Resolution	40 $\mu$ A
Accuracy	$\pm[1\% + (0.5 +  V_{mon} /10000)]$ mA] (at $23 \pm 5$ °C, typical) $\pm[2\% + (1.0 +  V_{mon} /5000)]$ mA] (beyond $23 \pm 5$ °C, typical)

### DC bias monitor

DC voltage range	(Same as the dc voltage bias setting range)
DC voltage accuracy	$\pm[0.2\% + (5 + Z_d \times  I_{mon} )]$ mV] (at $23 \pm 5$ °C) $\pm[0.4\% + (10 + Z_d \times  I_{mon} )]$ mV] (beyond $23 \pm 5$ °C)
DC current range	(Same as the dc current bias setting range)

DC current monitor accuracy	$\pm[1\% + (0.5 +  V_{mon} /10000)\text{mA}]$ (at $23 \pm 5^\circ\text{C}$ ) $\pm[2\% + (1.0 +  V_{mon} /5000)\text{mA}]$ (beyond $23 \pm 5^\circ\text{C}$ )
Output impedance	25 $\Omega$ (nominal)

**NOTE**

$V_{mon}$ : dc voltage bias monitor reading value [mV]

$I_{mon}$ : dc current bias monitor reading value [mA]


$Z_d$  = 0.3 (at four-terminal pair port of the 4294A, adapter setup: NONE)

$Z_d$  = 2.0 (at 3.5 mm port of the 42941A, adapter setup: 42941A Impedance Probe)

$Z_d$  = 0.5 (at 7-mm port of the 42942A, adapter setup: 42942A Terminal Adapter)

$Z_d$  = 1.0 (at measurement port of the 16048G, adapter setup: four-terminal pair 1 m)

$Z_d$  = 1.5 (at measurement port of the 16048H, adapter setup: four-terminal pair 2 m)

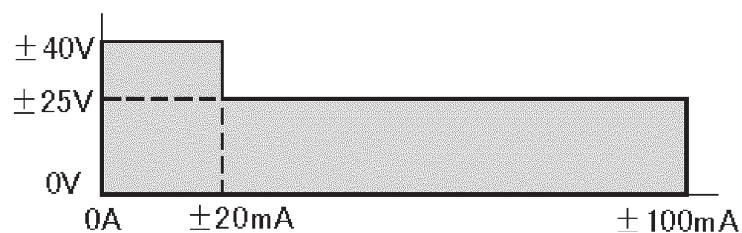

**Figure 1. DC Bias Range (SPC)**

**Sweep Characteristics**


Available sweep parameters	Frequency, Signal voltage, Signal current, DC bias voltage, DC bias current
Sweep type	Linear, Log <sup>1</sup> , List <sup>1</sup> , Zero-span, Manual
Manual sweep	Available for all sweep types
Sweep direction	Up sweep, Down sweep
Number of measurement points	2 to 801 points
<b>List Sweep</b>	
Available setup parameters for each segment	Sweep frequency range, Number of measurement points, Signal level (voltage or current), DC bias (voltage or current), Measurement bandwidth, Point averaging factor

1. Frequency sweep only.

Number of segments	1 to 18
Sweep span type	Segment span or single span
Delay time	
Type	Point delay or sweep delay
Range	0 sec to 30 sec
Resolution	1 msec

**Measurement Time**

Measurement time per point (sec)

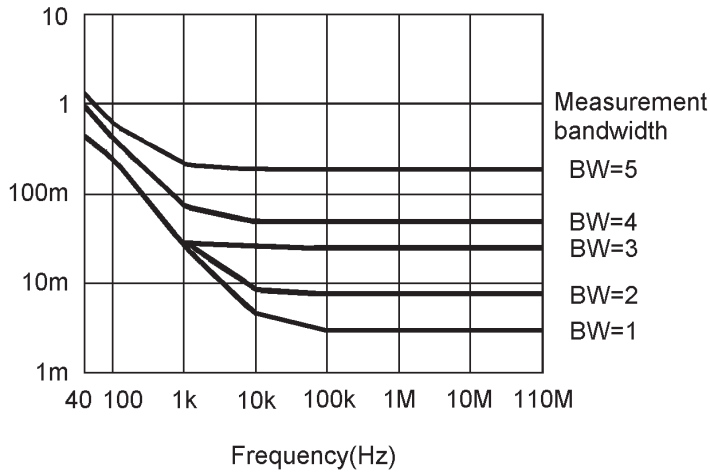

**Figure 2. Measurement Time (SPC)**

**NOTE**

When the Agilent 42941A Impedance Probe or 42942A Terminal Adapter is used, measurement time is 1.5 times longer than the value in Figure 2.

## Trigger Function

---

Trigger type	Continuous, Single, Number of groups
Trigger source	Internal (Free run), External (BNC connector input), GPIB or LAN, Manual (Front key)
Trigger event type	Point trigger, Sweep trigger

---

## Measurement Bandwidth/Averaging

---

Measurement bandwidth	
Range	1 (Fast) to 5 (Precise), 5 steps
Averaging	
Type	Sweep-to-sweep averaging, Point averaging
Averaging factor	1 to 256 (integer)

---

## Adapter Setup

---

Adapter Selection	
NONE	No adapter (the 16047E, etc. direct connection type test fixture is connected)
4TP 1M	Four-terminal pair 1 m (16048G)
4TP 2M	Four-terminal pair 2 m (16048H)
7-mm 42942A	Terminal Adapter (42942A)
PROBE 42941A	Impedance Probe (42941A)

---

## Calibration

---

Calibration	
User calibration	Calibration performed with user-defined calibration kit (OPEN, SHORT, LOAD)
Port extension	Compensation performed when the measurement terminal is expanded from the 7-mm connector of the 42942A Terminal Adapter or the 3.5-mm connector of the 42941A Impedance Probe. Enter electrical length or delay time for the extension.
Fixture compensation	Compensation performed at the device contacts of the test fixture using OPEN, SHORT, LOAD.
Calibration points	Fixed points, or User points determined by sweep setups

---

## Measurement Accuracy

### Conditions of Accuracy Specifications

#### Temperature

Four-terminal pair port of the 4294A's front panel	23 ±5 °C Beyond 23 ±5 °C, the measurement accuracy is twice as bad as described.
7-mm port of the 42942A Terminal Adapter	Within ±5 °C from the adapter setup temperature. Measurement accuracy applies when the adapter setup is performed at 23 ±5 °C. When the adapter setup is performed beyond 23 ±5 °C, the measurement accuracy is twice as bad as described.
3.5-mm port of the 42941A Impedance Probe	Within ±5 °C from the adapter setup temperature. Measurement accuracy applies when the adapter setup is performed at 23 ±5 °C. When the adapter setup is performed beyond 23 ±5 °C, the measurement accuracy is twice as bad as described.
Measurement terminal of the 16048G or 16048H	Within ±5 °C from the adapter setup temperature. Measurement accuracy applies when the adapter setup is performed at 23 ±5 °C. When the adapter setup is performed beyond 23 ±5 °C, the measurement accuracy is twice as bad as described.
Measurement bandwidth	5

### Measurement Accuracy

$ Z $ , $ Y $ accuracy	$\pm E$ [%] (see Equation 1 on page 10, Equation 2 on page 12, Equation 3 on page 14)
$\theta$ accuracy	$\pm E / 100$ [rad]
L, C, X, B accuracy	
at $D_x \leq 0.1$	$\pm E$ [%]
at $D_x > 0.1$	$\pm E \times \sqrt{1 + D_x^2}$ [%]
R accuracy	



at $D_x \leq 0.1$ ( $Q_x \geq 10$ )	Rp: $\pm \frac{E}{D_x \mp E/100}$ [%] Rs: $\pm E/D_x$ [%]
at $0.1 < D_x < 10$ ( $0.1 < Q_x < 10$ )	Rp: $\pm E \times \frac{\sqrt{1 + D_x^2}}{D_x \mp \frac{E}{100} \times \sqrt{1 + D_x^2}}$ [%] Rs: $\pm E \times \frac{\sqrt{1 + D_x^2}}{D_x}$ [%]
at $D_x \geq 10$ ( $Q_x \leq 0.1$ )	$\pm E$ [%]
D accuracy	
at $D_x \leq 0.1$	$\pm E/100$
at $0.1 < D_x \leq 1$	$\pm E \times (1 + D_x)/100$
Q accuracy (at $Q_x \times D_a < 1$ )	
at $Q_x \leq 10$ ( $D_x \geq 0.1$ )	$\pm \frac{Q_x^2 \times E(1 + D_x)/100}{1 \mp Q_x \times E(1 + D_x)/100}$
at $Q_x > 10$ ( $D_x < 0.1$ )	$\pm \frac{Q_x^2 \times E/100}{1 \mp Q_x \times E/100}$
G accuracy	
at $D_x > 0.1$	$\pm E \times \frac{\sqrt{1 + D_x^2}}{D_x}$ [%]
at $D_x \leq 0.1$	$\pm E/D_x$ [%]

**NOTE**

$D_x$  : measurement value of D.

$Q_x$  : measurement value of Q.

$D_a$  : measurement accuracy of D.

### Impedance Measurement Accuracy at Four-Terminal Pair Port

Equation 1 shows the impedance measurement accuracy [%] at four-terminal pair port of the Agilent 4294A, or measurement port of the 16048G/16048H.

#### Equation 1. Impedance Measurement Accuracy [%] at Four-Terminal Pair Port

$$E = E_p' + \left( \frac{Z_s'}{|Z_x|} + Y_o' \cdot |Z_x| \right) \times 100$$

Where,

$$E_p' = E_{PL} + E_{PBW} + E_{POSC} + E_p \text{ [%]}$$

$$Y_o' = Y_{OL} + K_{BW} \times K_{YOSC} \times (Y_{ODC} + Y_o) \text{ [S]}$$

$$Z_s' = Z_{SL} + K_{BW} \times K_{ZOSC} \times Z_s \text{ [\Omega]}$$

$Y_o, E_p, Z_s$ : See Figure 3 on page 17.

$E_{posc}$  [%] =

at oscillator level >500 mV	$0.03 \times \left( \frac{1000}{V_{mV}} - 1 \right) + \frac{f}{100}$
at oscillator level >250 mV, ≤500 mV	$0.03 \times \left( \frac{500}{V_{mV}} - 1 \right)$
at oscillator level >125 mV, ≤250 mV	$0.03 \times \left( \frac{250}{V_{mV}} - 1 \right)$
at oscillator level >64 mV, ≤125 mV	$0.03 \times \left( \frac{125}{V_{mV}} - 1 \right)$
at oscillator level ≤64 mV	$\left( \frac{64}{V_{mV}} - 1 \right) \times (0.03 + E_{PBW})$

$K_{Yosc}$  =

at oscillator level >500 mV	$\frac{1000}{V_{mV}}$
at oscillator level ≤500 mV	$\frac{500}{V_{mV}}$

$K_{Zosc}$  =

at oscillator level >500 mV	2
at oscillator level >250 mV, ≤500 mV	$\frac{500}{V_{mV}}$
at oscillator level >125 mV, ≤250 mV	$\frac{250}{V_{mV}}$
at oscillator level >64 mV, ≤125 mV	$\frac{125}{V_{mV}}$
at oscillator level ≤64 mV	$\frac{64}{V_{mV}}$

$E_{PBW} [\%] =$

at measurement BW = 5	0
at measurement BW = 4	
frequency $\geq 50$ kHz	0.03
frequency $< 50$ kHz	0.06
at measurement BW = 3	
frequency $\geq 50$ kHz	0.1
frequency $< 50$ kHz	0.2
at measurement BW = 2	
frequency $\geq 50$ kHz	0.2
frequency $< 50$ kHz	0.4
at measurement BW = 1	
frequency $\geq 50$ kHz	0.4
frequency $< 50$ kHz	0.8

$K_{BW} =$

at measurement BW = 5	1
at measurement BW = 4	1
at measurement BW = 3	
frequency $\leq 1$ MHz	3
frequency $> 1$ MHz	4
at measurement BW = 2	
frequency $\leq 1$ MHz	4
frequency $> 1$ MHz	5
at measurement BW = 1	
frequency $\leq 1$ MHz	6
frequency $> 1$ MHz	10

$Y_{ODC} =$

at dc bias range = 1 mA	0 [S]
at dc bias range = 10 mA	1 [ $\mu$ S]
at dc bias range = 100 mA	10 [ $\mu$ S]

$E_{PL}$  [%] =

when 16048G is used	$0.02 + 2 \times \frac{f}{100}$
when 16048H is used	$0.02 + 3 \times \frac{f}{100}$

$Y_{OL}$  =

when 16048G is used	$500 \times \frac{f}{100}$ [nS]
when 16048H is used	$1 \times \frac{f}{100}$ [μS]

$Z_{SL}$  =

when 16048G or 16048H is used	
frequency $\geq 500$ Hz	2 [mΩ]
frequency < 500 Hz	5 [mΩ]

NOTE

SPC at frequency >10 MHz.

$f$ : frequency in MHz.

$V_{mV}$ : oscillator level in mV

#### Impedance Measurement Accuracy at 7-mm Port of the Agilent 42942A

Equation 2 shows the impedance measurement accuracy [%] at 7-mm port of the 42942A Terminal Adapter.

#### Equation 2. Impedance Measurement Accuracy [%] at 7-mm Port of the Agilent 42942A

$$E = E_p' + \left( \frac{Z_s'}{|Z_x|} + Y_o' \cdot |Z_x| \right) \times 100$$

Where,

$$E_p' = E_{PBW} + E_{POSC} + E_p \text{ [%]}$$

$$Y_o' = K_{BW} \times K_{Y_{OSC}} \times (Y_{ODC} + Y_o) \text{ [S]}$$

$$Z_s' = K_{BW} \times K_{Z_{OSC}} \times Z_s \text{ [Ω]}$$

$Y_o$ ,  $E_p$ ,  $Z_s$ : See Figure 3 on page 17.

$E_{posc}$  [%] =

at oscillator level >500 mV	$\frac{f}{100} \times \left( \frac{V_{mV}}{500} - 1 \right)$
at oscillator level >125 mV, ≤500 mV	0

at oscillator level $\leq 125$ mV	$\left( \frac{125}{V_{mV}} - 1 \right) \times (0.05 + E_{PBW})$
$K_{Y_{osc}} =$	
at oscillator level $\geq 500$ mV	1
at oscillator level $< 500$ mV	$\frac{500}{V_{mV}}$
$K_{Z_{osc}} =$	
at oscillator level $> 500$ mV	$2 + \frac{f}{100}$
at oscillator level $> 250$ mV, $\leq 500$ mV	$\frac{500}{V_{mV}}$
at oscillator level $\leq 250$ mV, $> 125$ mV	$\frac{250}{V_{mV}}$
at oscillator level $\leq 125$ mV	$\frac{125}{V_{mV}}$
$E_{PBW}[\%] =$	
at measurement BW = 5	0
at measurement BW = 4	
frequency $\geq 50$ kHz	0.03
frequency $< 50$ kHz	0.06
at measurement BW = 3	
frequency $\geq 50$ kHz	0.1
frequency $< 50$ kHz	0.2
at measurement BW = 2	
frequency $\geq 50$ kHz	0.2
frequency $< 50$ kHz	0.4
at measurement BW = 1	
frequency $\geq 50$ kHz	0.4
frequency $< 50$ kHz	0.8
$K_{BW} =$	
at measurement BW = 5	1
at measurement BW = 4	1

at measurement BW = 3	3
at measurement BW = 2	4
at measurement BW = 1	6
$Y_{ODC} =$	
at dc bias range = 1 mA	0 [S]
at dc bias range = 10 mA	1 [μS]
at dc bias range = 100 mA	10 [μS]

**NOTE**

$f$ : frequency in MHz.

$V_{mV}$ : oscillator level in mV.

**Impedance Measurement Accuracy at 3.5-mm Port of the Agilent 42941A**

Equation 3 shows the impedance measurement accuracy [%] at 3.5-mm port of the 42941A Impedance Probe.

**Equation 3. Impedance Measurement Accuracy [%] at 3.5-mm Port of the Agilent 42941A**

$$E = E_p' + \left( \frac{Z_s'}{|Z_x|} + Y_o' \cdot |Z_x| \right) \times 100$$

Where,

$$E_p' = E_{PBW} + E_{POSC} + E_p \text{ [%]}$$

$$Y_o' = K_{BW} \times K_{Y_{OSC}} \times (Y_{ODC} + Y_o) \text{ [S]}$$

$$Z_s' = K_{BW} \times K_{Z_{OSC}} \times Z_s \text{ [}\Omega\text{]}$$

$Y_o, E_p, Z_s$ : See Figure 3 on page 17.

$$E_{posc} \text{ [%]} =$$

at oscillator level >500 mV	$\frac{f}{100} \times \left( \frac{V_{mV}}{500} - 1 \right)$
at oscillator level >125 mV, ≤500 mV	0
at oscillator level ≤125 mV	$\left( \frac{125}{V_{mV}} - 1 \right) \times (0.05 + E_{PBW})$

$$K_{Y_{osc}} =$$

at oscillator level ≥500 mV	1
at oscillator level <500 mV	$\frac{500}{V_{mV}}$

$K_{Z_{osc}} =$

at oscillator level >500 mV	$2 + \frac{f}{100}$
at oscillator level >250 mV, ≤500 mV	$\frac{500}{V_{mV}}$
at oscillator level ≤250 mV, >125 mV	$\frac{250}{V_{mV}}$
at oscillator level ≤125 mV	$\frac{125}{V_{mV}}$

$E_{PBW}[\%] =$

at measurement BW = 5	0
at measurement BW = 4	
frequency ≥50 kHz	0.03
frequency <50 kHz	0.06
at measurement BW = 3	
frequency ≥50 kHz	0.1
frequency <50 kHz	0.2
at measurement BW = 2	
frequency ≥50 kHz	0.2
frequency <50 kHz	0.4
at measurement BW = 1	
frequency ≥50 kHz	0.4
frequency <50 kHz	0.8

$K_{BW} =$

at measurement BW = 5	1
at measurement BW = 4	1
at measurement BW = 3	3
at measurement BW = 2	4
at measurement BW = 1	6

$Y_{ODC} =$

at dc bias range = 1 mA	0 [S]
at dc bias range = 10 mA	1 [μS]
at dc bias range = 100 mA	10 [μS]

**NOTE**

$f$ : frequency in MHz.

$V_{mV}$ : oscillator level in mV.

**Temperature Coefficient of the Agilent 42941A Impedance Probe (SPC)**

Proportional part (at 50  $\Omega$  measurement)


Z  deviation [ppm/°C]	
at frequency $\leq 1$ MHz	<5
at frequency >1 MHz	$20 + 500 \times \frac{f}{100}$
$\theta$ deviation [ $\mu$ rad/°C]	
at frequency $\leq 1$ MHz	<5
at frequency >1 MHz, $\leq 5$ MHz	$30 \times \frac{f}{5}$
at frequency >5 MHz, $\leq 30$ MHz	$50 + 150 \times \frac{f}{30}$
at frequency >30 MHz	200
Residual part	
Residual impedance	$5 \times \frac{f}{100}$ [m $\Omega$ /°C]
Residual admittance	$\frac{f}{100}$ [ $\mu$ S/°C]

**NOTE**

$f$ : frequency in MHz.


These characteristics apply when the temperature of the probe (tip to 30 cm) is changed.



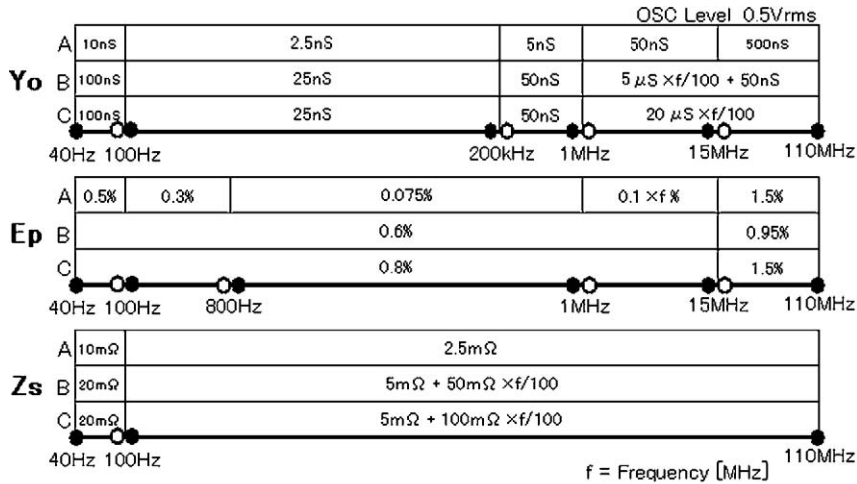


- A = 4294A front panel 4 terminal pair port (no extension),
  - B = 7-mm one port (with 42942A).
  - C = Probe 3.5-mm port (with 42941A).
- For accuracy at probe tip, add the following error factors (typical):
- Yo:  $+ 2\pi f \times 0.1 \mu\text{S}$
  - Zs:  $+ 20\text{m}\Omega$


**Figure 3. Parameters  $Y_o$ ,  $E_p$ , and  $Z_s$**

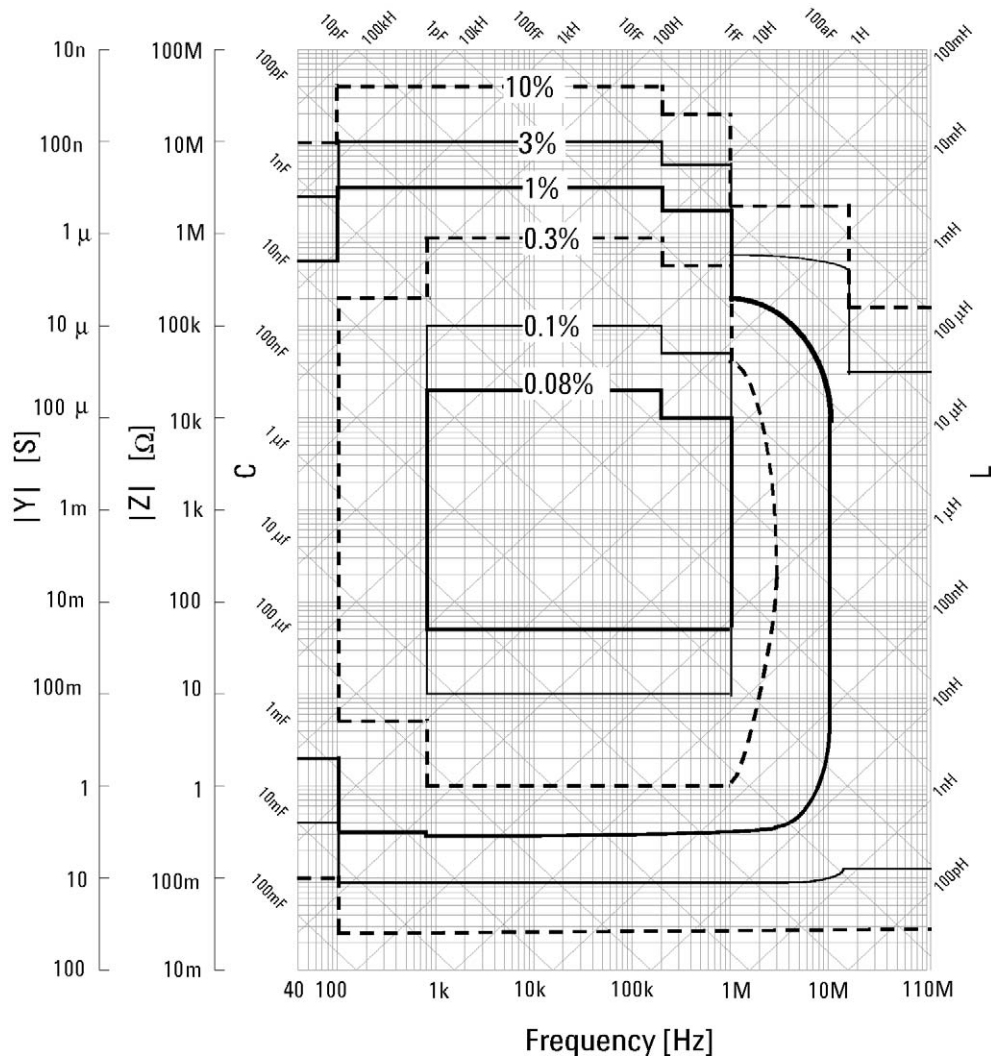

**Figure 4. Examples of Calculated Impedance Measurement Accuracy at Four-Terminal Pair Port of the Agilent 4294A's Front Panel (Oscillator Level = 0.5 Vrms)**

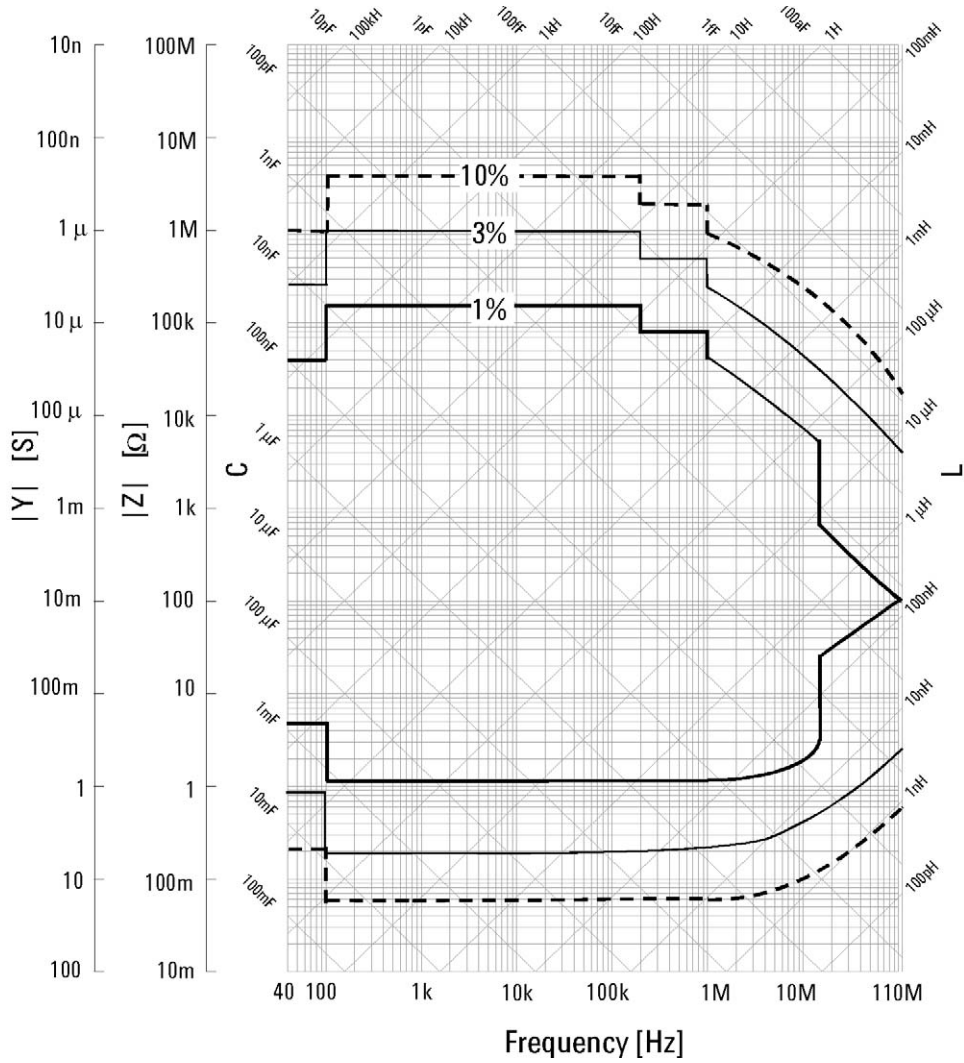

**Figure 5. Impedance Measurement Accuracy at 7-mm Port of the Agilent 42942A Terminal Adapter Connected to the Agilent 4294A (Oscillator Level = 0.5 Vrms)**

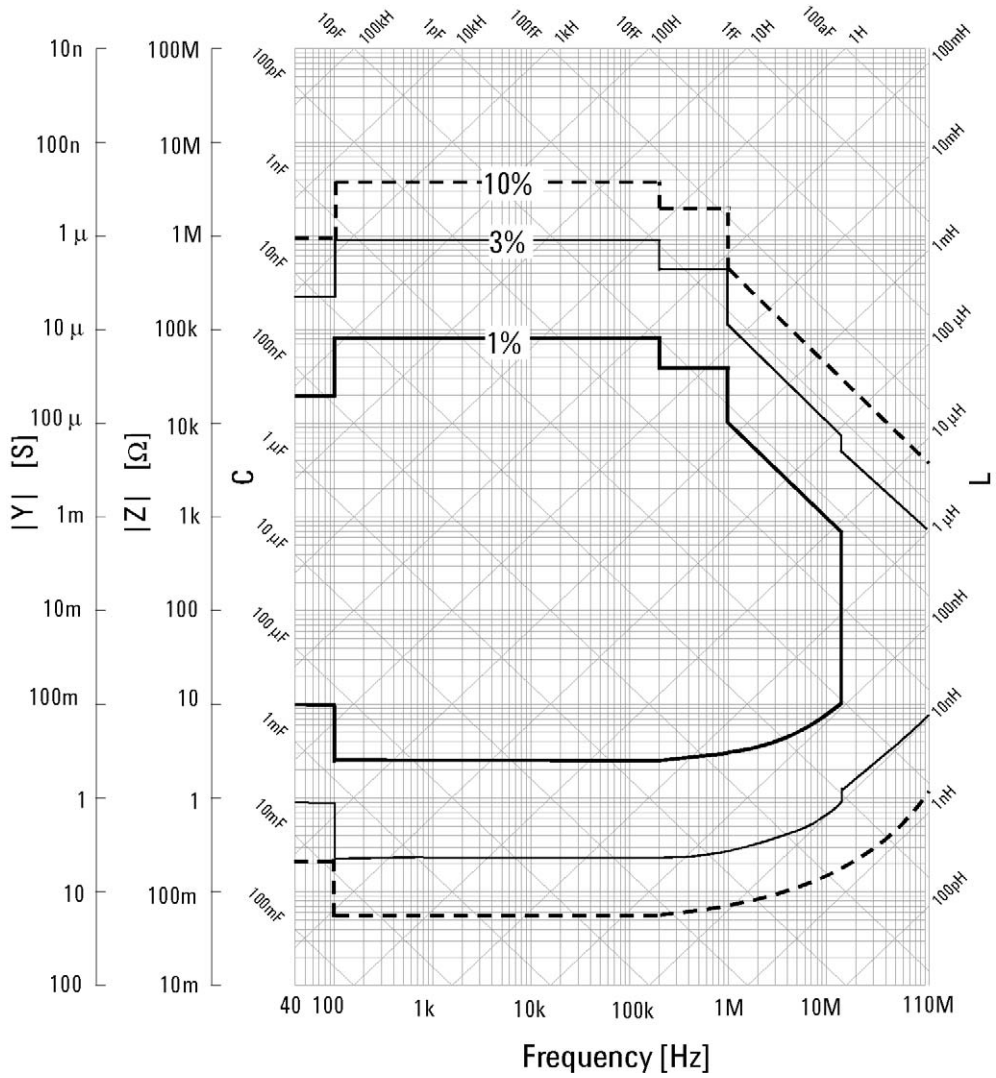

**Figure 6. Impedance Measurement Accuracy at 3.5-mm port of the Agilent 42941A Impedance Probe Connected to the Agilent 4294A (Oscillator Level = 0.5 Vrms)**

## Display Function

### Display

Size/Type	8.4 inch color LCD (TFT)
-----------	--------------------------

Number of pixels	640 X 480 (VGA)
------------------	-----------------

### Scale type

X axis scale	Linear and Log
--------------	----------------

Y axis scale	Linear and Log (depends on the sweep type)
--------------	--

### Number of traces

Data trace	2 traces (trace A and trace B)
------------	--------------------------------

Memory trace	2 traces (trace A and trace B)
--------------	--------------------------------

Split display	Available (trace A: upper half, trace B: lower half)
---------------	--

Instrument/IBASIC display selection	All Instrument, Half Instrument and half IBASIC, all IBASIC, or Instrument and IBASIC status.
-------------------------------------	---

Other display function	Inactive trace off, Trace accumulation, Phase expansion
------------------------	---

Data math function	Data—Memory, Data/Memory <sup>1</sup> , Delta% <sup>2</sup> , Offset
--------------------	--

1. Complex Z-Y measurement only.

2. Except for Complex Z-Y measurement.

## Marker Function

### Marker type and number

Main marker	One for each trace (A and B).
-------------	-------------------------------

Sub marker	Seven for each trace (A and B).
------------	---------------------------------

Δ marker	One for each trace (A and B).
----------	-------------------------------

### Marker search

Search type	Maximum, Minimum, Target, Peak, Trace bandwidth analysis
-------------	--

Search track	Performs search by each sweep
--------------	-------------------------------

Marker X-axis display	Sweep parameter value, Sweep elapsed time, or Relaxation time ( $1/2\pi f$ )
-----------------------	--

Others	Marker continuous mode, Δ marker mode, Marker coupled mode, Marker value substitution (Marker→), Marker zooming, Marker list, Marker statistics, Marker signal/dc bias monitor
--------	--

### Equivalent Circuit Analysis

---

Circuit model	3 component model (4 models), 4 component model (1 model)
Analysis type	Equivalent circuit parameters calculation, Frequency characteristics simulation

---

### Limit Line Test

---

Available setup parameters for each	Sweep start value, sweep stop value, upper limit (middle value) segment and lower limit (delta limit) for sweep start, upper limit (middle value) and lower limit (delta limit) for sweep stop
Number of segments	1 to 18
Other functions	Beep fail, Limit line offset

---

### Mass Storage

#### Flexible disk drive

---

Type	3.5 inch, Built-in
Size	1.44 MB
Format	DOS
Formatting	Available

---

#### Volatile memory disk

---

Size	512 KB
------	--------

---

#### Non-volatile memory disk (Flash memory)

---

Size	10 MB
------	-------

---

---

Stored data	State (binary), Data (binary or ASCII), Display graphics (TIFF)
-------------	---

---

### Printer Parallel Port

---

Interface Standard	IEEE 1284 Centronics
Printer control language	HP PCL3 printer control language
Connector type	25 pin D-SUB connector

---

## GPIB

Standard conformity	IEEE 448.1-1987, IEEE 488.2-1987, IEC 625, JIS C ,1901-1987
Available functions (function code) <sup>1</sup>	SH1, AH1, T6, TE0, L4, LE0, SR1, RL1, PP0, DC1, DT1, C1, C2, C3, C4, C11, E2
Numeric data transfer format	ASCII, 32 or 64 bit IEEE 754 floating point format, DOS PC format (32 bit IEEE reversed byte order)

1. See document of the standard for the meaning of each code.

## Instrument BASIC

### Keyboard

Type	PS/2 style 101 English
Connector Type	Mini-DIN connector

## 8 Bit I/O Port

Connector type	15 pin D-SUB connector
Signal level	TTL
Number of I/O bit	4 bit for input, 8 bit for output
Pin assignment	(see Figure 7)


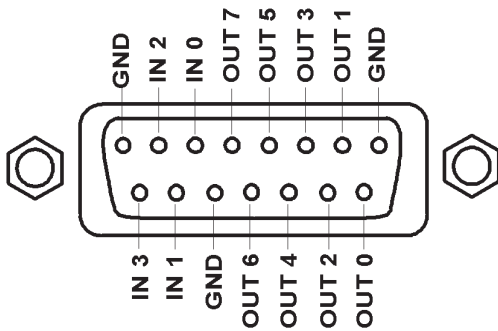


Figure 7. 8 Bit I/O Port Pin Assignment

### 24 Bit I/O Port (Handler Interface)

Connector type	36 pin D-SUB connector
Signal level	TTL
Number of I/O bit	8 bit for input or output, 16 bit for output
Pin Assignment	(see Figure 8 and Table 1)

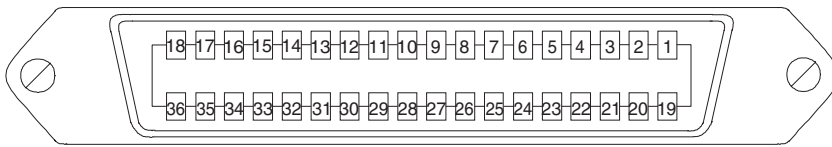

**Figure 8. 24 Bit I/O Port Pin Assignment**

**Table 1. 24 Bit I/O Port Pin Assignment**

Pin No.	Signal Name	Signal Standard
1	GND	0 V
2	INPUT1	TTL level, pulse input, pulse width: 1 $\mu$ s or above
3	OUTPUT1	TTL level, latch output
4	OUTPUT2	TTL level, latch output
5	Output port A0	TTL level, latch output
6	Output port A1	TTL level, latch output
7	Output port A2	TTL level, latch output
8	Output port A3	TTL level, latch output
9	Output port A4	TTL level, latch output
10	Output port A5	TTL level, latch output
11	Output port A6	TTL level, latch output
12	Output port A7	TTL level, latch output
13	Output port B0	TTL level, latch output
14	Output port B1	TTL level, latch output
15	Output port B2	TTL level, latch output
16	Output port B3	TTL level, latch output



**Table 1. 24 Bit I/O Port Pin Assignment**

<b>Pin No.</b>	<b>Signal Name</b>	<b>Signal Standard</b>
17	Output port B4	TTL level, latch output
18	Output port B5	TTL level, latch output
19	Output port B6	TTL level, latch output
20	Output port B7	TTL level, latch output
21	Input/Output port C0	TTL level, latch output
22	Input/Output port C1	TTL level, latch output
23	Input/Output port C2	TTL level, latch output
24	Input/Output port C3	TTL level, latch output
25	Input/Output port D0	TTL level, latch output
26	Input/Output port D1	TTL level, latch output
27	Input/Output port D2	TTL level, latch output
28	Input/Output port D3	TTL level, latch output
29	Port C status	TTL level, input mode; LOW, output mode: HIGH
30	Port D status	TTL level, input mode; LOW, output mode: HIGH
31	Write strobe signal	TTL level, active low, pulse output (width: 10 $\mu$ s, typical)
32	+5 V pullup	
33	SWEEP END signal	TTL level, active low, pulse output (width: 20 $\mu$ s, typical)
34	+5 V	+5 V, 100 mA MAX
35	PASS/FAIL signal	TTL level, PASS: HIGH, FAIL; LOW, latch output
36	PASS/FAIL write strobe signal	TTL level, active low, pulse output (width: 10 $\mu$ s, typical)

**LAN Interface**

Standard conformity	10 Base-T Ethertwist, RJ45 connector
Protocol	TCP/IP
Supported application	Telnet, FTP, FTP with automatic execution

## General Characteristics

### External Reference Input

Frequency	10 MHz $\pm$ 10 ppm (typical)
Level	- 5 dBm to +5 dBm (typical)
Input impedance	50 $\Omega$ (nominal)
Connector type	BNC (female)

### Internal Reference Output


Frequency	10 MHz (nominal)
Level	0 dBm (typical)
Output impedance	50 $\Omega$ (nominal)
Connector type	BNC (female)

### High Stability Frequency Reference Output (Option 4294A-1D5)

Frequency	10 MHz (nominal)
Level	0 dBm (typical)
Output impedance	50 $\Omega$ (nominal)
Connector type	BNC (female)

### External Trigger Input

Level	TTL
Pulse width (Tp)	$\geq$ 2 $\mu$ s (typical); see Figure 9 for the definition of Tp.
Polarity	Positive or Negative (selective)
Connector type	BNC (female)

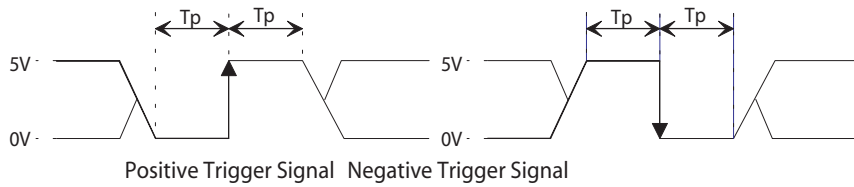

**Figure 9. Required Pulse Width ( $T_p$ ) for External Trigger Input**

#### External Program RUN/CONT Input

Level	TTL
Connector type	BNC (female)

#### External Monitor Output

Connector type	D-SUB, 15 pin HD
Display resolution	640 X 480 (VGA)

#### Operating Conditions

##### Temperature

Disk drive non-operating condition	0 °C to 40 °C
Disk drive operating condition	10 °C to 40 °C

##### Humidity (at wet bulb temperature $\leq 29$ °C, without condensation)

Disk drive non-operating condition	15% to 95% RH
Disk drive operating condition	15% to 80% RH

Altitude	0 m to 2,000 m
----------	----------------

Warm-up time	30 minutes
--------------	------------

## Non-operating Conditions

---

Temperature	-20 °C to +60 °C
-------------	------------------

---

Humidity (at wet bulb temperature ≤45 °C, without condensation)	15% to 95% RH
---	---------------

---

Altitude	0 m to 4,572 m
----------	----------------

---

## Others

---

EMC	EN 55011(1991)/CISPR 11(1990) Group 1, Class A EN 50082-1(1992)/IEC 61000-4-2(1995) 4 kV CD, 8 kV AD EN 50082-1(1992)/IEC 61000-4-3(1995) 3 V/m, 27 MHz to 1 GHz EN 50082-1(1992)/IEC 61000-4-4(1995) 0,5 kV Signal Line, 1 kV Power Line EN 61000-3-2(1995)/IEC 61000-3-2(1995) EN 61000-3-3(1995)/IEC 61000-3-3(1994)z
-----	---

---

Safety	EN 61010-1(1993) +Amd2(1995)/IEC61010-1(1990) +Am1(1992) +Am2(1995) CSA-C22.2 NO.1010.1-92
--------	--

---

Power requirement	90 V to 132 V, or 198 V to 264 V (automatically switched), 47 Hz to 63 Hz, 300 VA max.
-------------------	---


---

Weight	25 kg (SPC)
--------	-------------


---

Dimensions	See Figures 10 through 12.
------------	----------------------------


---

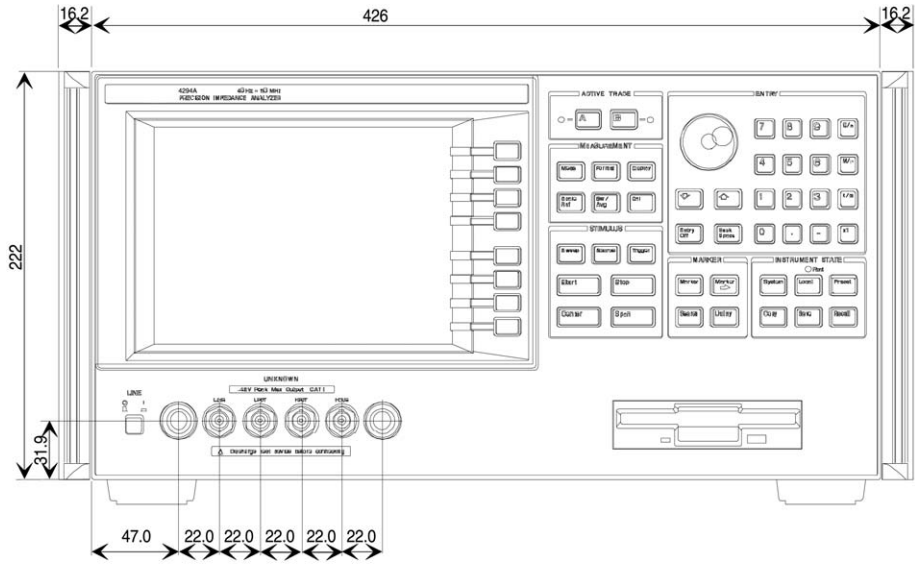

**Figure 10. Agilent 4294A dimensions (front view, with Option 4294A-1CN/4294A-1D5, typical, in millimeters)**

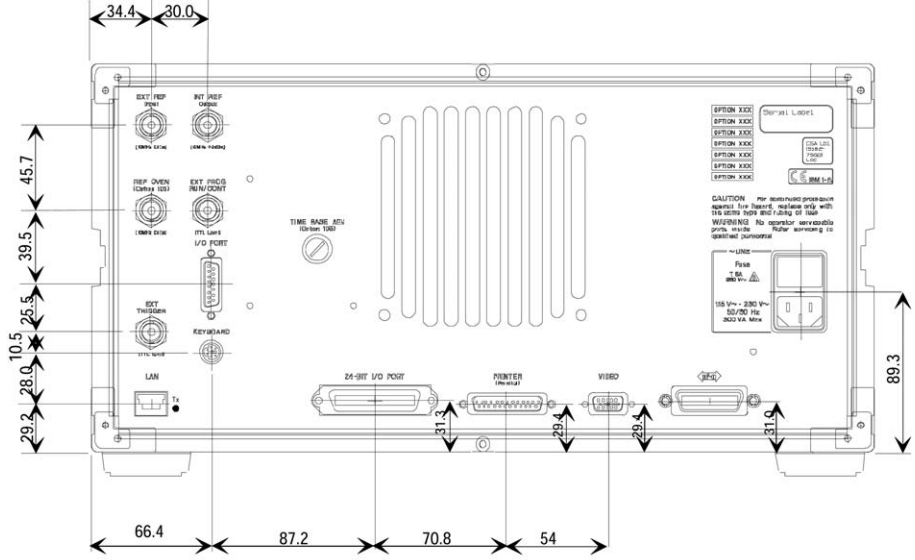

**Figure 11. Agilent 4294A dimensions (rear view, with Option 4294A-1CN/4294A-1D5, typical, in millimeters)**

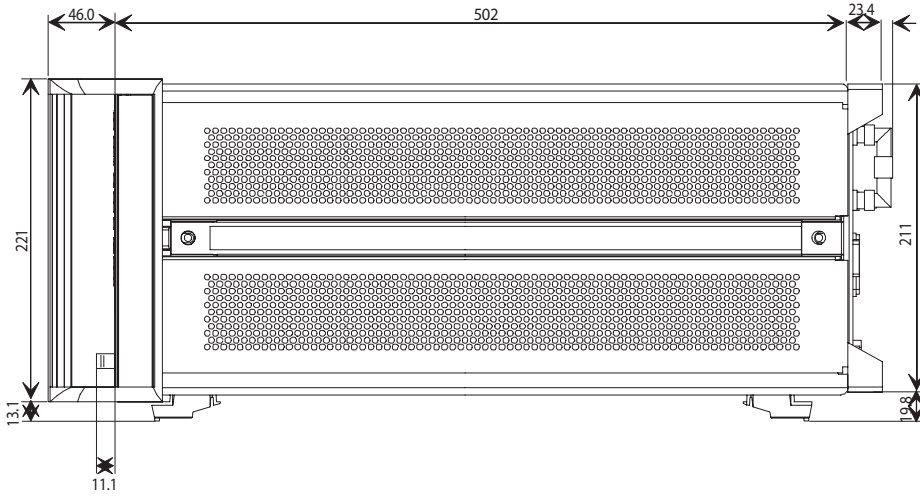

**Figure 12. Agilent 4294A dimensions (side view, with Option 4294A-1CN/4294A-1D5, typical, in millimeters)**

## Furnished Accessories

Agilent Part Number	Description	Qty
04294-900X0/04294-970X0	Operation Manual (English/Japanese) <sup>1</sup>	1
04294-900X1/04294-970X1	Programming Manual (English/Japanese) <sup>1</sup>	1
E2083-90005	Instrument BASIC User's Handbook <sup>1</sup>	1
04294-901X0	Service Manual <sup>2</sup>	1
04294-180X0	Sample Program Disk (3.5 inch) <sup>1</sup>	1
04294-61001	100 $\Omega$ Resister	1
_____	Mini-DIN Keyboard <sup>3</sup>	1
_____	Power Cable <sup>4</sup>	1
1250-1859	BNC Adapter <sup>5</sup>	1
5063-9229	Handle Kit <sup>6</sup>	1
5063-9216	Rackmount Kit <sup>7</sup>	1
5063-9223	Rackmount & Handle Kit <sup>8</sup>	1

1. Not furnished if Option 4294A-ABA/ABJ (English/Japanese manual) is not designated.
2. Option 4294A-0BW (Add service manual) only.
3. Not furnished if Option 4294A-810 (add keyboard) is not designated.
4. The power cable depends on which country the instrument is used in.
5. Option 4294A-1D5 (high stability frequency reference) only.
6. Option 4294A-1CN (handle kit) only.
7. Option 4294A-1CM (rackmount kit) only.
8. Option 4294A-1CP (rackmount and handle kit) only.

## Web Resource

[www.agilent.com/find/impedance](http://www.agilent.com/find/impedance)



## Agilent Email Updates

[www.agilent.com/find/emailupdates](http://www.agilent.com/find/emailupdates)

Get the latest information on the products and applications you select.



## Agilent Direct

[www.agilent.com/find/agilentdirect](http://www.agilent.com/find/agilentdirect)

Quickly choose and use your test equipment solutions with confidence.

## Remove all doubt

Our repair and calibration services will get your equipment back to you, performing like new, when promised. You will get full value out of your Agilent equipment throughout its lifetime. Your equipment will be serviced by Agilent-trained technicians using the latest factory calibration procedures, automated repair diagnostics and genuine parts. You will always have the utmost confidence in your measurements.

Agilent offers a wide range of additional expert test and measurement services for your equipment, including initial start-up assistance onsite education and training, as well as design, system integration, and project management.

For more information on repair and calibration services, go to

[www.agilent.com/find/removealldoubt](http://www.agilent.com/find/removealldoubt)

## www.agilent.com

For more information on Agilent Technologies' products, applications or services, please contact your local Agilent office. The complete list is available at:

[www.agilent.com/find/contactus](http://www.agilent.com/find/contactus)

### Americas

Canada	(877) 894-4414
Latin America	305 269 7500
United States	(800) 829-4444

### Asia Pacific

Australia	1 800 629 485
China	800 810 0189
Hong Kong	800 938 693
India	1 800 112 929
Japan	0120 (421) 345
Korea	080 769 0800
Malaysia	1 800 888 848
Singapore	1 800 375 8100
Taiwan	0800 047 866
Thailand	1 800 226 008

### Europe & Middle East

Austria	0820 87 44 11
Belgium	32 (0)2 404 93 40
Denmark	45 70 13 15 15
Finland	358 (0)10 855 2100
France	0825 010 700*
	*0.125 €/minute
Germany	01805 24 6333**
	**0.14€/minute
Ireland	1890 924 204
Israel	972-3-9288-504/544
Italy	39 02 92 60 8484
Netherlands	31 (0)20 547 2111
Spain	34 (91)631 3300
Sweden	0200-88 22 55
Switzerland	0800 80 53 53
United Kingdom	44 (0)118 9276201

Other European Countries:

[www.agilent.com/find/contactus](http://www.agilent.com/find/contactus)

Revised: March 27, 2008

Product specifications and descriptions in this document subject to change without notice.

© Agilent Technologies, Inc., 1999, 2000, 2002, 2003, 2008  
Printed in USA, April 10, 2008  
5968-3809E



Agilent Technologies