

## B\_(X)T-W2 Series

**0.25W, FIXED INPUT, ISOLATED & UNREGULATED SINGLE OUTPUT, SMD DC-DC CONVERTER**

multi-country patent protection **RoHS**

### FEATURES

- Single Voltage Output
- SMD Package Style
- No Heat sink Required
- 1KVDC Isolation
- Temperature Range: -40°C to +85°C
- Internal SMD construction
- No External Component Required
- Industry Standard Pinout
- RoHS Compliance

### APPLICATIONS

The B\_(X)T-W2 Series are specially designed for applications where a group of polar power supplies are isolated from the input power supply in a distributed power supply system on a circuit board.


These products apply to:

- 1) Where the voltage of the input power supply is fixed (voltage variation  $\leq \pm 10\%$ );
- 2) Where isolation is necessary between input and output (isolation voltage  $\leq 1000\text{VDC}$ );
- 3) Where the regulation of the output voltage and the output ripple noise are not demanding.

Such as: purely digital circuits, ordinary low frequency analog circuits, and IGBT power device driving circuits.

### MODEL SELECTION

**B0505(X)T-W2**

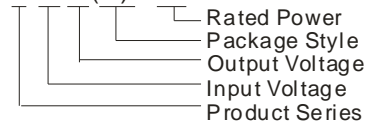

### MORNSUN Science& Technology co.,Ltd.

Address: 2th floor 6th building, Huangzhou Industrial District, Guangzhou, China  
 Tel: 86-20-38601850  
 Fax: 86-20-38601272  
[Http://www.mornsun-power.com](http://www.mornsun-power.com)

### PRODUCT PROGRAM

Part Number	Input		Output			Efficiency (% Typ.)
	Voltage (VDC)		Voltage (VDC)	Current (mA)		
	Nominal	Range		Max	Min	
B0503(X)T-W2	5	4.5-5.5	3.3	76	8	62
B0505(X)T-W2			5	50	5	64
B0509(X)T-W2			9	28	3	65
B0512(X)T-W2			12	21	2	67
B0515(X)T-W2			15	17	2	66
B1205(X)T-W2	12	10.8-13.2	5	50	5	65
B1209(X)T-W2			9	28	3	64
B1212(X)T-W2			12	21	2	63
B1215(X)T-W2			15	17	2	64
B2405(X)T-W2	24	21.6-26.4	5	50	5	60
B2409(X)T-W2			9	28	3	61
B2412(X)T-W2			12	21	2	63
B2415(X)T-W2			15	17	2	65

Note: The B\_XT-W2 series have no 3,6,7 pin. For example B0505XT-W2.

### ISOLATION SPECIFICATIONS

Item	Test Conditions	Min	Typ.	Max	Units
Isolation voltage	Tested for 1 minute and 1mA max	1000			VDC
Isolation resistance	Test at 500VDC	1000			MΩ

### OUTPUT SPECIFICATIONS

Item	Test Conditions	Min	Typ.	Max	Units
Output power				0.25	W
Line regulation	For Vin change of 1%(3.3V output)			±1.5	%
	For Vin change of 1%(Others output)			±1.2	
Load regulation	10% to 100% load (3.3V output)		15	20	
	10% to 100% load (5V output)		12.8	15	
	10% to 100% load (9V output)		8.3	10	
	10% to 100% load (12V output)		6.8	10	
	10% to 100% load (15V output)		6.3	10	
Output voltage accuracy		See tolerance envelope graph			
Temperature drift	100% full load			0.03	%/°C
Output ripple & Noise*	20MHz Bandwidth		50	75	mVp-p
Switching frequency	Full load, nominal input(24V input)		500		KHz
	Full load, nominal input (others input)		110		

\*Test ripple and noise by "parallel cable" method. See detailed operation instructions at Testing of Power Converter section, application notes.

Note:

1. All specifications measured at  $T_A=25^\circ\text{C}$ , humidity<75%, nominal input voltage and rated output load unless otherwise specified.
2. See below recommended circuits for more details.

## COMMON SPECIFICATION

Item	Test Conditions	Min	Typ.	Max	Units
Storage humidity				95	%
Operating temperature		-40		85	°C
Storage temperature		-55		125	
Temp. rise at full load			15	25	
Lead temperature	1.5mm from case for 10 seconds			260	
Cooling		Free air convection			
Case material		Plastic(UL94-V0)			
Short circuit protection*				1	s
MTBF		3500			K hours
Weight			1.35		g

\*Supply voltage must be discontinued at the end of short circuit duration.


## APPLICATION NOTE

### Requirement on output load

To ensure this module can operate efficiently and reliably, During operation, the minimum output load is **not less than 10%** of the full load, and that **this product should never be operated under no load!** If the actual output power is very small, please connect a resistor with proper resistance at the output end in parallel to increase the load.


### Recommended circuit

If you want to further decrease the input/output ripple, an "LC" filtering network may be connected to the input and output ends of the DC/DC converter, see (Figure 1).

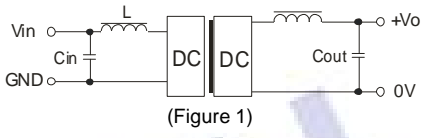


It should also be noted that the inductance and the frequency of the "LC" filtering network should be staggered with the DC/DC frequency to avoid mutual interference. However, the capacitance of the output filter capacitor must be proper. If the capacitance is too big, a startup problem might arise. It's not recommended to connect any external capacitor in the application field.

## TYPICAL CHARACTERISTICS

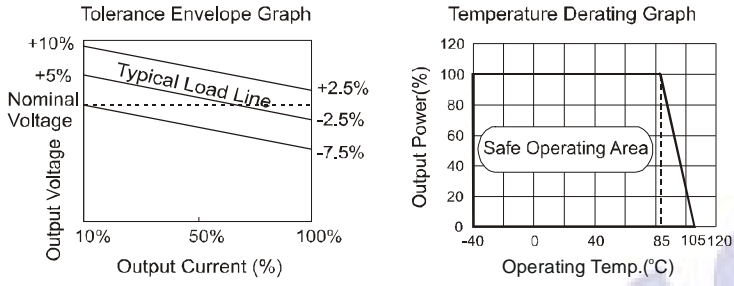


## RECOMMENDED REFLOW SOLDERING PROFILE


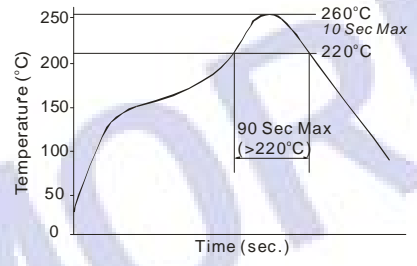


### Output Voltage Regulation and Over-voltage Protection Circuit

The simplest device for output voltage regulation, over-voltage and over-current protection is a linear voltage regulator with overheat protection that is connected to the input or output end in series (Figure2).

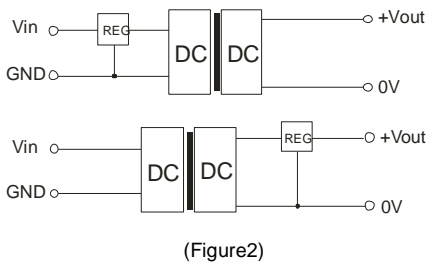

## OUTLINE DIMENSIONS & FOOTPRINT DETAILS

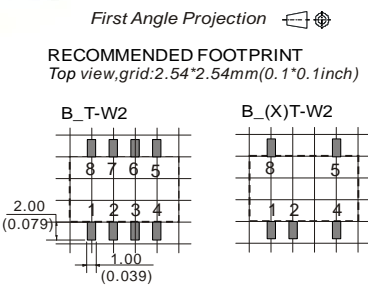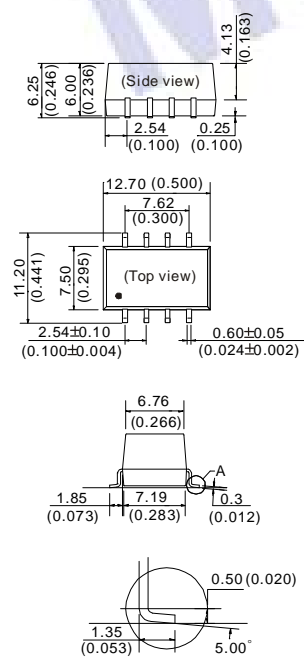

**FOOTPRINT DETAILS**

Pin	Function(T)	Function(XT)
1	GND	GND
2	Vin	Vin
4	0V	0V
5	+Vo	+Vo
3,6,7	NC	No Pin
8	NC	NC

NC:No Connection

Note:  
Unit:mm(inch)  
Pin section:0.60\*0.25mm(0.024\*0.010inch)  
Pin section tolerances:±0.10mm(±0.004inch)  
General tolerances:±0.15mm(±0.006inch)

### Overload Protection

Under normal operating conditions, the output circuit of these products has no protection against over-current and short-circuits. The simplest method is to connect a self-recovery fuse in series at the input end or add a circuit breaker to the circuit.

### No parallel connection or plug and play.