

Infiniium 54850 Series Oscilloscopes InfiniiMax 1130 Series Probes

7 GHz, 20 GSa/s Differential and Single-Ended Oscilloscope Measurement System

Data Sheet

- 7, 6, 4, 2.5 and 2 GHz bandwidth real-time oscilloscopes with up to 20 GSa/s sample rate on all four channels simultaneously
- Up to 1 Mpts MegaZoom deep memory at all sample rates and 32 Mpts MegaZoom deep memory at 2 GSa/s and slower sample rates
- Electronic attenuators eliminate the reliability and repeatability concerns associated with mechanical attenuator relays
- Trigger jitter 1.0 ps rms
- Easy-to-use, easy-to-understand jitter analysis option
- InfiniiMax 7 GHz, 5 GHz, 3.5 GHz, and 1.5 GHz probing systems
- Each InfiniiMax probe amplifier supports both differential and single-ended measurements for a more cost-effective solution
- Unrivaled InfiniiMax probing accessories support browsing, solder-in, and socket use models at the maximum performance available
- Award-winning user interface based on Microsoft Windows® XP Pro supports CD-RW, dual-monitor, and third-party software packages



The highest-performance end-to-end measurement system available

If you are an experienced scope user, you know that your measurements are only as good as your probing system. And as bandwidth increases, it's increasingly important to ask the question: am I measuring my circuit or my scope probe? Nothing is more frustrating than chasing down an apparent design problem, only to find that it was caused by an inferior scope probe.

Together, the newest Agilent Infiniium scopes and the breakthrough Agilent InfiniiMax

high-performance probing systems offer an end-to-end measurement system with unmatched performance, accuracy, and connectivity. The result is measurements you can trust and better insight into your circuit behavior.

InfiniiMax: The Worlds Best High-Speed Probing System

EDN Magazine has awarded Agilent's InfiniiMax active probe system the 2002 Innovation of the Year Award.



Agilent Technologies

Benefits

54850 Series Infiniium oscilloscopes

Model	Bandwidth	Channels	Sample rate per channel	Standard acquisition memory	Optional acquisition memory
54855A	6 - 7 GHz	4	20 GSa/s	262 kpts per channel	1 Mpts per channel up to 20 GSa/s 32 Mpts per channel \leq 2 GSa/s
54854A	4 GHz	4	20 GSa/s	262 kpts per channel	1 Mpts per channel up to 20 GSa/s 32 Mpts per channel \leq 2 GSa/s
54853A	2.5 GHz	4	20 GSa/s	262 kpts per channel	1 Mpts per channel up to 20 GSa/s 32 Mpts per channel \leq 2 GSa/s
54852A	2 GHz	4	10 GSa/s	262 kpts per channel	1 Mpts per channel up to 10 GSa/s 32 Mpts per channel \leq 2 GSa/s

1130 Series InfiniiMax probe amplifier

Model	Bandwidth	Description
1134A	7 GHz	Probe amplifier – order one or more probe heads or connectivity kits
1132A	5 GHz	Probe amplifier – order one or more probe heads or connectivity kits
1131A	3.5 GHz	Probe amplifier – order one or more probe heads or connectivity kits
1130A	1.5 GHz	Probe amplifier – order one or more probe heads or connectivity kits
E2669A differential kit		Each connectivity kit includes browser, solder-in and socket probe-heads
E2668A single-ended kit		Each connectivity kit includes browser, solder-in and socket probe-heads

InfiniiMax probe amplifier specifications: Dynamic range = \pm 2.5 V, DC offset range = \pm 12 V, maximum voltage = \pm 30 V

1130 Series InfiniiMax probe system specifications (1134A probe amplifier with probe head)

Probe head	Model number	Differential measurement (BW, input C, input R)	Single-ended measurement (BW, input C, input R)
Differential solder-in	E2677A	7 GHz, 0.27 pF, 50 k Ω	7 GHz, 0.44 pF, 25 k Ω
Differential socket	E2678A	7 GHz, 0.34 pF, 50 k Ω	7 GHz, 0.56 pF, 25 k Ω
Differential browser	E2675A	6 GHz, 0.32 pF, 50 k Ω	6 GHz, 0.57 pF, 25 k Ω
Differential SMA	E2695A	7 GHz	7 GHz
Single-ended solder-in	E2679A	N/A	5.2 GHz, 0.50 pF, 25 k Ω
Single-ended browser	E2676A	N/A	5.5 GHz, 0.67 pF, 25 k Ω

Benefits (continued)

How much bandwidth and sample rate do I need?


Bandwidth required to measure risetime with 3% error	Example: 100 ps rise time (20-80%)
Maximum signal frequency content = $0.4/\text{rise time}$ (20-80%)	Maximum signal frequency = 4 GHz
Scope bandwidth required = $1.4 \times$ maximum frequency	Required scope bandwidth = 5.6 GHz
Minimum scope sample rate required = $2.5 \times$ bandwidth	Required scope sample rate = 14 GSa/s

Key trends in the electronics market


- Technologies with dramatically increased clock speeds and edge rates have emerged.
- Very fast serial differential buses are being used to save board space, reduce power and provide better noise immunity.
- Densely packed circuit boards, often with stacked daughter boards, increase the need to probe in very hard-to-reach places.

Key benefits of the 54850 and InfiniiMax Series


- Up to 7 GHz bandwidth can track even the fastest signal speeds.
- A sample rate of 20 GSa/s on all four channels can measure high-speed differential buses correlated with other signals.
- The innovative InfiniiMax probing system supports even the most demanding mechanical access requirements without sacrificing performance.

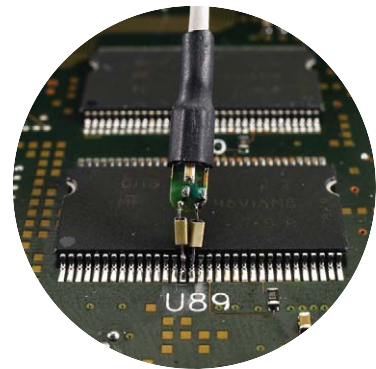

20 GSa/s Sample Rate on All Channels at Once!

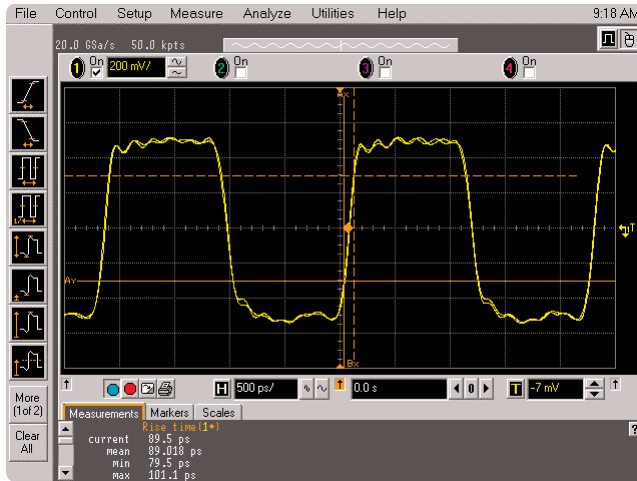


20 GSa/s provides accurate measurement.

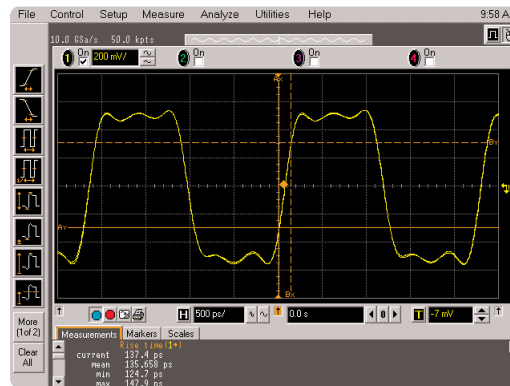

10 GSa/s is not enough.

Sample rate	Measured rise time
20 GSa/s	89 psec
10 GSa/s	137 psec
5 GSa/s	238 psec


Example for 90 ps rise time input

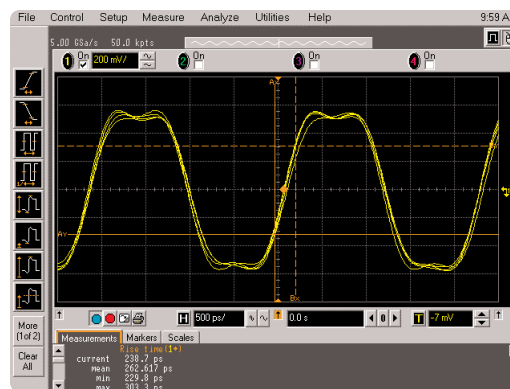

5 GSa/s is not enough.


- The full real-time bandwidth of up to 7 GHz is supported on every channel by the 20 GSa/s sample rate.
- This industry-leading sample rate produces more accurate and repeatable measurements, avoiding measurement error and signal aliasing due to under sampling, as shown above.
- The combination of 7 GHz bandwidth and 20 GSa/s sample rate on all channels makes the 54850 series ideal for designs that include: PCI-Express, Serial ATA, Rapid IO, HyperTransport, InfiniBand, or Gigabit Ethernet.

Application Software

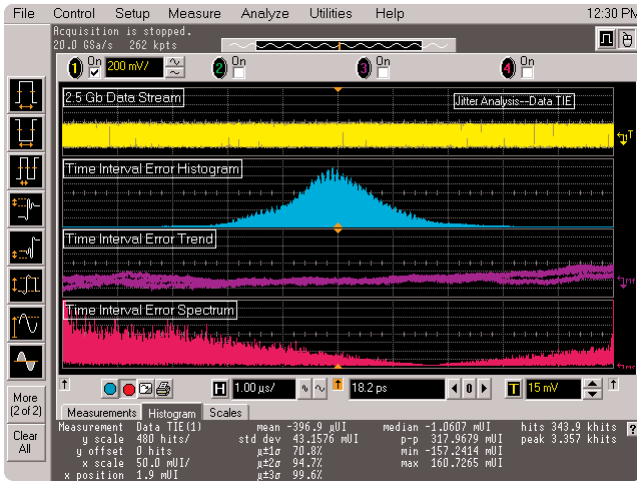


E2681A EZJIT Jitter analysis software

Includes the following key measurements: cycle-to-cycle jitter, n-cycle jitter, period jitter, time interval error, setup and hold time, measurement histograms, measurement trending, and jitter spectrum.

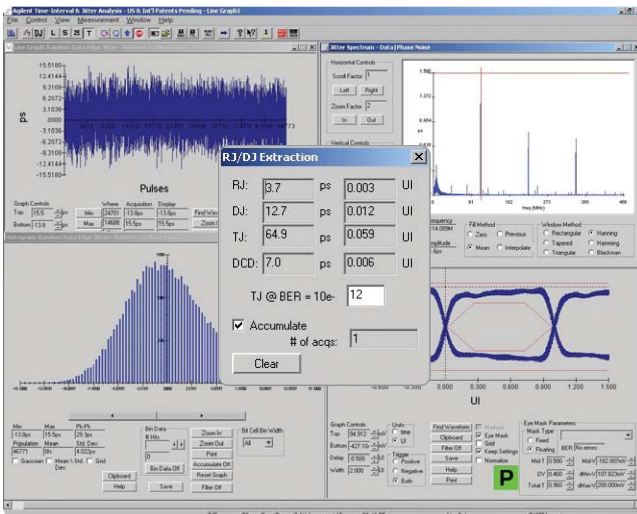

E2690A Timing Interval and Jitter Analysis software

Measure the worst-case jitter in serial data streams, PLLs, and high-speed clock designs. Measurements include line graph, histogram, jitter spectrum, RJ/DJ separation, and bathtub curve. Provides a superset of capabilities relative to the E2681A EZJIT software.

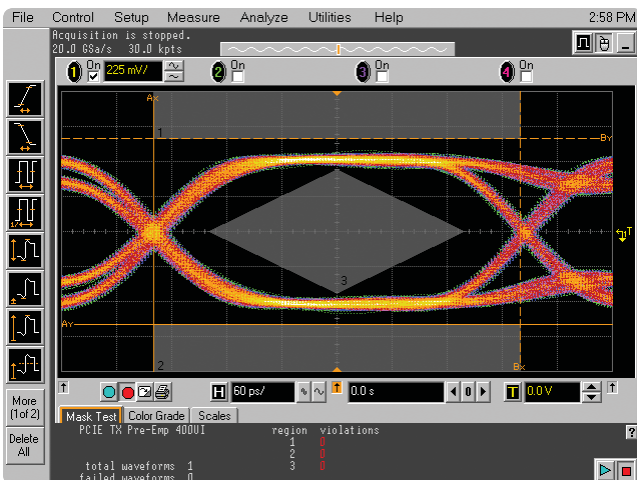

E2688A High-Speed Serial Bus Analysis/Mask Testing with Clock Recovery

Characterize high-speed serial data streams, perform eye mask testing, and decode 8b/10b data for PCI Express, Serial ATA, Serial Attached SCSI (SAS), Fibre Channel, 10/100/1000 Base-T Ethernet, and XAUI.

Infiniium: “It’s like someone who sits down and actually uses a scope designed this one.”

Steve Montgomery, Director of Engineering, Linx Technologies

20 GSa/s sample rate on all four channels significantly reduces the chances of aliasing, increases measurement accuracy, and delivers the full real-time bandwidth of the oscilloscope on every channel simultaneously.

Get fast answers to your questions with the built-in information system. Infiniium’s task-oriented Setup Guide provides step-by-step instructions for several advanced measurements and procedures.

See your signal more clearly with a large (8.4-inch) high-resolution color display. Infiniium’s bright TFT display with anti-glare coating lets you see the details of your signal from all angles.

20 GB hard drive, 3.5” 1.44 MB floppy drive and rear USB port make it easy to save setup files, data files, screen shots, etc.

Identify anomalies easily with color-graded persistence, a colorful visual representation of waveform distribution.

Label waveforms and add notes to your screen captures — Infiniium’s keyboard makes it easy.

Drag and drop markers with your mouse or use the arrow keys.

Easy access to advanced features like math functions and FFTs, is provided by the Windows-based graphical user interface. This GUI also gives you unique capabilities like drag-and-drop measurements and zooming, and offers a graphical equivalent to all front panel controls.

Remote access with Web-enabled connectivity, e-mail on trigger, and GPIB over LAN allows you to access your scope from remote locations.

Infiniium: Award-winning scopes

Infiniium has received eight industry awards to date, including EDN’s “Innovation of the Year” award (twice) and T&M World’s “Best in Test.” Agilent is committed to breaking new ground and providing tools that bring unique value to our customers.

32 Mpts acquisition memory at 2 GSa/s or slower sample rates allows you to capture long time windows at high resolution – such as identifying glitches due to a power supply start-up from reset.



QuickMeas+ key gives you any five automated measurements with a push of a button. You can also configure this key to print/save screen shots, save waveforms, or load a favorite setup.

Zoom and search with instant response. Zoom into your signal using the horizontal scale knob and search through your waveform with the position knob. MegaZoom technology allows you to find your area of interest quickly and easily – even with 32 Mpts waveforms.



Built-in CD-RW drive on rear panel allows you to update the system software conveniently and can be used to archive large data files and install third-party application packages.

Install third-party software packages such as Excel, LabView, Agilent Vee, MATLAB®, anti-virus software, and more to perform customized processing and automation of your oscilloscope or to make the scope compliant to the network environment of your company.

An external monitor allows you to run third-party applications on a large, high-resolution display while using the scope's built-in monitor for high-speed waveform display.

Windows® XP Pro operating system.

A familiar interface makes simple tasks simple. Infiniium's analog-like front panel has a full set of controls color coded to the waveforms and measurements, making simple tasks simple.

Three-year standard warranty and a variety of Agilent support options protect your investment for the long term.

A new 18 GHz, BNC-compatible connector provides a high signal fidelity connection to Agilent active probes, SMA adapters, and standard BNCs.

AutoProbe interface completely configures your scope for use with the InfiniiMax probing system and previous generation Agilent active probes.

10/100 Mbps LAN interface lets you easily print waveforms on networked printers, save your results on your office PC, share information with others, and control the scope over the Web.



Hands-free operation with the Infiniium VoiceControl option. Just speak into the microphone to operate front-panel controls.

InfiniiMax: The Worlds Best High-Speed Probing System

InfiniiMax offers you the highest performance available for measuring differential and single-ended signals, with flexible connectivity solutions for today's high-density ICs and circuit boards.

Variable spacing via the tab on the side of the differential browser allows the probe tips to be adjusted for different circuit geometries from 0.25-5.80 mm (10-230 mills).

Z-axis compliance allows both probe tips of the differential browser to spring, supporting various probing angles and target system characteristics.

Differential browser is the best choice for general-purpose trouble-shooting of differential or single-ended signals up to 6 GHz bandwidth.

Solder-in differential probe head provides 7 GHz bandwidth and can be attached to very small geometry circuits for measuring both single-ended and differential signals.

The differential socket probe head can be used to measure either differential or single-ended signals to 7 GHz bandwidth.

Extremely small single-ended, solder-in probe heads support 5.2 GHz measurements of even the hardest-to-reach single-ended signals.



Single-ended browser is the best choice for general purpose probing of single-ended signals when small size of the probe head is the primary consideration. Bandwidths up to 5.5 GHz can be obtained in this configuration.

Differential SMA probe head provides 7 GHz bandwidth and allows you to connect two SMA cables to make a differential measurement on a single scope channel.

The 54006A 7.5 GHz resistive divider probe is available as a low-cost probing alternative for casual inspection of signals.

A flat frequency response over the entire probe bandwidth eliminates the distortion and frequency-dependent loading effects that are present in probes that have an in-band resonance.

Ergonomic sleeves make hand browsing comfortable even over long periods of time.

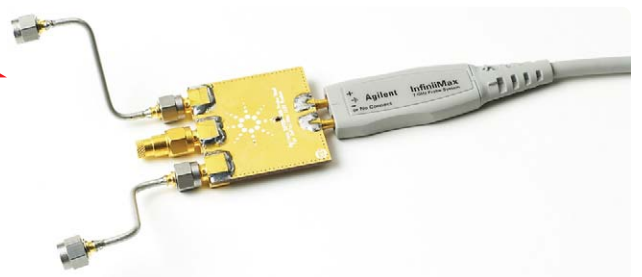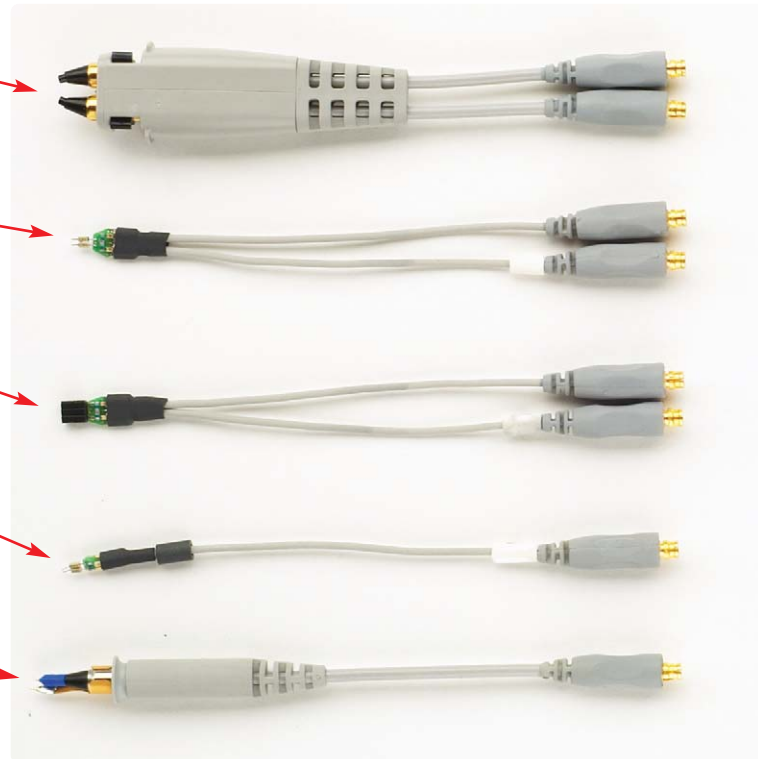



Supplied axial lead resistors, when trimmed to the appropriate length, allow user to trade off bandwidth and reach. Values and trimming templates are supplied for measurements from 2.8 GHz to 7 GHz.

The damped-wire accessory provides maximum connection reach and flexibility without introducing an in-band resonance for signals up to 1.2 GHz bandwidth.

InfiniiMax probes have fully characterized performance for all of their various probe heads. This includes:

- Swept frequency response plot
- Common mode rejection vs. frequency plot
- Impedance vs. frequency plot
- Time-domain probe loading plot
- Time-domain probe tracking plot

See page 16 for an example.

One-year standard warranty on active probes and a variety of Agilent support options to choose from.

Controlled impedance transmission lines in every probe head deliver full performance versus the performance limitations produced by traditional wire accessories.

Probe interface software allows you to save the calibration information for up to 10 different probe heads per channel and will automatically retrieve calibration data for a probe amplifier as it is attached to the scope.

High-input impedance active probes minimize loading, support differential measurements and DC offset, and can compensate for cable loss.



InfiniiMax is the world's best high-speed probe

- InfiniiMax's bandwidth is greater than the scope's bandwidth.
- Each use model (browsing, solder-in, socket) is optimized for maximum performance.
- Supports both differential and single-ended measurements with a single probe amplifier.



EDN Magazine has awarded Agilent's InfiniiMax active probe system the 2002 Innovation of the year award. This exclusive award program, now in its 13th year, awards truly outstanding products in the electronics industry.

Infiniium 54850 Series Performance Characteristics

Vertical

Input channels	4			
Analog bandwidth (–3 dB)*	54855A: 6 GHz	54854A: 4 GHz	54853A: 2.5 GHz	54852A: 2 GHz
Rise time (10% to 90%)	54855A: 70 ps 54855A with option 008: 62 ps	54854A: 105 ps	54853A: 168 ps	54852A: 210 ps
Input impedance	50 Ω ± 2.5%			
Sensitivity ¹	1 mV/div to 1 V/div			
Input coupling	DC			
Vertical resolution ²	8 bits, ≥ 12 bits with averaging			
Channel to channel isolation (any two channels with equal V/div settings)	DC to 100 MHz: 40 dB 100 MHz to 1 GHz: 28 dB > 1 GHz to 6 GHz: 24dB			
DC gain accuracy* ¹	± 1% of full scale at full resolution channel scale			
Maximum input voltage*	± 5 V			
Offset range	> ± 12 div or ± 4 Volts, whichever is smallest			
Offset accuracy* ¹	± (2% of channel offset + 1% of full scale)			
Dynamic range	± 4 div from center screen			
DC voltage measurement accuracy* ¹				
Dual cursor	± [(DC gain accuracy)+(resolution)]			
Single cursor	± [(DC gain accuracy)+(offset accuracy)+(resolution/2)]			

Horizontal

Main timebase range	54855A and 54854A: 5 ps/div to 20 s/div		54853A and 54852A: 10 ps/div to 20 s/div	
Main timebase delay range	–200 s to 200 s			
Delayed timebase scale range	1 ps/div to current main time scale setting			
Channel deskew	–50 μs to 150 μs range, 100 fs resolution			
Time scale accuracy ³	± 1 ppm pk			
Delta-time measurement accuracy ^{6,7}				
≥ 256 Averages, rms	54855A: 70 fs rms	54854A: 90 fs rms	54853A: 110 fs rms	54852A: 160 fs rms
≥ 256 Averages, peak	± [(0.5 ps) + (1 × 10 ^{–6} × reading)] peak			
Averaging disabled, rms	54855A: 2.0 ps rms	54854A: 2.5 ps rms	54853A: 3.0 ps rms	54852A: 4.5 ps rms
Averaging disabled, peak	± [(X ps) + (1 × 10 ^{–6} × reading)] peak			
	54855A: X = 7.0 ps	54854A: X = 8.0 ps	54853A: X = 10.0 ps	54852A: X = 15.0 ps
Jitter measurement floor ⁶				
Time interval error	54855A: 1.4 ps rms	54854A: 1.8 ps rms	54853A: 2.0 ps rms	54852A: 3.0 ps rms
Period jitter	54855A: 2.0 ps rms	54854A: 2.5 ps rms	54853A: 3.0 ps rms	54852A: 4.5 ps rms
N-cycle, cycle-cycle jitter	54855A: 3.0 ps rms	54854A: 3.8 ps rms	54853A: 4.5 ps rms	54852A: 6.8 ps rms

Infiniium 54850 Series Performance Characteristics (continued)

Acquisition

Real time sample rate per channel	54855A: 20 GSa/s 54854A: 20 GSa/s 54853A: 20 GSa/s 54852A: 10 GSa/s
Memory depth per channel	
Standard	262,144 at all sample rates
Option 001	1,025,000 at all sample rates 32,800,000 \leq 2 GSa/s sample rate
Sampling modes	
Real time	Successive single-shot acquisitions
Real time with averaging	Selectable from 2 to 4096
Real time with peak detect	2 GSa/s peak detect, for less than 2 GSa/s sample rates (option 001 only)
Filters	
Sin(x)/x Interpolation	On/off selectable FIR digital filter. Digital signal processing adds points between acquired data points to enhance measurement accuracy and waveform display quality.

Trigger

Sensitivity ¹	
Internal Low ¹	54855A: 0.5 div p-p 0 to 2 GHz, 1.0 div p-p 2 to 4 GHz, < 2.5 div @ 5 GHz 54854A: 0.5 div p-p 0 to 2 GHz, 1.0 div p-p 2 to 4 GHz 54853A: 0.5 div p-p 0 to 2 GHz, 1.0 div p-p 2 to 2.5 GHz 54852A: 0.5 div p-p 0 to 2 GHz
Internal High ¹	54855A: 0.2 div p-p 0 to 6 GHz 54854A: 0.2 div p-p 0 to 4 GHz 54853A: 0.2 div p-p 0 to 2.5 GHz 54852A: 0.2 div p-p 0 to 2 GHz
Auxiliary	DC to 500 MHz: 500 mV p-p
Level range	
Internal	± 8 div from center screen or ± 4 Volts, whichever is smallest
Auxiliary	± 5 V
Sweep modes	Auto, triggered, single
Trigger jitter ^{6,8}	54855A: 1.0 ps rms 54854A: 1.3 ps rms 54853A: 1.7 ps rms 54852A: 1.8 ps rms
Trigger holdoff range	80 ns to 320 ms
Trigger actions	Specify an action to occur and the frequency of the action when a trigger condition occurs. Actions include e-mail on trigger and QuickMeas+.

Infiniium 54850 Series Performance Characteristics (continued)

Trigger (continued)

Trigger modes	
Edge	Triggers on a specified slope and voltage level on any channel or auxiliary trigger.
Glitch	Triggers on glitches narrower than the other pulses in your waveform by specifying a width less than your narrowest pulse and a polarity. Triggers on glitches as narrow as 500 ps. Glitch range settings: < 1.5 ns to < 160 ms.
Line	Triggers on the line voltage powering the oscilloscope.
Pattern	Triggers when a specified logical combination of the channels is entered, exited, present for a specified period of time or is within a specified time range. Each channel can have a value of High (H), Low (L) or Don't care (X). Triggers on patterns as narrow as 500 ps.
State	Pattern trigger clocked by the rising or falling edge of one channel. Logic type: AND or NAND.
Delay by time	The trigger is qualified by an edge. After a specified time delay between 30 ns to 160 ms, a rising or falling edge on any one selected input will generate the trigger.
Delay by events	The trigger is qualified by an edge. After a specified delay between 1 to 16,000,000 rising or falling edges, another rising or falling edge on any one selected input will generate the trigger.

Violation triggers	
Pulse width	Trigger on a pulse that is wider or narrower than the other pulses in your waveform by specifying a pulse width and a polarity. Triggers on pulse widths as narrow as 500 ps. Pulse width range settings: 1.5 ns to 160 ms.
Setup/hold	Triggers on setup, hold or setup and hold violations in your circuit. Requires a clock and data signal on any two input channels as trigger sources. High and low thresholds and setup and/or hold time must then be specified.
Transition	Trigger on pulse rising or falling edges that do not cross two voltage levels in > or < the amount of time specified.

Measurements and math

Waveform measurements	
Voltage	Peak to peak, minimum, maximum, average, RMS, amplitude, base, top, overshoot, preshoot, upper, middle, lower, area.
Time	Period, frequency, positive width, negative width, duty cycle, delta time, rise time, fall time, T _{min} , T _{max} , channel-to-channel phase.
Frequency domain	FFT frequency, FFT magnitude, FFT delta frequency, FFT delta magnitude, FFT phase.
Statistics	Displays the mean, standard deviation, minimum, maximum and number of measurements value for the displayed automatic measurements.
Histograms	Vertical (for timing and jitter measurements) or horizontal (noise and amplitude change) modes, regions are defined using waveform markers. Measurements included: mean, standard deviation, peak-to-peak value, median, min, max, total hits, peak (area of most hits), and mean ± 1, 2, and 3 sigma.
Eye-diagram measurements	Eye-diagram measurements include eye height, eye width, eye jitter, crossing percentage, Q factor, and duty-cycle distortion.
Jitter analysis measurements (Available E2681A EZJIT Jitter Analysis software)	Cycle-cycle jitter, N-cycle jitter, cycle-cycle + width, cycle-cycle – width, cycle-cycle duty cycle, data rate, unit interval, time interval error data, time interval error clock, setup time, hold time, phase, period, frequency, + width, – width, duty cycle, rise time, fall time.

Infiniium 54850 Series Performance Characteristics (continued)

Measurements and math (continued)

Mask testing	Allows pass/fail testing to user-defined or Agilent-supplied waveform templates. AutoMask lets you create a mask template from a captured waveform and define a tolerance range in time/voltage or percentage. Test modes include test forever, test to specified time or event limit, and stop on failure. Communications Mask Test Kit option provides a set of ITU-T G.703, ANSI T1.102, and IEEE 802.3 industry-standard masks for compliance testing.
Waveform math	Four functions, select from add, average, differentiate, divide, FFT magnitude, FFT phase, integrate, invert, magnify, min, max, multiply, subtract, versus, common mode, smoothing.
FFT	
Frequency range ⁴	DC to 10 GHz.
Frequency resolution	Sample rate/memory depth = Resolution.
Best resolution at maximum sample rate	54855A, 54854A, 54853A: 20 GSa/s / 1 Mpts = 20 kHz. 54852A: 10 GSa/s / 1 Mpts = 10 kHz.
Frequency accuracy	(1/2 frequency resolution)+(1 x 10 ⁻⁶)(signal frequency).
Signal-to-noise ratio ⁵	60 dB at 32k memory depth.
Window modes	Hanning, flattop, rectangular.
Measurement modes	
Automatic measurements	Measure menu access to all measurements, five measurements can be displayed simultaneously.
QuickMeas+	Front-panel button activates five pre-selected or five user-defined automatic measurements.
Drag-and-drop measurement toolbar	Measurement toolbar with common measurement icons that can be dragged and dropped onto the displayed waveforms.
Marker modes	Manual markers, track waveform data, track measurements.

Display

Display	
Display	8.4 inch diagonal color TFT-LCD.
Resolution	640 pixels horizontally x 480 pixels vertically.
Annotation	Up to 12 labels, with up to 100 characters each, can be inserted into the waveform area.
Grids	Can display 1, 2 or 4 waveform grids.
Waveform styles	Connected dots, dots, persistence (minimum, variable, infinite), color-graded infinite persistence.

Computer system and peripherals, I/O ports

Computer system and peripherals	
Operating system	Windows [®] XP Pro.
CPU	Intel [®] Pentium [®] III 1 GHz microprocessor.
PC system memory	512 MB.
Drives	≥ 20 GB internal hard drive, CD-RW drive on rear panel, standard 3.5 inch 1.44 MB floppy drive.
Peripherals	Logitech optical USB mouse and compact keyboard supplied. All Infiniium models support any Windows-compatible input device with a serial, PS/2 or USB interface.
File types	
Waveforms	Compressed internal format, comma and tab separated X and Y pairs or voltage values.
Images	BMP, PCX, TIFF, GIF or JPEG.

Infiniium 54850 Series Performance Characteristics (continued)

Computer system and peripherals, I/O ports (continued)

I/O ports	
LAN	RJ-45 connector, supports 10Base-T and 100Base-T. Enables Web-enabled remote control, e-mail on trigger or demand, data/file transfers and network printing.
GPIO	IEEE 488.2, fully programmable.
RS-232 (serial)	COM1, printer and pointing device support.
Parallel	Centronics printer port.
PS/2	2 ports. Supports PS/2 pointing and input devices.
USB	2 ports. Allows connection of USB peripherals like storage devices and pointing devices while the oscilloscope is on.
Video output	15 pin VGA, full color output of scope waveform display.
Dual-monitor video output	15 pin XGA, full color output for using third-party applications.
Auxiliary output	DC (± 2.4 V); square wave (~ 715 Hz and 456 MHz); trigger output (255 mV p-p into 50 Ω).
Trigger output	5 V 50 Ω back-terminated.
Time base reference output	10 MHz, 5V 50 Ω back-terminated.

General characteristics

Temperature	Operating: 5° C to +40° C. Non-operating: -40° C to +70° C.
Humidity	Operating: Up to 95% relative humidity (non-condensing) at +40°C. Non-operating: Up to 90% relative humidity at +65°C.
Altitude	Operating: Up to 4,600 meters (15,000 feet). Non-operating: Up to 15,300 meters (50,000 feet).
Vibration	Operating: Random vibration 5-500 Hz, 10 minutes per axis, 0.3 g(rms). Non-operating: Random vibration 5-500 Hz, 10 minutes per axis, 2.41 g(rms); resonant search 5-500 Hz, swept sine, 1 octave/minute sweep rate, (0.75g), 5 minute resonant dwell at 4 resonances per axis.
Power	100-240 VAC, $\pm 10\%$, Cat II, 47 to 440 Hz; max power dissipated: 475 W.
Weight	Net: 13 kg (28.5 lbs.). Shipping: 16 kg (35.2 lbs.).
Dimensions (excluding handle)	Height: 216 mm (8.5 in). Width: 437 mm (17.19 in). Depth: 440 mm (17.34 in).
Safety	Meets IEC 61010-1 +A2, CSA certified to C22.2 No.1010.1, self-certified to UL 3111.

* Denotes warranted specifications, all others are typical. Specifications are valid after a 30-minute warm-up period, and $\pm 5^\circ\text{C}$ from annual calibration temperature.

1 Full scale is defined as 8 vertical divisions. Vertical divisions are defined by the major scale settings above non-major scale settings. The major scale settings are 10 mV, 20 mV, 50 mV, 100 mV, 200 mV, 500 mV, 1 V.

2 Vertical resolution for 8 bits = 0.4% of full scale, for 12 bits = 0.024% of full scale.

3 Within one year of previous calibration.

4 FFT amplitude readings are affected by input amplifier roll-off.

54855A: -3 dB at 6 GHz, with amplitude decreasing as frequency increases above 6 GHz.

54854A: -3 dB at 4 GHz, with amplitude decreasing as frequency increases above 4 GHz.

54853A: -3 dB at 2.5 GHz, with amplitude decreasing as frequency increases above 2.5 GHz.

54852A: -3 dB at 2 GHz, with amplitude decreasing as frequency increases above 2 GHz.

5 The noise floor varies with memory depth and averaging.

6 Test signal peak-to-peak amplitude ≥ 5 divisions; vertical scale ≥ 10 mV/div; test signal rise time ≤ 415 ps (54852A), 335 ps (54853A), 225 ps (54854A), 150 ps (54855A); sample rate = 20 GSa/s (10 GSa/s for 54852A); sin(x)/x interpolation enabled; measurement threshold = fixed voltage at 50 % level.

7 Between two edges on a single channel. Rms value refers to the standard deviation of 256 consecutive measurements performed using an individual instrument.



8 Internal trigger. Trigger level contained within full scale display range of trigger channel.

InfiniiMax 1130 Series Performance Characteristics

	1134A, 1132A, 1131A, 1130A	
Bandwidth*	1134A: > 7 GHz 1132A: > 5 GHz	1131A: > 3.5 GHz 1130A: > 1.5 GHz
Rise and fall time (10% to 90%)	1134A: 60 ps 1132A: 86 ps	1131A: 100 ps 1130A: 233 ps
System bandwidth (-3 dB)	1134A with 54855A: 6 GHz 1132A with 54854A: 4 GHz 1131A with 54853A: 2.5 GHz 1131A with 54846B: 2.25 GHz 1131A with 54852A: 2 GHz 1130A with 54832B/D, 33A/D: 1 GHz	
Input capacitance ¹	C _m = 0.10 pF C _g = 0.34 pF C _{diff} = 0.27 pF C _{se} = 0.44 pF	C _m is between tips C _g is to ground for each tip Differential mode capacitance = C _m + C _g /2 Single-ended mode capacitance = C _m + C _g
Input resistance*	Differential mode resistance = 50 kΩ ± 2% Single-ended mode resistance = 25 kΩ ± 2%	
Input dynamic range	5.0 V peak to peak, ± 2.5 V	
Input common mode range	6.75 V peak to peak dc to 100 Hz; 1.25 V peak to peak > 100 Hz	
Maximum signal slew rate	18 V/ns when probing a single-ended signal 30 V/ns when probing a differential signal	
DC attenuation	10:1 ± 3% before calibration on oscilloscope 10:1 ± 1% after calibration on oscilloscope	
Zero offset error referred to input	< 30 mV before calibration on oscilloscope < 5 mV after calibration on oscilloscope	
Offset range	± 12.0 V when probing single-ended	
Offset accuracy	< ± 1% of setting when probing single-ended	
Noise referred to input	3.0 mV rms	
Propagation delay	~6 ns (this delay can be deskewed relative to other signals)	
Maximum input voltage	30 V peak, CAT I	
ESD tolerance	> 8 kV from 100 pF, 300 Ω HBM	


* Denotes warranted specifications, all others are typical.

¹ Measured using the probe amplifier and solder-in differential probe head with full bandwidth resistors.

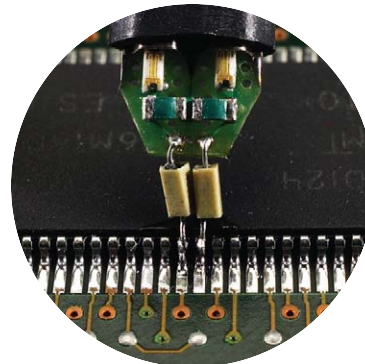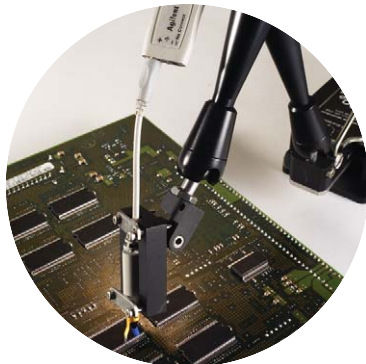


InfiniiMax 1130 Series Performance Characteristics (continued)


Example of characterized performance plots: differential solder-in probe head

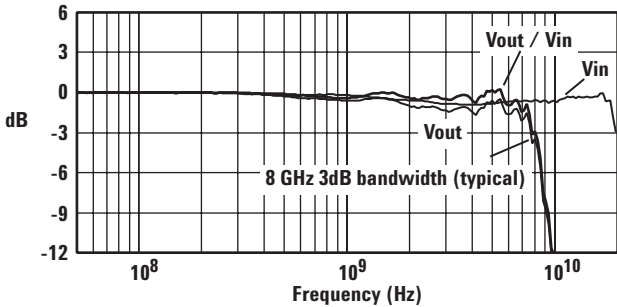


Swept frequency response

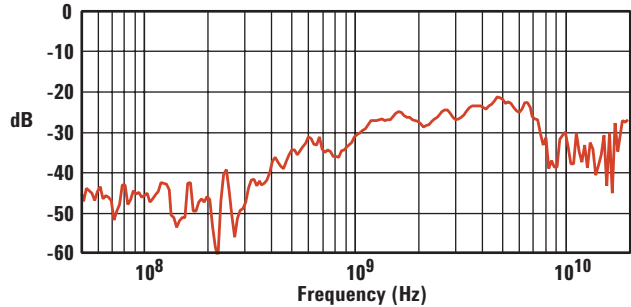


Common mode rejection vs. frequency

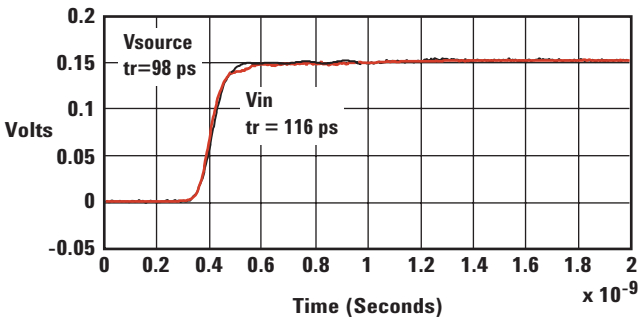

Time-domain probe loading

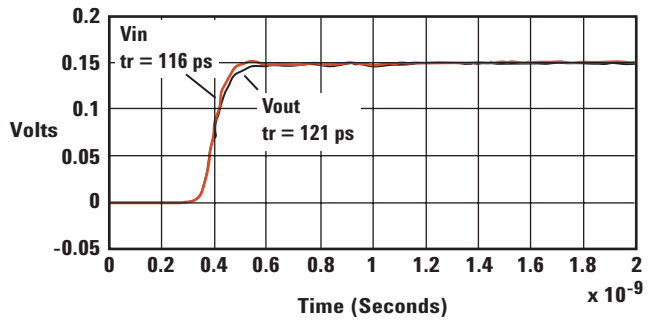

Time-domain probe tracking of 100 ps 10-90% step

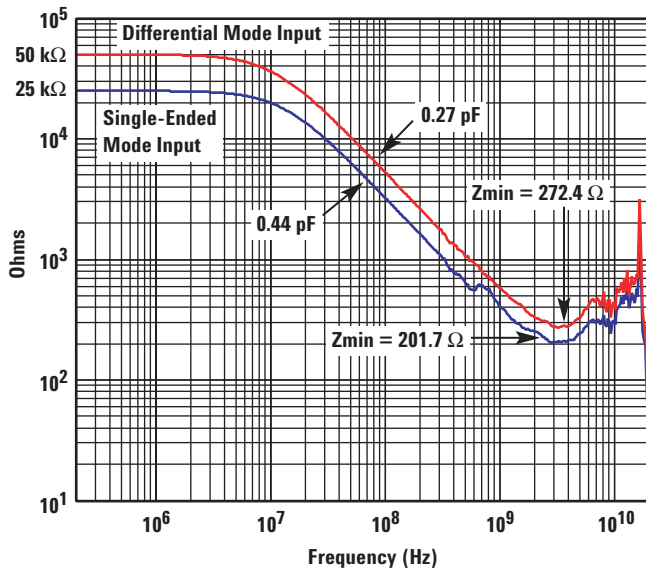

Impedance vs. frequency

The electrical properties of the oscilloscope's probe head or probe accessory can often be the limiting factor in the measurement bandwidth or measurement accuracy that can be realized in practical use. The InfiniiMax probing system is the only high-bandwidth probing system that provides characterized performance plots for each of its probe heads. This allows you to see the measurement capability you can achieve for a given use model.

Input impedance SPICE models (and corresponding SPICE decks) for InfiniiMax probes can be found online at (<http://www.cos.agilent.com/manuals/>).

Ordering Information


54850 Series Infiniium oscilloscopes

Model	Bandwidth	Channels	Sample rate per channel	Standard acquisition memory
54855A	6 - 7 GHz	4	20 GSa/s	262 kpts per channel
54854A	4 GHz	4	20 GSa/s	262 kpts per channel
54853A	2.5 GHz	4	20 GSa/s	262 kpts per channel
54852A	2 GHz	4	10 GSa/s	262 kpts per channel

The above models include:

- Optical USB mouse
- Compact keyboard
- User's quick-start guide
- Documentation CD (service guide, programmer's guide, programmer's quick reference guide)
- Accessory pouch
- Power cord
- High-performance calibration cable (54855A only)
- E2655A probe deskew and performance verification kit
- Two 54855-67604 BNC-compatible to precision 3.5 mm (f) adapters (54855A, 54854A only)
- Three-year warranty.

Note: No probes are included with the 54850 Series oscilloscopes. The InfiniiMax 1130 Series probes must be purchased separately.

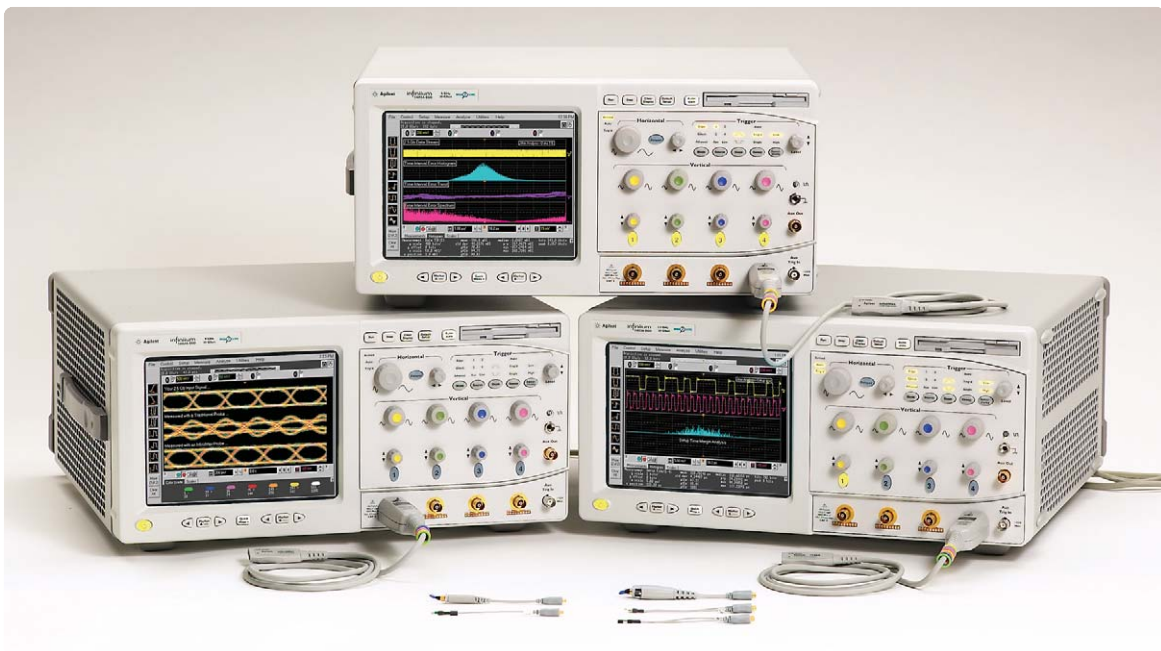

Ordering Information (continued)

54850 Series Infiniium oscilloscope options and accessories


Options	Description
001	1M/ch memory upgrade for Infiniium 5485xA oscilloscopes (32M/ch for sample rates \leq 2 GSa/s).
002	EZJIT jitter analysis software for Infiniium 5485xA oscilloscopes (installed at the factory).
003	High-Speed Serial Data Analysis/Mask Testing with clock recovery for Infiniium 5485xA oscilloscopes (installed at the factory).
008	7 GHz enhanced bandwidth software for the 54855A oscilloscope. Increase measurement bandwidth to 7 GHz (typical) or reduce scope bandwidth to 1 GHz to reduce system noise.
017	20 GB removable hard disk drive for Infiniium 5485xA oscilloscopes Replaces internal hard disk with a removable hard disk. Order the N5390A for additional hard disk drive cartridges.
021	Low-Speed Serial Data Analysis for Infiniium 548xx oscilloscopes (installed at the factory).
Instrument options	Description
1CM (E2609B)	Rack-mount kit.
Service options	Description
A6J	ANSI Z540-compliant calibration.
Accessories	Description
E2680A	After-purchase memory upgrade for Infiniium 5485xA oscilloscopes. Order 5485xA option 001 when purchasing a new Infiniium 5485xA oscilloscope. The E2680A is for customers who own a 5485xA scope and wish to upgrade the acquisition memory.
E2681A	After-purchase EZJIT jitter analysis software for Infiniium 5485xA oscilloscopes. Order 5485xA option 002 when purchasing a new Infiniium 5485xA oscilloscope. The E2681A is for customers who own a 5485xA oscilloscope and wish to upgrade to add the EZJIT software.
E2690A ADV	After-purchase Advanced Timing Interval and Jitter Analysis software for Infiniium 5485xA oscilloscopes. Available in one scope license and four scope license versions.
E2688A	After-purchase High-Speed Serial Data Analysis/Mask Testing with clock recovery for Infiniium 5485xA oscilloscopes. Order 5485xA option 003 when purchasing a new Infiniium 5485xA oscilloscope. The E2688A is for customers who own a 5485xA oscilloscope and wish to upgrade to add the High-Speed SDA software.
N5390A	Additional 20 GB hard disk drive cartridge for Infiniium 5485xA option 017
N5391A	After-purchase Low-Speed Serial Data Analysis/Mask Testing with clock recovery for Infiniium 5485xA oscilloscopes. Order 5485xA option 021 when purchasing a new Infiniium 5485xA oscilloscope. The N5391A is for customers who own a 5485xA oscilloscope and wish to upgrade to add the Low-Speed SDA software.
E2697A	High impedance adapter (includes passive probe)
E2698A	Ethernet Mask Testing for 54850/54830 series oscilloscopes
E2654A	EZ Probe Positioner [®] : includes base, joystick, and articulating arm.

Ordering Information (continued)

54850 Series Infiniium oscilloscope options and accessories (continued)

Accessories (continued)	Description
E2682A	VoiceControl. (See page 23.)
E2683A	USB 2.0 Compliance Test option. (See page 20.)
E2625A	Communication Mask Test Kit. (See page 22.)
1184A	Testmobile with keyboard and mouse tray, drawer for accessories. (See page 23.)
E5850A	Time-correlation fixture – integrate Infiniium scope and 1670x logic analyzer. (See page 22.)
E2655A	Additional probe deskew/performance verification kit for InfiniiMax probes.
54855-67604	18 GHz BNC-compatible to precision 3.5 mm (f) adapter for Infiniium 5485xA scopes. Allows highest fidelity connection of 3.5 mm or SMA cables.

E2688A



High-Speed Serial Data Analysis/Mask Testing with Clock Recovery.

Easily perform mask testing and characterize serial data streams that employ embedded clocks. The E2688A provides mask templates and clock recovery for verifying compliance to computer, communication and datacom standards. You can even characterize proprietary serial buses with the built-in, general purpose golden PLL clock recovery.


Features include:

- Golden PLL clock recovery
- Set up wizard to configure the clock recovery
- Real-time eye diagram display with eye-mask unfolding
- Recovered clock display
- Time interval error (TIE) jitter measurement with statistics on the data stream
- Mask template loading
- 8b/10b decode with symbol trigger and search

Standard masks include:

- PCI Express (2.5 Gbps)
- Serial ATA (1.5 Gbps)
- Fibre Channel Electrical (1.0625, 2.125, 4.25 Gbps)
- Ethernet IEEE 802.3 (10/100/1000Base-T)
- Serial Attached SCSI, XAUI

N5391A



Low-Speed Serial Data Analysis Software.

Provides a fast and easy way to debug Inter-Integrated Circuit (I²C) and 2-wire or 3-wire Serial Peripheral Interface (SPI) serial communication busses. The Low-Speed SDA software, when used with the Agilent 54830 Series or 54850 Series Infiniium oscilloscopes, provides the ability to capture and automatically display decoded serial data in numerical format synchronized with the analog or digital waveform view of I²C or SPI serial data streams.


Ordering Information (continued)

54850 Series Infiniium oscilloscope options and accessories (continued)

Accessories (continued)

Description

Download



Serial ATA Signal Quality Compliance Test.

If you develop Serial ATA host bus adapters or devices and would like to perform compliance testing to the standard, the sigtest program provides the following features:

- program runs inside Infiniium 54855A and tests host bus adapters and devices for compliance to Serial ATA standard, as issued by Serial ATA working group
- written test procedure for Agilent Infiniium 54855A and Agilent 81134A pulse/pattern generator
- software automatically sets up the oscilloscope, allows user to transfer setups to pattern generator, acquires waveform data and launches eye measurement (sigtest)
- includes support for OOB (out of band) signal testing
- solution has been evaluated and proven at Serial ATA plugfests

Program can be downloaded for free from the following URL:
<http://www.cos.agilent.com/scope-apps/sata.html>


Partner Product

IEEE-1394 Pre-Compliance Test Option.

A pre-compliance test solution is available from Quantum Parametrics for use in conjunction with Agilent 54850 Series oscilloscopes. This test solution automates the compliance test process for the IEEE-1394 standard. See <http://www.quantumparametrics.com> for additional information.

E2683A

USB 2.0 Compliance Test Option.

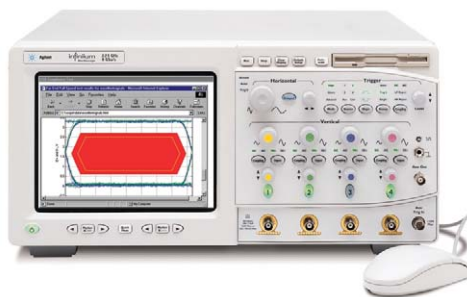

The Agilent USB 2.0 compliance test option makes USB signal integrity testing as simple as capturing the signals with your oscilloscope. Infiniium has significantly reduced the work associated with USB compliance testing by eliminating the need to transfer scope waveforms to a PC. The Infiniium USB 2.0 test option features run-time MATLAB embedded in the scope for use with the USB signal integrity scripts, providing a one-box solution. The USB-IF compliance program recognizes Infiniium as a recommended scope for use in pre-compliance testing. In addition, all MATLAB scripts used with the USB 2.0 test option come from the USB-IF organization.

This option works with all Infiniium 5485xA 4-channel oscilloscopes. Included with the E2683A are USB-IF MATLAB scripts and Signal Quality Inrush Droop/Drop (SqIDD) test fixture, needed for low/full speed testing. Additional SqIDD test fixtures can be purchased as the E2646A.

For USB 2.0 High Speed testing, order the E2683A test option as well as the E2649A for a complete set of six fixtures and power supply.

For USB 2.0 High Speed testing, a differential probe is required. Please order either the InfiniiMax 1130A 1.5 GHz, 1131A 3.5 GHz, 1132A 5 GHz or 1134A 7 GHz probe amplifiers, along with the E2669A differential connectivity kit or E2678A differential socketed probe head.

The USB 2.0 Compliance Test Procedure is located at <http://www.usb.org/developers/docs>

Ordering Information (continued)

54850 Series Infiniium oscilloscope options and accessories (continued)

Accessories (continued)

Description

E2698A



Ethernet Mask Testing for 54850/54830 Series Oscilloscopes.

The E2698A Ethernet Masks provide mask templates for 1000BaseTX, 100BaseT and 10BaseT. These masks are supported for both the Infiniium 54850 series and Infiniium 54830 series of oscilloscopes, and provide pass/fail testing for Ethernet signals.

Masks provided: 1000BaseTX: six masks (points A, B, C, D, F and H as specified in paragraph 40.6.1.1.2 and figure 40-19 of IEEE 802.3-2002 specification). The masks assume that the user has properly connected a differential probe from channel 1 of the oscilloscope to one pair of the transmitter under test (as in 802.3-2002 paragraph 40.6.1.1.3) and that Test Mode 1 (802.3-2002 paragraph 40.6.1.1.2) is enabled. You also receive two mask templates for 100BaseT and four mask templates for 10BaseT.

E2697A

High Impedance Adapter (Includes 500 MHz Passive Probe) for Infiniium 54850 Series Oscilloscopes.

The E2697A high impedance adapter allows connection of probes that require a high impedance input (e.g., passive probes, current probes) to the Infiniium 54855A, 54854A and 54853A family of high performance oscilloscopes. The E2697A high impedance adapter extends the capability of Agilent Infiniium high-performance oscilloscopes, making them ideal for a variety of general-purpose measurements such as power supplies, inverters, semiconductor measurements, etc. The E2697A provides switchable ac/dc coupling, as well as 10:1 and 1:1 attenuation settings.



Specifications/Characteristics

Bandwidth	Analog BW (-3 dB)*	500 MHz (with supplied 10073C passive probe)
	System Bandwidth	500 MHz (with 10073C passive probe and 54850 series oscilloscope)
Dc attenuation	1.16:1	E2697A internal attenuator at 1:1 (at scale settings > 200 mV/div signal size limited by input dynamic range)
	11.6:1	E2697A internal attenuator at 10:1 (at scale settings > 200 mV/div signal size limited by input dynamic range)
Input Dynamic Range	E2697A internal attenuator setting of 1:1	±0.8 V
	E2697A internal attenuator setting of 10:1	±8 V
Input Dynamic Range with 10073C passive probe	E2697A internal attenuator setting of 1:1	±8 V
	E2697A internal attenuator setting of 10:1	±80 V
Input Impedance*	1 MΩ ± 1% (~12 pF)	
Input Coupling	dc, ac (7 Hz)	
Maximum Input Voltage	±100V [dc + ac] [ac < 10 kHz], CAT I	
Offset Range	E2697A internal attenuator setting of 1:1	±5 V
	E2697A internal attenuator setting of 10:1	±50 V
Dc Gain Accuracy* ¹	±1.5% of full scale	
Offset Accuracy* ¹	±(1.5% of channel offset + 1.5% of full scale)	

* Denotes warranted specifications, all others typical. Specifications are valid after a 30 minute warm-up period and ±5 °C from calibration temperature.

¹ Full scale is defined as 8 vertical divisions.

Ordering Information (continued)

54850 Series Infiniium oscilloscope options and accessories (continued)

Accessories (continued)

Description

E2625A

Communication Mask Test Kit.




Take the frustration out of communications testing and prove your designs conform to industry standards with the E2625A Communications Mask Test Kit option. Infiniium's familiar Windows interface makes it easy for you to access the masks you need and configure your tests.

In addition, the E2625A Communication Mask Test Kit comes with a set of electrical communication adapters to ensure convenient, reliable and accurate connections to your device under test. Included are more than 20 industry standard ANSI T1.102 and ITU-T G.703 communication signal mask templates.

E5850A

Logic Analyzer/Oscilloscope Time-Correlation Fixture.

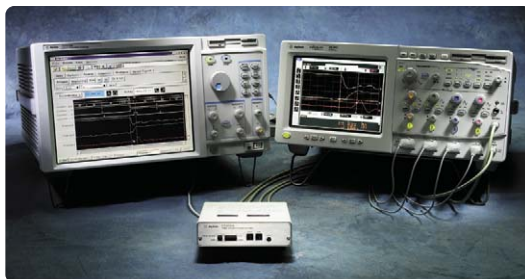

Now you can more effectively verify and track down problems between the analog and digital portions of a design. Easily make time-correlated measurements between an Agilent 16700 Series logic analysis system and an Infiniium 54800 Series oscilloscope. With the E5850A Time-Correlation Fixture, you can trigger the Infiniium from the logic analyzer (or vice versa), automatically deskew the waveforms and simultaneously view the Infiniium oscilloscope waveforms and the logic analyzer's timing waveforms on your Agilent 16700 Series Logic Analyzer.

Foot Switch

Kinesis Savant 3-Action Programmable Foot Switch P/N AC004PF.

Allows you to easily program the 3-action foot pedals to perform the following scope functions: run, stop, toggle between run and stop, save waveform, save screenshot, measure any five waveform parameters and recall an instrument setup.

See http://www.kinesis-ergo.com/prog_fs.htm for additional information and ordering instructions.

Ordering Information (continued)

54850 Series Infiniium oscilloscope options and accessories (continued)

Accessories (continued)

Description

1184A

Testmobile.

Agilent's 1184A testmobile provides a convenient solution for your portability and storage needs. The 1184A includes a drawer for accessories and a keyboard tray with a mouse extension for either right- or left-handed operation.



E2682A


VoiceControl Option.



If you're making measurements on target systems with densely packed Ics, your hands are tied up holding probes, making it difficult to turn knobs and press buttons on the front panel of your scope. Infiniium's award-winning VoiceControl option solves this problem. Just speak into the collar-mounted microphone to operate your Infiniium's front-panel controls without using your hands. Simply tell the scope what you want it to do, using natural English-language commands, such as "set channel one to 1 volt per division." The VoiceControl system does not require the scope to be trained to understand a particular user.

E2699A

My Infiniium Integration Package



My Infiniium allows you to extend the power of your Windows XP-based Infiniium oscilloscope by letting you launch customized applications, such as those written for Agilent VEE Pro, NI LabVIEW[®] or Microsoft Excel, directly from the oscilloscope's front panel or graphical user interface.

For more detailed information, please request Agilent publication number 5988-9934EN.

Ordering Information (continued)

1130 Series InfiniiMax probing system

Probe amplifiers model	Description
1134A	7 GHz InfiniiMax probe amp – order one or more probe heads or connectivity kits.
1132A	5 GHz InfiniiMax probe amp – order one or more probe heads or connectivity kits.
1131A	3.5 GHz InfiniiMax probe amp – order one or more probe heads or connectivity kits.

Connectivity kits model	Description
E2669A	InfiniiMax connectivity kit for differential/single-ended measurements. Includes a differential browser, four solder-in differential probe heads and two socketed differential probe heads. Includes all necessary accessories.
E2668A	InfiniiMax connectivity kit for single-ended measurements. Includes one single-ended browser, one solder-in probe head and one socketed probe head. Includes all necessary accessories.

Individual probe heads	Description
E2675A	InfiniiMax differential browser probe head and accessories. Includes 20 replaceable tips and ergonomic handle. Order E2658A for replacement accessories.
E2676A	InfiniiMax single-ended browser probe head and accessories. Includes 2 ground collar assemblies, 10 replaceable tips, a ground lead socket and ergonomic browser handle. Order E2663A for replacement accessories.
E2677A	InfiniiMax differential solder-in probe head and accessories. Includes 20 full bandwidth and 10 medium bandwidth damping resistors. Order E2670A for replacement accessories.
E2678A	InfiniiMax single-ended/differential socketed probe head and accessories. Includes 48 full bandwidth damping resistors, 6 damped wire accessories, 4 square pin sockets and socket heatshrink. Order E2671A for replacement accessories. Order E5381-82103 for 34 damped wire accessories only.
E2679A	InfiniiMax single-ended solder-in probe head and accessories. Includes 16 full bandwidth and 8 medium bandwidth damping resistors and 24 zero ohm ground resistors. Order E2672A for replacement accessories.
E2695A	Differential SMA probe head. Includes semi-rigid coax to change span between SMA cables. Works with InfiniiMax 1130 series probe amplifiers.

Adapters	Description
N1022A	Adapts 113x/115x active probes to 86100 Infiniium DCA.

Ordering Information (continued)

1130 Series InfiniiMax probing system (continued)

Other compatible probes	Description
1144A	800 MHz active probe. Requires 1142A probe power supply when used with Infiniium scopes. Requires 01144-61604 probe power extender when using two or more 1144A active probes.
1145A	2-channel, 750 MHz active probe. Requires 1142A power supply when used with Infiniium oscilloscopes.
1156A	1.5 GHz single-ended active probe for Infiniium scopes.
1157A	2.5 GHz single-ended active probe for Infiniium scopes.
1158A	4 GHz single-ended active probe for Infiniium scopes.
54006A	7.5 GHz passive resistive divider probe – 10:1 (500 ohms) or 20:1 (1 kohms).

Ordering Information (continued)



The Agilent 81134A pulse/pattern generator provides high speed stimulus to your devices, with pulses, patterns and PRBS data from 15 MHz to 3.35 GHz. You can also perform stressed eye diagram measurements with jitter on PRBS, data and clock signals.

Related Literature

Publication Title	Publication Type	Publication Number
<i>Infiniium 54800 Series Oscilloscopes</i>	Data Sheet	5988-3788ENUS
<i>Option 008, 7 GHz Enhanced Bandwidth Oscilloscope</i>	Data Sheet	5989-1066EN
<i>E2681A EZJIT Jitter Analysis Software</i>	Data Sheet	5989-0109EN
<i>E2690A Timing Interval & Jitter Analysis Software</i>	Data Sheet	5988-9723EN
<i>E2683A USB 2.0 Compliance Test Software</i>	Data Sheet	5989-0236EN
<i>E2688A High-Speed Serial Data Analysis Software</i>	Data Sheet	5989-0108EN
<i>Using Agilent InfiniiMax Probes with Test Equipment other than Agilent Infiniium Oscilloscopes</i>	Configuration Guide	5989-1869EN
<i>Infiniium 54800 Series Oscilloscope Probes, Accessories and Options</i>	Selection Guide	5968-7141EUS
<i>Advantages and Disadvantages of Using DSP Filtering on Oscilloscope Waveforms</i>	Application Note 1494	5989-1145EN
<i>Restoring Confidence in Your High-Bandwidth Probe Measurements</i>	Application Note 1419-01	5988-7951EN
<i>Understanding Usability Versus Performance on High-Bandwidth Active Oscilloscope Probes</i>	Application Note 1419-02	5988-8005EN
<i>Performance Comparison of Differential and Single-Ended Active Voltage Probes</i>	Application Note 1419-03	5988-8006EN
<i>Understanding Oscilloscope Frequency Response and Its Effect on Rise Time Accuracy</i>	Application Note 1420	5988-8008EN
<i>Understanding and Using Offset in InfiniiMax Active Probes</i>	Application Note 1451	5988-9264EN
<i>Finding Sources of Jitter with Real-Time Jitter Analysis</i>	Application Note 1448-2	5988-9740EN

Product Web site

For the most up-to-date and complete application and product information, please visit our product Web site at:
www.agilent.com/find/infiniimax

Agilent Technologies' Test and Measurement Support, Services, and Assistance

Agilent Technologies aims to maximize the value you receive, while minimizing your risk and problems. We strive to ensure that you get the test and measurement capabilities you paid for and obtain the support you need. Our extensive support resources and services can help you choose the right Agilent products for your applications and apply them successfully. Every instrument and system we sell has a global warranty. Support is available for at least five years beyond the production life of the product. Two concepts underlie Agilent's overall support policy: "Our Promise" and "Your Advantage."

Our Promise

Our Promise means your Agilent test and measurement equipment will meet its advertised performance and functionality. When you are choosing new equipment, we will help you with product information, including realistic performance specifications and practical recommendations from experienced test engineers. When you use Agilent equipment, we can verify that it works properly, help with product operation, and provide basic measurement assistance for the use of specified capabilities, at no extra cost upon request. Many self-help tools are available.

Your Advantage

Your Advantage means that Agilent offers a wide range of additional expert test and measurement services, which you can purchase according to your unique technical and business needs. Solve problems efficiently and gain a competitive edge by contracting with us for calibration, extra-cost upgrades, out-of-warranty repairs, and on-site education and training, as well as design, system integration, project management, and other professional engineering services. Experienced Agilent engineers and technicians worldwide can help you maximize your productivity, optimize the return on investment of your Agilent instruments and systems, and obtain dependable measurement accuracy for the life of those products.



Agilent Email Updates

www.agilent.com/find/emailupdates

Get the latest information on the products and applications you select.



Agilent Direct

www.agilent.com/find/agilentdirect

Quickly choose and use your test equipment solutions with confidence.

Agilent T&M Software and Connectivity

Agilent's Test and Measurement software and connectivity products, solutions and developer network allows you to take time out of connecting your instruments to your computer with tools based on PC standards, so you can focus on your tasks, not on your connections. Visit www.agilent.com/find/connectivity for more information.

MATLAB[®] is a U.S. registered trademark of Math Works, Inc.
Windows[®] is a U.S. registered trademark of Microsoft Corporation.
Intel[®] and Pentium[®] is a U.S. registered trademark of Intel Corporation.
EZ-Probe Positioner[®] is a registered trademark of Cascade Microtech.

www.agilent.com/find/infiniimax

For more information on Agilent Technologies' products, applications or services, please contact your local Agilent office. The complete list is available at:

www.agilent.com/find/contactus

Phone or Fax

United States:

(tel) 800 829 4444
(fax) 800 829 4433

Canada:

(tel) 877 894 4414
(fax) 800 746 4866

China:

(tel) 800 810 0189
(fax) 800 820 2816

Europe:

(tel) 31 20 547 2111

Japan:

(tel) (81) 426 56 7832
(fax) (81) 426 56 7840

Korea:

(tel) (080) 769 0800
(fax) (080) 769 0900

Latin America:

(tel) (305) 269 7500

Taiwan:

(tel) 0800 047 866
(fax) 0800 286 331

Other Asia Pacific Countries:

(tel) (65) 6375 8100
(fax) (65) 67556 0042
Email: tm_ap@agilent.com

Contacts revised: 9/17/04

Product specifications and descriptions in this document subject to change without notice.

© Agilent Technologies, Inc. 2004

Printed in USA December 23, 2004

5988-7976EN

