


# Schottky Or'ing Diode FST8115, FST8120

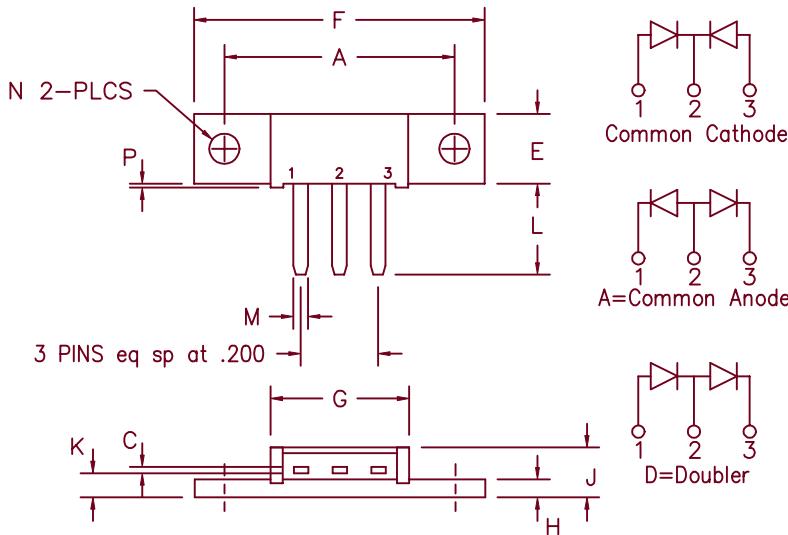

Dim.	Inches		Millimeter		Notes
	Minimum	Maximum	Minimum	Maximum	
A	1.180	1.195	29.97	30.35	
C	.027	.037	0.69	0.94	
E	.350	.370	8.89	9.40	
F	1.490	1.510	37.85	38.35	
G	.695	.715	17.65	18.16	
H	.088	.098	2.24	2.49	
J	.240	.260	6.10	6.60	
K	.115	.135	2.92	3.43	
L	.460	.480	11.68	12.19	
M	.065	.085	1.65	2.16	
N	.151	.161	3.84	4.09	Dia.
P	.015	.025	0.38	0.64	

Note: Baseplate Common with Pin 2

Microsemi  
Catalog Number

Working Peak  
Reverse Voltage

Repetitive Peak  
Reverse Voltage

FST8115\*  
FST8120\*

15V  
20V

15V  
20V

- Schottky Barrier Rectifier
- Guard ring protection
- Common cathode center tap
- 2X40 Amperes avg.
- 125°C Junction temperature
- Reverse energy tested
- Low forward voltage

\*Add the Suffix A for Common Anode, D for Doubler

## Electrical Characteristics

Average forward current per pkg  
Average forward current per leg  
Maximum surge current per leg  
Max repetitive peak reverse current per leg  
Max peak forward voltage per leg  
Max peak forward voltage per leg  
Max peak reverse current per leg  
Max peak reverse current per leg  
Typical junction capacitance per leg

|F(AV) 80 Amps  
|F(AV) 40 Amps  
|FSM 800 Amps  
|R(OV) 2 Amps  
VFM 0.32 Volts  
VFM 0.44 Volts  
|RM 1.0 Amp  
|RM 10 mA  
CJ 4000 pF

T<sub>C</sub> = 107°C, Square wave, R<sub>θJC</sub> = 0.5°C/W  
T<sub>C</sub> = 107°C, Square wave, R<sub>θJC</sub> = 1.0°C/W  
8.3 ms, half sine, T<sub>J</sub> = 125°C  
f = 1 KHZ, 25°C, 1 μsec square wave  
| FM = 40A: T<sub>J</sub> = 125°C  
| FM = 40A: T<sub>J</sub> = 25°C \*  
V<sub>RRM</sub>, T<sub>J</sub> = 125°C\*  
V<sub>RRM</sub>, T<sub>J</sub> = 25°C  
VR = 5.0V, T<sub>C</sub> = 25°C

\*Pulse test: Pulse width 300 μsec, Duty cycle 2%

## Thermal and Mechanical Characteristics

Storage temp range  
Operating junction temp range  
Max thermal resistance per leg  
Max thermal resistance per pkg  
Typical thermal resistance (greased)  
Mounting Base Torque  
Weight

T<sub>STG</sub>  
T<sub>J</sub>  
R<sub>θJC</sub>  
R<sub>θJC</sub>  
R<sub>θCS</sub>  
10 inch pounds maximum  
0.3 ounce (8.4 grams) typical

# FST8115, FST8120

Figure 1  
Typical Forward Characteristics – Per Leg

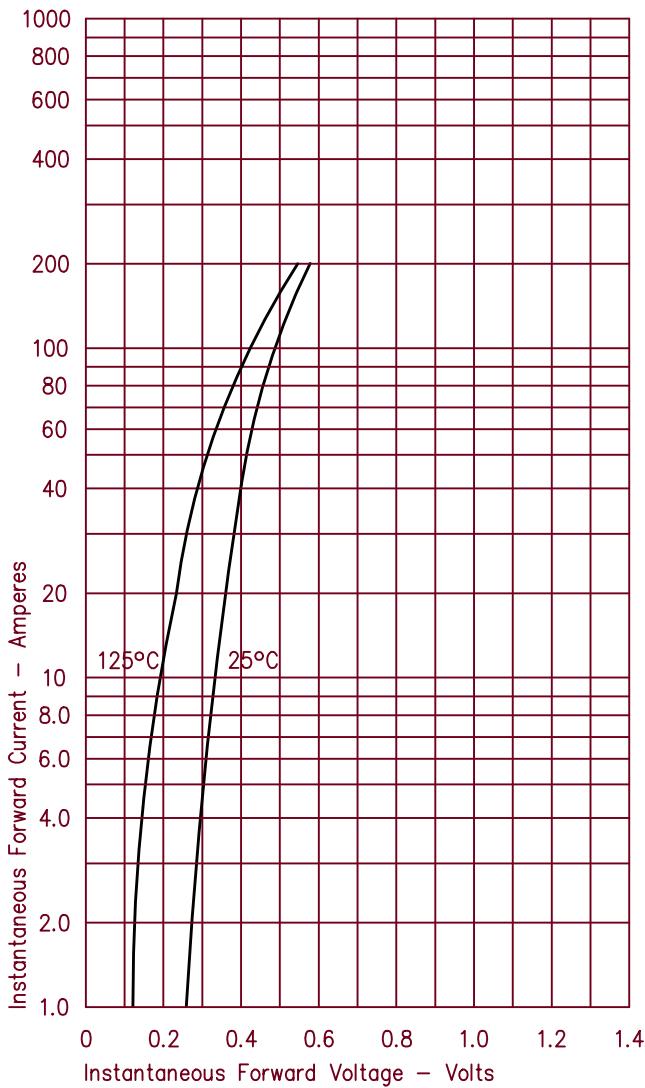


Figure 2  
Typical Reverse Characteristics – Per Leg

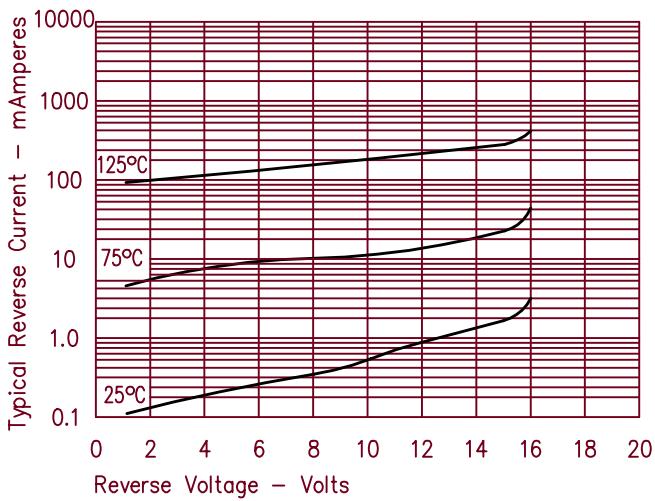


Figure 3  
Typical Junction Capacitance – Per Leg

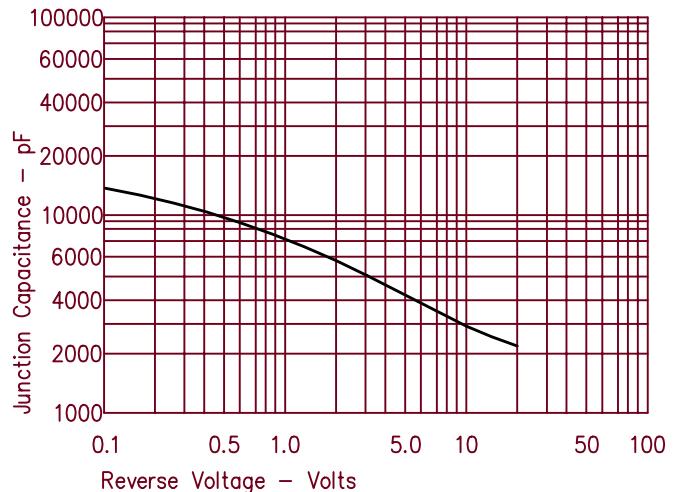


Figure 4  
Forward Current Derating – Per Leg

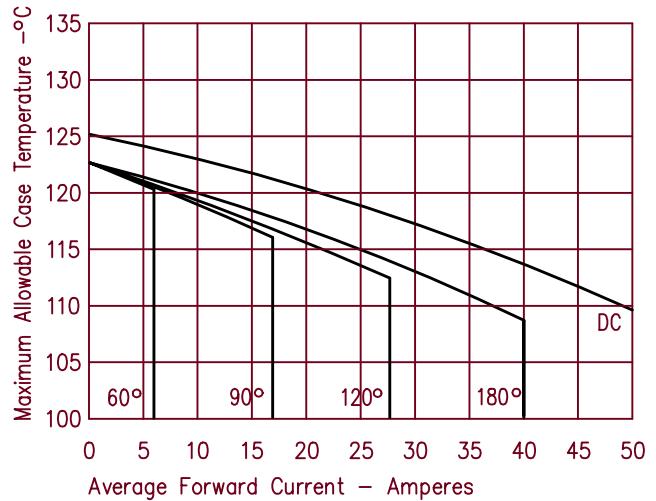


Figure 5  
Maximum Forward Power Dissipation – Per Leg

