

Registered Hex ECL/TTL Translator

The MC10/100H605 is a 6-bit, registered, dual supply ECL to TTL translator. The device features differential ECL inputs for both data and clock. The TTL outputs feature balanced 24mA sink/source capabilities for driving transmission lines.

With its differential ECL inputs and TTL outputs the H605 device is ideally suited for the receive function of a HPPI bus type board-to-board interface application. The on chip registers simplify the task of synchronizing the data between the two boards.


A V_{BB} reference voltage is supplied for use with single-ended data or clock. For single-ended applications the V_{BB} output should be connected to the "bar" inputs (Dn or CLK) and bypassed to ground via a 0.01 μ F capacitor. To minimize the skew of the device differential clocks should be used.

The ECL level Master Reset pin is asynchronous and common to all flip-flops. A "HIGH" on the Master Reset forces the Q outputs "LOW".


The device is available in either ECL standard: the 10H device is compatible with MECL 10H™ logic levels while the 100H device is compatible with 100K logic levels.

- Differential ECL Data and Clock Inputs
- 24mA Sink, 24mA Source TTL Outputs
- Dual Power Supply
- Multiple Power and Ground Pins to Minimize Noise
- 2.0ns Part-to-Part Skew

LOGIC SYMBOL

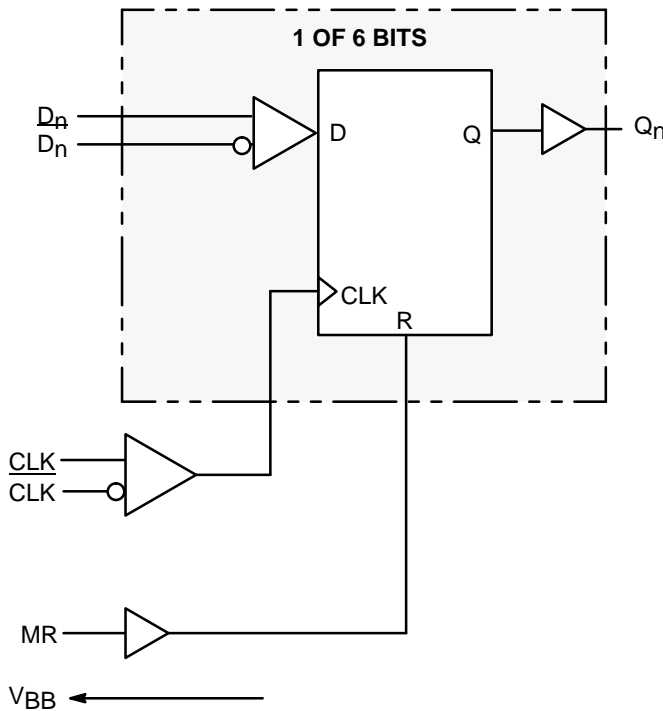

MC10H605 MC100H605



FN SUFFIX
PLASTIC PACKAGE
CASE 776-02

PIN NAMES


PIN	FUNCTION
D0-D5	True ECL Data Inputs
D0-D5 $\bar{}$	Inverted ECL Data Inputs
CLK, CLK $\bar{}$	Differential ECL Clock Input
MR	ECL Master Reset Input
Q0-Q5	TTL Outputs
V_{CCE}	ECL V_{CC}
V_{CCT}	TTL V_{CC}
GND	TTL Ground
V_{EE}	ECL V_{EE}

TRUTH TABLE

Dn	MR	TCLK/CLK	Qn+1
L	L	Z	L
H	L	Z	H
X	H	X	L

Z = LOW to HIGH Transition

Pinout: 28-Lead PLCC (Top View)

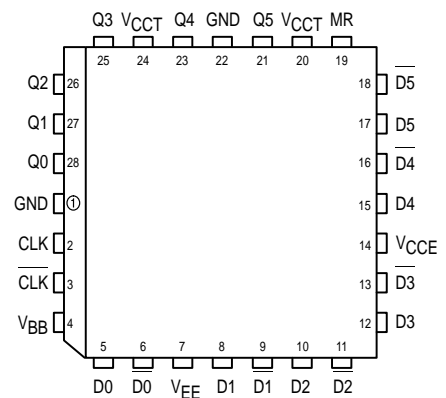

MECL 10H is a trademark of Motorola, Inc.



10H ECL DC CHARACTERISTICS ($V_{CCT} = +5.0V \pm 5\%$; $V_{EE} = -5.20V \pm 5\%$)

Symbol	Characteristic	0°C			25°C			85°C			Unit	Condition
		Min	Typ	Max	Min	Typ	Max	Min	Typ	Max		
I_{EE}	Supply Current		63	75		63	75		61	75	mA	
I_{IH}	Input High Current			225			145			145	μA	
I_{IL}	Input Low Current	0.5			0.5			0.5			μA	
V_{IH}	Input High Voltage	-1170		-840	-1130		-810	-1060		-720	mV	
V_{IL}	Input Low Voltage	-1950		-1480	-1950		-1480	-1950		-1480	mV	
V_{BB}	Output Bias Voltage	-1400		-1280	-1370		-1270	-1330		-1210	mV	
V_{Diff}	Input Differential Voltage	150			150			150			mV	
V_{max} CMRR	Input Common Mode Reject Range			0			0			0	mV	
V_{min} CMRR	Input Common Mode Reject Range	-2800 -3000 -3300			-2800 -3000 -3300			-2800 -3000 -3300			mV	$V_{EE} = -4.94$ $V_{EE} = -5.20$ $V_{EE} = -5.46$

100H ECL DC CHARACTERISTICS ($V_{CCT} = +5.0V \pm 5\%$; $V_{EE} = -4.5V \pm 0.3V$)

Symbol	Characteristic	0°C			25°C			85°C			Unit	Condition
		Min	Typ	Max	Min	Typ	Max	Min	Typ	Max		
I_{EE}	Supply Current		65	75		65	75		70	85	mA	
I_{IH}	Input High Current			225			145			145	μA	
I_{IL}	Input Low Current	0.5			0.5			0.5			μA	
V_{IH}	Input High Voltage	-1165		-880	-1165		-880	-1165		-880	mV	
V_{IL}	Input Low Voltage	-1810		-1475	-1810		-1475	-1810		-1475	mV	
V_{BB}	Output Bias Voltage	-1400		-1280	-1400		-1280	-1400		-1200	mV	
V_{Diff}	Input Differential Voltage	150			150			150			mV	
V_{max} CMRR	Input Common Mode Reject Range			0			0			0	mV	
V_{min} CMRR	Input Common Mode Reject Range	-2000 -2200 -2400			-2000 -2200 -2400			-2000 -2200 -2400			mV	$V_{EE} = -4.20$ $V_{EE} = -4.50$ $V_{EE} = -4.80$

* NOTE: DO NOT short the ECL inputs to the TTL V_{CC} .

MC10H605 MC100H605

TTL DC CHARACTERISTICS ($V_{CC} = +5.0V \pm 5\%$; $V_{EE} = -5.2V \pm 5\%$ (10H); $V_{EE} = -4.5V \pm 0.3V$ (100H))


Symbol	Characteristic	0°C			25°C			85°C			Unit	Condition
		Min	Typ	Max	Min	Typ	Max	Min	Typ	Max		
I _{CCL}	Supply Current		65	75		65	75		65	75	mA	Outputs Low
I _{CCH}	Supply Current		65	75		65	75		65	75	mA	Outputs High
V _{OL}	Output Low Voltage			0.5			0.5			0.5	mV	I _{OL} = 24mA
V _{OH}	Output High Voltage	2.5			2.5			2.5			mV	I _{OH} = 24mA
I _{OS}	Output Short Circuit Current	100		225	100		225	100		225	mA	V _{OUT} = 0V

AC TEST LIMITS ($V_{CC} = +5.0V \pm 5\%$; $V_{EE} = -5.2V \pm 5\%$ (10H); $V_{EE} = -4.5V \pm 0.3V$ (100H))

Symbol	Characteristic	0°C			25°C			85°C			Unit	Condition
		Min	Typ	Max	Min	Typ	Max	Min	Typ	Max		
t _{PLH}	Propagation Delay CLK to Q (Diff) CLK to Q (SE)	4.5 4.3	5.3 5.3	6.5 6.7	4.5 4.3	5.4 5.4	6.5 6.7	4.5 4.3	5.6 5.6	6.5 6.7	ns	Across P.S. and Temp C _L = 50pF
t _{PHL}	Propagation Delay CLK to Q (Diff) CLK to Q (SE)	4.0 3.8	5.0 5.0	6.0 6.2	4.0 3.8	5.1 5.1	6.0 6.2	4.0 3.8	5.5 5.5	6.0 6.2	ns	Across P.S. and Temp C _L = 50pF
t _{PHL}	Propagation Delay MR to Q	2.5	4.9	7.0	2.5	5.2	7.0	3.0	5.8	7.5	ns	Across P.S. and Temp C _L = 50pF
t _{SKEW}	Device Skew Part-to-Part (Diff) Within-Device		1.0 0.3	2.0 0.7		1.0 0.3	2.0 0.7		1.0 0.3	2.0 0.7	ns	C _L = 50pF
t _S	Setup Time	1.5			1.5			1.5			ns	
t _H	Hold Time	1.5			1.5			1.5			ns	
t _{PW}	Minimum Pulse Width CLK	1.0			1.0			1.0			ns	
t _{PW}	Minimum Pulse Width MR	1.0			1.0			1.0			ns	
V _{PP}	Minimum Input Swing	150			150			150			mV	Peak-to-Peak
t _r	Rise Time	0.7	1.0	1.5	0.7	1.0	1.5	0.7	1.0	1.5	ns	1V to 2V
t _f	Fall Time	0.5	0.7	1.2	0.5	0.7	1.2	0.5	0.7	1.2	ns	1V to 2V
t _{RR}	Reset/Recovery Time	2.5			2.5			2.5			ns	

OUTLINE DIMENSIONS


FN SUFFIX
 PLASTIC PLCC PACKAGE
 CASE 776-02
 ISSUE D

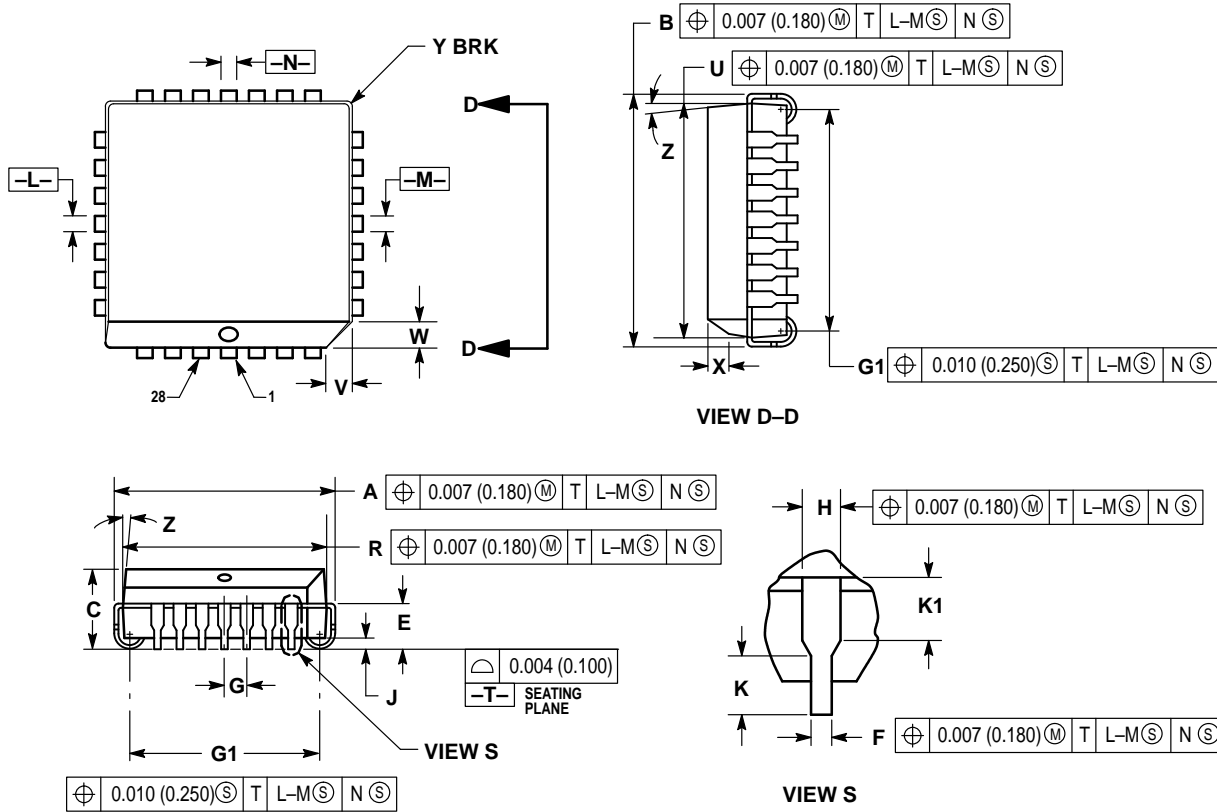

NOTES:

- DATUMS -L-, -M-, AND -N- DETERMINED WHERE TOP OF LEAD SHOULDER EXITS PLASTIC BODY AT MOLD PARTING LINE.
- DIMENSION G1, TRUE POSITION TO BE MEASURED AT DATUM -T-, SEATING PLANE.
- DIMENSIONS R AND U DO NOT INCLUDE MOLD FLASH. ALLOWABLE MOLD FLASH IS 0.010 (0.250) PER SIDE.
- DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
- CONTROLLING DIMENSION: INCH.
- THE PACKAGE TOP MAY BE SMALLER THAN THE PACKAGE BOTTOM BY UP TO 0.012 (0.300). DIMENSIONS R AND U ARE DETERMINED AT THE OUTERMOST EXTREMES OF THE PLASTIC BODY EXCLUSIVE OF MOLD FLASH, TIE BAR BURRS, GATE BURRS AND INTERLEAD FLASH, BUT INCLUDING ANY MISMATCH BETWEEN THE TOP AND BOTTOM OF THE PLASTIC BODY.
- DIMENSION H DOES NOT INCLUDE DAMBAR PROTRUSION OR INTRUSION. THE DAMBAR PROTRUSION(S) SHALL NOT CAUSE THE H DIMENSION TO BE GREATER THAN 0.037 (0.940). THE DAMBAR INTRUSION(S) SHALL NOT CAUSE THE H DIMENSION TO BE SMALLER THAN 0.025 (0.635).

DIM	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	0.485	0.495	12.32	12.57
B	0.485	0.495	12.32	12.57
C	0.165	0.180	4.20	4.57
E	0.090	0.110	2.29	2.79
F	0.013	0.019	0.33	0.48
G	0.050 BSC		1.27 BSC	
H	0.026	0.032	0.66	0.81
J	0.020	—	0.51	—
K	0.025	—	0.64	—
R	0.450	0.456	11.43	11.58
U	0.450	0.456	11.43	11.58
V	0.042	0.048	1.07	1.21
W	0.042	0.048	1.07	1.21
X	0.042	0.056	1.07	1.42
Y	—	0.020	—	0.50
Z	2°		10°	
G1	0.410	0.430	10.42	10.92
K1	0.040	—	1.02	—

Motorola reserves the right to make changes without further notice to any products herein. Motorola makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does Motorola assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation consequential or incidental damages. "Typical" parameters which may be provided in Motorola data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. Motorola does not convey any license under its patent rights nor the rights of others. Motorola products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the Motorola product could create a situation where personal injury or death may occur. Should Buyer purchase or use Motorola products for any such unintended or unauthorized application, Buyer shall indemnify and hold Motorola and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that Motorola was negligent regarding the design or manufacture of the part. Motorola and  are registered trademarks of Motorola, Inc. Motorola, Inc. is an Equal Opportunity/Affirmative Action Employer.

How to reach us:

USA/EUROPE/Locations Not Listed: Motorola Literature Distribution;
P.O. Box 20912; Phoenix, Arizona 85036. 1-800-441-2447 or 602-303-5454

MFAX: RMFAX0@email.sps.mot.com – TOUCHTONE 602-244-6609
INTERNET: <http://Design-NET.com>

JAPAN: Nippon Motorola Ltd.; Tatsumi-SPD-JLDC, 6F Seibu-Butsuryu-Center,
3-14-2 Tatsumi Koto-Ku, Tokyo 135, Japan. 03-81-3521-8315

ASIA/PACIFIC: Motorola Semiconductors H.K. Ltd.; 8B Tai Ping Industrial Park,
51 Ting Kok Road, Tai Po, N.T., Hong Kong. 852-26629298

