

Low voltage high performance mixer FM IF system

NE/SA607

DESCRIPTION

The NE/SA607 is a low voltage high performance monolithic FM IF system incorporating a mixer/oscillator, two limiting intermediate frequency amplifiers, quadrature detector, logarithmic received signal strength indicator (RSSI), voltage regulator and audio and RSSI op amps. The NE/SA607 is available in 20-lead dual-in-line plastic, 20-lead SOL (surface-mounted miniature package) and 20-lead SSOP package.

The NE607 was designed for portable communication applications and will function down to 2.7V. The RF section is similar to the famous NE605. The audio output has an internal amplifier with the feedback pin accessible. The RSSI output is buffered. The NE607 also has an extra limiter output. This signal is buffered from the output of the limiter and can be used to perform frequency check. This is accomplished by comparing a reference frequency with the frequency check signal using a comparator to a varactor or PLL at the oscillator inputs.

FEATURES


- Low power consumption: 3.5mA typical at 3V
- Mixer input to >150MHz
- Mixer conversion power gain of 17dB at 45MHz
- XTAL oscillator effective to 150MHz (L.C. oscillator or external oscillator can be used at higher frequencies)
- 102dB of IF Amp/Limiter gain
- 2MHz limiter small signal bandwidth

- Temperature compensated logarithmic Received Signal Strength Indicator (RSSI) with a 90dB dynamic range
- Low external component count; suitable for crystal/ceramic/LC filters
- Excellent sensitivity: $0.31\mu\text{V}$ into 50Ω matching network for 12dB SINAD (Signal to Noise and Distortion ratio) for 1kHz tone with RF at 45MHz and IF at 455kHz
- SA607 meets cellular radio specifications
- Audio output internal op amp
- RSSI output internal op amp
- Buffered frequency check output
- Internal op amps with rail-to-rail outputs
- ESD protection: Human Body Model 2kV
Robot Model 200V

APPLICATIONS

- Portable cellular radio FM IF
- Cordless phones
- Narrow band cellular applications (NAMPS/NTACS)
- RF level meter
- Spectrum analyzer
- Instrumentation
- FSK and ASK data receivers
- Log amps
- Portable high performance communication receivers
- Single conversion VHF receivers
- Wireless systems

PIN CONFIGURATION

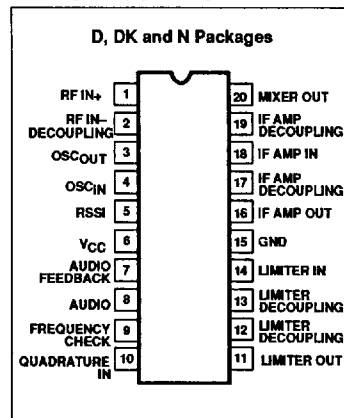


ORDERING INFORMATION

DESCRIPTION	TEMPERATURE RANGE	ORDER CODE
20-Pin Plastic DIP	0 to +70°C	NE607N
20-Pin Plastic SOL (Surface-mount)	0 to +70°C	NE607D
20-Pin Plastic SSOP (Surface-mount)	0 to +70°C	NE607DK
20-Pin Plastic DIP	-40 to +85°C	SA607N
20-Pin Plastic SOL (Surface-mount)	-40 to +85°C	SA607D
20-Pin Plastic SSOP (Surface-mount)	-40 to +85°C	SA607DK

Low voltage high performance mixer FM IF system

NE/SA607

BLOCK DIAGRAM

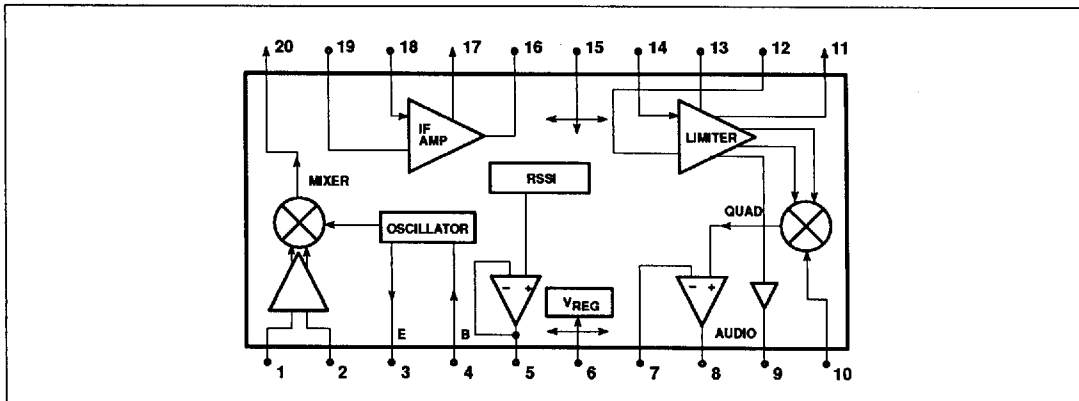

ABSOLUTE MAXIMUM RATINGS

SYMBOL	PARAMETER	RATING	UNITS
V_{CC}	Single supply voltage	7	V
T_{STG}	Storage temperature range	-65 to +150	°C
T_A	Operating ambient temperature range NE607	0 to +70	°C
	SA607	-40 to +85	°C
θ_{JA}	Thermal impedance D package	90	°C/W
	DK package	117	
	N package	75	

DC ELECTRICAL CHARACTERISTICS

 $V_{CC} = +3V$, $T_A = 25^\circ C$; unless otherwise stated.

SYMBOL	PARAMETER	TEST CONDITIONS	LIMITS			UNITS
			NE/SA607			
			MIN	TYP	MAX	
V _{CC}	Power supply voltage range		2.7		7.0	V
I _{CC}	DC current drain			3.5	4.2	mA

Low voltage high performance mixer FM IF system

NE/SA607

AC ELECTRICAL CHARACTERISTICS

$T_A = 25^\circ\text{C}$; $V_{CC} = +3\text{V}$, unless otherwise stated. RF frequency = 45MHz + 14.5dBV RF input step-up; IF frequency = 455kHz; $R_{17} = 2.4\text{k}$; $R_{18} = 3.3\text{k}$; RF level = -45dBm; FM modulation = 1kHz with $\pm 8\text{kHz}$ peak deviation. Audio output with de-emphasis filter and C-message weighted filter. Test circuit Figure 1. The parameters listed below are tested using automatic test equipment to assure consistent electrical characteristics. The limits do not represent the ultimate performance limits of the device. Use of an optimized RF layout will improve many of the listed parameters.

SYMBOL	PARAMETER	TEST CONDITIONS	LIMITS			UNITS
			NE/SA607			
			MIN	TYP	MAX	
Mixer/Osc section (ext LO = 220mV _{RMS})						
f _{IN}	Input signal frequency			150		MHz
f _{osc}	Crystal oscillator frequency			150		MHz
	Noise figure at 45MHz			6.2		dB
	Third-order input intercept point (50Ω source)	f1 = 45.0; f2 = 45.06MHz Input RF Level = -52dBm		-9		dBm
	Conversion power gain	Matched 14.5dBV step-up	13.5	17	19.5	dB
		50Ω source		+2.5		dB
	RF input resistance	Single-ended input		8		kΩ
	RF input capacitance			3.0	4.0	pF
	Mixer output resistance	(Pin 20)	1.25	1.5		kΩ
IF section						
	IF amp gain	50Ω source		44		dB
	Limiter gain	50Ω source		58		dB
	Input limiting -3dB, R ₁₇ = 2.4k	Test at Pin 18		-109		dBm
	AM rejection	80% AM 1kHz		45		dB
	Audio level	Gain of two (2kΩ AC load)	70	114	160	mV
	SINAD sensitivity	RF level -110dB		17		dB
THD	Total harmonic distortion		-35	-50		dB
S/N	Signal-to-noise ratio	No modulation for noise		62		dB
	IF RSSI output, R _g = 2kΩ ¹	IF level = -118dBm		0.3	0.8	V
		IF level = -68dBm	.70	1.1	1.80	V
		IF level = -23dBm	1.2	1.8	2.5	V
	RSSI range			90		dB
	RSSI accuracy			±1.5		dB
	IF input impedance		1.3	1.5		kΩ
	IF output impedance			0.3		kΩ
	Limiter input impedance		1.30	1.5		kΩ
	Limiter output voltage	(Pin 11)		130		mV _{RMS}
RF/IF section (Int LO)						
	Audio level	3V = V _{CC} , RF level = -27dBm		240		mV _{RMS}
	System RSSI output	3V = V _{CC} , RF level = -27dBm		2.2		V
	System SINAD sensitivity	RF level = -117dBm		12		dB

NOTE:

- The generator source impedance is 50 Ω , but the NE/SA607 input impedance at Pin 18 is 1500 Ω . As a result, IF level refers to the actual signal that enters the NE/SA607 input (Pin 18) which is about 21dB less than the "available power" at the generator.

Low voltage high performance mixer FM IF system

NE/SA607

CIRCUIT DESCRIPTION

The NE/SA607 is an IF signal processing system suitable for second IF systems with input frequency as high as 150MHz. The bandwidth of the IF amplifier and limiter is at least 2MHz with 90dB of gain. The gain/bandwidth distribution is optimized for 455kHz, 1.5k Ω source applications. The overall system is well-suited to battery operation as well as high performance and high quality products of all types.

The input stage is a Gilbert cell mixer with oscillator. Typical mixer characteristics include a noise figure of 6.2dB, conversion gain of 17dB, and input third-order intercept of -9dBm. The oscillator will operate in excess of 200MHz in L/C tank configurations. Hartley or Colpitts circuits can be used up to 100MHz for xtal configurations. Butler oscillators are recommended for xtal configurations up to 150MHz.

The output impedance of the mixer is a 1.5k Ω resistor permitting direct connection to a 455kHz ceramic filter. The input resistance of

the limiting IF amplifiers is also 1.5k Ω . With most 455kHz ceramic filters and many crystal filters, no impedance matching network is necessary. The IF amplifier has 43dB of gain and 5.5MHz bandwidth. The IF limiter has 60dB of gain and 4.5MHz bandwidth. To achieve optimum linearity of the log signal strength indicator, there must be a 12dB(v) insertion loss between the first and second IF stages. If the IF filter or interstage network does not cause 12dB(v) insertion loss, a fixed or variable resistor or an L pad for simultaneous loss and impedance matching can be added between the first IF output (Pin 16) and the interstage network. The overall gain will then be 90dB with 2MHz bandwidth.

The signal from the second limiting amplifier goes to a Gilbert cell quadrature detector. One port of the Gilbert cell is internally driven by the IF. The other output of the IF is AC-coupled to a tuned quadrature network. This signal, which now has a 90° phase relationship to the internal signal, drives the other port of the multiplier cell.


The demodulated output of the quadrature drives an internal op amp. This op amp can be configured as a unity gain buffer, or for simultaneous gain, filtering, and 2nd-order temperature compensation if needed. It can drive an AC load as low as 2k Ω with a rail-to-rail output.

A log signal strength completes the circuitry. The output range is greater than 90dB and is temperature compensated. This log signal strength indicator exceeds the criteria for AMPs or TACs cellular telephone. This signal is buffered through an internal unity gain op amp. The frequency check pin provides a buffered limiter output. This is useful for implementing an AFC (Automatic Frequency Check) function. This same output can also be used in conjunction with limiter output (Pin 11) for demodulating FSK (Frequency Shift Keying) data. Both pins are of the same amplitude, but 180° out of phase.

NOTE: $\text{dB(v)} = 20 \log V_{\text{OUT}}/V_{\text{IN}}$

Low voltage high performance mixer FM IF system

NE/SA607

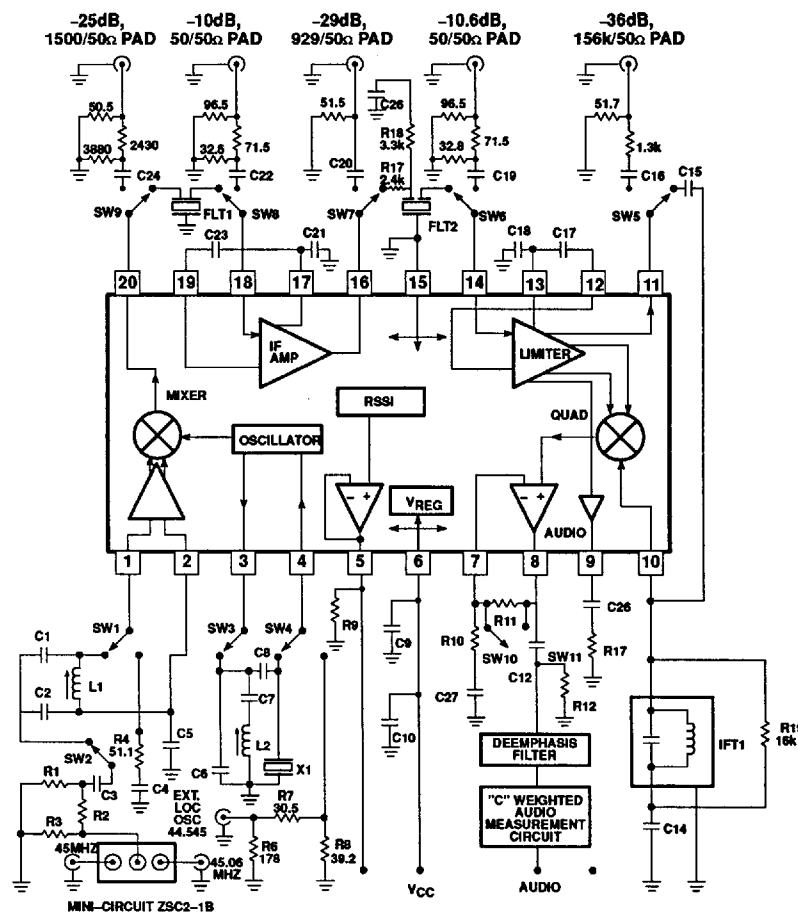


Automatic Test Circuit Component List

C1	100pF NPO Ceramic	C26	0.1μF ±10% Monolithic Ceramic
C2	390pF NPO Ceramic	C27	2.2μF
C5	100nF ±10% Monolithic Ceramic	Fit 1	Ceramic Filter Murata SFG455A3 or equiv
C6	22pF NPO Ceramic	Fit 2	Ceramic Filter Murata SFG455A3 or equiv
C7	1nF Ceramic	IFT 1	455kHz (C _e = 180pF) Toko RMC-2A6597H
C8	10.0pF NPO Ceramic	L1	147-160nH Coilcraft UNI-10/142-04J08S
C9	100nF ±10% Monolithic Ceramic	L2	3.3μH nominal
C10	15μF Tantalum (minimum)		Toko 292CNS-T1046Z
C12	2.2μF	X1	44.545MHz Crystal ICM4712701
C14	100nF ±10% Monolithic Ceramic	R9	2kΩ ±1% 1/4W Metal Film
C15	10pF NPO Ceramic	R10	8.2kΩ ±1%
C17	100nF ±10% Monolithic Ceramic	R11	10kΩ ±1%
C18	100nF ±10% Monolithic Ceramic	R12	2kΩ ±1%
C21	100nF ±10% Monolithic Ceramic	R14	10kΩ ±1%
C23	100nF ±10% Monolithic Ceramic	R17	2.4kΩ ±5% 1/4W Carbon Composition
C25	100nF ±10% Monolithic Ceramic	R18	3.3kΩ ±5% 1/4W Carbon Composition
		R19	16kΩ ±5% 1/4W Carbon Composition

Figure 1. NE/SA607 45MHz Test Circuit (Relays as shown)

Low voltage high performance mixer FM IF system

NE/SA607

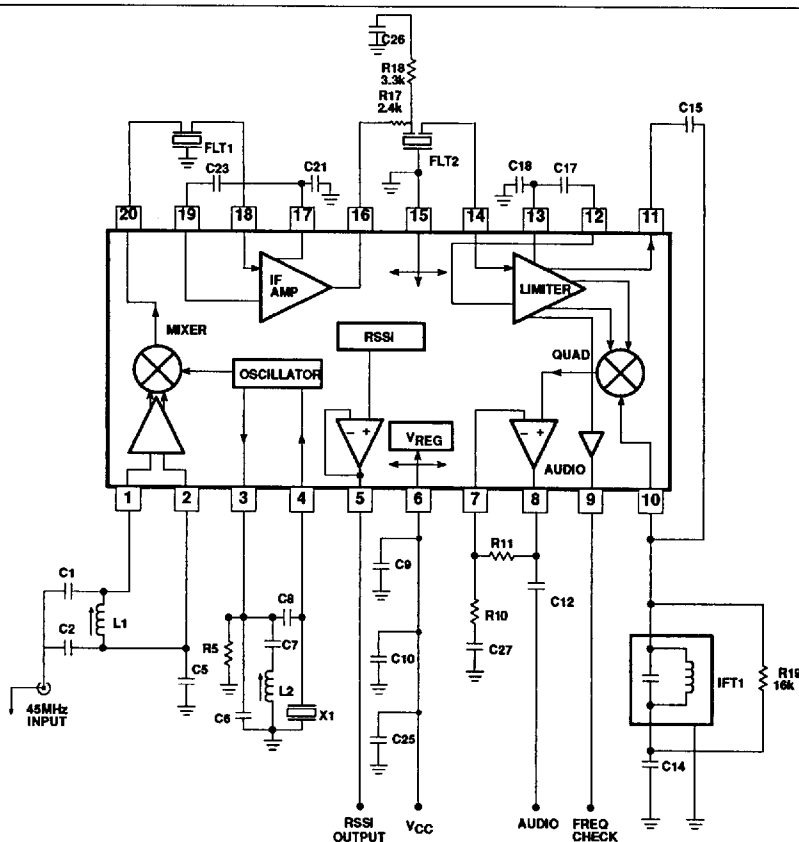

Application Component List

C1	100pF NPO Ceramic	C23	100nF $\pm 10\%$ Monolithic Ceramic
C2	390pF NPO Ceramic	C25	100nF $\pm 10\%$ Monolithic Ceramic
C5	100nF $\pm 10\%$ Monolithic Ceramic	C26	100nF $\pm 10\%$ Monolithic Ceramic
C6	22pF NPO Ceramic	C27	2.2 μ F $\pm 10\%$ Monolithic Ceramic
C7	1nF Ceramic	Flt 1	Ceramic Filter Murata SFG455A3 or equiv
C8	10.0pF NPO Ceramic	Flt 2	Ceramic Filter Murata SFG455A3 or equiv
C9	100nF $\pm 10\%$ Monolithic Ceramic	IFT 1	455kHz ($C_e \approx 180$ pF) Toko RMC-2A6597H
C10	15 μ F Tantalum (minimum)	L1	147-160nH Coilcraft UNI-10/142-04J08S
C12	2.2 μ F $\pm 10\%$ Ceramic	L2	0.8 μ H nominal
C14	100nF $\pm 10\%$ Monolithic Ceramic		Toko 292CNS-T1038Z
C15	10pF NPO Ceramic	X1	44.545MHz Crystal ICM4712701
C17	100nF $\pm 10\%$ Monolithic Ceramic	R5	Not Used in Application Board (see Note 8)
C18	100nF $\pm 10\%$ Monolithic Ceramic	R17	2.4k Ω $\pm 5\%$ 1/4W Carbon Composition
C21	100nF $\pm 10\%$ Monolithic Ceramic	R18	3.3k Ω $\pm 5\%$ 1/4W Carbon Composition
		R19	16k Ω $\pm 5\%$ 1/4W Carbon Composition

Figure 2. NE/SA607 45MHz Application Circuit

Low voltage high performance mixer FM IF system

NE/SA607

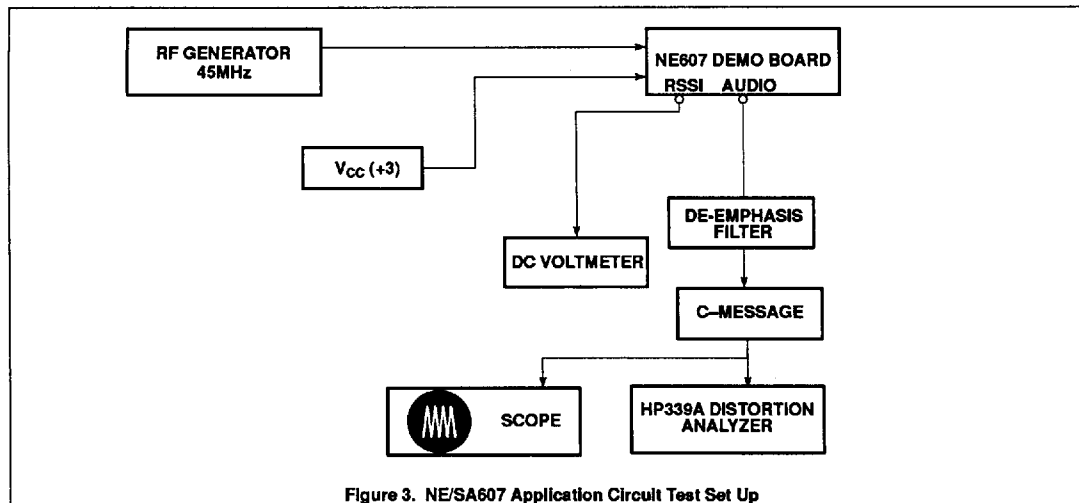




Figure 3. NE/SA607 Application Circuit Test Set Up

NOTES:

1. C-message: The C-message and de-emphasis filter combination has a peak gain of 10 for accurate measurements. Without the gain, the measurements may be affected by the noise of the scope and HP339 analyzer. The de-emphasis filter has a fixed -6dB/Octave slope between 300Hz and 3kHz.
2. Ceramic filters: The ceramic filters can be 30kHz SFG455A3s made by Murata which have 30kHz IF bandwidth (they come in blue), or 16kHz CFU455Ds, also made by Murata (they come in black). All of our specifications and testing are done with the more wideband filter.
3. RF generator: Set your RF generator at 45.000MHz, use a 1kHz modulation frequency and a 6kHz deviation if you use 16kHz filters, or 8kHz if you use 30kHz filters.
4. Sensitivity: The measured typical sensitivity for 12dB SINAD should be 0.35 μ V or -116dBm at the RF input.
5. Layout: The layout is very critical in the performance of the receiver. We highly recommend our demo board layout.
6. RSSI: The smallest RSSI voltage (i.e., when no RF input is present and the input is terminated) is a measure of the quality of the layout and design. If the lowest RSSI voltage is 500mV or higher, it means the receiver is in regenerative mode. In that case, the receiver sensitivity will be worse than expected.
7. Supply bypass and shielding: All of the inductors, the quad tank, and their shield must be grounded. A 10-15 μ F or higher value tantalum capacitor on the supply line is essential. A low frequency ESR screening test on this capacitor will ensure consistent good sensitivity in production. A 0.1 μ F bypass capacitor on the supply pin, and grounded near the 44.545MHz oscillator improves sensitivity by 2-3dB.
8. R5 can be used to bias the oscillator transistor at a higher current for operation above 45MHz. Recommended value is 22k Ω , but should not be below 10k Ω .

Low voltage high performance mixer FM IF system

NE/SA607

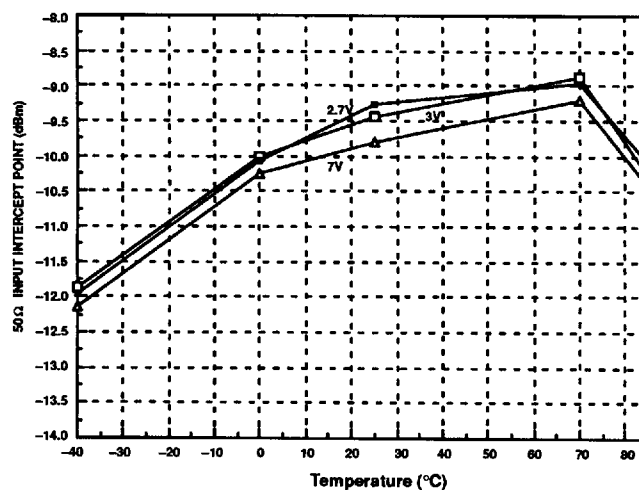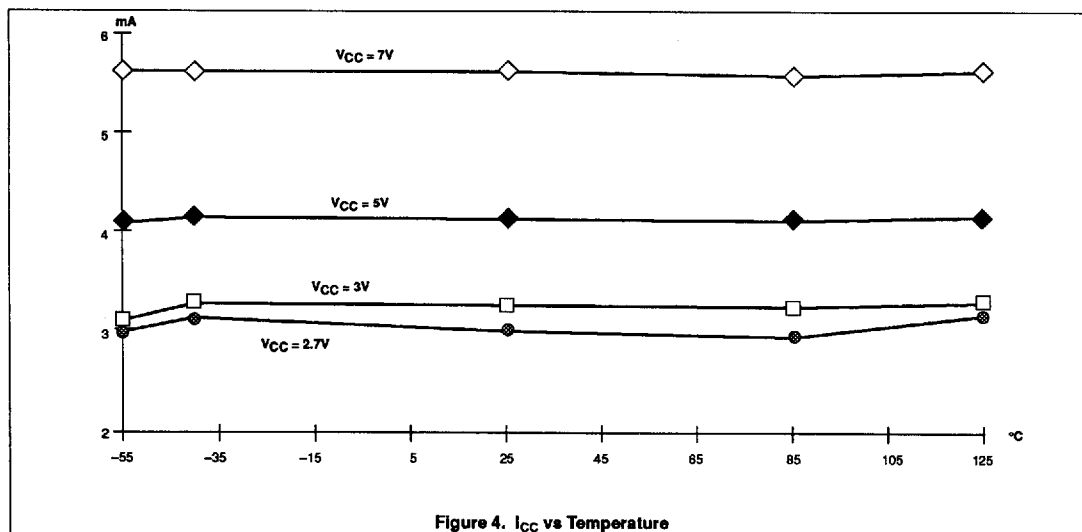

Low voltage high performance mixer FM IF system

NE/SA607

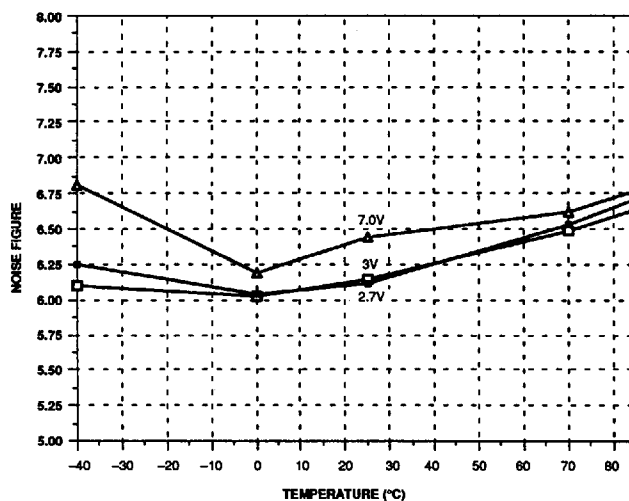


Figure 6. Mixer Noise Figure vs Supply Voltage

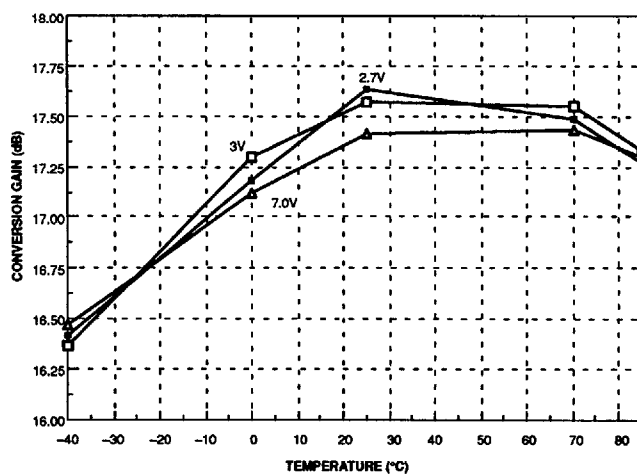


Figure 7. Conversion Gain vs Supply Voltage

Low voltage high performance mixer FM IF system

NE/SA607

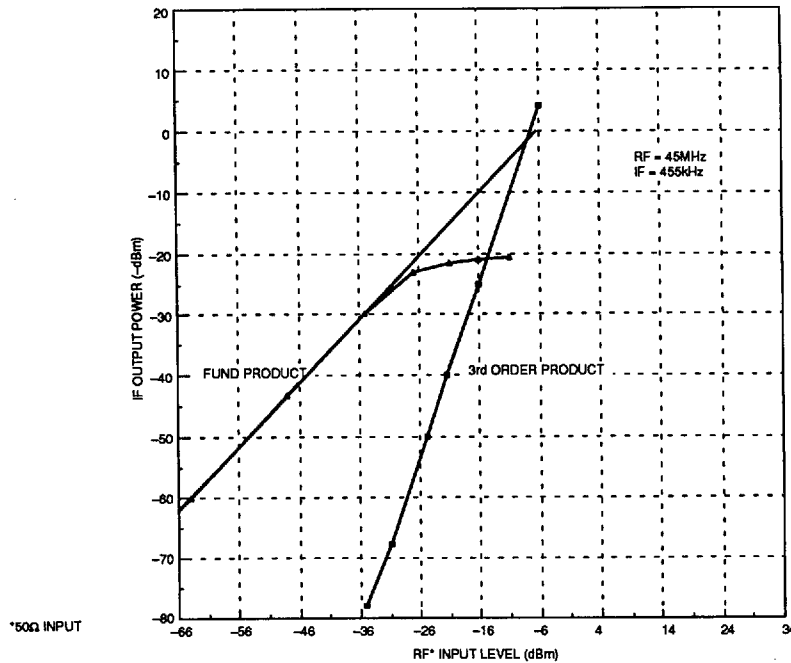


Figure 8. Mixer Third Order Intercept and Compression

Low voltage high performance mixer FM IF system

NE/SA607

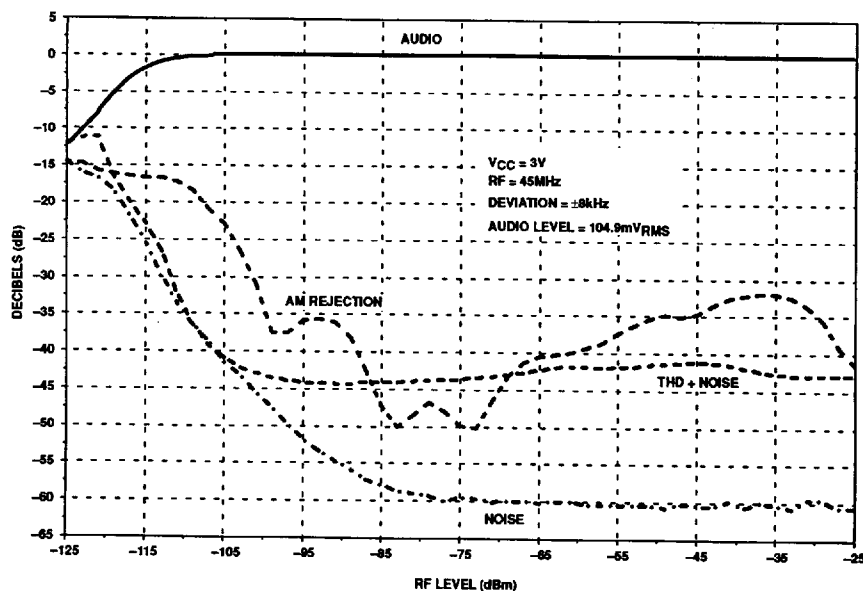


Figure 9. Sensitivity vs RF Level (-40°C)



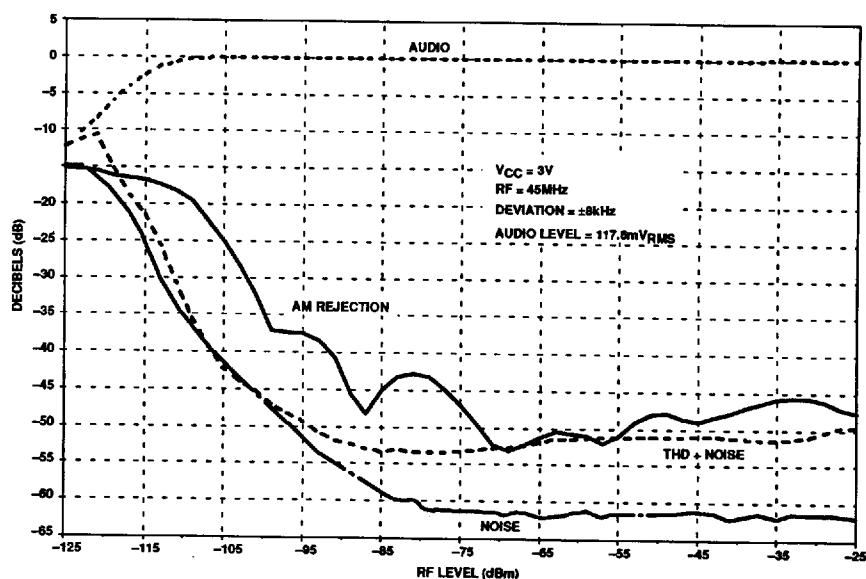


Figure 10. Sensitivity vs RF Level (+25°C)

Low voltage high performance mixer FM IF system

NE/SA607

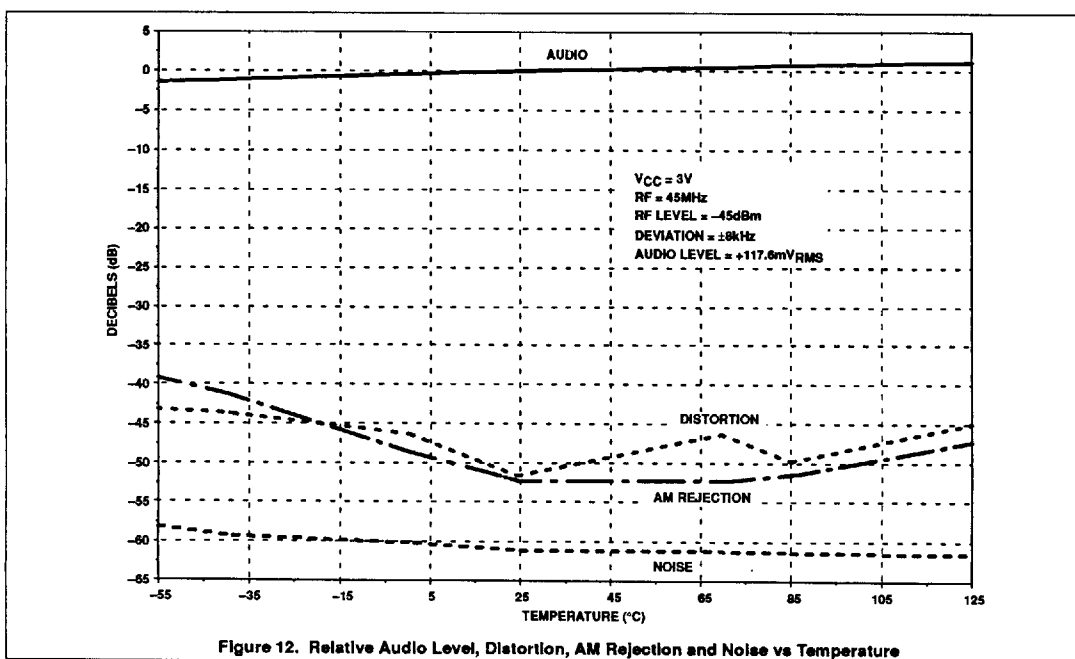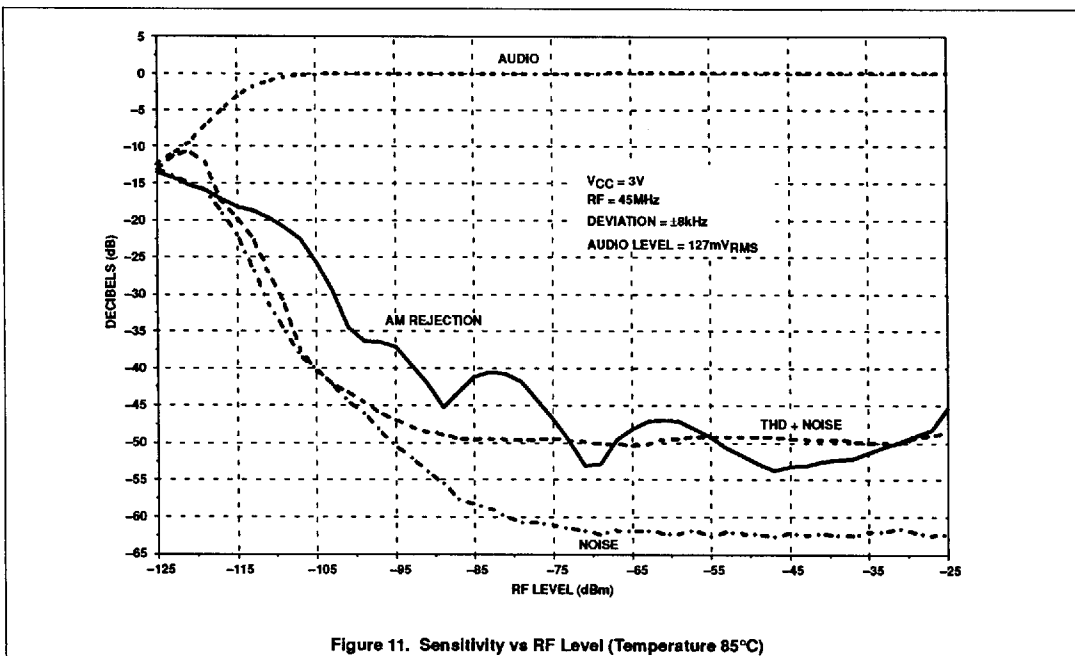

Low voltage high performance mixer FM IF system

NE/SA607


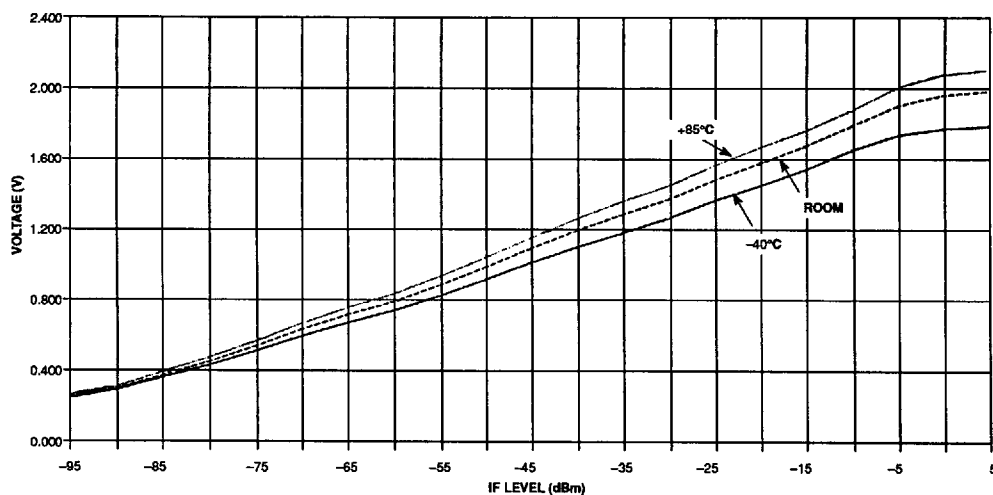


Figure 13. RSSI (455kHz IF @ 3V)

Figure 14. RSSI vs RF Level and Temperature - V_{CC} = 3V

Low voltage high performance mixer FM IF system

NE/SA607

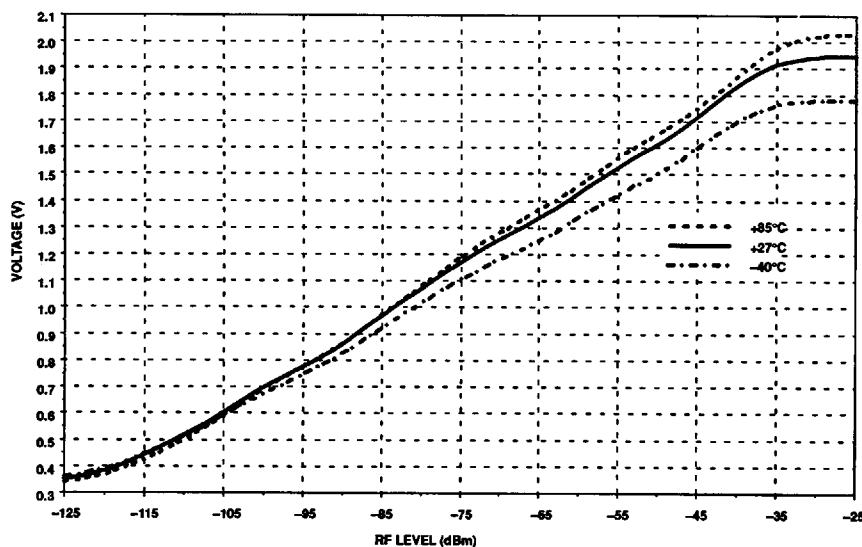