



## POWER ANALYZER 3390

Power measuring instruments



Measure the Secondary Side of Inverters  
with the Latest Technology



Maximum accuracy of  $\pm 0.16\%$  achieved with current sensors!

- Directly measure the primary and secondary sides of inverters
- Advanced motor analysis functions
- DC, 0.5 Hz to 5 kHz (frequency response: DC, 0.5 Hz to 150 kHz) measurement range
- Sample and save waveforms at high speeds of 500 kS/s
- Measure inverter noise
- Powerful yet portable to cover a wide range of applications from bench to on-vehicle measurements



ISO 9001  
JMI-0216



ISO 14001  
JQA-E-90091



[www.hioki.com](http://www.hioki.com)

HIOKI company overview, new products, environmental considerations and other information are available on our website.

# Current Sensor Method Surpasses the Accuracy of Direct Connection Method

## Power Analyzer 3390



Portable design incorporates new-generation measurement technologies

Demand for high-accuracy, wide-band, high-speed data processing with safe and simultaneous measurement over several channels is fully met with a single unit – improving efficiency for applications to evaluate new energies, inverters and motors

### 3390 Power Analyzer – Your Best Partner in an Era of New Energies

#### ■ Features

- ◆ Newly developed Power Analyzing Control Engine Technology processes all measurement data at high speeds and with excellent accuracy
- ◆ Maximum accuracy of  $\pm 0.16\%$  (when combined with the AC/DC Current Sensor 9709)
- ◆ Primary and secondary sides of inverters can be measured simultaneously, while also measuring inverter noise
- ◆ Wide variety of motor evaluation and analysis functions on-board
- ◆ Easy-to-read, crystal-clear, multi-colored data display on a 9" WVGA color screen

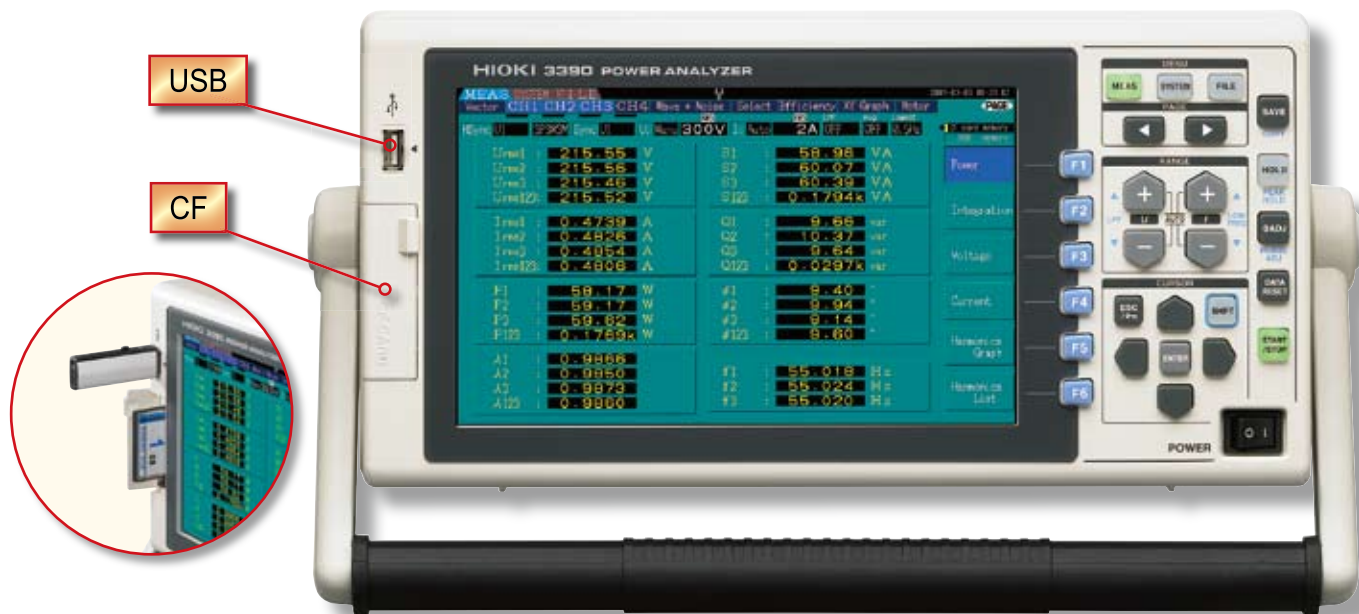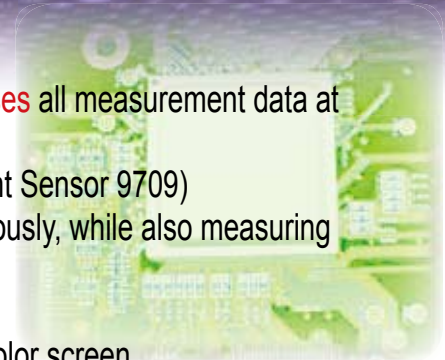

#### 1 4-channel isolated input and current sensor method

- Choose wiring from single-phase two-wire to three-phase four-wire
- Measure the primary and secondary sides of inverters simultaneously
- Synchronize the measurements of multiple 3390s

#### 3 All data updated at 50ms\*

- Rapid processing achieved with the HIOKI proprietary Power Analyzing Control Engine Technology
- 50ms data refresh rate for all measurements unaffected by settings restraints
- Synchronize the measurements of multiple 3390s

Automatic update rate eliminates the need of switching for low-frequency measurements (50ms data refresh rate does not apply to waveform and noise analysis)

#### 2 Basic accuracy of Model 3390: $\pm 0.1\%$

**Basic measurement range: DC, 0.5 Hz to 5 kHz**

(Frequency bandwidth: DC, 0.5 Hz to 150 kHz)

**Effective input range: 1% to 110%**

- High accuracy, wide band, and wide dynamic range
- Also measure the secondary side of DC inverters in conjunction with a variety of HIOKI current sensors

#### 4 Multiple interfaces

- LAN and USB communication (with free dedicated software)
- Automatically save interval measurement data to a CF card (When saving manually, measured data and waveform data can be saved directly to the CF card and USB memory)

### 5 Simple and safe measurements using a variety of HIOKI current sensors

- Choice of sensors include easy-to-measure AC and AC/DC clamp-on sensors and feed-through current sensors for high-accuracy measurements
- Current sensor design allows for safe and efficient testing
- Immune to in-phase noise effects when measuring inverters



### 6 Ideal for Motor Evaluation and Analysis

- Use of the **MOTOR TESTING OPTION 9791** (or **9793**) allows torque meter output and rotation input, and facilitates motor power measurement

Voltage input terminal

Current sensor connection terminal



Motor options

- Terminal A
- Terminal B
- Terminal Z



D/A output terminal  
(Waveform output terminal)

### 7 HTTP server function available with free dedicated PC software

- HTTP server function through web browser allows easy remote operation
  - Free dedicated PC application can be downloaded from the HIOKI website
- Collect data and operate the 3390 remotely by connecting it to a PC via LAN or USB

### 8 Waveform Output and 16 Channel D/A output

- Use the **D/A OUTPUT OPTION 9792** to update data every 50ms and output up to 16 items in analog format
  - Also output the voltage and current waveforms for each channel (using 1 to 8 channels)
- (Waveforms are output at 500 kS/s and sinusoidal waveforms can be represented accurately at up to 20 kHz)

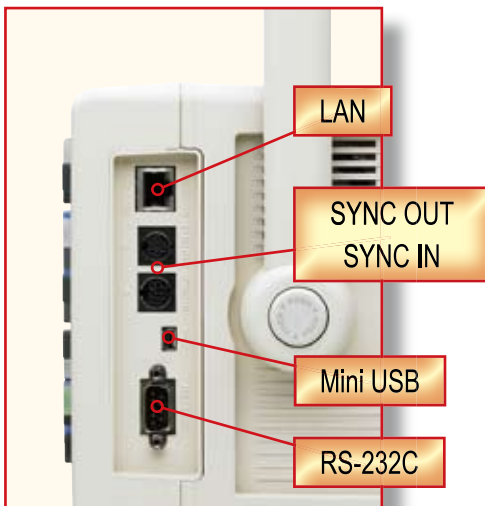

### 9 Multiple 3390 units can be linked for synchronized operation

- Connect up to four 3390s and synchronize their clocks and measurement timing for multiple-channel measurements (using the SYNC terminal and Connection Cable 9683)
- Use dedicated application software to conduct synchronized operations for up to 4 units and obtain all the measurement data

### 10 Perfectly sized for Portability and System Installation

- Compact and lightweight
- Ideal for field measurements
- Designed for rack mounts



### 11 Connect an External Printer or Thermometer

- Print measurements on site by connecting the **Printer 9670** (option)
  - Data from temperature measurements taken with an external thermometer aids in motor evaluation
- Connecting the **3440 Series Temperature HiTESTER** (via the RS-232C interface) also allows temperature data to be collected simultaneously




3440 Series

9670

# Extra-Large Screen Expands Possibilities

Capture measured data and waveforms at a glance utilizing a variety of display options

(The 9" color LCD can display up to 32 data parameters)

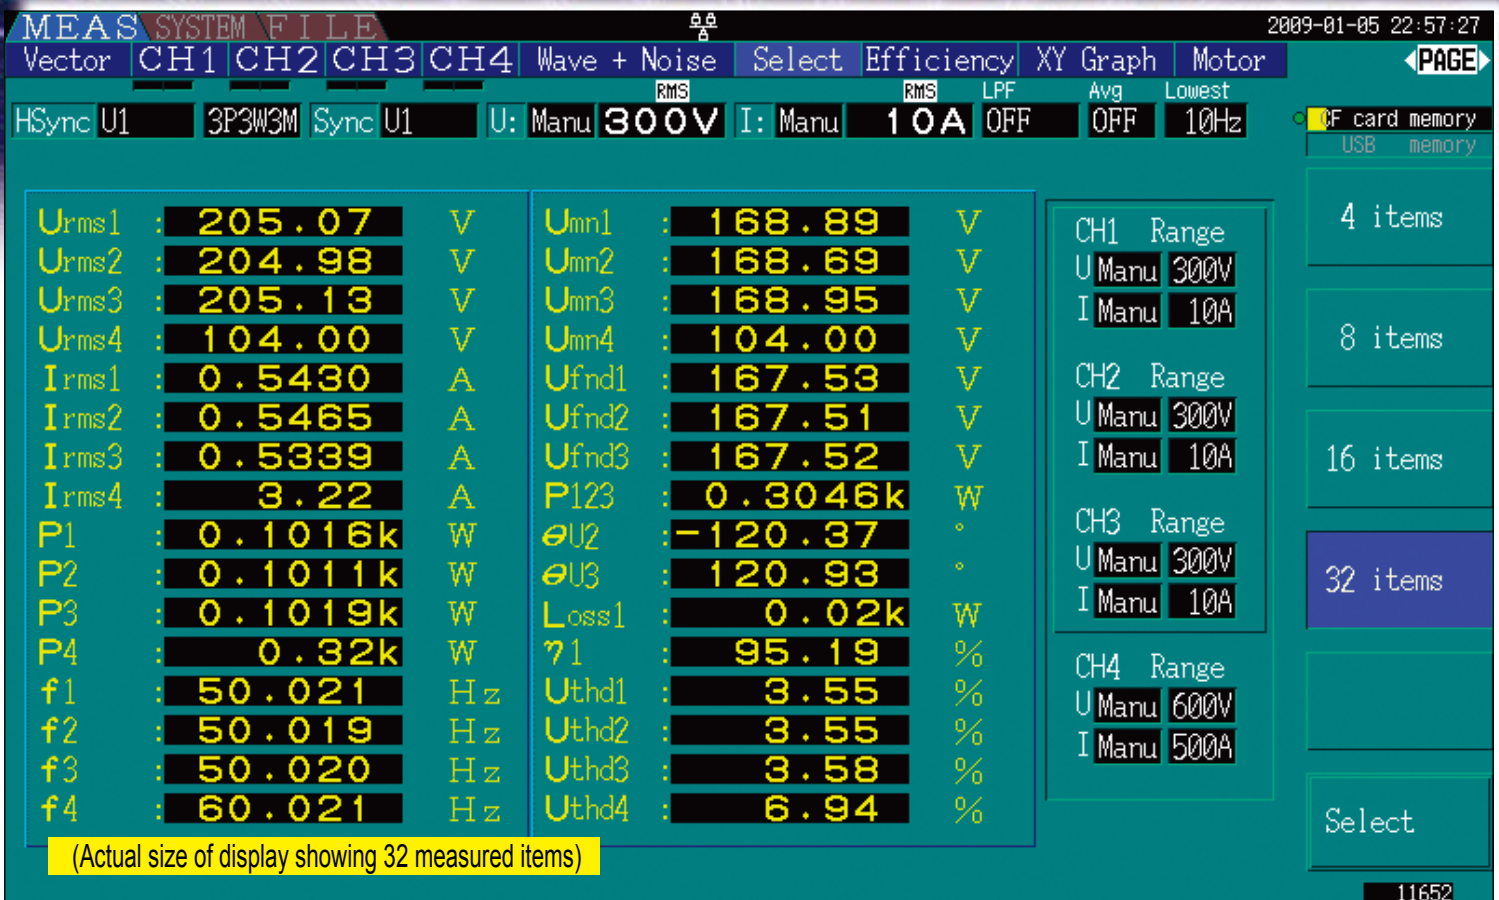

**All measurements start with just a connection**

Wiring check function prevents connection errors

Display connection and vector diagrams on the Connection Check screen


Improve efficiency and reliability while saving time in wiring even for three-phase measurements

**Display just the required data in an easy-to-read graphic interface on the Select and Display screen**

Screen displaying 32, 16, 8, or 4 items

Display items can be set individually for each selected screen

Data can be read quickly and easily by just switching between the screens

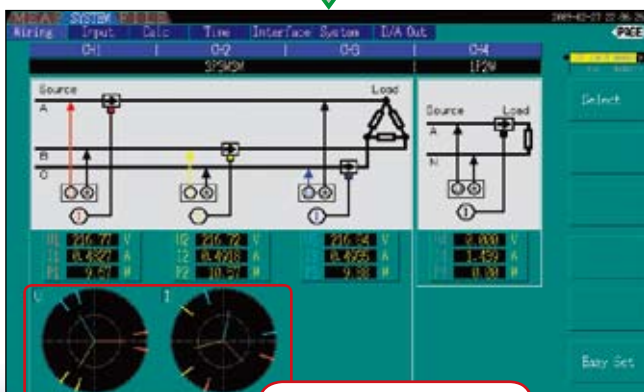

**All data is processed in parallel simultaneously. A wealth of data analysis functions all built-in and ready to use.**

Add the **MOTOR TESTING OPTION 9791 (9793)** to get extra functionality, and just switch between the screens to check all data.

1. RMS and MEAN values, and AC, DC, and fundamental waveform components can be measured and displayed simultaneously
2. Waveform display: Inverter waveforms can be observed at a high speed of 500 kS/s
3. Harmonic analysis: Up to 100th order
4. Inverter noise analysis: 100 kHz (FFT analysis)
5. X-Y graph function: For multifaceted analysis


**Analyze harmonics up to the 100th order**

Ideal for analysis of inverters (List & Graph)




**Clean waveform display at high speeds of 500 kS/s!**

Primary and secondary waveforms of inverters can also be displayed clearly

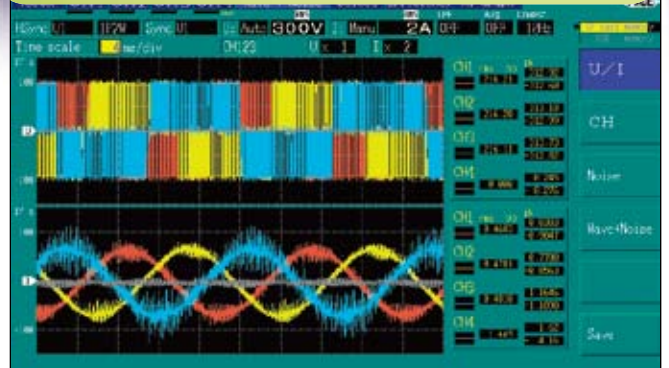

**Noise analysis at 100 kHz**

Ideal for frequency analysis of inverter noise (FFT analysis)

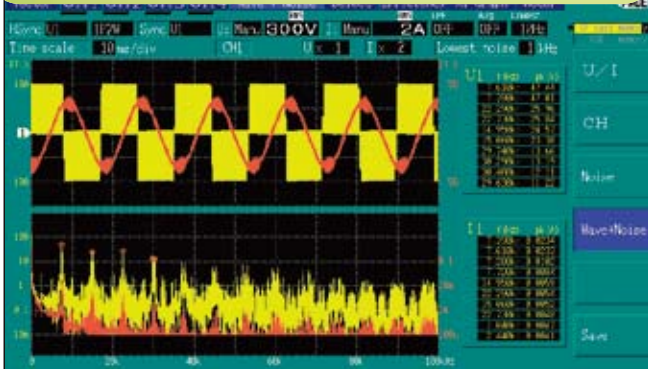


**Y-axis 2-item display of the X-Y graph enables a variety of applications**

Power and torque display makes it easy to understand the motor I/O characteristics



**Efficiency display important for inverter evaluation**

Simultaneously display efficiency and power loss

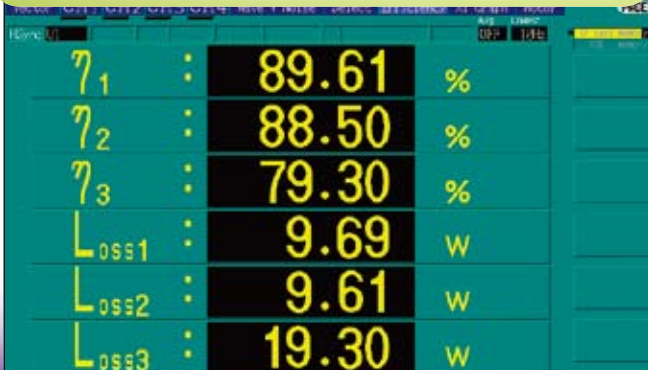

**Real-time display of motor I/O characteristics**

Simultaneously display torque, rotation, output, and slip



# Measure the primary and secondary sides of inverters

## (Performance evaluation of motors and inverters)


Accurately and easily measure the power of inverters and motors for a wide range of measurements, from research and development to field tests

### Advantages

1. Isolated input of voltage and current lets you measure the power on the primary and secondary sides of inverters simultaneously.
2. Using a non-invasive current sensor makes the connection simple and easy. A vector diagram display ensures connections are checked.

### Proprietary HIOKI Technology

3. Accurately measure the Fundamental wave voltage and current values related to the motor axis output with confidence
4. All data is measured simultaneously and updated every 50 ms.
5. In addition to the harmonic analysis required to evaluate the inverter control, noise components can also be measured at the same time - ideal for determining the leakage of inverter noise
6. Use of a current sensor reduces the effect of in-phase noise from inverters when measuring the power

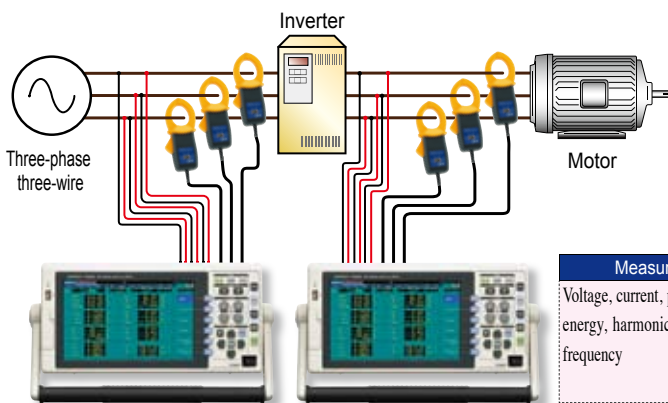


Measure the primary side of inverters  
(Using channels 1, 2, and 3)

Measure the secondary side of inverters  
(Using channels 1, 2, and 3)

## 1 To ensure accurate measurements:

- Understand the connections and input states while looking at the connection diagram screen
- Checking unsure connections allows you to perform measurements without worry

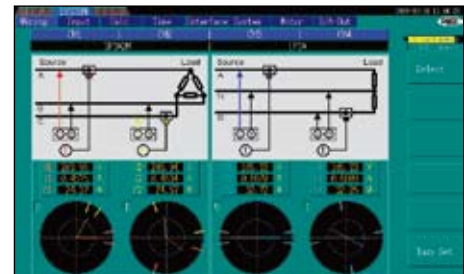


## 2 PC measurements and multiple-unit synchronized measurements

- Dedicated application software allows you to perform PC measurements right out of the box

LAN and USB compatibility facilitates efficient data collection and remote operation. Bundled application software allows you to control up to 4 units.

- Acquire all data even when multi-unit measurements are performed
- Two units can be connected using the CONNECTION CABLE 9683 (option) to synchronize the internal clocks and control signals.

Interval measurements with the two units allow the acquisition of perfectly synchronized data, making it easy to collect completely harmonized data with a CF card without using a PC.

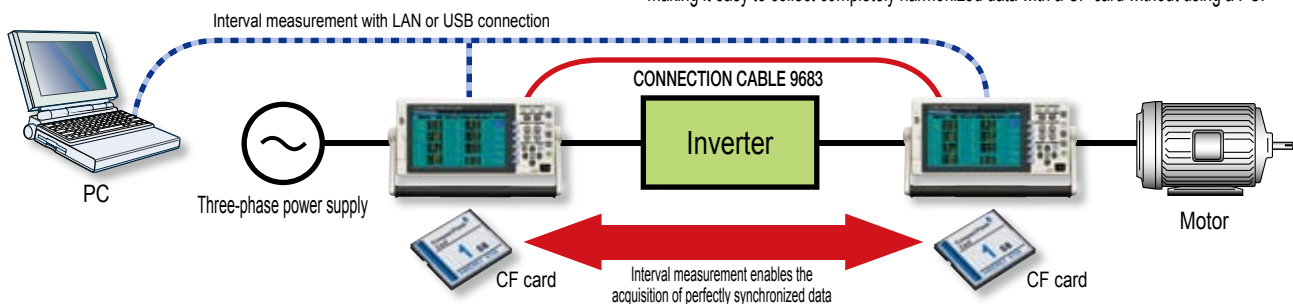

### What's so special about inverter motors?

Inverter motors are indispensable as the power source of industrial equipment. The rotation of an induction motor depends on the input frequency, so if this input frequency can be made variable, the rotation can be controlled freely. Development of a frequency conversion technology called an inverter has made it possible to freely control the rotation of motors.

In recent years, the mainstream inverter control method is the PWM (Pulse-width Modulation) method.

#### What is the PWM method?


A pseudo sinusoidal waveform (fundamental wave) is comprised of a pulse train called a carrier frequency (at about several kHz to 15 kHz) as the fundamental wave frequency that determines the rotation of a motor.

#### Performance evaluation and electrical measurement of motor

The axis output of a motor is closely related to the fundamental wave frequency to be input, so an accurate measurement of this fundamental wave component is required to evaluate the input characteristics.

#### Conventional measurement method

Traditional methods use the average rectified RMS indication (Mean) in order to obtain a component value close to the fundamental wave frequency from a pseudo sinusoidal waveform (fundamental wave + carrier wave) to be input. To measure an accurate fundamental component, frequency analysis was required; however, the conventional processing method was not practical because it could barely perform real-time measurements with FFT as a result of the limited computing power.

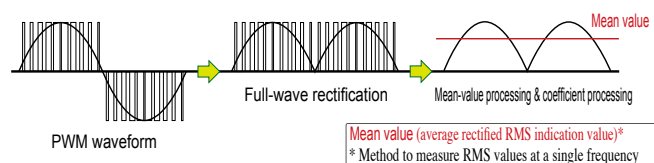


- The 3390 is capable of measuring the fundamental wave component accurately
- The 3390 performs this frequency analysis using high-speed harmonic computation processing at an interval of 50 ms and displays the true fundamental wave component.

### 3 To make the best of inverter motor measurements:

- Parameters critical to the measurement of motor inputs (outputs on the secondary side of inverters) can be measured and displayed simultaneously.

Display item	Measurement details
rms value	RMS value of fundamental wave + carrier wave components
mn value	RMS value (mean value) close to the fundamental wave component
fnd value	True fundamental wave component
thd value	Displays the distortion factor of measured waveform
unb value	Displays the balance between phases
±pk value	Maximum positive/negative values of waveform that is being measured
dc value	Displays a DC component harmful to the motor
ac value	RMS value obtained by removing the DC component from the RMS value
f value	Frequency of each phase

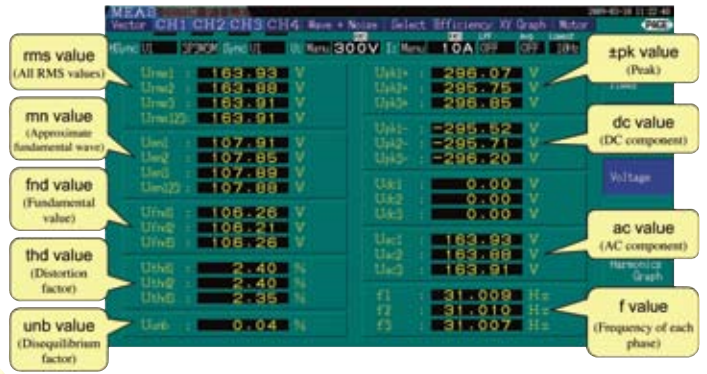

### 4 Clearly display efficiency and loss of inverters

- Efficiency and loss measurement function built-in

The operating efficiency and power loss of an inverter can be displayed when measuring the inputs and outputs of the inverter simultaneously.



### 5 X-Y graph display lets you check the dynamic characteristics of inverters

- X-Y graph display function built-in (X-axis: 1 item, Y-axis: 2 items)

By simply specifying the voltage for the X-axis and the power consumption and efficiency for the Y-axis, you can display the dynamic characteristics of a motor in real time.



### 6 Harmonic measurement indispensable for inverter evaluation

- 4-channel simultaneous harmonic analysis function built-in (Performed simultaneously with power measurement)

Harmonic analysis is essential for the development and evaluation of inverters Synchronized to the fundamental wave frequency from 0.5 Hz to 5 kHz Harmonic analysis up to the 100th order can be performed simultaneously with power measurement.



### 7 Evaluation of the troublesome noise of inverters

- Noise measurement function built-in (1-channel measurement: Performed simultaneously with power measurement and harmonic analysis)

Noise components at up to 100 kHz can be read while looking at the measured waveforms Simultaneously display the top 10 point frequency and voltage/current levels



### 8 Waveforms can be observed at 500 kS/s, and fundamental waves can also be checked


- Waveform monitoring function fully supported

Display the voltage and current waveforms being measured The carrier frequency components of an inverter are also displayed in real time

- Filter function

A filter function is used to remove the carrier frequency components from the inverter, and fundamental wave frequency waveforms can be checked in the waveform display.

\* The filter function is reflected in the measured values. Please be careful when you switch to the function during measurement.

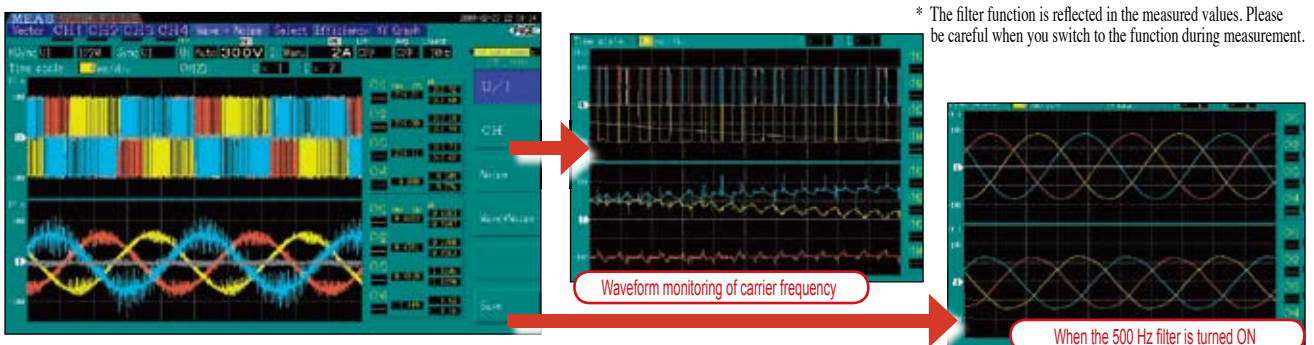

# Geared for the latest motor evaluation and analysis of Hybrid Electric Vehicles, Electric Vehicles and the like

Drive the research and development of three-phase inverter motors with high accuracy and high-speed measurements


## Advantages

1. Use of the **MOTOR TESTING OPTION 9791 (9793)** lets you perform a total evaluation of inverter motors
2. The voltage, torque, rotation, frequency, slip, and motor power required for motor analysis can be measured with one unit
3. Current sensors make the connection simple. In addition, use of the **AC/DC CURRENT SENSOR 9709** enables measurements with superior accuracy

## Proprietary HIOKI Technology

4. All data is measured simultaneously and updated every 50 ms. Data collection and characteristics tests can be performed at the industry's fastest speed
5. Evolution of electrical angle measurements critical to motor analysis has made it possible to perform more accurate measurements using an incremental encoder
6. Harmonic analysis at 0.5 Hz to 5 kHz without the need for an external timing mechanism
7. Built-in digital anti-aliasing filter (AAF) lets you measure the broadband power on the secondary side of inverters to make accurate harmonic analyses


### ● Example of HEV and EV measurement systems

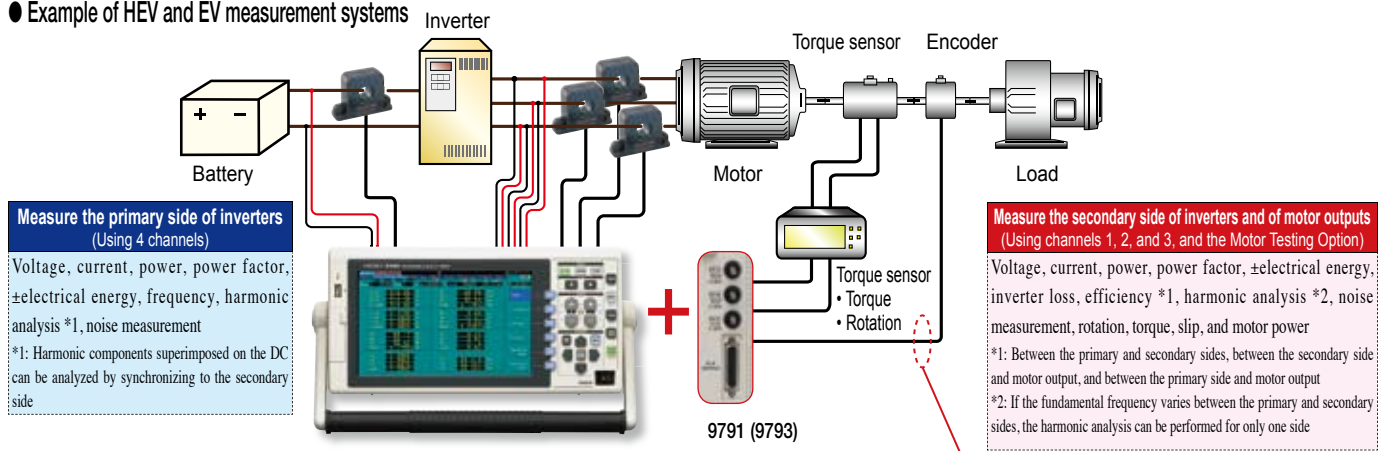

## 1 Evaluate high-performance vector control inverters:


- Measurements of fundamental wave voltage and current and their phases based on an accurate harmonic analysis are indispensable to motor analysis
- Support of an incremental encoder allows detecting synchronization signals from a motor easily and accurately

Electrical angle measurements are indispensable for dynamic characteristics analysis of motors. The 3390 can conduct FFT analyses synchronized to rotation pulses from the tachometer and the motor induced voltage, and the A-phase and Z-phase pulse inputs that allow measuring and detecting the origin of the motor more simply and accurately – fully meeting the needs of the latest motor analysis tests.

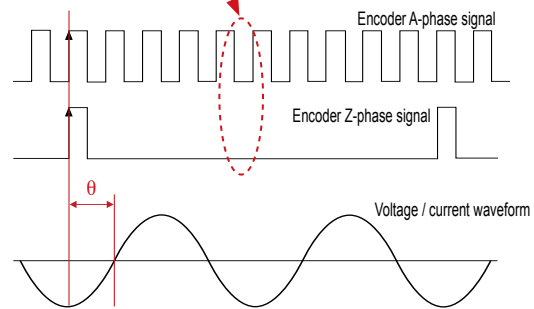

### ■ Application 1: “Electrical angle measurement”

- The voltage / current fundamental wave component  $\theta$  from the machine angle origin can be calculated by performing harmonic analysis of motor input voltage / current by synchronizing to the A-phase signal and z-phase signal of an encoder.
- A function to perform zero compensation for this phase angle when a motor induced voltage is generated can be used to measure the voltage and current phase (electrical angle) in real time based on the induced voltage when the motor is started.

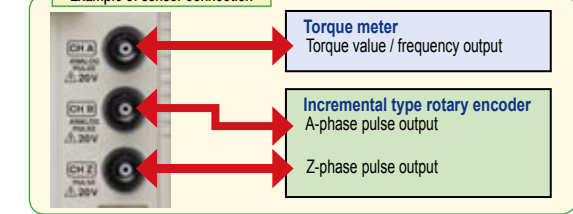

### ■ The importance of measuring the electrical angle of synchronous motors

The key to the performance of high-performance low-fuel consumption vehicles represented by HEV and EV is the synchronous motor that is used as the power source. The synchronous motor is finely controlled by alternating signals generated by an inverter device (DC to AC conversion) using the electricity from batteries.

#### ● What is a synchronous motor?

A synchronous motor rotates in synchronization with the AC frequency. Structurally, the motor is turned by the rotating force at the magnetic pole of the rotator (rotator magnetic pole), which is generated by the rotating magnetic field generated by applying an alternating current to the magnetic field (stator magnetic pole). The rotation speed is synchronized to the speed of the rotating magnetic field, so the

speed can be controlled by changing the speed of the rotating magnetic field (power supply frequency). In addition, high operating efficiency is one of the advantages of the synchronous motor.

#### ● Why is electrical angle measurement necessary?

In the case of a synchronous motor, a phase shifting occurs between the stator magnetic pole and the rotator magnetic pole due to a change in the load torque. This shifted angle and the torque force that can be generated by a motor have a close relationship, so it is important to understand this shifted angle (electrical angle) in order to achieve high-efficiency motor control.

#### ● The 3390 provides a more accurate measurement method

The 3390 supports the incremental encoder output in addition to the measurement methods of the HIOKI 3194 Power HiTESTER – enabling you to measure this electrical angle more easily and accurately.



## 2 Perform harmonic analysis from the low-speed rotation range of motors

• Harmonic analysis from a synchronization frequency of 0.5 Hz  
 Accurate measurements can be performed in the low-speed rotation range of motors without the need of an external clock.  
 If the synchronization frequency is 45 Hz or more, analysis results are updated every 50 ms, so data analysis can be performed in real time.

Synchronization frequency range	Window wave number	Analysis order
0.5Hz to 40Hz	1	100th order
40Hz to 80Hz	1	100th order
80Hz to 160Hz	2	80th order
160Hz to 320Hz	4	40th order
320Hz to 640Hz	8	20th order
640Hz to 1.2kHz	16	10th order
1.2kHz to 2.5kHz	32	5th order
2.5kHz to 5.0kHz	64	3rd order

• Analyze up to the 100th order  
 Synchronized to the fundamental wave frequency of 0.5 Hz to 5 kHz  
 Simultaneously perform analysis up to the 100th order harmonic along with power measurement



## 3 Vector display of electrical angles of motors

• Display vectors including that of the phase angle and electrical angle ( $\Delta\theta$ ) of fundamental wave voltage and current. The measured data can be used as parameters to calculate the Ld and Lq values.




## 4 Clearly view the inverter efficiency/loss and motor power

• Output, efficiency, and loss of inverter motors can be measured with one single unit  
 Operating efficiency and power loss of the inverter and motor can be displayed when the inputs and outputs of the inverter are measured simultaneously.




## 5 X-Y graph display lets you check the dynamic characteristics of inverters

• X-Y graph display function built-in (X-axis: 1 item, Y-axis: 2 items)  
 By simply setting 2 items to the Y-axis as with a 6-axis graph used to evaluate motors, you can display the characteristics of a motor and similar devices in real time.

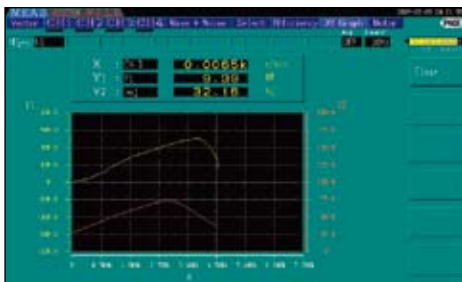

## 6 Temperature data that is indispensable for motor evaluation can also be measured simultaneously


• Connect the HIOKI 3440 Series Temperature HiTESTER to measure changes in the motor temperature and acquire data as parameters for motor evaluation  
 Connect the HIOKI 3440 Series Temperature HiTESTER to the 3390 (via the RS-232C interface) to acquire data while displaying the temperature.

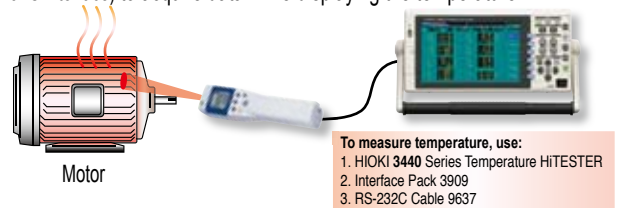


### Application 2: Electrical angle measurement using induced voltage of motors (The same measurements conducted with the HIOKI 3194 can also be performed)

Correct the rotation synchronization signal and induced voltage phase of motors as well as measure the phase of voltage and current for the induced voltage of a running motor as an electrical angle.

Step 1: Turn the motor from the load side, and measure the induced voltage of the motor

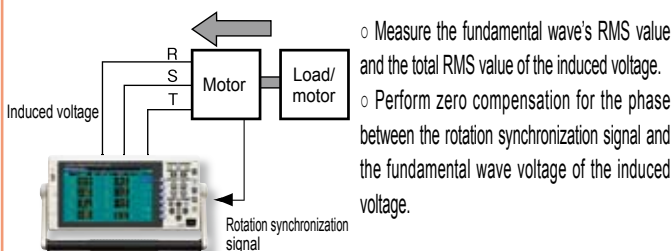

Step 2: Measurement of a running motor

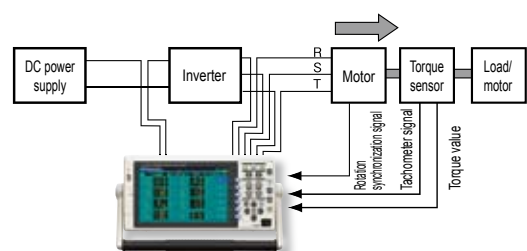

#### Other Advance Functionsmotor

- Frequency divider circuit (up to 1/60000 frequency dividing) – helpful when the rotation synchronization signal consists of multiple pulses for one cycle of induced voltage.
- $\Delta$ -to-Y conversation function - convert the line voltage to a phase voltage (virtual neutral reference) when three-phase three-wire (3P3W3M connection) measurements are performed.

- Measure the fundamental wave component, harmonic component, and electrical angle of line voltage and current of a line to the motor. (The measured data can also be used as parameters for calculation of Lp/Lq)
- Simultaneously measure motor efficiency, inverter efficiency, total efficiency, and inverter loss while observing the motor control.

# Evaluate new energies such as solar power, wind power, and fuel cells


Assess power conditioners that are indispensable for converting new energies to electrical power

## Advantages

1. The input and output characteristics of a power conditioner can be measured simultaneously in combination with an AC/DC current sensor
2. Use of a current sensor makes the connection simple. Furthermore, accurate measurements can be performed in combination with the AC/DC CURRENT SENSOR 9709
3. The sale and purchase of electrical energy of a power line connected to a power conditioner can also be measured with one unit

## Proprietary HIOKI Technology

4. Measure DC mode integration, which responds quickly to changes in the input of sunlight and the like, and RMS mode integration, which handles the separate integration of the sale and purchase of electric energy, all at the same time
5. Ripple factor, efficiency and loss, which are required to evaluate power conditioners for solar power generation, can be measured with one single unit.

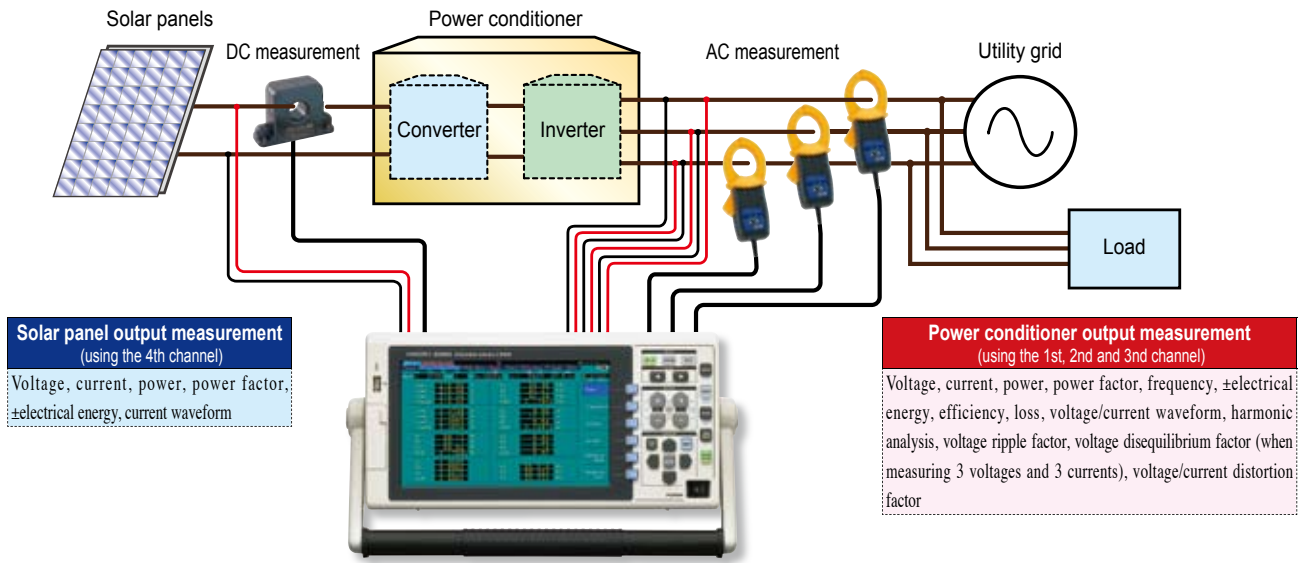

## 1 Conditioner-specific measurement items all measurable

• Power conditioner measurement-specific ripple factor and disequilibrium factor can also be measured and displayed simultaneously (up to 32 items can be displayed simultaneously), resulting in enhanced test efficiency

Display item	Measurement item
rms value	RMS (DC/AC voltage/current of input and output)
P, Q, S, λ values	Active power, reactive power, apparent power, power factor
Loss value	Input and output loss
η value	Efficiency
thd value	Distortion factor (voltage/current)
rf value	Ripple factor (for DC)
unb value	Disequilibrium
f value	Output frequency



## Current trends in solar power generation

● **Interconnected system of solar power generation and power conditioner**  
Electrical energy generated from the solar power generation is DC electrical energy, so it needs to be converted to AC electrical energy to be used by connecting to the utility grid. The device to convert direct current to alternating current is the power conditioner. In particular, to sell electrical energy by connecting to the utility grid, the performance of the power conditioner is important, so the method to evaluate the performance is specified by the national standards.

● **IEC standard**


**IEC 61683:1999**, Photovoltaic systems -Power conditioners- Procedure for measuring efficiency

● **Evaluation and measurement of power conditioners**

The IEC standard stipulates detailed measurement items to evaluate the input and output characteristics of power conditioners such as harmonic level, ripple factor, voltage disequilibrium factor, and voltage/current waveform.

● The 3390 supports a long list of measurement items including the specific ones required.

The 3390 can measure ripple factor and evaluate and analyze through simultaneous measurements.

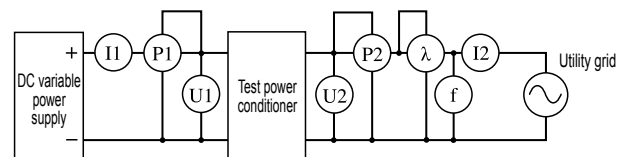

## 2 The efficiency (loss) and the amount of electrical energy sold and purchased can be displayed clearly

• Not only the amount of electricity generated with solar cells and the efficiency (loss) of a conditioner but also the amount of electrical energy sold and purchased by connecting to the utility grid can be measured simultaneously with one single unit




## 4 Accurately measure harmonics that are important for connecting to the utility grid

• The harmonic component and distortion factor important for connecting a power conditioner to the utility grid can be measured simultaneously. Synchronized to the fundamental frequency of 0.5 Hz to 5 kHz. Analyze up to the 100th order of voltage, current, and voltage harmonic, and display the current direction



## 3 Check the input and output waveforms of a conditioner

• Simultaneously check the input and output waveforms of a conditioner at 500 kS/s. The input and output waveforms required to evaluate power conditioners can be checked simultaneously with one unit.

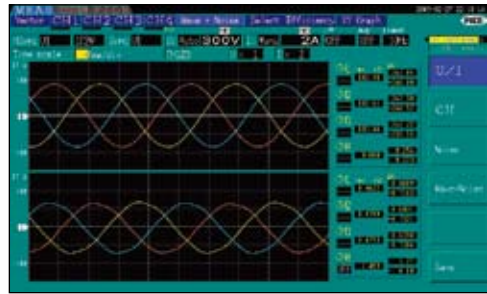

## 5 Also measure the noise flow of a connected utility grid

• Noise measurement function (1-channel measurement: Performed simultaneously with power measurement and harmonic analysis). Noise components at up to 100 kHz can be read while looking at the measured waveforms. Frequency and voltage/current levels for the top 10 points can be displayed simultaneously.



## Bundled software dedicated to the 3390 (free download from the HIOKI website)

### ◆ Features

- Connect the 3390 to a PC via LAN or USB for completely remote operation
- Save measured data to the PC in real time (interval saving is also available)
- Download data stored in the USB memory or CF card
- Connect up to four 3390 Power Analyzers using the free software for remote operation and simultaneous data collection


### ■ General specifications

Delivery media	Download from the HIOKI website
Operating environment	Windows 2000, XP, or Vista (32-bit version) PC Pentium III 500 MHz or higher CPU, 128 MB or more RAM, and LAN or USB interface Java Runtime Environment (JRE) 1.5.0 or later required
Communication method	Ethernet (TCP/IP), USB 1.1/2.0 For a USB connection, use the supplied dedicated driver (included with the software)
Number of simultaneously-connected units	4


### ■ Functions

Remote operation function	Key operation and screen display on a PC
Download function	Downloads data stored on the media (Files in the USB memory or CF card)
Display function	Displays instantaneously measured values of the 3390 on the PC monitor Numerical display: Basic measurement items Waveform display: Instantaneous waveform data Bar graph: Harmonic Vector: Fundamental wave vector
Measured value save function	Saves the specified instantaneous value data to the PC Selects the item to save from the numerical value display items in the display function
Interval save function	Saves instantaneous value data to the PC at the specified interval
CSV conversion function	Saves the displayed waveform data in CSV format to the PC
BMP save function	Saves the displayed waveform and graph data in image format to the PC or copy images to the clipboard
Setting function	Sends the settings of the 3390 made on a PC to the 3390 Setting contents can be saved and loaded to and from a file

Real-time monitoring screen

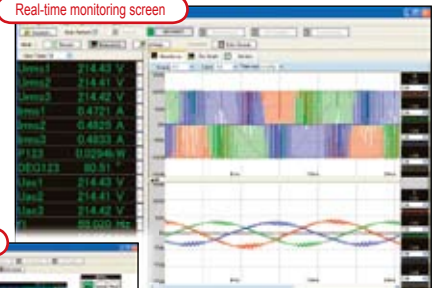

Remote operation screen



Connection of PC and 3390 via LAN or USB



Up to 4 units can be connected using free software

**3390 Specifications**  
 (Accuracy guarantee conditions: 23°C ±3°C, 80%RH or less, warm-up time 30 minutes or more, sinusoidal wave input, power factor 1, voltage to ground 0 V, in the range where the fundamental wave meets the conditions of the synchronization source after zero adjustment)

Input				
Measurement line	Single-phase two-wire (1P2W), single-phase three-wire (1P3W), three-phase three-wire (3P3W2M, 3P3W3M), three-phase four-wire (3P4W)			
Connection setting	CH1	CH2	CH3	CH4
Pattern 1	1P2W	1P2W	1P2W	1P2W
Pattern 2	1P3W		1P2W	1P2W
Pattern 3	3P3W2M		1P2W	1P2W
Pattern 4	1P3W		1P3W	
Pattern 5	3P3W2M		1P3W	
Pattern 6	3P3W2M		3P3W2M	
Pattern 7	3P3W3M			1P2W
Pattern 8	3P4W			1P2W
Number of input channels	Voltage: 4 channels U1 to U4 Current: 4 channels I1 to I4			
Input terminals	Voltage: Plug-in terminal (safety terminal) Current: Dedicated connector			
Input method	Voltage: Isolated input, resistance voltage dividing method Current: Isolated input using current sensor (voltage output)			
Measurement range	(Selectable for each connection, auto range available)			
Voltage range	15.000V / 30.000V / 60.000V / 150.00V / 300.00V / 600.00V / 1500.0V			
Current range	*400.00mA / *800.00mA / 2.0000A / 4.0000A / 8.0000A / 20.000A (20 A rating) 4.0000A / 8.0000A / 20.000A / 40.000A / 80.000A / 200.00A (200 A rating) 1.0000A / 2.0000A / 5.0000A / 10.000A / 20.000A / 50.000A (50 A rating) 10.000A / 20.000A / 50.000A / 100.00A / 200.00A / 500.00A (500 A rating) * Only UNIVERSAL CLAMP ON CT 9277 is applicable			
Power range	Depends on combination of voltage and current range (6.0000 W to 2.2500 MW)			
Crest factor	3 (voltage/current), 1.33 for 1500 V			
Input method (50/60Hz)	Voltage input part: 2 MΩ ±40 kΩ (Differential input and isolated input) Current sensor input part: 1 MΩ ±50 kΩ			
Maximum input voltage	Voltage input part: 1500 V ±2000 V peak Current sensor input part: 5 V ±10 V peak			
Maximum rated voltage to ground	Voltage input terminal 1000 V (50/60 Hz) Measurement category III 600 V (Expected transient overvoltage 6000 V) Measurement category II 1000 V (Expected transient overvoltage 6000 V)			
Measurement method	Voltage and current simultaneous digital sampling and zero cross synchronization calculation method			
Sampling	500kHz / 16bit			
Frequency band	DC, 0.5 Hz to 150 kHz			
Synchronization frequency range	0.5Hz to 5kHz			
Synchronization source	U1 to U4 / I1 to I4 / Ext (with motor analysis option, CH B: when pulse is set) / DC (50 ms, 100 ms fixed) * Selectable for each connection (Zero cross auto follow-up by digital LPF when U / I), Filter resistance two-stage switching (high / low), source input 30% f.s. or more when U / I			
Data update rate	50ms			
LPF	OFF / 500 Hz / 5 kHz / 100 kHz (Selectable for each connection) When 500 Hz: Accuracy ±0.1% f.s. specified at 60 Hz or less When 5 kHz: Accuracy specified at 500 Hz or less When 100 kHz: Accuracy specified at 20 kHz or less (1%rdg. is added at 10k Hz to 20 kHz)			
Polarity determination	Voltage/current zero cross timing comparison method			
Polarity determination Measurement parameters	Voltage (U), current (I), active power (P), apparent power (S), reactive power (Q), power factor (λ), phase angle (φ), frequency (f), efficiency (η), loss (Loss), voltage ripple factor (Ufr), current ripple factor (Ifrr), current integration (Ih), power integration (WP), voltage peak (Upk), current peak (Ipk)			

**Accurate Voltage, current, and active power measurements**

Accuracy	Voltage (U)	Current (I)	Active power (P)
DC	±0.1%rdg±0.1% f.s.	±0.1%rdg±0.1% f.s.	±0.1%rdg±0.1% f.s.
0.5Hz to 30Hz	±0.1%rdg±0.2% f.s.	±0.1%rdg±0.2% f.s.	±0.1%rdg±0.2% f.s.
30Hz to 45Hz	±0.1%rdg±0.1% f.s.	±0.1%rdg±0.1% f.s.	±0.1%rdg±0.1% f.s.
45Hz to 66Hz	±0.05%rdg±0.05% f.s.	±0.05%rdg±0.05% f.s.	±0.05%rdg±0.05% f.s.
66Hz to 1kHz	±0.1%rdg±0.1% f.s.	±0.1%rdg±0.1% f.s.	±0.1%rdg±0.1% f.s.
1kHz to 10kHz	±0.2%rdg±0.1% f.s.	±0.2%rdg±0.1% f.s.	±0.2%rdg±0.1% f.s.
10kHz to 50kHz	±0.3%rdg±0.2% f.s.	±0.3%rdg±0.2% f.s.	±0.4%rdg±0.3% f.s.
50kHz to 100kHz	±1.0%rdg±0.3% f.s.	±1.0%rdg±0.3% f.s.	±1.5%rdg±0.5% f.s.
100kHz to 150kHz	±20% f.s.	±20% f.s.	±20% f.s.

\* Voltage, current, and active power values at 0.5 Hz to 10 Hz are reference values  
 \* Voltage and active power values more than 220 V at 10 Hz to 16 Hz are reference values  
 \* Voltage and active power values more than 750 V at 30 kHz to 100 kHz are reference values  
 \* Voltage and active power values more than (2200V/[kHz]) V at 100 kHz to 150 kHz are reference values  
 \* Voltage and active power values more than 1000 V are reference values  
 \* As for the current and active power values, add the accuracy of the current sensor to the above accuracy

Accuracy guarantee period	6 months (One-year accuracy is the above accuracy x 1.5)
Temperature coefficient	±0.01% f.s / °C (When DC: Add ±0.01% f.s./°C)
Effect of common mode voltage	±0.01% f.s. or less (When applying 1000 V (50/60 Hz) between the voltage input terminal and the case)
Effect of external magnetic field	±1.0% f.s. or less (in a magnetic field at 400 A/m, DC, and 50/60 Hz)

Effect of power factor	±0.15% f.s. or less (When power factor = 0.0 at 45 Hz to 66 Hz), add ±0.45% f.s. when LPF is 500 Hz
Effective measurement range	Voltage, current, and power: 1% to 110% of range
Display range	Voltage, current, and power: Range's zero suppress range setting to ±120%
Zero suppress range	Selects from OFF, 0.1% f.s., and 0.5% f.s. * When OFF is selected, a numerical value may be displayed even if zero is input
Zero adjustment	Voltage: ±10% f.s. Current: ±10% f.s. zero correction is performed for an input offset less than ±4 mV
Waveform peak measurement	Range: Within ±300% of respective voltage and current range Accuracy: Voltage and current respective display accuracy ±2% f.s.

**Frequency measurement**

Number of measurement channels	4 channels (f1, f2, f3, f4)
Measurement source	Selects from U / I for each input channel
Measurement method	Reciprocal method + zero cross sampling value correction
Measurement range	Within synchronization frequency range between 0.5 Hz and 5 kHz
Data update rate	50 ms (Depends on the frequency when 45 Hz or less )
Accuracy	±0.05%rdg, ±1dgt. (When sinusoidal waveform is 30% or more relative to the measurement range of measurement source)
Display range	0.5000kHz to 9.9999Hz / 9.900Hz to 99.999Hz / 99.00Hz to 999.99Hz / 0.9900kHz to 5.0000kHz

**Integration measurement**

Measurement mode	RMS / DC (Selectable for each connection, DC is only available when AC/DC sensor is used for 1P2W connections) RMS: Integrates the current RMS values and active power values, only the active values are integrated for each polarity DC: Integrates the current values and instantaneous power values for each polarity
Measurement item	Current integration (Ih+, Ih-, Ih), active power integration (WP+, WP-, WP) Ih+ and Ih- are available only in DC mode, and only Ih is available in RMS mode.
Measurement method	Digital calculation from each current and active power
Measurement interval	Data update rate of 50 ms
Display resolution	999999 (6 digits + decimal point)
Measurement range	0 to ±9999.99 TAh / TWh (Integration time is within 9999 h 59 m) If any integration value or integration time exceeds the above limit, integration stops.
Integration time accuracy	±50 ppm ±1 dgt. (0°C to 40°C)
Integration accuracy	±(Accuracy of current and active power) ± integration time accuracy
Backup function	If power fails during integration, integration resumes after power is restored

**Harmonic measurement**

Integration time accuracy	4 channels (Harmonic measurement for another line at a different frequency cannot be performed)		
Measurement item	Harmonic voltage RMS value, harmonic voltage percentage, harmonic voltage phase angle, harmonic current RMS value, harmonic current percentage, harmonic current phase angle, harmonic active power, harmonic power percentage, harmonic voltage/current phase difference, total harmonic voltage distortion factor, total harmonic current distortion factor, voltage disequilibrium factor, current disequilibrium factor		
Measurement method	Zero cross synchronous calculation method (All channels same window) with gap		
Synchronization source	U1 to U4 / I1 to I4 / Ext (Motor analysis option included, CHB: when pulse is set) / DC (50 ms/100 ms)		
FFT processing word length	32-bit		
Anti-aliasing filter	Digital filter (Variable by the synchronization frequency)		
Window function	Rectangular		
Synchronization frequency range	0.5 Hz to 5 kHz		
Data update rate	50 ms (Depends on the synchronization frequency when less than 45 Hz)		
Phase zero adjustment	Phase zero adjustment is possible by key / communication command (only when the synchronization source is Ext)		
Maximum analysis order	Synchronization frequency range	Window wave number	Analysis order
	0.5Hz to 40Hz	1	100th order
	40Hz to 80Hz	1	100th order
	80Hz to 160Hz	2	80th order
	160Hz to 320Hz	4	40th order
	320Hz to 640Hz	8	20th order
	640Hz to 1.2kHz	16	10th order
1.2kHz to 2.5kHz	32	5th order	
2.5kHz to 5.0kHz	64	3rd order	

Accuracy	Frequency	Voltage (U) / current (I) / active power(P)
	0.5Hz to 30Hz	$\pm 0.4\% \text{rdg} \pm 0.2\% \text{f.s.}$
	30Hz to 400Hz	$\pm 0.3\% \text{rdg} \pm 0.1\% \text{f.s.}$
	400Hz to 1kHz	$\pm 0.4\% \text{rdg} \pm 0.2\% \text{f.s.}$
	1kHz to 5kHz	$\pm 1.0\% \text{rdg} \pm 0.5\% \text{f.s.}$
	5kHz to 10kHz	$\pm 2.0\% \text{rdg} \pm 1.0\% \text{f.s.}$
	10kHz to 13kHz	$\pm 5.0\% \text{rdg} \pm 1.0\% \text{f.s.}$

\* Not specified when the synchronization frequency is 4.3 kHz or more

### Noise measurement (FFT processing)

Number of channels	1 channel (Selects one channel from CH1 to CH4)
Measurement item	Voltage/current
Calculation type	RMS spectrum
Measurement method	500 kHz/s sampling (Decimation after digital anti-aliasing filtering)
FFT processing word length	32-bit
Number of FFT points	1,000 points / 5,000 points / 10,000 points / 50,000 points (Linked to the waveform display record length)
Anti-aliasing filter	Digital filter auto (Variable by the maximum analysis frequency)
Window function	Rectangular / Hanning / flat top
Data update rate	Within about 400 ms to 15 s depending on the number of FFT points, with gap
Maximum analysis frequency	100kHz / 50kHz / 20kHz / 10kHz / 5kHz / 2kHz
Frequency resolution	0.2 Hz to 500 Hz (Determined by the number of FFT points and the maximum analysis frequency)
Noise value measurement	Calculates the levels and frequencies of voltage and current peaks (maximum values) for the top 10 points

### MOTOR TESTING OPTION (Applicable to the 9791 and 9793)

Number of input channels	3 channels CH A: Analog DC input / frequency input (torque signal input) CH B: Analog DC input / pulse input (rotation signal input) CH Z: Pulse input (Z-phase signal input)
Input terminal form	Isolation type BNC connector
Input resistance (DC)	1 M $\Omega$ $\pm$ 100 k $\Omega$
Input method	Isolated input and differential input (No isolation between CH B and CH Z)
Measurement item	Voltage, torque, rotation, frequency, slip, motor output
Maximum input voltage	$\pm 20$ V (When analog / frequency / pulse)
Maximum rated voltage to ground	50 V (50/60 Hz), measurement category I 50 V (Expected transient overvoltage of 500 V)
Accuracy guarantee period	6 months (One-year accuracy is the accuracy below x 1.5)

#### 1. Analog DC input (CH A / CH B)

Measurement range	$\pm 1$ V / $\pm 5$ V / $\pm 10$ V (When analog DC input)
Effective input range	1% to 110% f.s.
Sampling	10 kHz / 16-bit
Measurement method	Simultaneous digital sampling and zero cross synchronization calculation method (zero cross averaging)
Synchronization source	Same as the 3390 power measurement input specification (Common for CH A and CH B)
Accuracy	$\pm 0.1\% \text{rdg} \pm 0.1\% \text{f.s.}$
Temperature coefficient	$\pm 0.03\% \text{f.s.}/^\circ\text{C}$
Effect of common mode voltage	$\pm 0.01\% \text{f.s.}$ or less when applying 50 V (DC 50/60 Hz) between the input terminal and the 3390 case
Display range	Range's zero suppress range setting to $\pm 120\%$
Zero adjustment	Voltage $\pm 10\% \text{f.s.}$

#### 2. Frequency input (only for CH A)

Effective amplitude range	$\pm 5$ V peak
Measurement range	100kHz
Band width	1kHz to 100kHz
Accuracy	$\pm 0.05\% \text{rdg} \pm 3 \text{dgt.}$
Display range	1.000kHz to 99.999kHz

#### 3. Pulse input (only for CH B)

Detection level	Low: 0.5 V or less, High: 2.0 V or more
Measurement band	1 Hz to 200 kHz (When duty ratio is 50%)
Frequency divider setting range	1 to 60000
Measurement frequency range	0.5 Hz to 5.0 kHz (Specified by the frequency at which the measurement pulse is divided by the set frequency dividing number)
Minimum detection width	2.5 $\mu\text{s}$ or more
Accuracy	$\pm 0.05\% \text{rdg} \pm 3 \text{dgt.}$

#### 4. Pulse input (only for CH Z)

Detection level	Low: 0.5 V or less, High: 2.0 V or more
Measurement band	0.1 Hz to 1 kHz
Minimum detection width	2.5 $\mu\text{s}$ or more
Setting	OFF / ON (When ON, a frequency divider circuit of CH B is cleared by a rising edge)

### D/A OUTPUT OPTION (Applicable to the 9792 and 9793)

Number of output channels	16 channels
---------------------------	-------------

Output content	Switchable between Waveform output / Analog output (selects from the measurement items) * Waveform output is only for CH 1 to CH 8
Output terminal form	D-sub 25-pin connector x 1
D/A conversion resolution	16-bit (Polarity + 15-bit)
Output voltage	Analog: DC $\pm 5$ V f.s. (Max. about DC $\pm 12$ V) Waveform output: 2 Vrms f.s., crest factor: 2.5 or more
Accuracy	Analog output: Measurement accuracy $\pm 0.2\% \text{f.s.}$ (DC level) Waveform output: Measurement accuracy $\pm 0.5\% \text{f.s.}$ (at RMS level, in synchronization frequency range)
Accuracy guarantee period	6 months (one-year accuracy is the above accuracy x 1.5)
Output update rate	Analog output: 50 ms (As per the data update rate of the selected item) Waveform output: 500 kHz
Output resistance	100 $\Omega$ $\pm 5$ $\Omega$
Temperature coefficient	$\pm 0.05\% \text{f.s.}/^\circ\text{C}$

### Display

Display character	English / Japanese / Chinese (simplified characters)
Display	9-inch TFT color LCD display (800 x 480 pixels)
LCD backlight	ON / Auto OFF (1min / 5min / 10min / 30min / 60min)
Display resolution	99999 counts (Integrated value: 999999 counts)
Display refresh rate	200 ms (Independent of internal data update rate; waveform and FFT depend on the screen)
Display screen	Measurement, Setting, File Manipulation screens

### External interfaces

#### 1. USB Interface (Function)

Connector	Series Mini-B receptacle
Electrical specification	USB2.0 (Full Speed / High Speed)
Number of ports	1
Class	Vendor specific (USB488h)
Destination	PC (Windows 2000 / XP / Vista (32-bit version))
Function	Data transfer, remote operation, command control

#### 2. USB memory interface

Connector	USB type A connector
Electrical specification	USB2.0
Power supply	Up to 500 mA
Number of ports	1
Applicable USB memory	USB Mass Storage Class
Recordable items	Setting file: Save/Load Measured value/recorded data: Copy (from the CF card data) Waveform data: Save, screen hard copy

#### 3. LAN interface

Connector	RJ-45 connector x 1
Electrical specification	IEEE802.3 compliant
Transmission method	10BASE-T / 100BASE-TX auto recognition
Protocol	TCP/IP
Function	HTTP server (remote operation), dedicated port (port transfer, command control)

#### 4. CF card interface

Slot	TYPE I x 1
Usable card	Compact flash memory card (32 MB or more)
Applicable memory capacity	Up to 2 GB
Data format	MS-DOS format (FAT16 / FAT32)
Recordable items	Setting file: Save / Load Measured value / automatically recorded data: Save (in CSV format) Waveform data: Save, screen hard copy

#### 5. RS-232C interface

Method	RS-232C, EIA RS-232D, CCITT V.24, JIS X5101 compliant
Connector	D-sub 9-pin connector x 1
Destination	Printer / thermometer
Recordable items	Full duplex asynchronous method Data length: 8, parity: none, stop bit: 1, Flow control: Hard flow, delimiter: CR+LF
Baud rate	2400, 9600, 19200, 38400 bps (2400 bps for thermometer)

#### 6. Synchronization control interface

Terminal form	IN-side 9-pin round connector x1, OUT-side 8-pin round connector x 1
Signal	5 V (CMOS level)
Maximum allowable input	$\pm 20$ V
Signal delay	Up to 2 $\mu\text{s}$ (Specified by the rising edge)

### Functions

#### 1. Setting

Rectification switching	rms / mean (Selectable for the voltage/current of each connection) rms: Displays the true RMS value (True RMS) mean: Displays the average-value rectified RMS value
Auto range	OFF / ON (Voltage and current range is selectable for each connection)

Data save interval	OFF / 50 ms / 100 ms / 200 ms / 500 ms / 1 s / 5 s / 10 s / 15 s / 30 s / 1 min / 5 min / 10 min / 15 min / 30 min / 60 min * Maximum number of items to save can be specified by the setting (130 items/50 ms, up to 5000 items)				
	Interval time and maximum number of items to be saved		Guide to the time during which items can be saved automatically(When using a 512 MB card)		
	Interval	Number of items	Number of items to be saved	Time during which items can be stored	
	50ms	130 (When 200 ms: 520)	10 40	About 2 days About 14 hours	
1s	2600 (5 s or more: 5000)	10 1000	About 42 days About 11 hours		
				1min	5000
Time control	OFF / Timer / Actual time When using Timer: 10 s to 9999 h 59 m 59 s (unit: 1 s) When using Actual Time: Start time / stop time (unit: 1 min)				
Scaling	VT ratio: OFF / 0.01 to 9999.99 CT ratio: OFF / 0.01 to 9999.99				
Averaging	Displays the averaged values of all instantaneously measured values including harmonic value (Excluding the peak value, integrated value, and noise value) * Averaged data applies to all data including the saved data during averaging				
Method	Exponential averaging (Applies to the data update rate of 50 ms)				
Response time	OFF / 0.2s (FAST) / 1.0s (MID) / 5.0s (SLOW) (Time within which to fall in the accuracy range when the input changes to 0%f.s. to 100%f.s.)				
Efficiency/loss calculation	Calculates the efficiency $\eta$ [%] and loss [W] of active power for each connection and channel.				
Calculated item	Active power value (P) for each channel and connection Motor power (Pm) when the 9791 and 9793 Motor Analysis Option is included				
Calculation rate	Calculates and updates at a data update rate of 50 ms * The latest data of calculation is used for a calculation between connections whose synchronization sources are different				
Calculable factors	3 formats for the efficiency and loss, respectively				
Calculation algorithm	Calculated item is specified for Pin and Pout in the format below $\eta=100 \times  Pout  /  Pin $ , $Loss= Pin  -  Pout $				
$\Delta - Y$ calculation	Converts line voltage waveform to phase voltage waveform using the virtual neutral point for 3P3W3M connection Uses a phase voltage to calculate all voltage parameters including harmonic or voltage RMS value				
Display hold	Stops and displays all displayed measured values and display update of waveforms				
Data update	Updates data when the hold key is manipulated, when the interval is reached, and when an external synchronization signal is detected				
Output data	D/A output, CF data save: Outputs the hold data (The waveform output continues, and the interval auto-save outputs data immediately before it is updated)				
Peak hold	Displays and updates the maximum value for each of all measured data (without waveform display and integrated value) (While averaging is performed, the maximum value is applied to the measured value after averaging. This cannot be used in conjunction with the Hold function)				
Data update	Data is cleared when the hold key is manipulated, when the interval is reached, and when an external synchronization signal is detected (Data is updated at an internal data update rate of 50 ms)				
Output data	D/A output, CF data save: Outputs the peak hold data (The waveform output continues, and the interval auto-save outputs data immediately before it is cleared)				
<b>2. Display</b>					
Connection check screen	Displays the connection diagram and the voltage/current vector diagram * The right connection range is displayed in the vector diagram, so the connection can be checked.				
Connection display screen	Displays measured power and harmonic values on channels 1 to 4 * The values are displayed for each measurement line pattern of combined connections				
DMM screen	Basic Measurement screen, Voltage Measurement screen, Current Measurement screen, Power Measurement screen				
Harmonic screen	Bar Graph screen, List screen, Vector screen				
Select/Display screen	Selects and displays any 4, 8, 16, or 32 measurement items from all basic measurement items Display pattern: 4 items, 8 items, 16 items, or 32 items (4 pattern switching)				
Efficiency/Loss screen	Displays the numerical values of efficient and loss set in the calculation algorithm Display pattern: 3 efficiency items, 3 loss items.				
Waveform & Noise Measurement screen	Displays the voltage/current waveforms sampled at 500 kHz in a compressed screen * Displays the waveform and noise measurement (FFT calculation) result when noise measurement is performed				
Trigger	Synchronization timing of harmonic synchronization source				
Record Length	1,000 points / 5,000 points / 10,000 points / 50,000 points x all voltage/current channels				
Compression Ratio	1/1, 1/2, 1/5, 1/10, 1/25, 1/50 (Peak-Peak compression)				
Recording time	Recording speed / Recording length	1,000 points	5,000 points	10,000 points	50,000 points
	500kS/s	2ms	10ms	20ms	100ms
	250kS/s	4ms	20ms	40ms	200ms
	100kS/s	10ms	50ms	100ms	500ms
	50kS/s	20ms	100ms	200ms	1000ms
	25kS/s	40ms	200ms	400ms	2000ms
	10kS/s	100ms	500ms	1000ms	5000ms
X-Y Plot screen	Selects items on the horizontal and vertical axes from the basic measurement items and displays them in the X-Y graph *The graph is drawn at the data update rate, data is not recorded, and drawing data is cleared				
Option	Horizontal axis: 1 item (with gauge display) Vertical axis: 2 items (with gauge display)				

Motor screen	Displays the measured values of the MOTOR TESTING OPTION 9791 (9793). Display pattern: Displays the numerical values of 4 items	
<b>3. Data save</b>		
Auto data save	Saves each measured value to the CF card at each interval	
Save destination	OFF / CF card (cannot be saved to the USB memory), the save destination folder can be specified	
Save itemAuto	Any item can be selected from all measured data, including harmonic value, and peak value of the noise measurement function	
Data format	CSV file format	
Manual data Save	Saves each measured value to each save destination when the SAVE key is pressed	
Save destination	USB memory / CF card, the save destination folder can be specified	
Save itemSave	Any item can be selected from all measured data, including harmonic value, and peak value of the noise measurement function	
Data format	CSV file format	
Screen hard copy	Saves the display screen to the save destination when the COPY key is pressed	
Save destination	USB memory / CF card / printer * The save destination folder can be specified when USB memory or CF card is specified.	
Data format	Compressed BMP format (256 colors), monochrome when printer is selected	
Setting data save	Setting information can be saved and loaded to and from the save destination as a setting file (With the exception of language setting and communication setting)	
Save destination	USB memory / CF card (the save destination folder can be specified)	
<b>4. External connected equipment</b>		
Synchronized measurement	The 3390 master and 3390 slaves can be connected with synchronization cables to perform synchronized measurements * If the interval setting is identical, synchronized measurements can be saved automatically	
Synchronized item	Clock, data update rate (excl. noise measurement), integration start/stop, data reset, event	
Event item	Hold, manual save, screen copy	
Synchronization timing	Clock, data update rate, start/stop, data reset, event (During operation of the master by the key or via communication)	
Synchronization delay	Up to 5 $\mu$ s per connection, up to +50 ms per event	
Temperature measurement	Acquires the measured temperature values from the thermometer connected to the RS-232C interface	
Applicable thermometer	HIOKI thermometers capable of communication via RS-232C	
Number of channels	1 channel	
Printer output	Screen copy is printed to the printer connected to the RS-232C interface	
Applicable printer	HIOKI 9670	
Output content	Screen hard copy	
Printer setup	Printer auto setup function available	
<b>5. System</b>		
Display language	English / Japanese / Chinese* (*available soon)	
Clock function	Auto Calendar, Auto Leap Year Adjustment, 24 Hour Meter	
Clock setting	Year, Month, Day, Hour, Minute Setting, Zero Second Adjustment	
Real time accuracy	Within $\pm 3$ s / day (25°C)	
Beep tone	OFF / ON	
Screen color	COLOR1 / COLOR2 / COLOR3 / COLOR4 / MONO	
Start screen select	Connection screen / screen closed in the previous session (Measurement screen only)	
LCD backlight	ON / 1 min / 5 min / 10 min / 30 min / 60 min	
Sensor recognition	Automatically recognizes the current sensor connected	
Alarm display	Voltage/current peak over threshold detection, synchronization source non-detection (Alarm mark on)	
Key lock	ESC key: ON/OFF by holding down the key for 3 seconds (Key lock mark on)	
System reset	Sets the equipment to the default (factory) settings (Communication settings are not changed)	
File manipulation	Media data list display, media formatting, new folder creation, folder file deletion, file copy between media	
<b>General specifications</b>		
Operating location	Indoors, altitude up to 2000 m, contamination class 2	
Storage temperature and humidity ranges	-10°C to 50°C, 80%RH or less (No dew condensation)	
Operating temperature and humidity ranges	0°C to 40°C, 80%RH or less (No dew condensation)	
Withstand voltage	For 15 seconds at 50/60 Hz AC5.312 kVrms: Between the voltage input terminal and the unit case AC3.32 kVrms: Between the voltage input terminal and the current input terminal / interface AC370 Vrms: Between the 9791 and 9793 input terminals (CH A, CH B, CH Z) and the unit case Between CH A and CH B / CH Z	
Applicable standard	Safety: EN61010-1 EMC: EN61326-1 Class A, EN61000-3-2, EN61000-3-3	
Rated power supply voltage	100 to 240 VAC (expected transient overvoltage of 2500 V), 50/60 Hz	
Maximum rated power	140VA	
Dimensions	340 (W) x 170 (H) x 157 (D) mm (excluding protrusions)	
Weight	4.8 kg (including the 9793)	
Backup battery life	About 10 years (a reference value of a lithium ion battery used at 23°C to back up the clock, setting conditions, and integrated values)	
Product warranty period	1 year	

Basic calculation algorithms					
Connection	1P2W	1P3W	3P3W2M	3P3W3M	3P4W
Voltage and current RMS value (True RMS value)	$X_{rms}(i) = \sqrt{\frac{1}{M} \sum_{s=0}^{M-1} (X_{(i)s})^2}$	$X_{rms12} \text{ or } X_{rms34} = \frac{1}{2} (X_{rms(i)} + X_{rms(i+1)})$	$X_{rms123} = \frac{1}{3} (X_{rms1} + X_{rms2} + X_{rms3})$		
Voltage and current average rectified RMS indication value	$X_{mn}(i) = \frac{\pi}{2\sqrt{2}} \frac{1}{M} \sum_{s=0}^{M-1}  X_{(i)s} $	$X_{mn12} \text{ or } X_{mn34} = \frac{1}{2} (X_{mn(i)} + X_{mn(i+1)})$	$X_{mn123} = \frac{1}{3} (X_{mn1} + X_{mn2} + X_{mn3})$		
Voltage and current alternating-current component	$X_{ac}(i) = \sqrt{(X_{rms(i)})^2 - (X_{dc(i)})^2}$				
Voltage and current mean value	$X_{dc}(i) = \frac{1}{M} \sum_{s=0}^{M-1} X_{(i)s}$				
Voltage and current fundamental wave component	Fundamental wave value X1(i) based on the harmonic calculation result				
Voltage and current peak value	Maximum value among X pk+(i) = X (i)s M Minimum value among X pk-(i) = X (i)s M				
Active power	$P(i) = \frac{1}{M} \sum_{s=0}^{M-1} (U_{(i)s} \times I_{(i)s})$	$P12 = P1+P2$ $P34 = P3+P4$	$P123 = P1+P2+P3$		
Apparent power	$S(i) = U(i) \times I(i)$	$S12 = S1+S2$ $S34 = S3+S4$	$S12 = \frac{\sqrt{3}}{2} (S1 + S2)$ $S34 = \frac{\sqrt{3}}{2} (S3 + S4)$	$S123 = S1+S2+S3$	
Reactive power	$Q(i) = \frac{1}{M} \sum_{s=0}^{M-1} (U_{(i)s} \sqrt{S_{(i)s}^2 - P_{(i)s}^2})$	$Q12 = Q1+Q2$ $Q34 = Q3+Q4$	$Q123 = Q1+Q2+Q3$		
Power factor	$\lambda(i) = \frac{P(i)}{S(i)}$	$\lambda_{12} = \frac{P12}{S12}$ , $\lambda_{34} = \frac{P34}{S34}$	$\lambda_{123} = \frac{P123}{S123}$		
Phase angle	$\phi(i) = \text{si}(i) \cos^{-1} \lambda(i)$	$\phi_{12} = \text{si}_{12} \cos^{-1} \lambda_{12}$ $\phi_{34} = \text{si}_{34} \cos^{-1} \lambda_{34}$	$\phi_{123} = \text{si}_{123} \cos^{-1} \lambda_{123}$		

(i): Measurement channel, M: Number of samples between synchronization timings, s: Sample point number

Motor analysis calculation algorithm		
Item	Setting unit	Calculation algorithm
chA	V (DV voltage)	$\frac{1}{M} \sum_{s=0}^{M-1} A_s$
	N•m / mN•m / kN•m	When analog DC: A [V] × chA scaling setpoint When frequency: (Measurement frequency - fc setpoint) × rated torque setpoint / fd setpoint
	common (torque)	M: Number of samples between synchronization timings, s: Sample point number
chB	V (DC voltage)	$\frac{1}{M} \sum_{s=0}^{M-1} B_s$
	Hz (frequency)	When analog DC: B[V] × chB scaling setpoint When pulse input: Pole number setpoint × pulse frequency / 2 × pulse number setpoint
	r/min (rotation)	When analog DC:  B[V] × chB scaling setpoint  When pulse input: 2 × 60 × frequency [Hz] / pole number setpoint
Pm	N•m (unit of chA)	(Indicated value of chA) × 2 × π × (indicated value of chB) / 60
	mN•m (unit of chA)	(Indicated value of chA) × 2 × π × (indicated value of chB) / 60 / 1000
	kN•m (unit of chA)	(Indicated value of chA) × 2 × π × (indicated value of chB) × 1000 / 60
Calculation cannot be performed when the unit of chA is other than the above, or the unit of chB is other than r/min.		
Slip	Hz (unit of chB)	100 × input frequency - indicated value of chB / input frequency
	r/min (unit of chB)	100 × 2 × 60 × input frequency - indicated value of chB × pole number setpoint / 2 × π × input frequency
Selects the input frequency from f1 to f4		

When using the 3390 with a DC power supply as with the case of on-vehicle measurements:  
Provide a DC-AC converter separately.






Required DC-AC converter output specification  
Output type : Sinusoid wave type, 50/60 Hz (60 Hz recommended)  
Output capacity: The maximum power consumption of the 3390 is 140VA. Select a rating more than the capacity.

Options

Options for current measurements

CLAMP ON SENSOR 9272-10 (AC)      UNIVERSAL CLAMP ON CT 9279 (AC/DC)  
UNIVERSAL CLAMP ON CT 9277 (AC/DC)      AC/DC CURRENT SENSOR 9709 (AC/DC)  
UNIVERSAL CLAMP ON CT 9278 (AC/DC)

Overview of sensor specifications (Accuracy guarantee period of 1 year with the exception of the 9709 for 6 months)

Model	9272-10	9277	9278	9279	9709
	 CAT III 600V	 CAT II 600V CAT III 300V	 CAT II 600V CAT III 300V	 Not CE-marked 600 V insulated conductor	 CAT III 1000V
Rated current	AC 20A/200A	AC/DC 20A	AC/DC 200A	AC/DC 500A	AC/DC 500A
Maximum continuous input range	50A/300A rms	50A rms	350A rms	650A rms	700A rms
Accuracy (45 to 66 Hz, DC: DC compatible sensor)	±0.3%rdg, ±0.01% f.s., ±0.2°	±0.5%rdg, ±0.05% f.s., ±0.2° (30 minutes after power is turned on and after magnetization)			±0.05%rdg, ±0.01% f.s., ±0.2° (10 minutes after power is turned on)
Frequency characteristic	1Hz to 5Hz: ±2%rdg ±0.1% f.s. 1kHz to 5kHz: ±1%rdg ±0.05% f.s. (±1.0°) 10kHz to 50kHz: ±5%rdg ±0.1% f.s.	DC to 1kHz: ±1.0% (±0.5°) 1 k to 50 kHz: ±2.5 % (±2.5°) 50 k to 100 kHz: ±5.0 % (±5.0°)		1 k to 10 kHz: ±2.5 % (±2.5°) 10 k to 20 kHz: ±5.0 % (±5.0°)	DC to 45Hz: ±0.2%rdg, ±0.02% f.s. (±0.3°) 5kHz to 10kHz: ±2%rdg, ±0.1% f.s. (±2.0°) 20kHz to 100kHz: ±30%rdg, ±0.1% f.s. (±30°)
Measurable conductor diameter	φ 46mm	φ 20mm		φ 40mm	φ 36mm
Dimensions/weight	78W×188H×35Dmm, 850g	176W×69H×27Dmm, 470g		220W×103H×43.5Dmm, 860g	160W×112H×50Dmm, 850g

Cord length: 3 m

## Options for voltage measurements

Voltage Cord 9438-50 (Red x1 and black x 1, 600 V specification)  
 Voltage Cord 9438-70 (Red x 1 and black x 1, 1000 V specification)  
 Grabber Clip 9243 (Red x 1 and black x 1)



**Usage:**  
 Indoor wiring in buildings and factories for measurements up to 600 V.

CAT III 600V  
 9438-50



**Usage:**  
 Indoor wiring in buildings and factories for measurements up to 600 V; can also be used for internal voltage measurements of equipment up to 1000 V.

CAT II 1000V  
 CAT III 600V  
 9438-70



9243

**Usage:**  
 Attaches to the end of the Voltage Cord 9438-50 or 9438-70.



Enlarged view of the end

## PC connection and other options

PC Card 256M 9727 (Capacity: 256 MB)  
 PC Card 512M 9728 (Capacity: 512 MB)  
 PC Card 1G 9729 (Capacity: 1 GB)  
 LAN CABLE 9642  
 CONNECTION CORD 9217 (For input of the 9791 and 9793 with a length of 1.5 m)  
 CONNECTION CABLE 9683 (For synchronized measurement with a length of 1.5 m)  
 CARRYING CASE 9794 (Hard case dedicated to the 3390)  
 Rack mount brackets



Supplied with PC Card adapter  
 9729



9642



9683



9794

### PC Card Precaution

Use only PC Cards sold by HIOKI. Compatibility and performance are not guaranteed for PC cards made by other manufacturers. You may be unable to read from or save data to such cards.



9217

Ready for truck, air, or other transportation services

Hard trunk to protect your 3390 during transportation (With casters)

## Printer option

PRINTER 9670  
 AC ADAPTER 9671 (For the Printer 9670, AC 100 V to 240 V)  
 RS-232C CABLE 9638 (To connect the 9670, 1.8 m (5.91 ft) length)  
 RECORDING PAPER 9237 (80 mmx25 mm, 4 rolls)



9670



9671



9638



9237

For display copy, includes 1 roll of recording paper, Power supply AC Adapter 9671

When purchasing the PRINTER 9670, please also purchase the AC ADAPTER 9671. To connect to the 3390, please purchase the RS-232C CABLE 9638.

## Factory options (please specify at the time of order)

MOTOR TESTING OPTION 9791  
 D/A OUTPUT OPTION 9792  
 MOTOR TESTING & D/A OUTPUT OPTION 9793

## Ordering Information

### POWER ANALYZER 3390

Accessories: Instruction Manual x 1, Measurement Guide x 1, Power cord x 1, USB cable x 1, D-sub connector x 1 (when 9792 or 9793 is installed), Color label x 2

**Note:** Dedicated PC application software and communication command manual are available for the 3390. Please download them from the HIOKI website.

Please purchase separately-sold voltage cord and current sensor for measurements. A HIOKI-issued PC card is also necessary in order to save measured data.

### Combination example 1.

General measurements (Three-phase three-wire (3P3W3M) single-circuit)  
 3390 x 1 + 9438-50 (voltage cord) x 3 + 9272-10 (200 A sensor) x 3 + 9729 (1 GB card) x 1 + 9794 case x 1



3390x1



9438-50x3



9272-10x3



9729x1



9794x1

### Combination example 2.

Inverter input and output evaluation and measurements (Three-phase three-wire (3P3W2M) two-circuit)  
 3390 x 1 + 9438-50 (voltage cord) x 4 + 9709 (500 A sensor) x 4 + 9729 (1 GB card) x 1 + 9794 case x 1



3390x1



9438-50x4



9709x4



9729x1



9794x1

### Combination example 3.

Motor evaluation and measurements (DC input / three-phase motor evaluation (DC, 3P3W3M measurements))  
 3390 x 1 + 9793 (motor and D/A option) + 9438-50 (voltage cord) x 4 + 9709 (500 A sensor) x 4 + 9729 (1 GB card) x 1



3390x1



9793x1



9438-50x4



9709x4



9729x1

# HIOKI

HIOKI E. E. CORPORATION

### HEAD OFFICE :

81 Koizumi, Ueda, Nagano, 386-1192, Japan  
 TEL +81-268-28-0562 / FAX +81-268-28-0568  
 E-mail: os-com@hioki.co.jp

### HIOKI USA CORPORATION :

6 Corporate Drive, Cranbury, NJ 08512 USA  
 TEL +1-609-409-9109 / FAX +1-609-409-9108  
 E-mail: hioki@hiokiusa.com

HIOKI (Shanghai) Sales & Trading Co., Ltd. :  
 1608-1610 Shanghai Times Square Office, 93 Huai Hai Zhong Road, Shanghai, P.R.China POSTCODE: 200021  
 TEL +86-21-6391-0090/0092 FAX +86-21-6391-0360  
 E-mail: info-sh@hioki.com.cn

### Beijing Office :

A-2602 Freetown, 58 Dong San Huan Nan Road Beijing, P.R.China POSTCODE: 100022  
 TEL +86-10-5867-4080/4081 FAX +86-10-5867-4090  
 E-mail: info-bj@hioki.com.cn

### Guangzhou Office :

Room A-3206, Victory Plaza Services Center, No.103, Tiyyuxi Road, Guangzhou, P.R.China POSTCODE: 510620  
 TEL +86-20-38392673/2676 FAX +86-20-38392679  
 E-mail: info-gz@hioki.com.cn

DISTRIBUTED BY