PRODUCT BRIEF*


AHA3422 StarLite

16 MBYTES/SEC LOSSLESS DECOMPRESSOR IC

AHA3422 is a high speed lossless decompression coprocessor IC for the hardcopy systems on many standard platforms, including the PCI Bus. The device offers a low cost decompression only solution for under 30 ppm printers or 50 ppm copiers at 1200 dpi.

High speed decompression, flexible interfaces and advanced banding support make this a unique solution for Raster Image Processing (RIP) controller designs. Advanced banding support handles blank, uncompressed and compressed bands. Scan line and record length counters accommodate various print resolutions and band buffer sizes.

Software simulation and an analysis of the algorithm for printer and copier images of various complexity are available for evaluation.

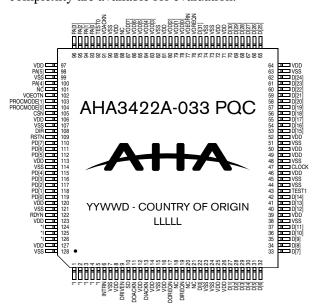

NOTES: NC = No Connect; *I = Connect to VDD or VSS YYWWD = DATE CODE: LLLLL = LOT NUMBER

FEATURES

PERFORMANCE:

- 16 MBytes/sec data rate
- 132 MBytes/sec burst data rate over a 32-bit data bus
- 33 MBytes/sec burst rate, 16 MBytes/sec sustained synchronous 8-bit video out port
- Average 15 to 1 compression ratio for 1200 dpi bitmap image data
- Advanced banding support

FLEXIBILITY:

- Big Endian or Little Endian; 32 or 16-bit bus width and data bit/byte reordering for duplex printing support
- Programmable Record Length, Record Count and Scan Length Registers may be prearmed
- Scan line length up to 2K bytes
- Interfaces directly with various Motorola 68xxx and Cold FIRE and Intel i960 processors
- Pass-through mode passes raw data through the decompression engine

SYSTEM INTERFACE:


- Single chip decompression solution—no external SRAM required
- Four internal 16 × 32-bit FIFOs
- Maskable interrupts
- Tristatable outputs to facilitate board level testing
- Low power modes
- Optional counter checks errors in decompression
- Software emulation program available
- 128 pin quad flat package

APPLICATIONS

- Digital copiers
- Printer controllers
- Multifunction printers and copiers



Figure 1: AHA3422 Block Diagram

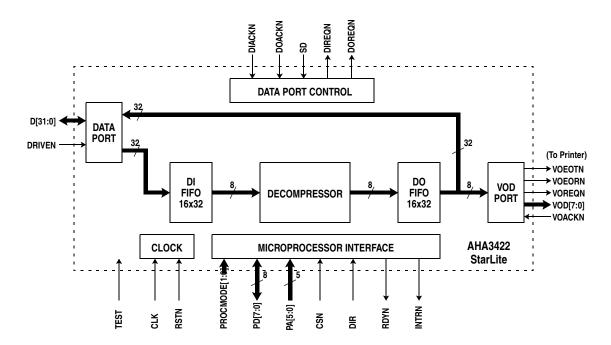

FUNCTIONAL DESCRIPTION

The coprocessor device has two external high speed synchronous data ports each capable of transferring once every 33 MHz clock. These are a 32-bit bidirectional data port and an 8-bit Video Output Data (VOD) port. The data port is capable of transferring up to 132 MBytes/sec. The VOD is capable of up to 33 MBytes/sec.

Decompression data is accepted through the data port, buffered in the Decompression Input FIFO (DI FIFO), and decompressed. The output data is made available on the data port via the Decompression Output FIFO (DO FIFO) or optionally on the 8-bit Video Output port. The decompression engine runs on the 33 MHz clock and is capable of processing an uncompressed byte every other clock, i.e. 16 MBytes/sec.

The two FIFOs are organized as 16×32 each. For data transfers through the two ports, the "effective" FIFO widths differ according to their data bus widths.

Data transfer is synchronous over the data ports functioning as DMA masters. To initiate a transfer into or out of the Video port, the device asserts VOREQN, the external device responds with VOACKN and begins to transfer data over the VOD bus on each succeeding rising edge of the clock until VOREQN is deasserted. The data port relies on the FIFO Threshold settings to determine the transfer.

SYSTEM APPLICATION

The device is intended for memory intensive applications requiring a hardware decompression device, such as high resolution copiers or printers. The part is typically used in systems where StarLite compression is performed either in software or in another StarLite compression device. It may also be used in systems requiring multiple decompressors.

StarLite IMAGE COMPRESSION RESULTS - 1200 x 1200 DPI


Uncompressed file size = 16 MBytes; Image dimensions = $10200 \times 13200 \text{ pels}$

FONTS - Simple Text

the total energy density a proportional to the amplitude represent. For extracting near we have $dE = -2\pi e^{-2\pi i t}$	the total energy density is peoporticed to the emplitude operand. For a constituty were we have of E.	Po total energy density is proportional to the amplitude spaces of Port providing ware for law of E
$\frac{dx}{dx} = \mu \omega L_1 \cos (\kappa x - \omega x)$	$\frac{dE}{dx} = \mu \mathbf{u}^{2} \mathbf{Z}_{+} \cos^{2}(kx - \mathbf{n}t)$	$\frac{dE}{dx} = \mu \omega^{1} Z_{0} \cos^{2}(kx - \omega t)$
the total energy density in proportional to the amplitude asymmet. Fur a transfling water we have	FOR DOTTE OF ACTION, NEWS TO A PER TRANSPORT WHICH IS, the total energy density to proper densit on the amplitude opening. For a condition was no large	FOR SICTS STANDARD WANTED AND TOWNS LINE YOUR fire treat energy density to proportional to the implicate equated. For a tensing most we upon
$\frac{dE}{dx} = \mu \omega^2 Z_4 \cos^2(kx - \omega t)$	$\frac{dE}{dx} = \mu \omega^2 Z_0 \cos^2(kx - \omega \epsilon)$	$\frac{dE}{dx} = \mu \omega^{1} Z_{\odot} \cos^{2}(kx - \omega t)$
for full shocky was and travelling money, the total energy dessity is proportional to she	For half-stending warm and travelling vacus, He conditioning dentity is proportional to As	For both standing warm and standing warm, the total energy density is propositional as the
nepřitede squared. For a travelling wave we have $\frac{dE}{dx} = \mu \cos^2 \mathbf{Z}_{\phi} \cos^2 (kx - \omega_d)$	employer spacet. For a transiting ware to have $\frac{dE}{dx} = \mu \cos^2 Z_z \cos^2 (kx - \omega t).$	angulate squared. For a concluding ware so have $\frac{dE}{dx} = \mu \sin^{3}Z_{ij} \cos x^{2}(kx - \sin x)$
		**
For both standing waves and providing waves, the total energy density is proportional to the emplitude squared. For a travelling wave we have		For both standing wines and morelling warse, the first energy density is proportional in the amplitude opened. For a trivialing some we have
$\frac{dE}{ds} = \mu \omega^2 Z_{\psi} \cos^2(kx - \omega t)$	$\frac{dE}{dx} = \mu \cos^2 Z_a \cos^2 (kx - \omega r)$	$\frac{dE}{dx} = \mu \omega^2 Z_0 \cos^2(kx - \omega t)$
For both shouling never and travelling seasor, the total energy density is propertional to the capitals spared. For a traveling was no ten	For short manding recent and constitute sectors, the first energy density is proportional to the augitude expects. The a twelling years in term	For both standing values and sounding somes, the held energy density is proportional to the argifule spaced. For a breaking ware to have
$\frac{dE}{dx} = \mu \omega^2 Z_0 \cos^2(kx - \omega t)$	$\frac{dE}{dx} = \mu \omega^{3} Z_{p} \cos^{3}(kx - \omega t)$	$\frac{dE}{dx} = \mu m^2 Z_0 \cos^2(kx - mt)$
For both standing waves and travelling source, the total energy density is proportional to the amplitude squared. For a travelling source we have $\frac{dE}{dx} = \mu \omega^2 Z_0 \cos^2(kx - \omega r)$	For both standing winns, and assembling manus, the both energy density in proportional to that the section of passes. For a controlling function have $\frac{dE}{dx} = \mu \otimes {}^{\dagger} Z_{\pm} \cos {}^{\dagger} (kx - \omega_{\delta})$	For both standing moves and travelling various the scall energy distrily in proportional to the standards exposed. Over the weeking move we have $\frac{dE}{dx} = \mu \Omega ^3 Z_{+} \cos^3(kx - \omega z)$
GA For both standing supery and transfling supery.	fix For both shading wares and instelling eases,	dix For help observed money and beguning money.
the total energy density is proportional as the amplitude squared. For a travelling wave we has	the total energy formity is propertional to the	the lotal energy density is proportional to the ve simplified request. For a transfer owner we have
$\frac{dE}{dx} = \mu \omega^2 Z_s \cos^3(kx - \omega \epsilon)$	$\frac{dE}{ds} = \mu m^2 \mathbf{Z}_0 \cos^2(kx - \omega t)$	$\frac{dE}{dx} = \mu \cos^2 Z_{\psi} \cos^2 (kx - \omega t)$
The best according source and corolling source, in and sony study is proposed in the corollines squared. For a travelling source we have $\frac{dE}{dx} = 100^{-2} Z_{\perp} \cos^2(kx - \omega x)$	Per harholder water and conciling words, the standard description is proportional to the B explaint equand. For a transfer, such as the $\frac{dE}{dx} = \mu \sin^2 Z_{\odot} \cos^4 (kx - \omega_B)$	Pix both standing worse and standing waves, the total energy depthy is proportional to to amplitude account. For a twending more we have dE
ds = per Z ₁ cos (ex - ur)	$\frac{dx}{dt} = \ln m \cdot \nabla^{\alpha} \cos \alpha (\pi x - m)$	$\frac{dE}{dx} = \mu \omega^{2} Z_{0} \cos^{2}(kx - \omega s)$
For both standing waves and travelling waves, the travel energy density is proportional to the amplitude equated. For a travelling wave we have $\frac{dE}{dx} = \mu e a^2 Z_0 \cos^2(kx - e a \epsilon)$	FOR THE THROUGH OF THE DESCRIPTION OF THE PROPERTY OF THE PRO	For both modely warrs and counting traves, the total casety benefit is propertised to the squared. For a investigation we have $\frac{dE}{dx} = \mu \varpi^2 Z_0 \cos^2(kx - \omega t)$
We belt standing waves and travelling waves, the total carryer density is preparational to the applicable approach in a constraing wave we have $\frac{dE}{dx} = \mu \Omega^{-1}Z_{0} \cos^{-1}(kx-mz)$	For both receding have and considing nature, the field energy details in programmed in the case of the special parts are lossed $\frac{dE}{dX} = \mu \text{EV}^2 Z_{ij} \text{cm}^{2} \{kx - 497\}$	For high Minday waves and startling varies, the total control of startly is proportional to the startling startling startling areas to high $\frac{dE}{dx} = \mu \varpi^2 Z_\phi \cos^2(kx - \omega r)$

Output File Size = 783,848 Compression Ratio = 21.5

MATH - Simple Text and Lineart




Output File Size = 79,245 Compression Ratio = 212.4

MP - Text and Simple Graphics




Output File Size = 86,525 Compression Ratio = 194.5

BENCH2 - Text and Graphics with Pictorials




Output File Size = 424,995 Compression Ratio = 39.6

BALLS - Complex Graphics with Pictorials



Output File Size = 3,665,167 Compression Ratio = 4.6

DECOMPRESSOR FOR MID-RANGE MULTIFUNCTION COPIER/PRINTER APPLICATIONS - AN EXAMPLE

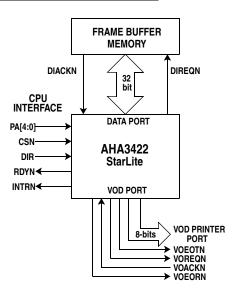

ABOUT AHA

Comtech AHA Corporation (AHA) develops and markets superior integrated circuits, boards, and intellectual property core technology for communications systems architects worldwide. AHA has been setting the standard in Forward Error Correction and Lossless Data Compression technology for many years and provides flexible, cost-effective solutions for today's growing bandwidth and reliability challenges. Comtech AHA Corporation is a wholly owned subsidiary of Comtech Telecommuncations Corp. (NASDAQ: CMTL). For more information, visit www.aha.com.

ORDERING INFORMATION

PART NUMBER	DESCRIPTION
AHA3422A-033 PQC	16 MBytes/sec Lossless Decompressor IC



A subsidiary of Comtech Telecommunications Corporation