


AHA3431 StarLite

SIMULTANEOUS COMPRESSOR/DECOMPRESSOR IC, 3.3V

AHA3431 is a high speed lossless compression coprocessor IC for the hardcopy systems on many standard platforms. The AHA3431 is functionally backward compatible to the AHA3411.

Simultaneous compression and decompression, flexible interfaces and advanced banding support make this a unique solution for high performance Raster Image Processing (RIP) controller designs. Advanced banding support handles blank, uncompressed and compressed bands during decompression mode. Scan line and record length counters accommodate various print resolutions and band buffer sizes.

Software simulation and an analysis of the algorithm for printer and copier images of various complexity are available for evaluation.

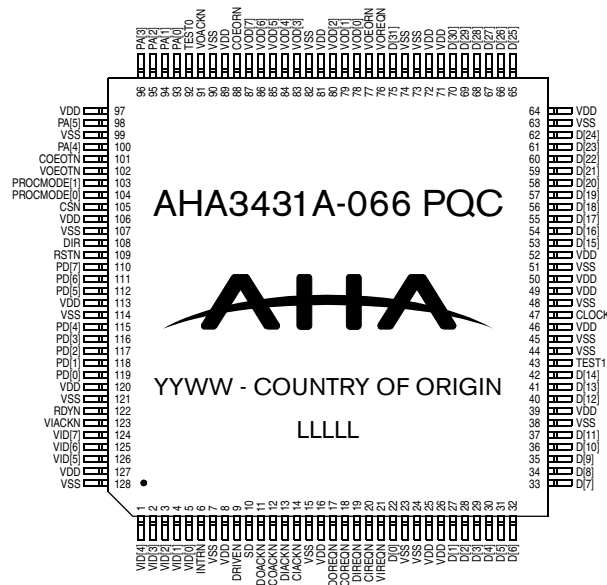

NOTE: YYWW = DATE CODE, LLLLL = LOT NUMBER

FEATURES

PERFORMANCE:

- 66 MBytes/sec compression/decompression rates
- 264 MBytes/sec burst data rate over a 32-bit data bus
- 66 MBytes/sec synchronous optional 8-bit video in and video out ports
- Simultaneous compression and decompression at full bandwidth
- Average 15 to 1 compression ratio for 1200 dpi bitmap image data
- Advanced banding support

FLEXIBILITY:

- Big Endian or Little Endian; 32 or 16-bit bus width and data bit/byte reordering for duplex printing support
- Programmable Record Length, Record Count and Scan Length Registers may be prearmed
- Scan line length up to 2K bytes
- Interfaces directly with various Motorola 68xxx and Cold FIRE and Intel i960 embedded processors
- Pass-through mode passes raw data through compression and decompression engines

SYSTEM INTERFACE:

- Single chip compression/decompression solution—no external SRAM required
- Four internal 16 × 32-bit FIFOs
- Maskable interrupts
- Tristatable outputs to facilitate board level testing


OTHERS:

- Low power modes
- Optional counter checks errors in decompression
- Software emulation program available
- 128 pin quad flat package
- 3.3V operation
- RoHS compliant

APPLICATIONS

- Digital copiers
- Printer controllers
- Multifunction printers and copiers

Figure 1: AHA3431 Block Diagram

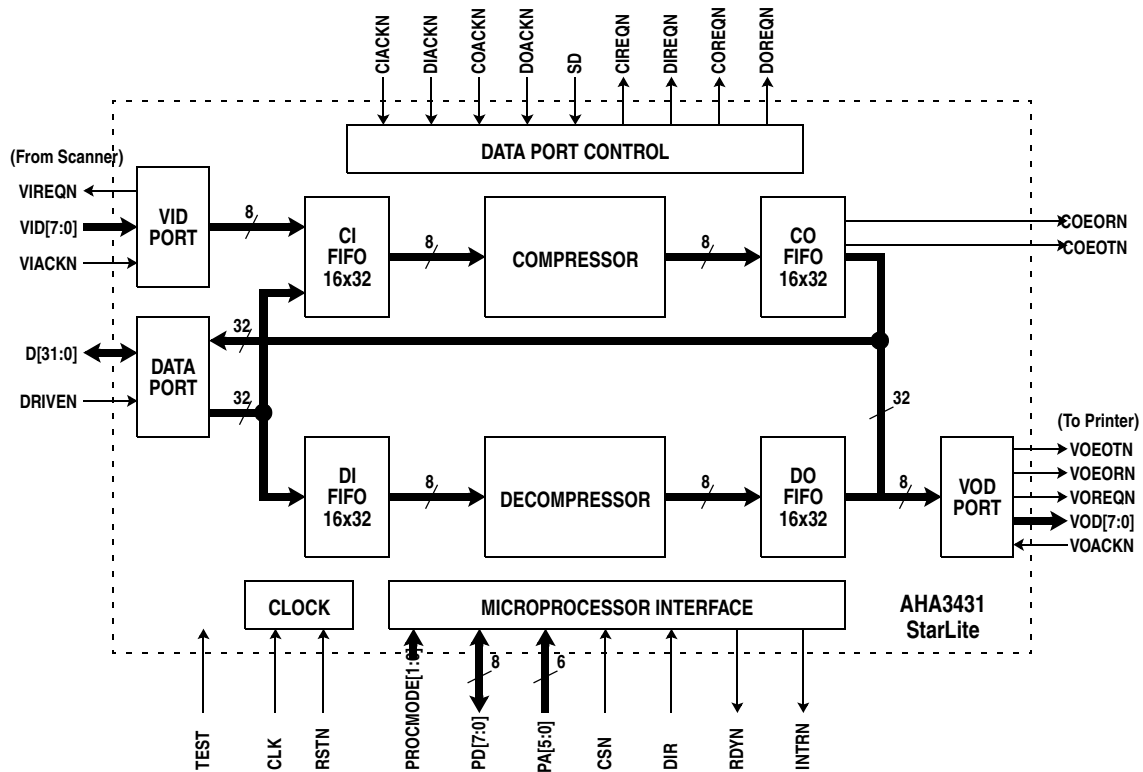

FUNCTIONAL DESCRIPTION

The coprocessor device has three external high speed synchronous data ports each capable of transferring once every clock. These are a 32-bit bidirectional data port, an 8-bit Video Input Data (VID) port and a Video Output Data (VOD) port. The data port is capable of transferring up to 32 bits per clock. The VID and VOD are also capable of one transfer per clock.

The device accepts uncompressed data through the data port or optionally through the 8-bit VID port into its Compression In FIFO (CI FIFO). Compressed data is available through the data port via the Compressed Output FIFO (CO FIFO). The sustained data rate through the compression engine is 66 MBytes/sec.

Decompression data is accepted through the data port, buffered in the Decompression Input FIFO (DI FIFO), and decompressed. The output data is made available on the data port via the Decompression Output FIFO (DO FIFO) or optionally on the 8-bit Video Output port. The decompression engine runs on the 66 MHz clock and is capable of processing an uncompressed byte every clock.

The four FIFOs are organized as 16×32 each. For data transfers through the three ports, the “effective” FIFO widths differ according to their data bus widths.

Data transfer for compression or decompression is synchronous over the three data ports functioning as DMA masters. To initiate a transfer into or out of the Video ports, the device asserts VxREQN, the external device responds with VxACKN and begins to transfer data over the VID or VOD busses on each succeeding rising edge of the clock until VxREQN is deasserted. The data port relies on the FIFO Threshold settings to determine the transfer.

Note: x is referred to I or O.

SYSTEM APPLICATION


The device is intended for memory intensive applications, such as digital copiers or printers. These applications require the simultaneous compression and decompression capability of the device. Copiers use this feature to feed the compressed bit maps through the decompressor to the printer engine while another process uses the compressor to input and compress scanned images. Movement for both processes is typically controlled by a DMA controller that is programmed by the local microprocessor.

StarLite IMAGE COMPRESSION RESULTS - 1200 x 1200 DPI

Uncompressed file size = 16 MBytes; Image dimensions = 10200 × 13200 pels


FONTS - Simple Text

Output File Size = 86,525
Compression Ratio = 194.5

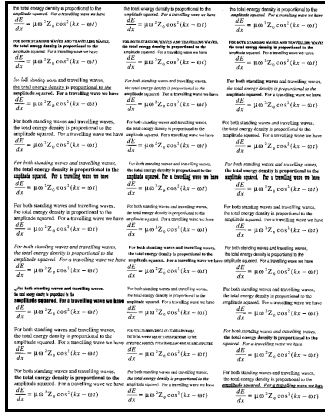


Output File Size = 783,848
Compression Ratio = 21.5

BENCH2 - Text and Graphics with Pictorials

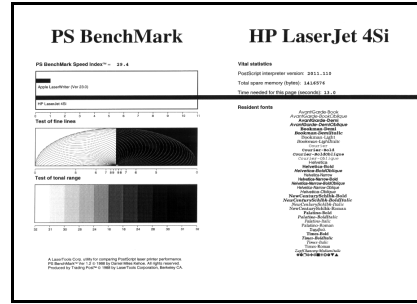


Output File Size = 424,995
Compression Ratio = 39.6

MATH - Simple Text and Linear

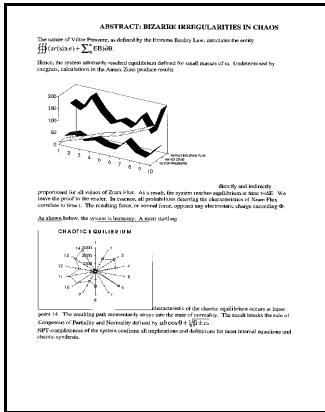


Output File Size = 79,245
Compression Ratio = 212.4

BALLS - Complex Graphics with Pictorials

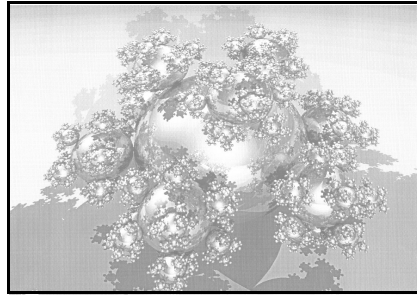

Output File Size = 3,665,167
Compression Ratio = 4.6


MP - Text and Simple Graphics

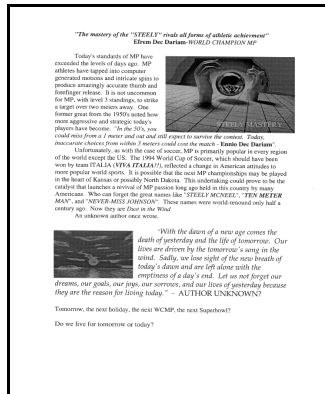

"With the dawn of a new age comes the death of yesterday and the life of tomorrow. Our lives are driven by the tomorrow's song in the wind. Sadly, we live right of the new breaks of today's dawn and are left alone with the emptiness of a day's end. Let us not forget our dreams, our goals, our joys, our sorrows, and our lives of yesterday because they are the reason for living today." - AUTHOR UNKNOWN?

Tomorrow, the new today, the new WCMF, the new Superhero?
Do we live for tomorrow or today?

COMPRESSOR/DECOMPRESSOR FOR MID-RANGE MULTIFUNCTION COPIER/PRINTER APPLICATIONS - AN EXAMPLE

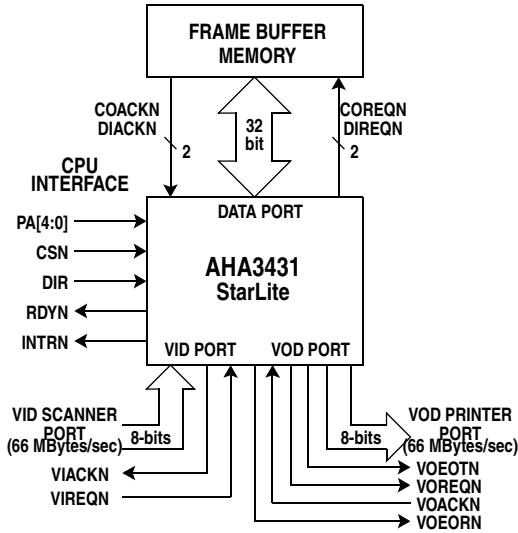

ABOUT AHA

Comtech AHA Corporation (AHA) develops and markets superior integrated circuits, boards, and intellectual property core technology for communications systems architects worldwide. AHA has been setting the standard in Forward Error Correction and Lossless Data Compression technology for many years and provides flexible, cost-effective solutions for today's growing bandwidth and reliability challenges. Comtech AHA Corporation is a wholly owned subsidiary of Comtech Telecommunications Corp. (NASDAQ: CMTL). For more information, visit www.aha.com.

ORDERING INFORMATION

PART NUMBER	DESCRIPTION
AHA3431A-050 PQC	50 MBytes/sec Simultaneous Compressor/Decompressor IC
AHA3431A-066 PQC	66 MBytes/sec Simultaneous Compressor/Decompressor IC



A subsidiary of Comtech Telecommunications Corporation

1126 Alturas Drive ■ Moscow ID 83843-8331

tel: 208.892.5600 ■ fax: 208.892.5601

e-mail: sales@aha.com ■ www.aha.com