

NON-ISOLATED DC/DC CONVERTERS


12V Input / 1.5V – 5.0V Output / 3A



BP02x7AH-03A

S7AH-03A / V7AH-03A Series

- Nonisolated
- Compact, low profile surface mount package
- Fixed frequency
- High efficiency means less power dissipation
- Excellent thermal performance
- Optimized for cost
- Remote on/off
- Undervoltage lockout (UVLO)
- Over current and short circuit protection

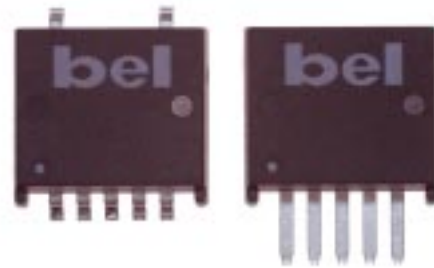

Description

The Bel S7AH-03A and V7AH-03A modules are a series of non-isolated, step down DC/DC power converters that operate from a nominal 12V source. These converters are available in a range of output voltages from 1.5V to 5.0V. They are packaged in a compact, overmolded package rated at 3A. Optional lead forming provides a vertical mount product for minimal footprint or a surface mount option for a very low profile. Standard features include remote on/off, over current and short circuit protection, and output voltage adjust. These products may be used almost anywhere low voltage silicon is employed and a 12V source is available. Typical applications include file servers, routers, line cards and other computing and communications equipment.

Applications

- Distributed power architectures
- Data networking equipment
- Telecommunications
- Computers and peripherals

Part Number Selection

Output Voltage	Input Voltage	Max. Output Current	Max. Output Power	Typical Efficiency	Part Number Surface Mount	Part Number Vertical Mount
5.0V	12V	3A	15W	91%	S7AH-03A500	V7AH-03A500
3.3V	12V	3A	9.9W	90%	S7AH-03A330	V7AH-03A330
2.5V	12V	3A	7.5W	88%	S7AH-03A250	V7AH-03A250
1.8V	12V	3A	5.4W	85%	S7AH-03A180	V7AH-03A180
1.5V	12V	3A	4.5W	84%	S7AH-03A150	V7AH-03A150

BP02x7AH-03A

Absolute Maximum Ratings

Parameter	Symbol	Min	Typical	Max	Unit
Continuous Input Voltage	Vin	-0.3		13.2	V
Output Enable Terminal Voltage	Vouten	-0.3		13.2	V
Ambient Temperature	Tamb	0		70	°C
Storage Temperature	Tstor	-40		125	°C

Note: Use beyond the maximum ratings may cause a reliability degradation of the DC/DC converter or may permanently damage the device.

Input Specifications

Parameter	Module	Symbol	Min	Typical	Max	Units
Operating Input Voltage	All	Vin	10.8		13.2	V
Input Current	5.0V 3.3V 2.5V 1.8V 1.5V	Iin			1.7 1.2 0.9 0.75 0.6	A
No Load Input Current	All				100	mA
Remote Off Input Current				3	10	mA
Input Reflected Ripple Current ¹	All			30		mA _{rms}
Input Reflected Ripple Current (P-P) ¹	All			140		mApk
I ² t Inrush Current Transient	All			0.005	0.01	A ² s
Turn On Voltage Threshold	All			9.4		V
Turn Off Voltage Threshold	All		8.0	9.0	10.0	V

Note: Input capacitance 270µF/16V, ESR = 0.03 Ω max at 100kHz @ 25° C.

1. With simulated source impedance of 500nH, 5Hz to 20MHz.

NON-ISOLATED DC/DC CONVERTERS

12V Input / 1.5V – 5.0V Output / 3A



BP02x7AH-03A

Output Specifications

Parameter	Module	Symbol	Min	Typical	Max	Units
Output Voltage Set Point ¹	5.0V	Vout	4.920	5.0	5.080	V
	3.3V		3.247	3.3	3.353	
	2.5V		2.460	2.5	2.540	
	1.8V		1.771	1.8	1.829	
	1.5V		1.476	1.5	1.524	
Load Regulation	5.0V			10	16.5	mV
	3.3V			10	16.5	
	2.5V			5	10	
	1.8V			5	10	
	1.5V			5	10	
Line Regulation	5.0V			10	16	mV
	3.3V			5	10	
	2.5V			3	5	
	1.8V			3	5	
	1.5V			3	5	
Regulation Over Temperature	5.0V			20	30	mV
	3.3V			12	25	
	2.5V			8	20	
	1.8V			5	10	
	1.5V			5	10	
Total Output Voltage Regulation	5.0V			40	62.5	mV
	3.3V			27	51.5	
	2.5V			16	35	
	1.8V			13	25	
	1.5V			13	25	
Output Ripple and Noise ²	All			40	100	mVp-p
Output Ripple and Noise ²	All			10	20	mVrms
Output Current Range	All	Iout	0		3	A
Output DC Current Limit	All	Ioutlim	3.6		7.5	A
Short Circuit Surge	All	Ioutsurge		0.35	0.7	A ² s
Turn on Time	All	Ton		12	20	ms
Overshoot at Turn On ³	All			0	3	%
Output Capacitance	All	Cout	0		1200	μF

Note: All specifications are typical at nominal input, full load at 25° C unless otherwise stated.

1. Vin = 12V, Iout = full load, Ta = 25° C.
2. 0 - 20 MHz, 0.1μF ceramic cap on output.
3. Overshoot at turn on output capacitance is 100μF.

BP02x7AH-03A

Output Specifications

Parameter	Module	Symbol	Min	Typical	Max	Units
Transient Response ⁴						
ΔV 50% to 100% of Max Load	5.0V			100	200	mV
Settling Time		Ts		40	80	μ s
ΔV 100% to 50% of Max Load				100	200	mV
Settling Time		Ts		40	80	μ s
Transient Response ⁴						
ΔV 50% to 100% of Max Load	3.3V			80	150	mV
Settling Time		Ts		40	80	μ s
ΔV 100% to 50% of Max Load				80	150	mV
Settling Time		Ts		40	80	μ s
Transient Response ⁴						
ΔV 50% to 100% of Max Load	2.5V			70	100	mV
Settling Time		Ts		40	80	μ s
ΔV 100% to 50% of Max Load				70	100	mV
Settling Time		Ts		40	80	μ s
Transient Response ⁴						
ΔV 50% to 100% of Max Load	1.8V			70	100	mV
Settling Time		Ts		40	80	μ s
ΔV 100% to 50% of Max Load				70	100	mV
Settling Time		Ts		40	80	μ s
Transient Response ⁴						
ΔV 50% to 100% of Max Load	1.5V			70	100	mV
Settling Time		Ts		40	80	μ s
ΔV 100% to 50% of Max Load				70	100	mV
Settling Time		Ts		40	80	μ s

Note: All specifications are typical at nominal input, full load at 25° C unless otherwise stated.

4. di/dt = 0.5A/1 μ S, Ta = 25° C without external load capacitance.

NON-ISOLATED DC/DC CONVERTERS

12V Input / 1.5V – 5.0V Output / 3A



BP02x7AH-03A

General Specifications

Parameter	Module	Symbol	Min	Typical	Max	Units
Efficiency ¹	5.0V	η	89	91		%
	3.3V		88	90		
	2.5V		86	88		
	1.8V		83	85		
	1.5V		82	84		
Switching Frequency	5.0V	Fsw	470	500	530	kHz
	3.3V		340	370	400	
	2.5V		270	300	330	
	1.8V		270	300	330	
	1.5V		270	300	330	
Output Voltage Trim Range ²	All		90		110	%
Weight	All			4.9		g

1. Vin=12V, full load and Ta=25° C.

2. See graphs on pages 11 - 13.

Control Specifications

Parameter	Module	Symbol	Min	Typical	Max	Units
Remote On/Off ³	All	Vouten				V
Signal Low (Unit Off)	All		-0.3		1	V
Signal High (Unit On)	All		2.8		13.2	V

3. With remote on/off pin 1 open, the module is on.








NON-ISOLATED DC/DC CONVERTERS

12V Input / 1.5V – 5.0V Output / 3A

BP02x7AH-03A

Efficiency Data

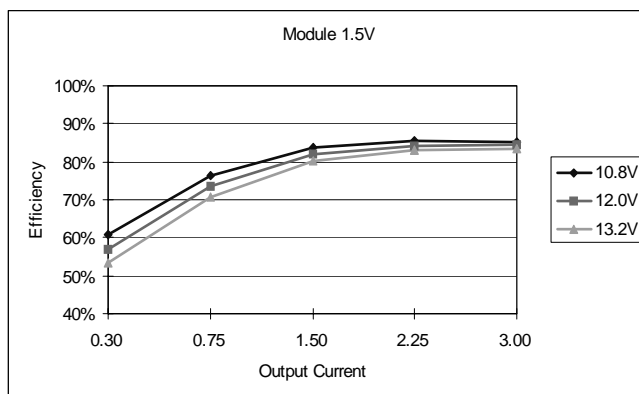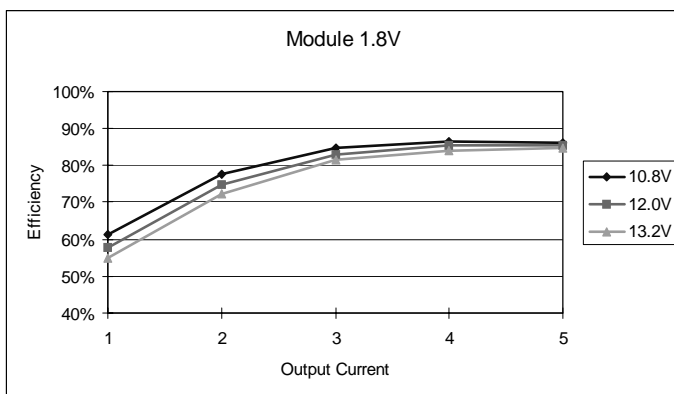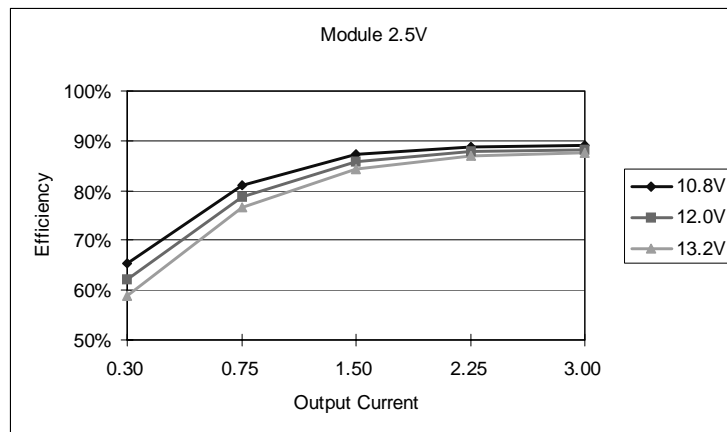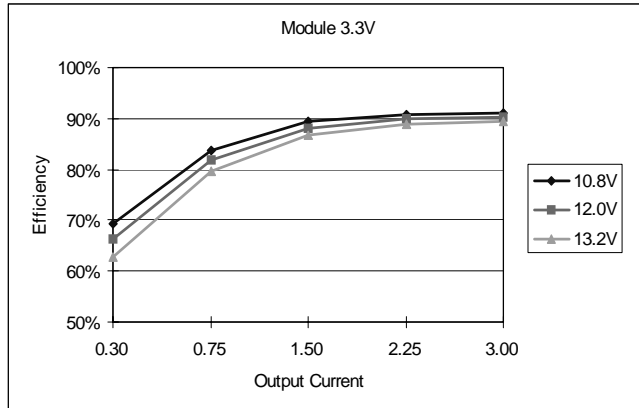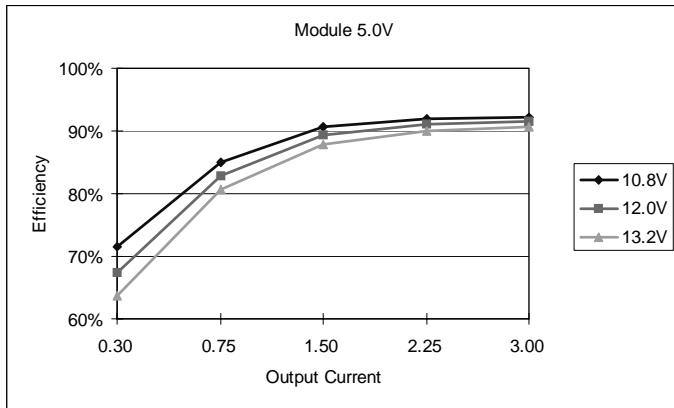

Note: On/off pin designed to work with an open collector/drain switch.

©2003 Bel Fuse Inc. Specifications subject to change without notice. 01.03

NON-ISOLATED DC/DC CONVERTERS

12V Input / 1.5V – 5.0V Output / 3A


bel

POWER PRODUCTS


BP02x7AH-03A

Ripple and Noise


0.1 μ F ceramic cap added at the output.

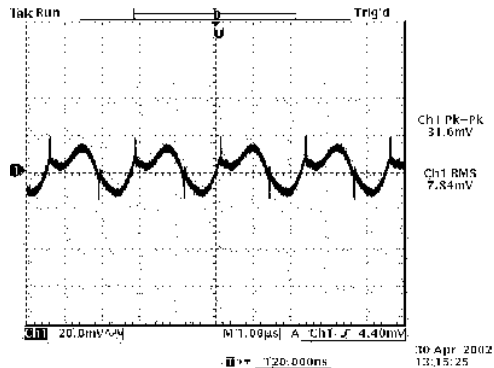


Ripple and noise at full load and 12Vdc input,
5.0Vdc output and $T_a=25^\circ\text{C}$

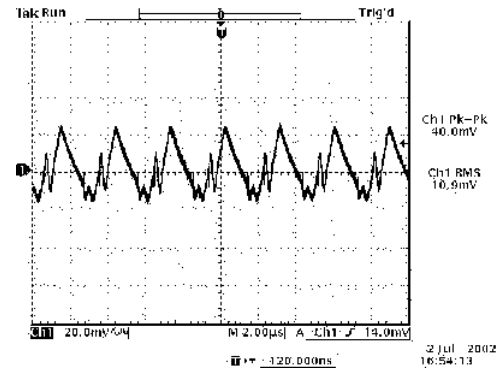


Ripple and noise at full load and 12Vdc input,
3.3Vdc output and $T_a=25^\circ\text{C}$

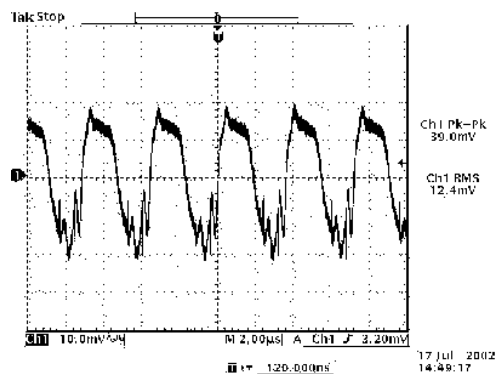

Ripple and noise at full load and 12Vdc input,
2.5Vdc output and $T_a=25^\circ\text{C}$

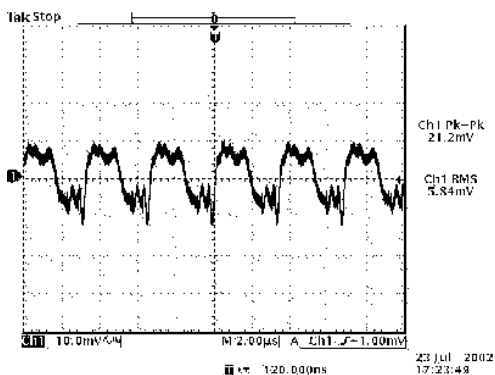

Ripple and noise at full load and 12Vdc input,
1.8Vdc output and $T_a=25^\circ\text{C}$

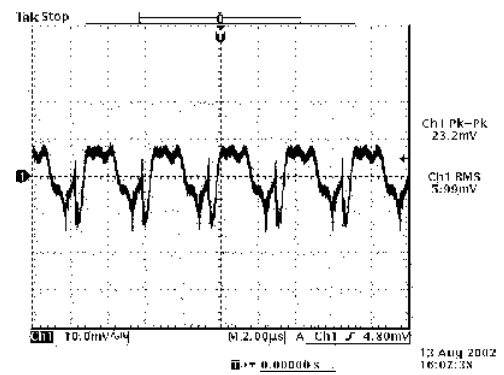

Ripple and noise at full load and 12Vdc input,
1.5Vdc output and $T_a=25^\circ\text{C}$




NON-ISOLATED DC/DC CONVERTERS

12V Input / 1.5V – 5.0V Output / 3A


BP02x7AH-03A

Transient Response


Transient response: $di/dt = 0.5A/\mu S$, no external load capacitance

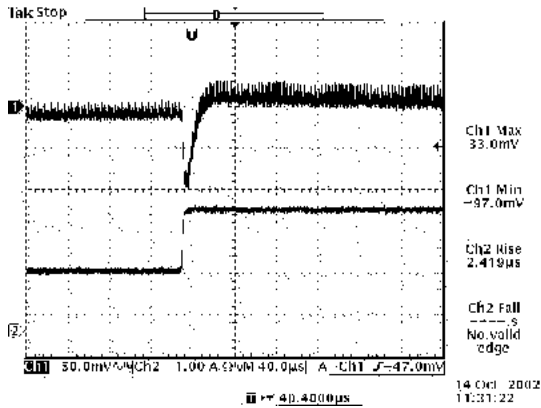


Vout=5.0V
50% to 100% load transients at 12V input and Ta=25° C

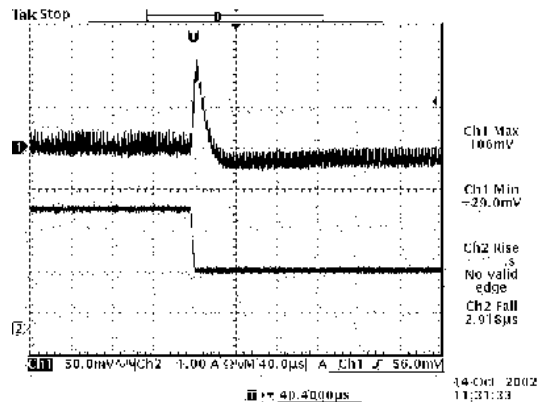

Vout=5.0V
100% to 50% load transients at 12V input and Ta=25° C

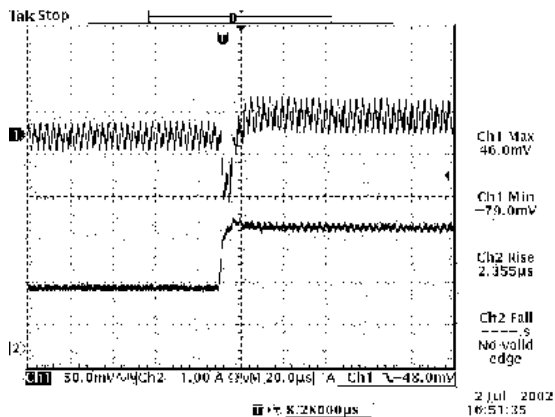

Vout=3.3V
50% to 100% load transients at 12V input and Ta=25° C

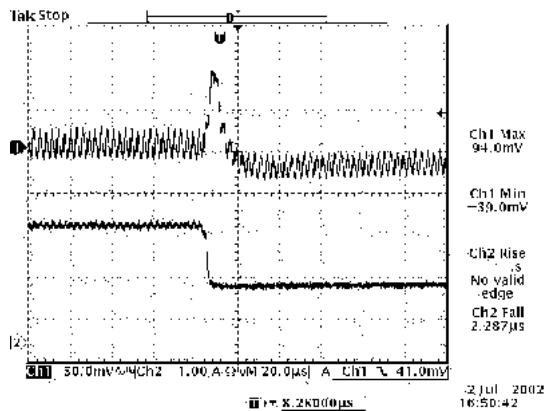

Vout=3.3V
100% to 50% load transients at 12V input and Ta=25° C

NON-ISOLATED DC/DC CONVERTERS

12V Input / 1.5V – 5.0V Output / 3A


bel

POWER PRODUCTS


BP02x7AH-03A

Transient Response


Transient response: $di/dt = 0.5A/\mu S$, no external load capacitance

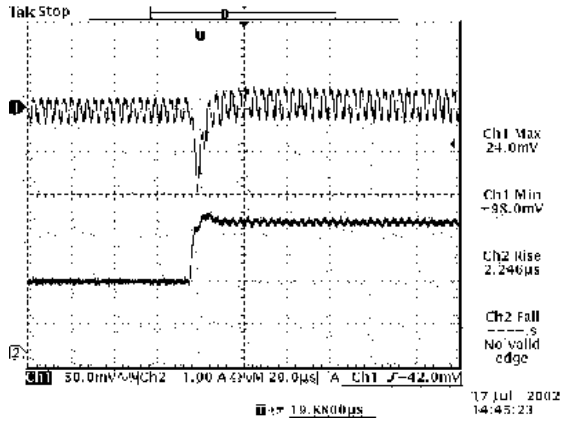


Vout=2.5V
50% to 100% load transients at 12V input and Ta=25° C

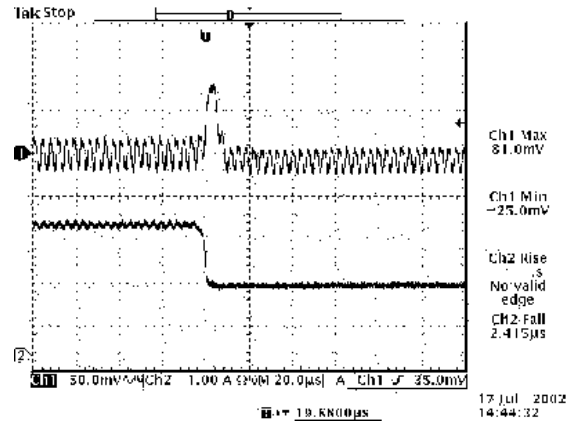

Vout=2.5V
100% to 50% load transients at 12V input and Ta=25° C

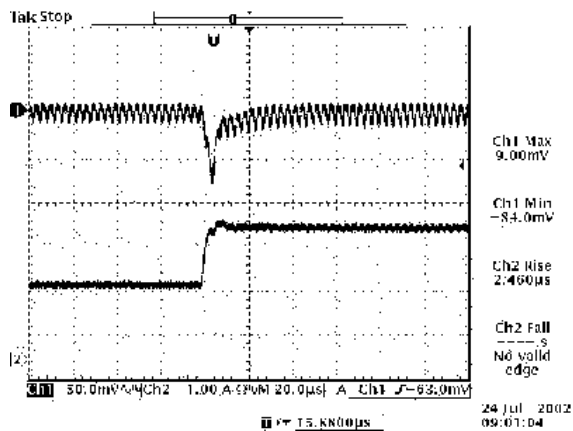

Vout=1.8V
50% to 100% load transients at 12V input and Ta=25° C

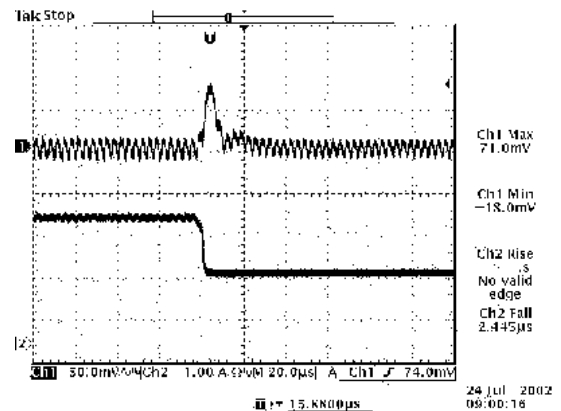

Vout=1.8V
100% to 50% load transients at 12V input and Ta=25° C




NON-ISOLATED DC/DC CONVERTERS

12V Input / 1.5V – 5.0V Output / 3A


BP02x7AH-03A

Transient Response

Transient response: $di/dt = 0.5A/\mu S$, no external load capacitance

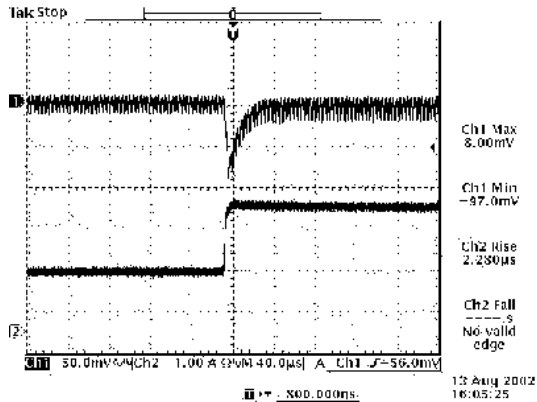


$V_{out}=1.5V$
50% to 100% load transients at 12V input and $T_a=25^\circ C$

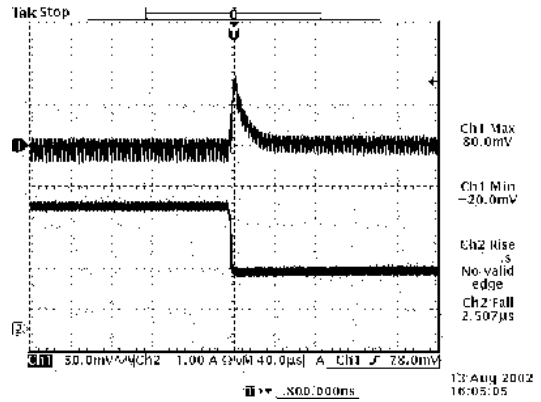

$V_{out}=1.5V$
100% to 50% load transients at 12V input and $T_a=25^\circ C$


Thermal Considerations

x7AH-03A500

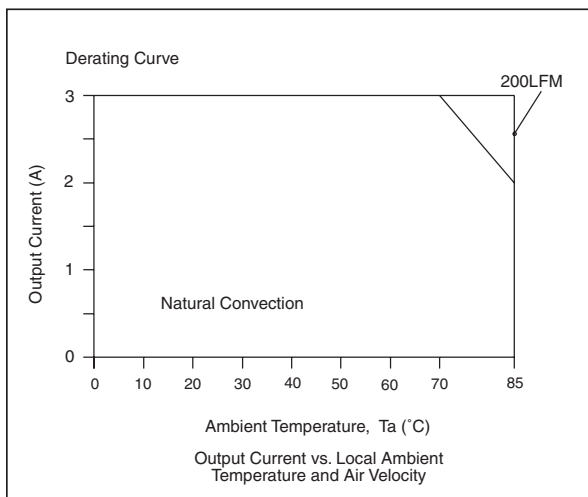

x7AH-03A150
x7AH-03A180

x7AH-03A250
x7AH-03A330

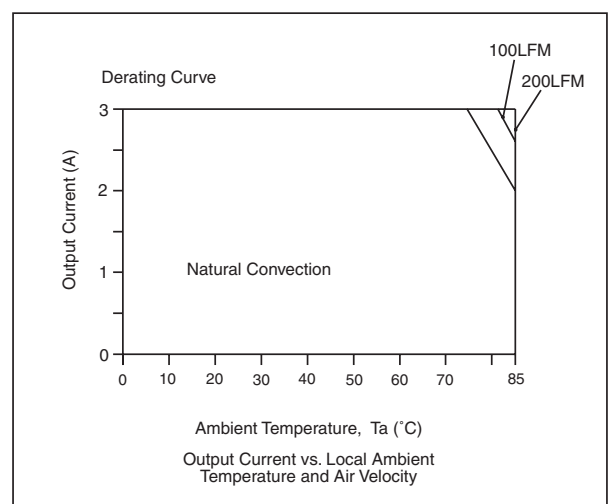

NON-ISOLATED DC/DC CONVERTERS


12V Input / 1.5V – 5.0V Output / 3A

bel
POWER PRODUCTS


BP02x7AH-03A

Output Voltage Set-Point Adjustment

Trim Down Test Circuit

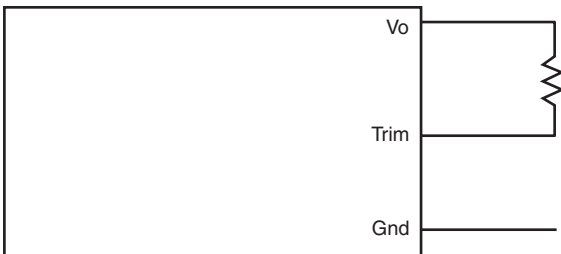


Trim Up Test Circuit

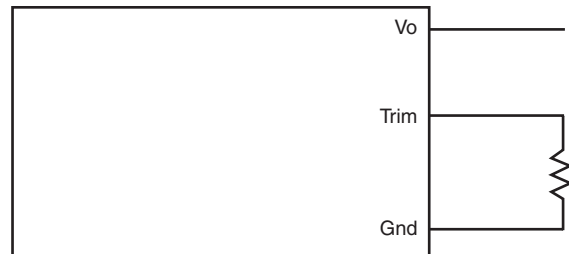


Output Voltage Set-Point Adjustment

x7AH-03A500 Trim Resistor Calculation

$$R_{\text{trim down}} = \left(\frac{23.703}{V_o - V_{o, \text{adj}}} - 13.87 \right) \text{ Kohm}$$

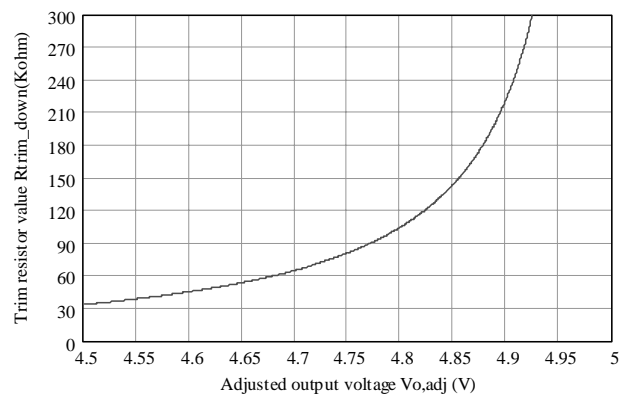

$$R_{\text{trim up}} = \left(\frac{4.496}{V_{o, \text{adj}} - V_o} - 8.25 \right) \text{ Kohm}$$

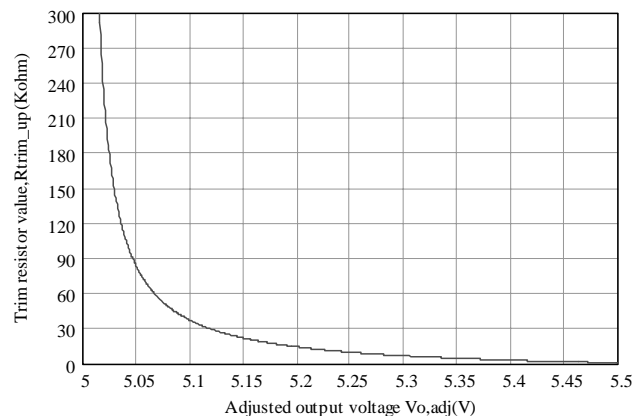


BP02x7AH-03A



Output Voltage Set-Point Adjustment

x7AH-03A330 Trim Resistor Calculation

$$R_{\text{trim down}} = \left(\frac{7.92}{V_o - V_{o, \text{adj}}} - 4.38 \right) \text{ Kohm}$$

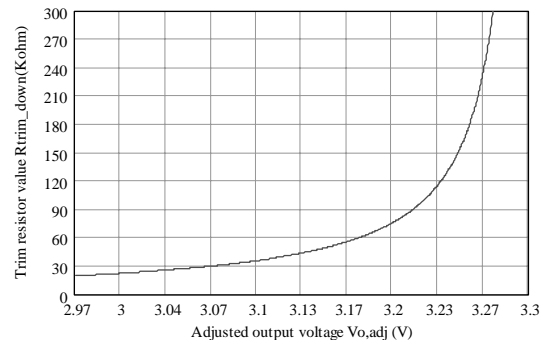


$$R_{\text{trim up}} = \left(\frac{2.536}{V_{o, \text{adj}} - V_o} - 1.21 \right) \text{ Kohm}$$

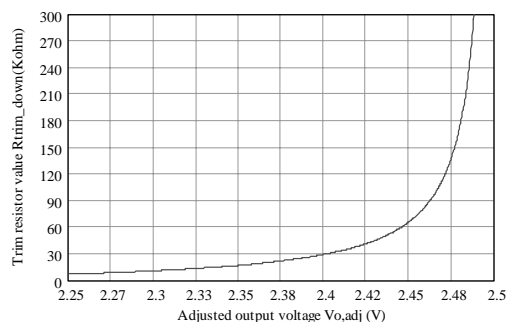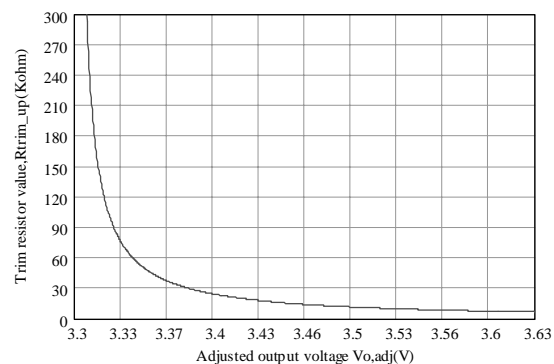

x7AH-03A250 Trim Resistor Calculation

$$R_{\text{trim down}} = \left(\frac{3.694}{V_o - V_{o, \text{adj}}} - 7.77 \right) \text{ Kohm}$$

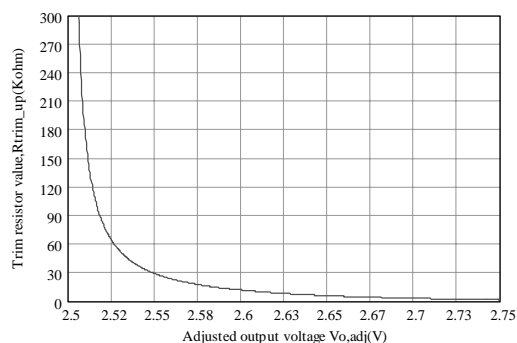

$$R_{\text{trim up}} = \left(\frac{1.72}{V_{o, \text{adj}} - V_o} - 5.62 \right) \text{ Kohm}$$

NON-ISOLATED DC/DC CONVERTERS

12V Input / 1.5V – 5.0V Output / 3A


bel
POWER PRODUCTS

BP02x7AH-03A



Output Voltage Set-Point Adjustment

x7AH-03A180 Trim Resistor Calculation

$$R_{\text{trim down}} = \left(\frac{3.849}{V_o - V_{o, \text{adj}}} - 19.23 \right) \text{ Kohm}$$

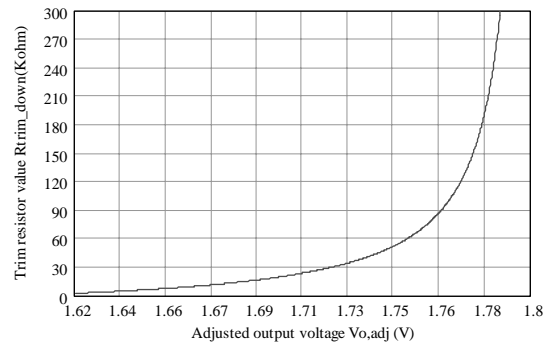


$$R_{\text{trim up}} = \left(\frac{3.064}{V_{o, \text{adj}} - V_o} - 15.4 \right) \text{ Kohm}$$

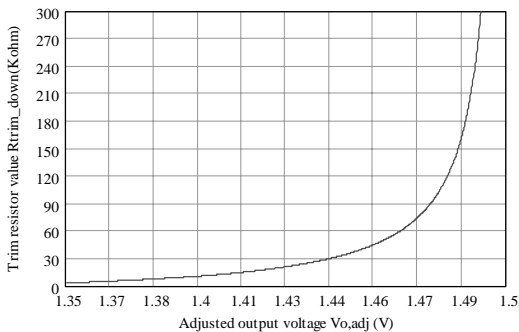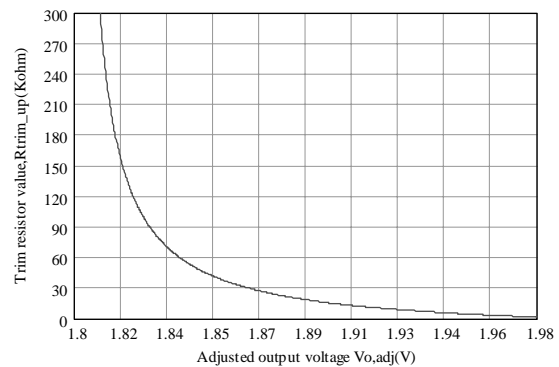

x7AH-03A150 Trim Resistor Calculation

$$R_{\text{trim down}} = \left(\frac{2.698}{V_o - V_{o, \text{adj}}} - 14.83 \right) \text{ Kohm}$$

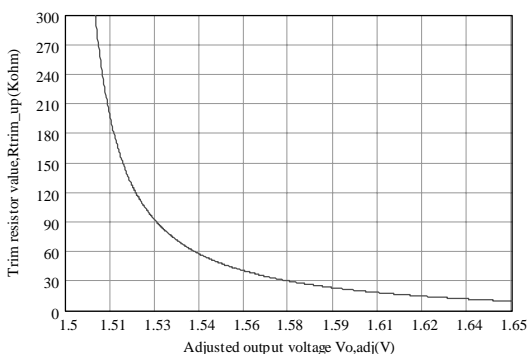

$$R_{\text{trim up}} = \left(\frac{3.064}{V_{o, \text{adj}} - V_o} - 11 \right) \text{ Kohm}$$




NON-ISOLATED DC/DC CONVERTERS

12V Input / 1.5V – 5.0V Output / 3A

BP02x7AH-03A


Mechanical

S7AH-03A

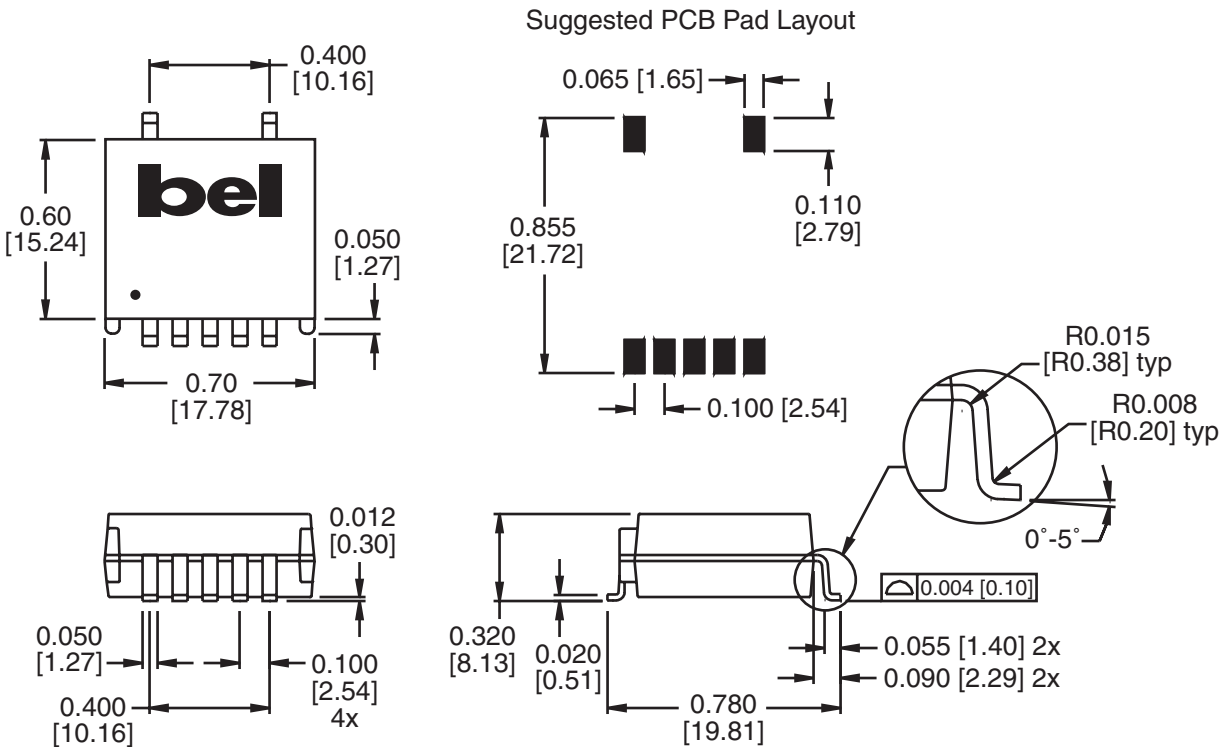

Dimensions are in inches [millimeters].
Standard dimension tolerance is ±0.005 [0.13] unless otherwise noted.

Pin	Function
1	Remote On/Off
2	+Vin
3	Ground
4	+Vo
5	Trim
6	No Connection
7	No Connection



NON-ISOLATED DC/DC CONVERTERS


12V Input / 1.5V – 5.0V Output / 3A

bel
POWER PRODUCTS

BP02x7AH-03A


Mechanical

V7AH-03A

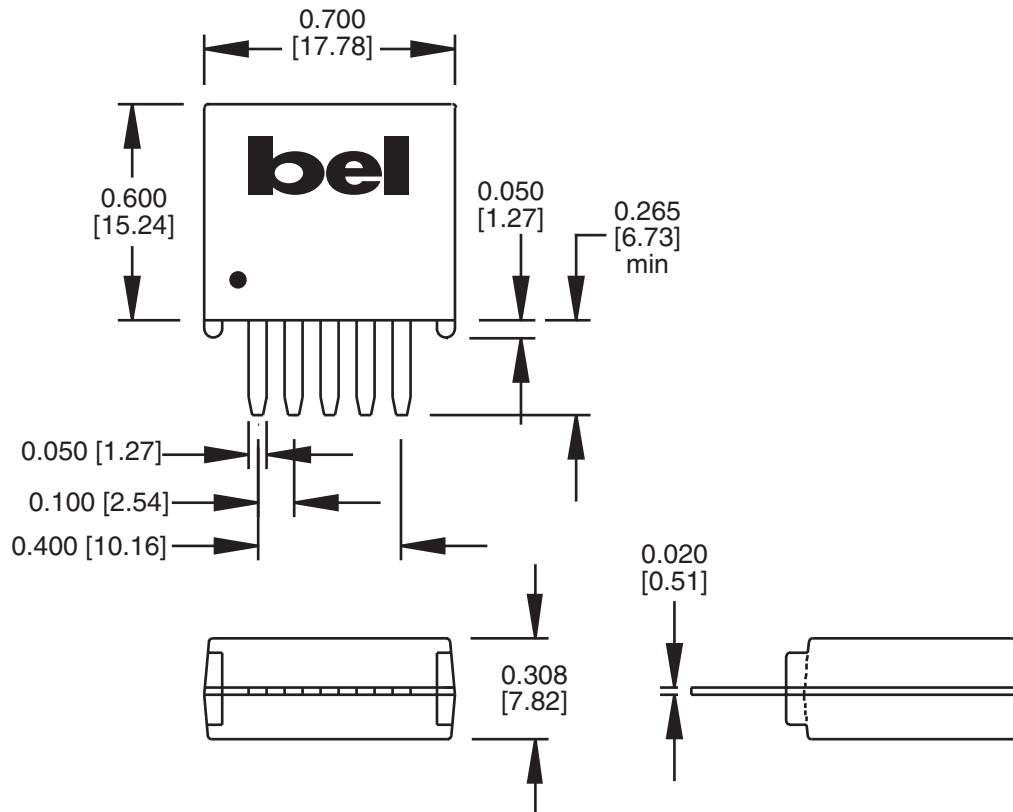

Dimensions are in inches [millimeters].
Standard dimension tolerance is ± 0.005 [0.13] unless otherwise noted.

Pin	Function
1	Remote On/Off
2	+Vin
3	Ground
4	+Vo
5	Trim

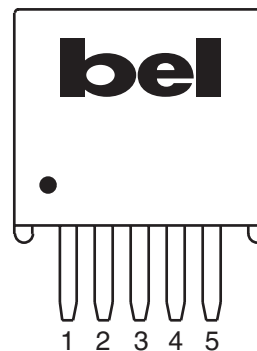

©2003 Bel Fuse Inc. Specifications subject to change without notice. 01.03

CORPORATE

Bel Fuse Inc.
206 Van Vorst Street
Jersey City, NJ 07302
Tel 201-432-0463
Fax 201-432-9542
www.belfuse.com

FAR EAST

Bel Fuse Ltd.
8F / 8 Luk Hop Street
San Po Kong
Kowloon, Hong Kong
Tel 852-2328-5515
Fax 852-2352-3706
www.belfuse.com

EUROPE

Bel Fuse Europe Ltd.
Preston Technology Management Centre
Marsh Lane, Suite G7, Preston
Lancashire, PR1 8UD, U.K. www.DataSheet4U.com
Tel 44-1772-556601
Fax 44-1772-888366
www.belfuse.com