




# OCTAL REGISTERED TRANSCEIVER, NON-INVERTING, 3-STATE

The MC74F543 Octal Registered Transceivers contain two sets of data flowing in either direction. Separate Latch Enable ( $\overline{LEAB}$ ,  $\overline{LEBA}$ ) and Enable ( $\overline{OEAB}$ ,  $\overline{OEBA}$ ) inputs are provided for each register to permit independent control of inputting and outputting in either direction of data flow. The MC74F543 has a noninverting data path. The A outputs are guaranteed to sink 20 mA while the B outputs are rated for 64 mA.

- Combines 74F245 and 74F373 Type Functions in One Chip
- 8-Bit Octal Transceiver
- Non-Inverting
- Back-to-Back Registers for Storage
- Separate Controls for Data Flow in Each Direction
- Glitchless Outputs During 3-State Power Up or Power Down Operation
- High Impedance Outputs in Power Off State
- A Outputs Sink 24 mA and Source 3.0 mA
- B Outputs Sink 64 mA and Source 15 mA
- See F544 for Inverting Version
- ESD Protection > 4000 Volts


## PIN ASSIGNMENT

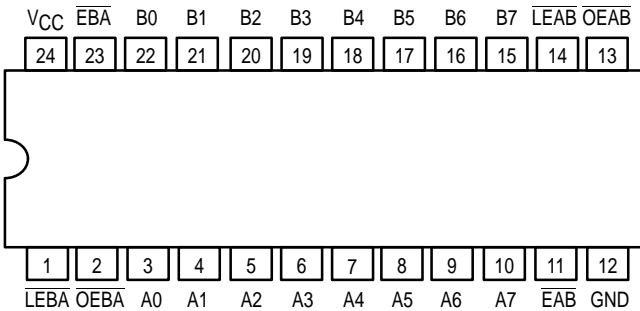


**MC74F543**

**OCTAL REGISTERED  
TRANSCEIVER,  
NON-INVERTING, 3-STATE**

**FAST™ SCHOTTKY TTL**



**N SUFFIX  
PLASTIC  
CASE 724-03**



**DW SUFFIX  
SOIC  
CASE 751E-03**

## ORDERING INFORMATION

MC74FXXXN Plastic  
MC74FXXXDW SOIC

## GUARANTEED OPERATING RANGES

Symbol	Parameter	Min	Typ	Max	Unit	
V <sub>CC</sub>	Supply Voltage	74	4.5	5.0	5.5	V
T <sub>A</sub>	Operating Ambient Temperature Range	74	0	25	70	°C
I <sub>OH</sub>	Output Current — High	74			-3.0/-15	mA
I <sub>OL</sub>	Output Current — Low	74			24/64	mA

# MC74F543

## FUNCTION TABLE

Inputs				Outputs	Status
$\overline{OE}X\overline{X}$	$\overline{E}X\overline{X}$	$\overline{LE}X\overline{X}$	Data		
H	X	X	X	Z	Outputs disabled
L	H	L	l	Z	Outputs disabled
L	H	L	h	Z	Data latched
L	L	H	l	L	Data latched
L	L	H	h	H	Data latched
L	L	L	L	L	Transparent
L	L	L	H	H	Transparent

H = HIGH voltage level; h = HIGH state must be present one set-up time before the LOW-to-HIGH transition of  $\overline{LE}X\overline{X}$  or  $\overline{E}X\overline{X}$  (XX = AB or BA); L = LOW Voltage Level; l = LOW state must be present one set-up time before the LOW-to-HIGH transition of  $\overline{LE}X\overline{X}$  or  $\overline{E}X\overline{X}$  (XX = AB or BA); X = Don't care; Z = HIGH impedance state.

## FUNCTIONAL DESCRIPTION

The MC74F543 contains two sets of eight D-type latches, with separate input and controls for each set. For data flow from A to B, for example, the A-to-B Enable ( $\overline{E}A\overline{B}$ ) Input must be LOW in order to enter data from A0–A7 or take data from B0–B7, as indicated in the Function Table. With  $\overline{E}A\overline{B}$  LOW, a LOW signal on the A-to-B Latch Enable ( $\overline{LE}A\overline{B}$ ) input makes the A-to-B latches transparent; a subsequent LOW-to-HIGH

transition of the  $\overline{LE}A\overline{B}$  signal puts the A latches in the storage mode and their outputs no longer change with the A inputs. With  $\overline{E}A\overline{B}$  and  $\overline{OE}A\overline{B}$  both LOW, the 3-State B output buffers are active and reflects the data present at the output of the A latches. Control of data flow from B to A is similar, but using the  $\overline{E}B\overline{A}$ ,  $\overline{LE}B\overline{A}$ , and  $\overline{OE}B\overline{A}$  inputs.

## DC CHARACTERISTICS OVER OPERATING TEMPERATURE RANGE (unless otherwise specified)

Symbol	Parameter		Limits			Unit	Test Conditions		
			Min	Typ	Max				
$V_{IH}$	Input HIGH Voltage		2.0			V	Guaranteed Input HIGH Voltage		
$V_{IL}$	Input LOW Voltage				0.8	V	Guaranteed Input LOW Voltage		
$V_{IK}$	Input Clamp Diode Voltage			-0.73	-1.2	V	$V_{CC} = \text{MIN}$ , $I_{IN} = -18 \text{ mA}$		
$V_{OH}$	Output HIGH Voltage	A0–A7	74	2.4		V	$I_{OH} = -3.0 \text{ mA}$	$V_{CC} = 4.5 \text{ V}$	
				2.7	3.4			$V_{CC} = 4.75 \text{ V}$	
		B0–B7	74	2.0		V	$I_{OH} = -15 \text{ mA}$	$V_{CC} = 4.5 \text{ V}$	
$V_{OL}$	Output LOW Voltage	A0–A7	74		0.35	0.5	V	$I_{OL} = 24 \text{ mA}$	$V_{CC} = \text{MIN}$
		B0–B7	74		0.4	0.55	V	$I_{OL} = 64 \text{ mA}$	
$I_{IH}$	Input HIGH Current	I/O Pins				1.0	mA	$V_{CC} = \text{MAX}$ , $V_{IN} = 5.5 \text{ V}$	
		Control Pins				100	$\mu\text{A}$	$V_{CC} = \text{MAX}$ , $V_{IN} = 7.0 \text{ V}$	
					20	$V_{CC} = \text{MAX}$ , $V_{IN} = 2.7 \text{ V}$			
$I_{IL}$	Input LOW Current	$\overline{E}A\overline{B}$ , $\overline{E}B\overline{A}$				-1.2	mA	$V_{CC} = \text{MAX}$ , $V_{IN} = 0.5 \text{ V}$	
		Other Inputs				-0.6			
$I_{OZH}$	Off-State Output Current, High-Level Voltage Applied					70	$\mu\text{A}$	$V_{OUT} = 2.7 \text{ V}$	
						1.0		mA	$V_{OUT} = 5.5 \text{ V}$
$I_{OZL}$	Off-State Output Current, Low-Level Voltage Applied					-600	$\mu\text{A}$	$V_{CC} = \text{MAX}$ , $V_{OUT} = 0.5 \text{ V}$	
$I_{OS}$	Output Short Circuit Current (Note 2)	$A_n$ Outputs		-60		-150	mA	$V_{CC} = \text{MAX}$ , $V_{OUT} = 0 \text{ V}$	
		$B_n$ Outputs		-100		-225			
$I_{CC}$	Total Supply Current	$I_{CCH}$			70	100	mA	$V_{CC} = \text{MAX}$	
		$I_{CCL}$			95	125			
		$I_{CCZ}$			95	125			

### NOTES:

- For conditions shown as MIN or MAX, use the appropriate value specified under recommended operating conditions for the applicable device type.
- Not more than one output should be shorted at a time, nor for more than 1 second.

# MC74F543

## AC ELECTRICAL CHARACTERISTICS


Symbol	Parameter	74F			74F		Unit
		T <sub>A</sub> = +25°C V <sub>CC</sub> = +5.0 V C <sub>L</sub> = 50 pF			T <sub>A</sub> = 0°C to +70°C V <sub>CC</sub> = +5.0 V ±10% C <sub>L</sub> = 50 pF		
		Min	Typ	Max	Min	Max	
f <sub>MAX</sub>	Maximum Clock Frequency	70	100		70		MHz
t <sub>PLH</sub> t <sub>PHL</sub>	Propagation Delay Transparent Mode A <sub>n</sub> to B <sub>n</sub> or B <sub>n</sub> to A <sub>n</sub>	3.0 3.0	5.5 5.0	7.5 6.5	3.0 3.0	8.5 7.5	ns
t <sub>PLH</sub> t <sub>PHL</sub>	Propagation Delay LEB <sub>A</sub> to A <sub>n</sub>	4.5 4.5	8.5 8.5	11 11	4.5 4.5	12.5 12.5	ns
t <sub>PLH</sub> t <sub>PHL</sub>	Propagation Delay LEA <sub>B</sub> to B <sub>n</sub>	4.5 4.5	8.5 8.5	11 11	4.5 4.5	12.5 12.5	ns
t <sub>PZH</sub> t <sub>PZL</sub>	Output Enable Time to OE <sub>B</sub> <sub>A</sub> or OE <sub>A</sub> <sub>B</sub> to A <sub>n</sub> or B <sub>n</sub> EB <sub>A</sub> or E <sub>A</sub> <sub>B</sub> to A <sub>n</sub> or B <sub>n</sub>	3.0 4.0	7.0 7.5	9.0 10.5	3.0 4.0	10 12	ns
t <sub>PHZ</sub> t <sub>PLZ</sub>	Output Disable Time to OE <sub>B</sub> <sub>A</sub> or OE <sub>A</sub> <sub>B</sub> to A <sub>n</sub> or B <sub>n</sub> EB <sub>A</sub> or E <sub>A</sub> <sub>B</sub> to A <sub>n</sub> or B <sub>n</sub>	2.5 2.0	6.0 5.5	8.0 7.5	2.5 2.0	9.0 8.5	ns

## AC OPERATING REQUIREMENTS

Symbol	Parameter	74F			74F			Unit
		T <sub>A</sub> = +25°C V <sub>CC</sub> = +5.0 V C <sub>L</sub> = 50 pF			T <sub>A</sub> = 0°C to +70°C V <sub>CC</sub> = +5.0 V ±10% C <sub>L</sub> = 50 pF			
		Min	Typ	Max	Min	Typ	Max	
t <sub>s(H)</sub> t <sub>s(L)</sub>	Setup Time, HIGH or LOW A <sub>n</sub> or B <sub>n</sub> to LE <sub>B</sub> <sub>A</sub> or LE <sub>A</sub> <sub>B</sub>	3.0 3.0			3.5 3.5			ns
t <sub>h(H)</sub> t <sub>h(L)</sub>	Hold Time, HIGH or LOW A <sub>n</sub> to B <sub>n</sub> to LE <sub>B</sub> <sub>A</sub> or LE <sub>A</sub> <sub>B</sub>	3.0 3.0			3.5 3.5			ns
t <sub>w(L)</sub>	Latch Enable, B to A Pulse Width, LOW	8.0			9.0			ns

# MC74F543

## LOGIC DIAGRAM

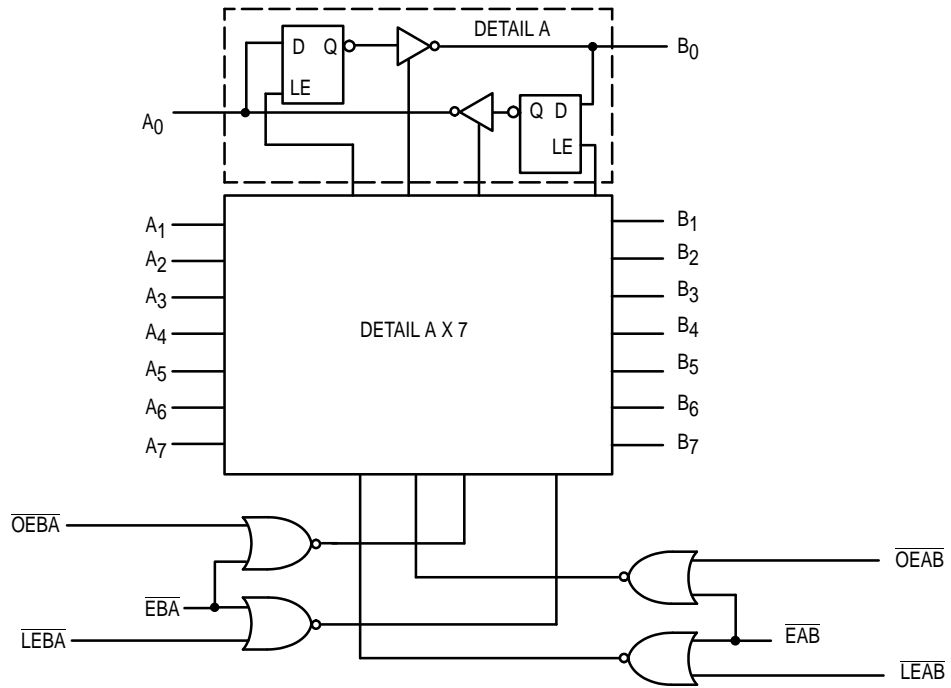

**NOTE:**

Please note that this diagram is provided only for the understanding of logic operations and should not be used to estimate propagation delays.