


# Power Tool Sentry


## Surge Protector with Replaceable Fuses

SEN-PT

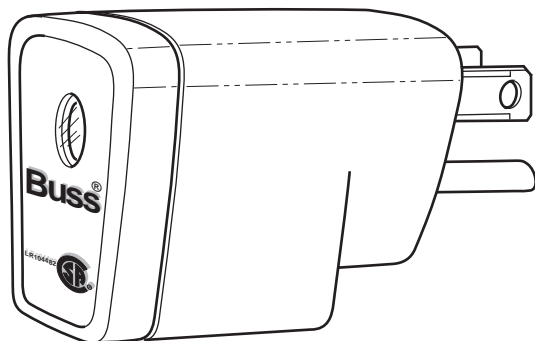

CATALOG SYMBOL: SEN  
 TRANSIENT VOLTAGE SPIKE PROTECTOR  
 RATED VOLTAGE: 125 VOLTS AC  
 SURGE DISSIPATION: 65 JOULES  
 PEAK SURGE: 6,000 VOLTS  
 MAXIMUM SURGE: 4,500 VOLTS  
 RESPONSE TIME: 1 NANOSECOND  
 CLAMPING VOLTAGE: 395 VOLTS  
 AGENCY APPROVAL: CSA CERTIFIED, LR104482  
 For use with Buss ECF-5, 125 VAC, 5 Amp Fuses.  
**WARNING: FOR INDOOR USE ONLY.**

### Dimensional Data

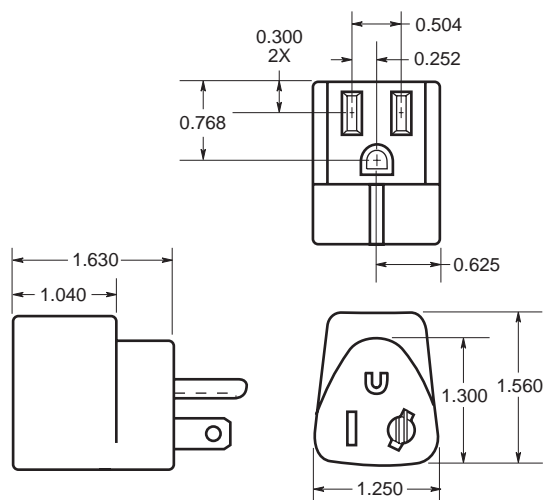


- Dual protection against voltage surges and short-circuits.
- Compact size - easy to carry.
- Indicator light - glows to show that Sentry is ready.
- Compact design provide wall-hugging connection.
- Replaceable fuses.
- Sentry can be used with all household appliances and electronics up to 4 Amps. Including Lap-top Computers, TVs, VCRs, telephones, answering machines, stereos, and similar devices.

**NOTE: Sentry is NOT a lightning arrestor and will not provide protection against direct or nearby lightning strikes.**

## Sentry Replacement Fuses

## ECF-8 and ECF-11



CATALOG SYMBOL: ECF-8 and ECF-11  
 REPLACEMENT FUSES  
 VOLTAGE RATING: 125 VAC  
 INTERRUPTING RATING: 10,000 AIR  
 AGENCY APPROVALS: U.L. LISTED

### Recommended Fuse Size

Motor Size	Replacement Catalog Number
1/4 hp or less	ECF-8 amp fuse installed in Sentry
1/3 hp or less	ECF-11 amp spare fuse enclosed.

The only controlled copy of this BIF document is the electronic read-only version located on the Bussmann Network Drive. All other copies of this BIF document are by definition uncontrolled. This bulletin is intended to clearly present comprehensive product data and provide technical information that will help the end user with design applications. Bussmann reserves the right, without notice, to change design or construction of any products and to discontinue or limit distribution of any products. Bussmann also reserves the right to change or update, without notice, any technical information contained in this bulletin. Once a product has been selected, it should be tested by the user in all possible applications.