

DATA SHEET

SZA1015 Brushless Motor Controller (BMC12)

Product specification
Supersedes data of 2000 Sep 19
File under Integrated Circuits, IC01

2001 Jul 11

Brushless Motor Controller (BMC12)

SZA1015

FEATURES

- Direct full bridge driving system
- No external series resistor required in motor supply line
- Adjustable output current up to 2.1 A (over 20X DVD and over 50X CD)
- D-MOSFET output with a total on-resistance of 0.7 Ω (typical)
- PWM controlled commutation
- Internal compensation for EMF of motor (EMF regenerator)
- Start/stop function with built-in power saving circuit
- Hall amplifiers with a minimum input level of 25 mV
- Built-in frequency generator (FG output)
- Adjustable motor current limiter
- Built-in thermal shutdown
- Reverse torque brake function (full bridge)
- Built-in reverse rotation protection circuit
- 32 mA Hall bias circuit
- Few external components
- Interfaces to 3 V and 5 V logic
- Package with very low thermal resistance from junction to heatsink (reflowable die pad).

GENERAL DESCRIPTION

The BMC12 is a 3-phase Brushless Motor Controller (BMC) for Hall commutated spindle motors in CD and DVD drives suitable for DVD speeds over 20X and CD speeds over 50X.

It uses a 5 V supply for the internal control circuit and a 5 to 12 V supply for the motor driver.

The switching PWM output is highly efficient resulting in a low power dissipation for forward torque acceleration as well as for reverse torque brake (PWM controlled reverse torque).

Sensitive Hall sensor amplifiers with a very low offset are integrated which can operate on very small Hall signals.

The current limiter circuit requires no external series resistor in the power ground which increases efficiency. The limiting current can be adjusted by means of an external resistor at pin RLIM (not in series with motor supply line). The current limiter is active during accelerating as well as during braking.

The EMF voltage of the motor is internally measured and is used to compensate for the PWM commutation. A scaling factor can be set by means of an external resistor at pin REMF.

The tacho-generator can be used to measure the rotational speed of the disk. It shows the triple frequency of the Hall signals.

A thermal shutdown circuit with a small hysteresis protects the IC from overheating.

A heatsink at the bottom of the chip with a very low thermal resistance enables effective cooling.

The start/stop function reduces current consumption of the IC to a minimum when the motor is stopped (stop mode) and also turns off the Hall sensor bias in the stop mode.

ORDERING INFORMATION

TYPE NUMBER	PACKAGE		
	NAME	DESCRIPTION	VERSION
SZA1015TT	HTSSOP32	plastic, heatsink thin shrink small outline package; 32 leads; body width 6.1 mm; lead pitch 0.65 mm	SOT549-1

Brushless Motor Controller (BMC12)

SZA1015

QUICK REFERENCE DATA

SYMBOL	PARAMETER	MIN.	TYP.	MAX.	UNIT
V _{DD}	supply voltage	4.5	5.0	5.5	V
V _{DDM}	motor supply voltage	4.5	12.0	14.5	V
I _{DDM}	motor current	–	–	2.1	A
R _{ds(on)}	D-MOSFET on-resistance (high or low)	–	0.35	–	Ω
P _{tot}	total power dissipation	–	–	3.0	W
T _{amb}	ambient temperature	0	–	85	°C

Brushless Motor Controller (BMC12)

SZA1015

BLOCK DIAGRAM

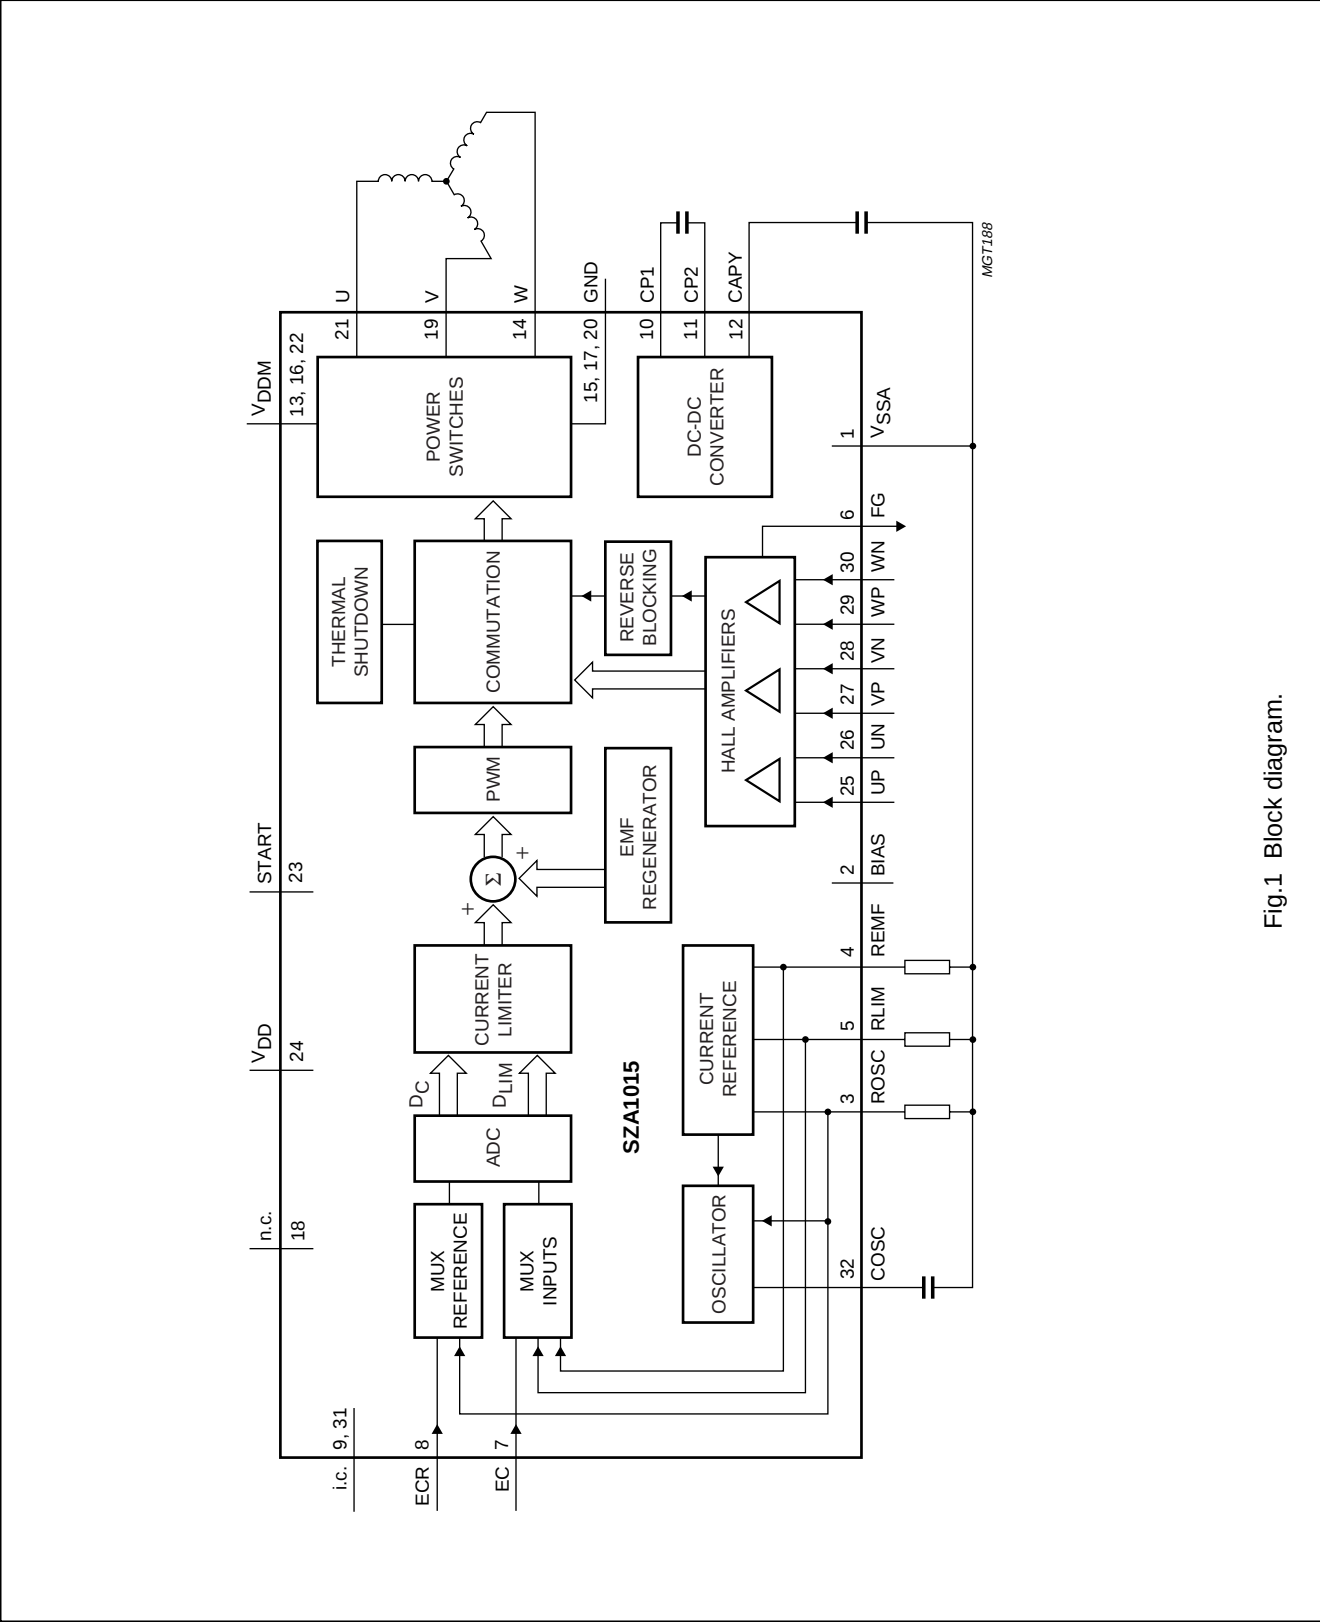


Fig.1 Block diagram.

Brushless Motor Controller (BMC12)

SZA1015

PINNING

SYMBOL	PIN	DESCRIPTION
V _{SSA}	1	motor control ground supply
BIAS	2	Hall element bias
ROSC	3	external resistor for internal oscillator
REMF	4	external resistor for EMF regeneration
RLIM	5	external resistor for current limiting
FG	6	frequency generator output
EC	7	output current control pin
ECR	8	output current control reference voltage pin
i.c.	9	internally connected (leave open-circuit)
CP1	10	booster capacitor connection 1
CP2	11	booster capacitor connection 2
CAPY	12	booster output
V _{DDM}	13	motor supply voltage
W	14	motor terminal W
GND	15	ground supply
V _{DDM}	16	motor supply voltage
GND	17	ground supply
n.c.	18	not connected
V	19	motor terminal V
GND	20	ground supply
U	21	motor terminal U
V _{DDM}	22	motor supply voltage
START	23	start/stop control pin
V _{DD}	24	system supply voltage
UP	25	positive Hall input U
UN	26	negative Hall input U
VP	27	positive Hall input V
VN	28	negative Hall input V
WP	29	positive Hall input W
WN	30	negative Hall input W
i.c.	31	internally connected (leave open-circuit)
COSC	32	external capacitor for internal oscillator

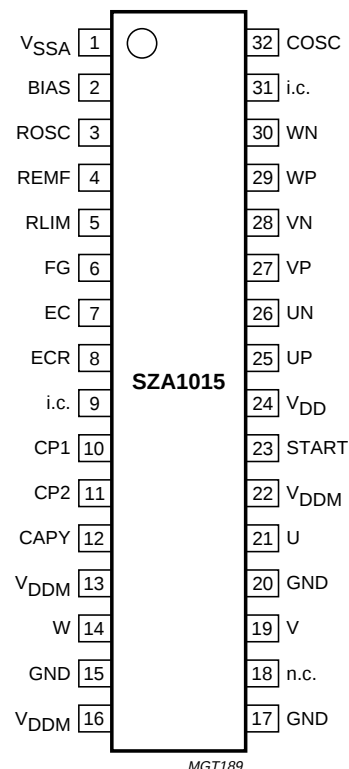


Fig.2 Pin configuration.


Brushless Motor Controller (BMC12)

SZA1015

FUNCTIONAL DESCRIPTION

Motor control

The control input voltage E_C is converted into a digital value (D_C) by the ADC where voltage E_{CR} is the midpoint reference for E_C (see Fig.3).


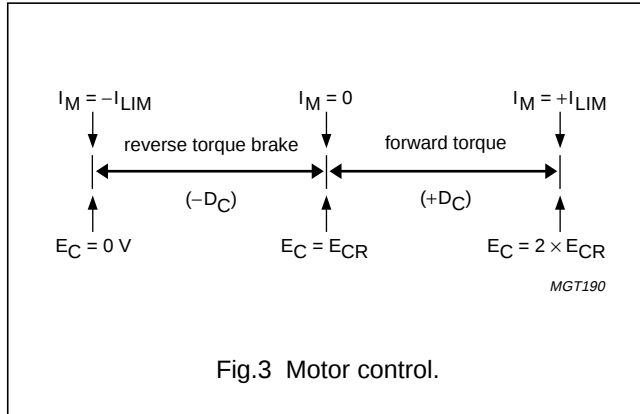


The gain from input voltage (E_C) to motor current (I_M) is I_{LIM}/E_{CR} (A/V). The motor current can be determined with the following formula: $I_M = \frac{I_{LIM}}{E_{CR}} \times (E_C - E_{CR})$

The maximum motor current I_{LIM} is set by the motor current limiter. When the rotational speed of the motor has become zero the motor current is switched off and all driver outputs (pins U, V and W) are connected to ground. This prevents the motor of spinning backwards.

Internal motor voltage generation

The simplified motor schematic in Fig.4 shows the series resistance and back-EMF voltage of the motor.

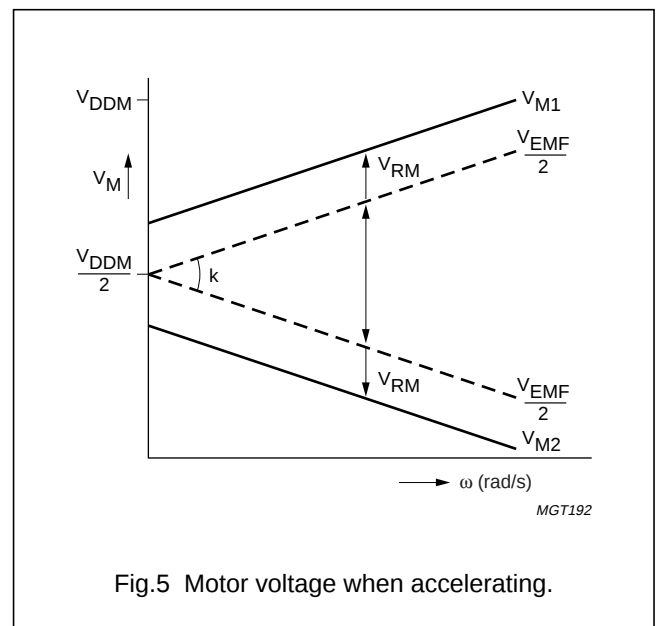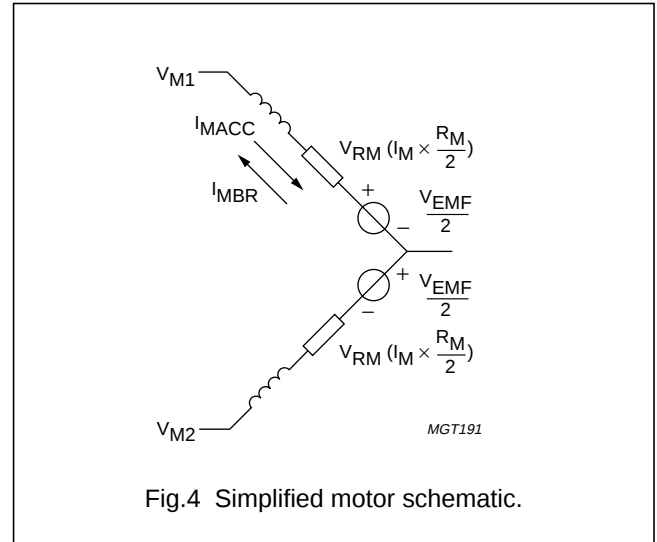

If we assume that I_{MACC} is used to accelerate and I_{MBR} is used to brake we can draw two pictures shown in Figs 5 (accelerate) and 6 (brake).

Brushless Motor Controller (BMC12)

SZA1015

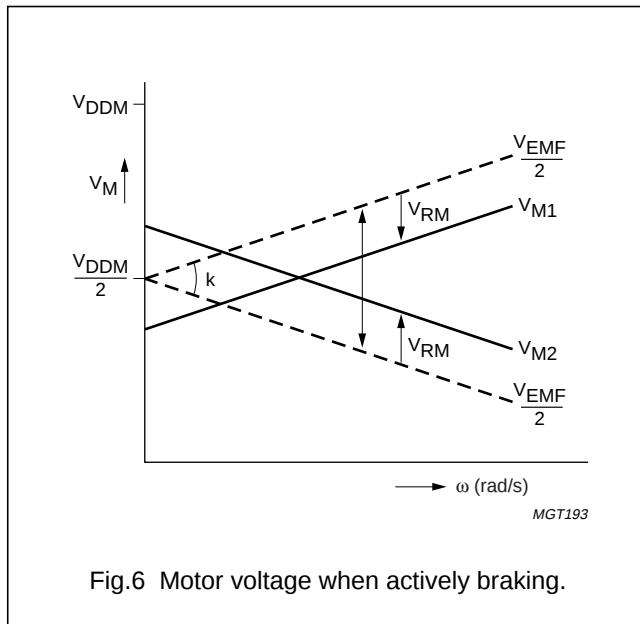


Fig.6 Motor voltage when actively braking.


The BMC12 regenerates V_{EMF} and superimposes V_M ($0 \leq I_M \leq I_{LIM}$) which depends on the E_C (gain) input voltage. V_{RM} (I_M) can be positive (accelerate) or negative (brake).

Motor current limiting function

The maximum motor current is determined with the

following formula: $I_{MAX} = \frac{V_{DDM}}{R_{motor} + R_{switches(min)}}$

I_{LIM} is a fraction of the maximum motor current I_{MAX} . During accelerating and braking the motor current will not exceed the limiting current set by R_{LIM} .

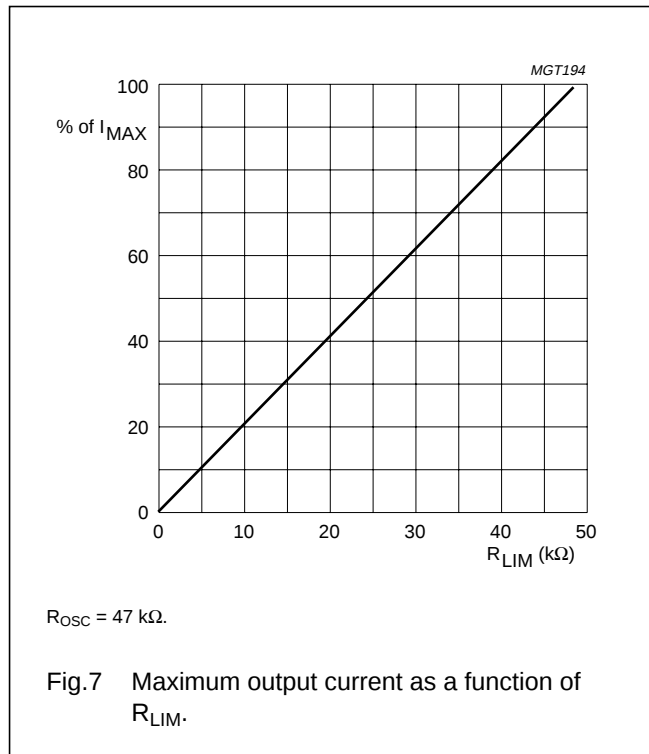

$R_{OSC} = 47 \text{ k}\Omega$.

Fig.7 Maximum output current as a function of R_{LIM} .

The formula to determine the limiting current is as follows:

$$I_{LIM} = \frac{R_{LIM}}{R_{OSC}} \times I_{MAX}$$

Back-EMF regeneration

The back-EMF voltage is internally regenerated. The ratio between R_{EMF} and R_{OSC} can be used to scale the internal EMF regeneration. The value of resistor R_{EMF} depends on the type of motor (k-factor, number of pole pairs) and the motor supply voltage used. This is shown in the following

$$\text{formula: } R_{EMF} = \frac{k \times 2.6 \times 10^3 \times R_{OSC}}{N_{PP} \times V_{DDM}}$$

For noise reduction the Hall signals are internally filtered.

Brushless Motor Controller (BMC12)

SZA1015

FG generator

The FG generator output shows a frequency which depends on the number of Hall signals (three) and the number of pole pairs (N_{PP}). The formula to determine the

motor frequency is as follows: $f_{\text{motor}} = \frac{FG}{3 \times N_{PP}}$

The FG has an open-drain output for easy interfacing to 3 V and 5 V logic.

Thermal shutdown

The thermal shutdown block sets all outputs to 3-state mode if the junction temperature of the BMC12 exceeds 155 °C (typical). There is a hysteresis of 15 °C (typical) between the temperatures at which the thermal shutdown activates and deactivates. As soon as the thermal shutdown deactivates, the commutation control continues its operation.

Oscillator

The RC oscillator uses two external components (R_{OSC} and C_{OSC}) to fix its frequency. To ensure a stable oscillator frequency the oscillator and R_{OSC} both use a reference current made by the current reference block. The nominal frequency is 3 MHz with $R_{OSC} = 47 \text{ k}\Omega$ (2% tolerance) and $C_{OSC} = 100 \text{ pF}$ (5% tolerance). The values of the external components for the oscillator are fixed. The oscillator can be overruled by applying a 3 MHz clock to pin COSC (R_{OSC} is used to determine I_{LIM} and R_{EMF} and should always be connected).

Start/stop function


At pin START = LOW, the BMC12 can be set to a power saving mode, reducing the current consumption. In the power saving mode the outputs will be in 3-state.

DC-DC converter

The on-board DC-DC converter generates a voltage of approximately $2 \times V_{DDM} - 1.2 \text{ V}$ with a maximum voltage of 19.3 V typical (internal clamp circuit). This voltage is used internal to switch the upper drivers of the U, V and W outputs.

Brushless Motor Controller (BMC12)

SZA1015

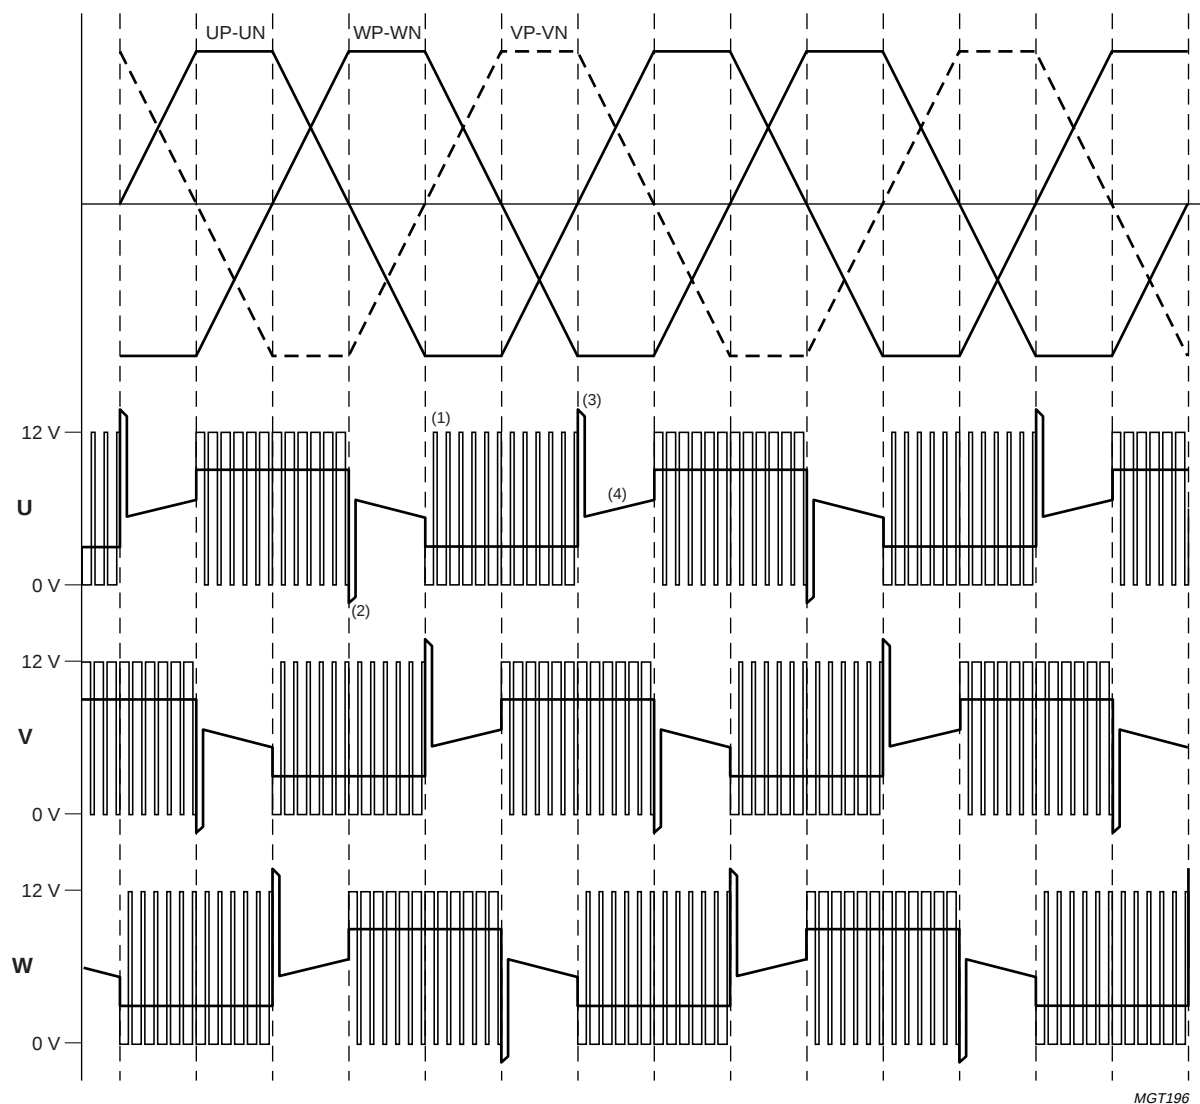

- (1) In this example, a PWM output signal with a 25% duty cycle is drawn as a thin line. The average motor voltage (drawn with a thicker line width) is $25\% \times V_{DDM}$, i.e. 3.0 V. At the opposite side of the coil (in this drawing pin W) the duty cycle is 75%, so the average voltage on pin W is 9.0 V. The differential voltage over the motor pins then is: $9 - 3 = 6$ V.
- (2) There is still a current flowing from pin U into the motor. The lower flyback diode starts conducting, and causes a flyback voltage of around 0.7 V below GND, until the current is zero.
- (3) There is still a current flowing from the motor into pin U. The upper flyback diode starts conducting, and causes a flyback voltage of around 0.7 V above V_{DDM} , until the current is zero.
- (4) During this phase, the driver output is 3-state. Because there is no current flowing through pin U, the back-EMF of the motor is seen.

Fig.8 Phase condition of Hall input and output voltage (motor running with $E_C > E_{CR}$).


Brushless Motor Controller (BMC12)

SZA1015

LIMITING VALUES

In accordance with the Absolute Maximum Rating System (IEC 60134).

SYMBOL	PARAMETER	MIN.	MAX.	UNIT
V_{DD}	supply voltage	-0.5	+6.5	V
V_{DDM}	motor supply voltage	-0.5	+15	V
I_{DDM}	motor current	–	2.1	A
P_{tot}	total power dissipation	–	3.0	W
T_{stg}	storage temperature	-55	+150	°C
T_{amb}	ambient temperature	0	85	°C

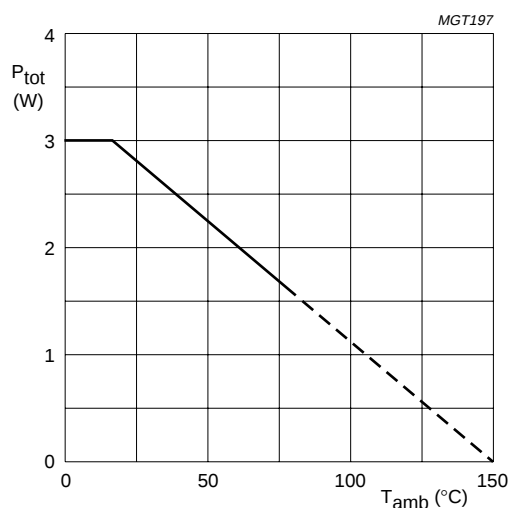

The IC is thermally connected with its heatsink to an external heatsink at ambient temperature, with a total thermal resistance of 35 K/W (10 K/W junction to case plus 25 K/W case to surrounding).

Fig.9 Maximum dissipation as a function of the ambient temperature.

THERMAL CHARACTERISTICS

SYMBOL	PARAMETER	VALUE	UNIT
$R_{th(j-c)}$	thermal resistance from junction to case	10	K/W

CHARACTERISTICS

$V_{DD} = 5\text{ V}$; $V_{DDM} = 12\text{ V}$; $GND = 0\text{ V}$; $T_{amb} = 25\text{ °C}$; $R_{OSC} = 47\text{ k}\Omega$, $C_{OSC} = 100\text{ pF}$; unless otherwise specified.

SYMBOL	PARAMETER	CONDITIONS	MIN.	TYP.	MAX.	UNIT
Supplies						
V_{DD}	supply voltage		4.5	5.0	5.5	V
V_{DDM}	motor supply voltage		4.5	12.0	14.5	V
I_{DDM}	motor current		–	–	2.1	A

Brushless Motor Controller (BMC12)

SZA1015

SYMBOL	PARAMETER	CONDITIONS	MIN.	TYP.	MAX.	UNIT
I _{DD}	supply current	START = HIGH	–	15	–	mA
I _{DD(q)}	quiescent current in power saving mode	START = LOW	–	–	1	mA
P _{tot}	total power dissipation		–	–	3.0	W
T _{amb}	ambient temperature		0	–	85	°C
Hall amplifier inputs (pins UN, UP, VN, VP, WN and WP)						
V _{IO}	input offset voltage		–3.5	–	+3.5	mV
V _i	input voltage range		0	–	4.0	V
V _{i(dif)(p-p)}	Hall amplifier input voltage (peak-to-peak value)		25	–	–	mV
Hall elements bias (pin BIAS)						
I _{bias}	bias current		–	–	32	mA
V _{bias}	bias voltage	I _{bias} = 32 mA	0.1	–	0.5	V
Oscillator						
f _{osc}	oscillator frequency	note 1	–	3.0	–	MHz
Thermal shutdown circuit						
T _{SD}	thermal shutdown operating temperature		140	155	170	°C
Power switches						
R _{ds(on)}	D-MOSFET on-resistance (high or low)	V _{DDM} = 12 V	0.25	0.35	0.50	Ω
		V _{DDM} = 5 V	0.35	0.50	0.71	Ω
Booster						
V _{CAPY}	booster output voltage	note 2	19	19.3	19.6	V
Torque control (pins EC and ECR)						
V _{ECR}	reference voltage on pin ECR		1.2	1.8	2.5	V
V _{EC}	torque control voltage on pin EC	note 3	0	–	V _{DD}	V
Digital input (pin START)						
V _{IH}	HIGH-level input voltage		2.0	–	–	V
V _{IL}	LOW-level input voltage		–	–	0.8	V
Open-drain output (pin FG)						
V _{OL}	LOW-level output voltage	I _O = 2 mA	–	–	0.5	V


Notes

1. The PWM frequency is: $f_{PWM} = \frac{f_{osc}}{33}$
2. Clamping level with $V_{DDM} = 12 \text{ V}$.
3. The maximum useful range of the control input voltage E_C is 0 to $2 \times E_{CR}$ (midpoint reference voltage).
When $E_C = E_{CR}$, then no torque is applied to the motor. The conversion characteristic does not have a 'dead zone'.

Brushless Motor Controller (BMC12)

SZA1015

APPLICATION INFORMATION

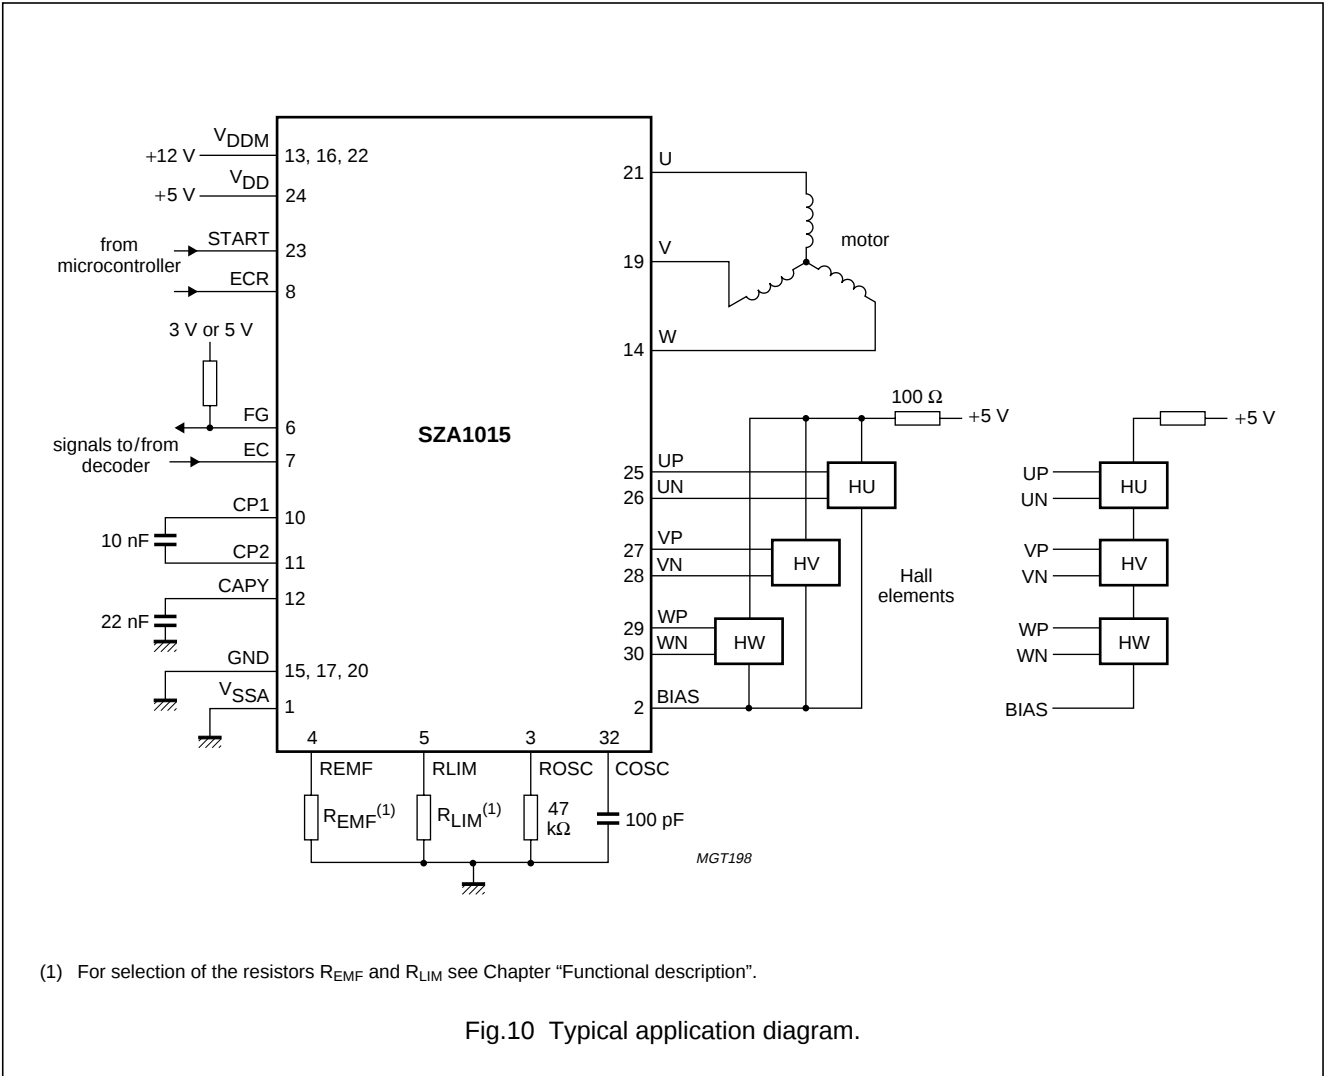

Brushless Motor Controller (BMC12)

SZA1015

INTERNAL PIN CONFIGURATION

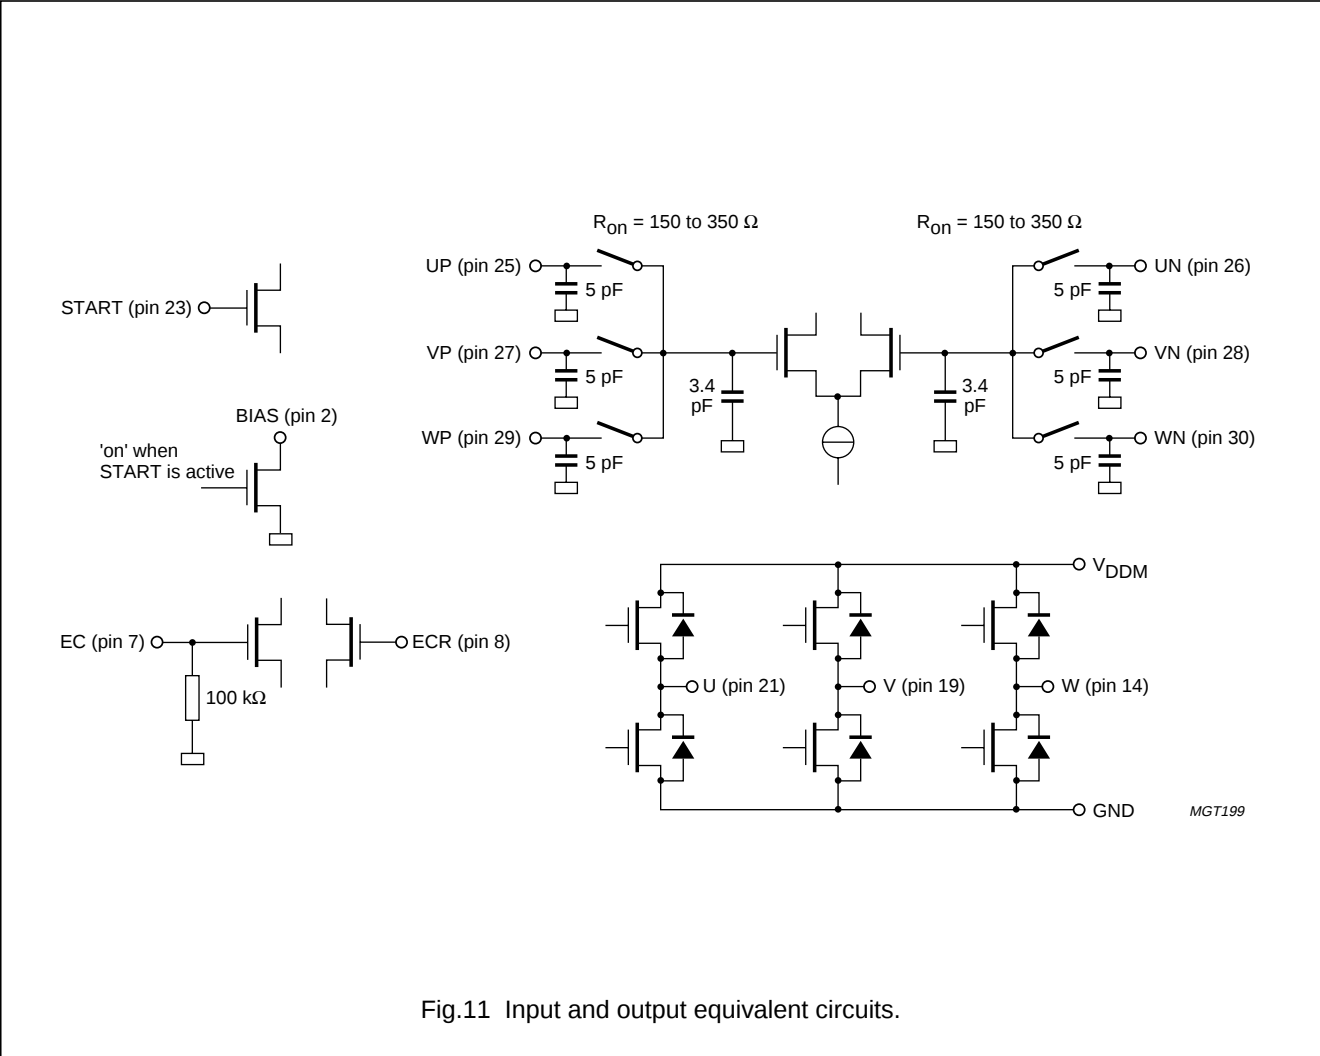


Fig.11 Input and output equivalent circuits.


Brushless Motor Controller (BMC12)

SZA1015

PACKAGE OUTLINE

HTSSOP32: plastic, heatsink thin shrink small outline package; 32 leads; body width 6.1 mm; lead pitch 0.65 mm

SOT549-1

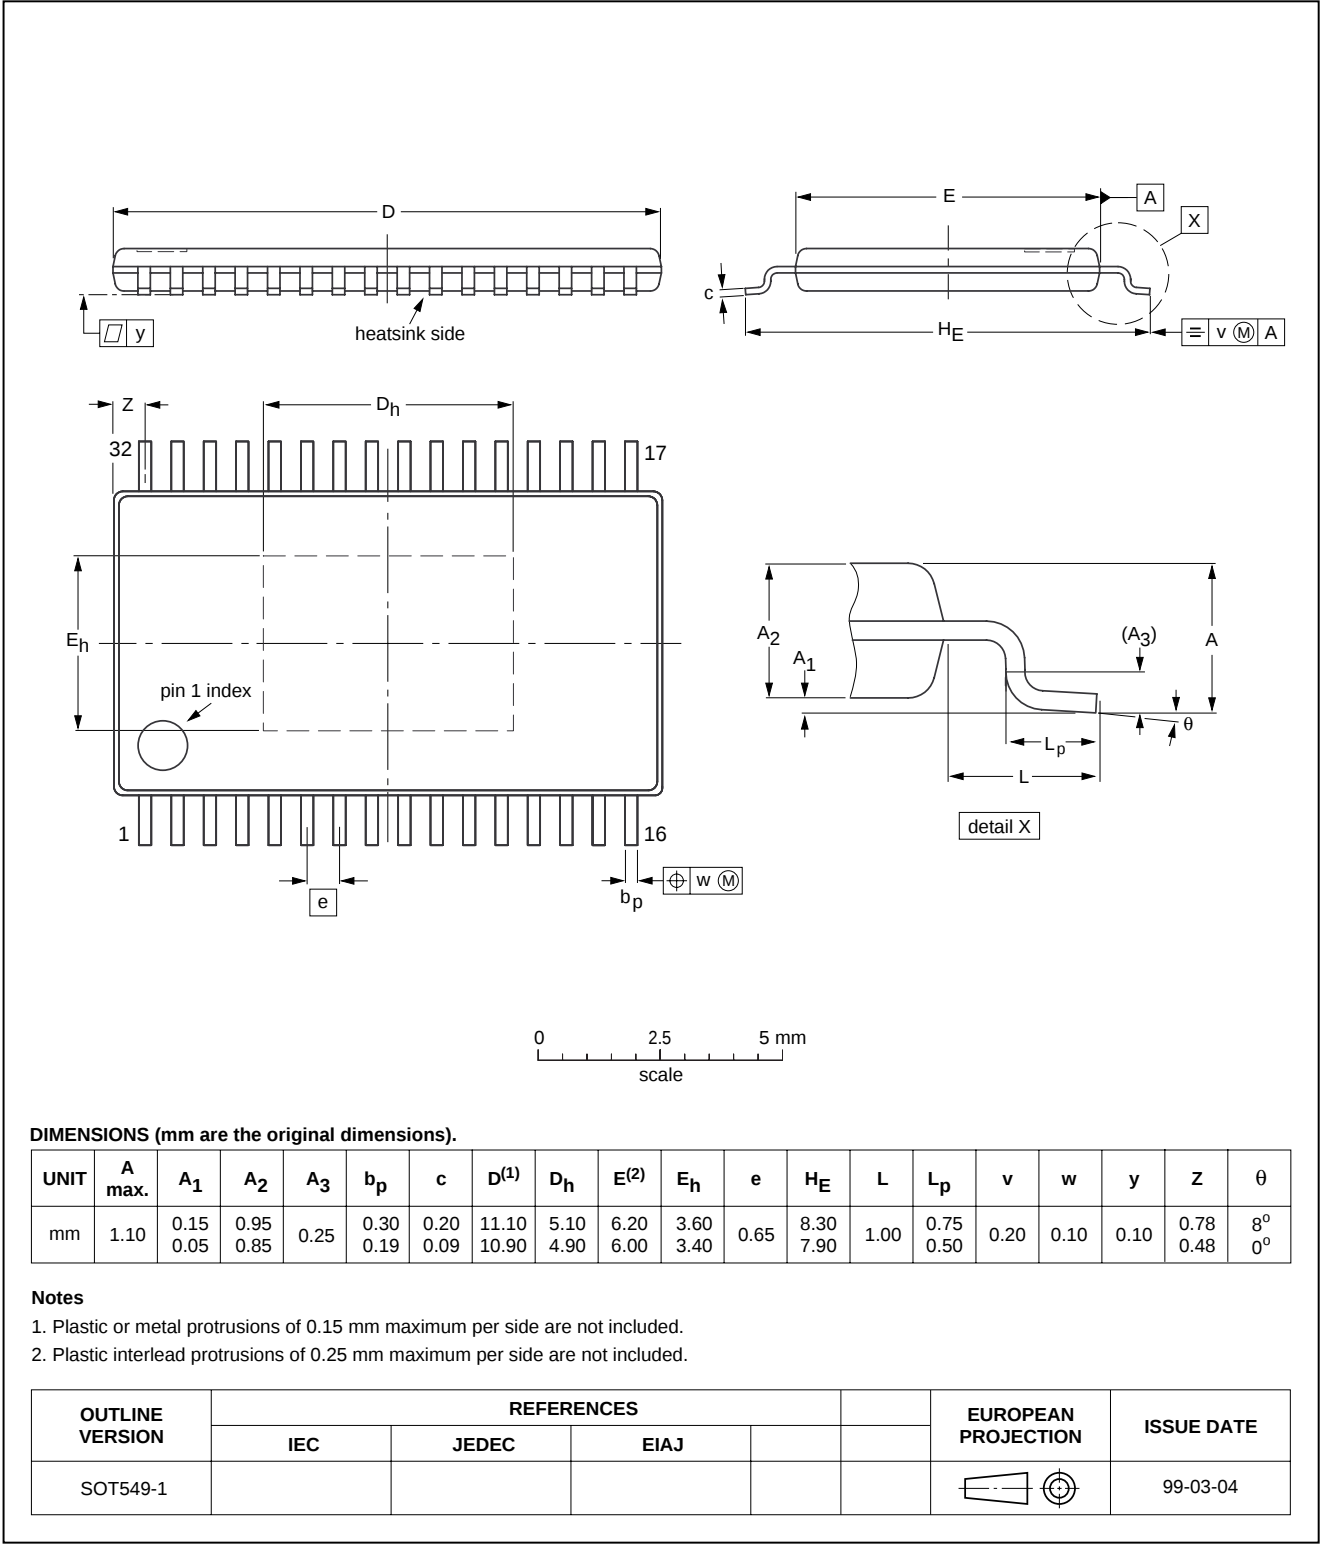

Brushless Motor Controller (BMC12)

SZA1015

SOLDERING

Introduction to soldering surface mount packages

This text gives a very brief insight to a complex technology. A more in-depth account of soldering ICs can be found in our *"Data Handbook IC26; Integrated Circuit Packages"* (document order number 9398 652 90011).

There is no soldering method that is ideal for all surface mount IC packages. Wave soldering is not always suitable for surface mount ICs, or for printed-circuit boards with high population densities. In these situations reflow soldering is often used.

Reflow soldering

Reflow soldering requires solder paste (a suspension of fine solder particles, flux and binding agent) to be applied to the printed-circuit board by screen printing, stencilling or pressure-syringe dispensing before package placement.

Several methods exist for reflowing; for example, infrared/convection heating in a conveyor type oven. Throughput times (preheating, soldering and cooling) vary between 100 and 200 seconds depending on heating method.

Typical reflow peak temperatures range from 215 to 250 °C. The top-surface temperature of the packages should preferably be kept below 230 °C.

Wave soldering

Conventional single wave soldering is not recommended for surface mount devices (SMDs) or printed-circuit boards with a high component density, as solder bridging and non-wetting can present major problems.

To overcome these problems the double-wave soldering method was specifically developed.

If wave soldering is used the following conditions must be observed for optimal results:

- Use a double-wave soldering method comprising a turbulent wave with high upward pressure followed by a smooth laminar wave.
- For packages with leads on two sides and a pitch (e):
 - larger than or equal to 1.27 mm, the footprint longitudinal axis is **preferred** to be parallel to the transport direction of the printed-circuit board;
 - smaller than 1.27 mm, the footprint longitudinal axis **must** be parallel to the transport direction of the printed-circuit board.

The footprint must incorporate solder thieves at the downstream end.

- For packages with leads on four sides, the footprint must be placed at a 45° angle to the transport direction of the printed-circuit board. The footprint must incorporate solder thieves downstream and at the side corners.

During placement and before soldering, the package must be fixed with a droplet of adhesive. The adhesive can be applied by screen printing, pin transfer or syringe dispensing. The package can be soldered after the adhesive is cured.

Typical dwell time is 4 seconds at 250 °C.

A mildly-activated flux will eliminate the need for removal of corrosive residues in most applications.

Manual soldering

Fix the component by first soldering two diagonally-opposite end leads. Use a low voltage (24 V or less) soldering iron applied to the flat part of the lead. Contact time must be limited to 10 seconds at up to 300 °C.

When using a dedicated tool, all other leads can be soldered in one operation within 2 to 5 seconds between 270 and 320 °C.

Brushless Motor Controller (BMC12)

SZA1015

Suitability of surface mount IC packages for wave and reflow soldering methods

PACKAGE	SOLDERING METHOD	
	WAVE	REFLOW ⁽¹⁾
BGA, LFBGA, SQFP, TFBGA	not suitable	suitable
HBCC, HLQFP, HSQFP, HSOP, HTQFP, HTSSOP, SMS	not suitable ⁽²⁾	suitable
PLCC ⁽³⁾ , SO, SOJ	suitable	suitable
LQFP, QFP, TQFP	not recommended ⁽³⁾⁽⁴⁾	suitable
SSOP, TSSOP, VSO	not recommended ⁽⁵⁾	suitable

Notes

1. All surface mount (SMD) packages are moisture sensitive. Depending upon the moisture content, the maximum temperature (with respect to time) and body size of the package, there is a risk that internal or external package cracks may occur due to vaporization of the moisture in them (the so called popcorn effect). For details, refer to the Drypack information in the *"Data Handbook IC26; Integrated Circuit Packages; Section: Packing Methods"*.
2. These packages are not suitable for wave soldering as a solder joint between the printed-circuit board and heatsink (at bottom version) can not be achieved, and as solder may stick to the heatsink (on top version).
3. If wave soldering is considered, then the package must be placed at a 45° angle to the solder wave direction. The package footprint must incorporate solder thieves downstream and at the side corners.
4. Wave soldering is only suitable for LQFP, TQFP and QFP packages with a pitch (e) equal to or larger than 0.8 mm; it is definitely not suitable for packages with a pitch (e) equal to or smaller than 0.65 mm.
5. Wave soldering is only suitable for SSOP and TSSOP packages with a pitch (e) equal to or larger than 0.65 mm; it is definitely not suitable for packages with a pitch (e) equal to or smaller than 0.5 mm.

Brushless Motor Controller (BMC12)

SZA1015

DATA SHEET STATUS

DATA SHEET STATUS ⁽¹⁾	PRODUCT STATUS ⁽²⁾	DEFINITIONS
Objective data	Development	This data sheet contains data from the objective specification for product development. Philips Semiconductors reserves the right to change the specification in any manner without notice.
Preliminary data	Qualification	This data sheet contains data from the preliminary specification. Supplementary data will be published at a later date. Philips Semiconductors reserves the right to change the specification without notice, in order to improve the design and supply the best possible product.
Product data	Production	This data sheet contains data from the product specification. Philips Semiconductors reserves the right to make changes at any time in order to improve the design, manufacturing and supply. Changes will be communicated according to the Customer Product/Process Change Notification (CPCN) procedure SNW-SQ-650A.

Notes

1. Please consult the most recently issued data sheet before initiating or completing a design.
2. The product status of the device(s) described in this data sheet may have changed since this data sheet was published. The latest information is available on the Internet at URL <http://www.semiconductors.philips.com>.

DEFINITIONS

Short-form specification — The data in a short-form specification is extracted from a full data sheet with the same type number and title. For detailed information see the relevant data sheet or data handbook.

Limiting values definition — Limiting values given are in accordance with the Absolute Maximum Rating System (IEC 60134). Stress above one or more of the limiting values may cause permanent damage to the device. These are stress ratings only and operation of the device at these or at any other conditions above those given in the Characteristics sections of the specification is not implied. Exposure to limiting values for extended periods may affect device reliability.

Application information — Applications that are described herein for any of these products are for illustrative purposes only. Philips Semiconductors make no representation or warranty that such applications will be suitable for the specified use without further testing or modification.

DISCLAIMERS

Life support applications — These products are not designed for use in life support appliances, devices, or systems where malfunction of these products can reasonably be expected to result in personal injury. Philips Semiconductors customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Philips Semiconductors for any damages resulting from such application.

Right to make changes — Philips Semiconductors reserves the right to make changes, without notice, in the products, including circuits, standard cells, and/or software, described or contained herein in order to improve design and/or performance. Philips Semiconductors assumes no responsibility or liability for the use of any of these products, conveys no licence or title under any patent, copyright, or mask work right to these products, and makes no representations or warranties that these products are free from patent, copyright, or mask work right infringement, unless otherwise specified.

Brushless Motor Controller (BMC12)

SZA1015

NOTES

Brushless Motor Controller (BMC12)

SZA1015

NOTES

Philips Semiconductors – a worldwide company

Argentina: see South America

Australia: 3 Figtree Drive, HOMEBUSH, NSW 2140,
Tel. +61 2 9704 8141, Fax. +61 2 9704 8139

Austria: Computerstr. 6, A-1101 WIEN, P.O. Box 213,
Tel. +43 1 60 101 1248, Fax. +43 1 60 101 1210

Belarus: Hotel Minsk Business Center, Bld. 3, r. 1211, Volodarski Str. 6,
220050 MINSK, Tel. +375 172 20 0733, Fax. +375 172 20 0773

Belgium: see The Netherlands

Brazil: see South America

Bulgaria: Philips Bulgaria Ltd., Energoproject, 15th floor,
51 James Bourchier Blvd., 1407 SOFIA,
Tel. +359 2 68 9211, Fax. +359 2 68 9102

Canada: PHILIPS SEMICONDUCTORS/COMPONENTS,
Tel. +1 800 234 7381, Fax. +1 800 943 0087

China/Hong Kong: 501 Hong Kong Industrial Technology Centre,
72 Tat Chee Avenue, Kowloon Tong, HONG KONG,
Tel. +852 2319 7888, Fax. +852 2319 7700

Colombia: see South America

Czech Republic: see Austria

Denmark: Sydhavnsgade 23, 1780 COPENHAGEN V,
Tel. +45 33 29 3333, Fax. +45 33 29 3905

Finland: Sinikalliontie 3, FIN-02630 ESPOO,
Tel. +358 9 615 800, Fax. +358 9 6158 0920

France: 7 - 9 Rue du Mont Valérien, BP317, 92156 SURESNES Cedex,
Tel. +33 1 4728 6600, Fax. +33 1 4728 6638

Germany: Hammerbrookstraße 69, D-20097 HAMBURG,
Tel. +49 40 2353 60, Fax. +49 40 2353 6300

Hungary: Philips Hungary Ltd., H-1119 Budapest, Fehervari ut 84/A,
Tel: +36 1 382 1700, Fax: +36 1 382 1800

India: Philips INDIA Ltd, Band Box Building, 2nd floor,
254-D, Dr. Annie Besant Road, Worli, MUMBAI 400 025,
Tel. +91 22 493 8541, Fax. +91 22 493 0966

Indonesia: PT Philips Development Corporation, Semiconductors Division,
Gedung Philips, Jl. Buncit Raya Kav.99-100, JAKARTA 12510,
Tel. +62 21 794 0040 ext. 2501, Fax. +62 21 794 0080

Ireland: Newstead, Clonskeagh, DUBLIN 14,
Tel. +353 1 7640 000, Fax. +353 1 7640 200

Israel: RAPAC Electronics, 7 Kehilat Saloniki St, PO Box 18053,
TEL AVIV 61180, Tel. +972 3 645 0444, Fax. +972 3 649 1007

Italy: PHILIPS SEMICONDUCTORS, Via Casati, 23 - 20052 MONZA (MI),
Tel. +39 039 203 6838, Fax +39 039 203 6800

Japan: Philips Bldg 13-37, Kohnan 2-chome, Minato-ku,
TOKYO 108-8507, Tel. +81 3 3740 5130, Fax. +81 3 3740 5057

Korea: Philips House, 260-199 Itaewon-dong, Yongsan-ku, SEOUL,
Tel. +82 2 709 1412, Fax. +82 2 709 1415

Malaysia: No. 76 Jalan Universiti, 46200 PETALING JAYA, SELANGOR,
Tel. +60 3 750 5214, Fax. +60 3 757 4880

Mexico: 5900 Gateway East, Suite 200, EL PASO, TEXAS 79905,
Tel. +9-5 800 234 7381, Fax +9-5 800 943 0087

Middle East: see Italy

Netherlands: Postbus 90050, 5600 PB EINDHOVEN, Bldg. VB,
Tel. +31 40 27 82785, Fax. +31 40 27 88399

New Zealand: 2 Wagener Place, C.P.O. Box 1041, AUCKLAND,
Tel. +64 9 849 4160, Fax. +64 9 849 7811

Norway: Box 1, Manglerud 0612, OSLO,
Tel. +47 22 74 8000, Fax. +47 22 74 8341

Pakistan: see Singapore

Philippines: Philips Semiconductors Philippines Inc.,
106 Valero St. Salcedo Village, P.O. Box 2108 MCC, MAKATI,
Metro MANILA, Tel. +63 2 816 6380, Fax. +63 2 817 3474

Poland: Al.Jerozolimskie 195 B, 02-222 WARSAW,
Tel. +48 22 5710 000, Fax. +48 22 5710 001

Portugal: see Spain

Romania: see Italy

Russia: Philips Russia, Ul. Usatcheva 35A, 119048 MOSCOW,
Tel. +7 095 755 6918, Fax. +7 095 755 6919

Singapore: Lorong 1, Toa Payoh, SINGAPORE 319762,
Tel. +65 350 2538, Fax. +65 251 6500

Slovakia: see Austria

Slovenia: see Italy

South Africa: S.A. PHILIPS Pty Ltd., 195-215 Main Road Martindale,
2092 JOHANNESBURG, P.O. Box 58088 Newville 2114,
Tel. +27 11 471 5401, Fax. +27 11 471 5398

South America: Al. Vicente Pinzon, 173, 6th floor,
04547-130 SÃO PAULO, SP, Brazil,
Tel. +55 11 821 2333, Fax. +55 11 821 2382

Spain: Balmes 22, 08007 BARCELONA,
Tel. +34 93 301 6312, Fax. +34 93 301 4107

Sweden: Kottbygatan 7, Akalla, S-16485 STOCKHOLM,
Tel. +46 8 5985 2000, Fax. +46 8 5985 2745

Switzerland: Allmendstrasse 140, CH-8027 ZÜRICH,
Tel. +41 1 488 2741 Fax. +41 1 488 3263

Taiwan: Philips Semiconductors, 5F, No. 96, Chien Kuo N. Rd., Sec. 1,
TAIPEI, Taiwan Tel. +886 2 2134 2451, Fax. +886 2 2134 2874

Thailand: PHILIPS ELECTRONICS (THAILAND) Ltd.,
60/14 MOO 11, Bangna Trad Road KM. 3, Bagna, BANGKOK 10260,
Tel. +66 2 361 7910, Fax. +66 2 398 3447

Turkey: Yukari Dudullu, Org. San. Blg., 2.Cad. Nr. 28 81260 Umraniye,
ISTANBUL, Tel. +90 216 522 1500, Fax. +90 216 522 1813

Ukraine: PHILIPS UKRAINE, 4 Patrice Lumumba str., Building B, Floor 7,
252042 KIEV, Tel. +380 44 264 2776, Fax. +380 44 268 0461

United Kingdom: Philips Semiconductors Ltd., 276 Bath Road, Hayes,
MIDDLESEX UB3 5BX, Tel. +44 208 730 5000, Fax. +44 208 754 8421

United States: 811 East Arques Avenue, SUNNYVALE, CA 94088-3409,
Tel. +1 800 234 7381, Fax. +1 800 943 0087

Uruguay: see South America

Vietnam: see Singapore

Yugoslavia: PHILIPS, Trg N. Pasica 5/v, 11000 BEOGRAD,
Tel. +381 11 3341 299, Fax.+381 11 3342 553

For all other countries apply to: Philips Semiconductors,
Marketing Communications, Building BE-p, P.O. Box 218, 5600 MD EINDHOVEN,
The Netherlands, Fax. +31 40 27 24825

Internet: <http://www.semiconductors.philips.com>

© Philips Electronics N.V. 2001

SCA 72

All rights are reserved. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner.

The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice. No liability will be accepted by the publisher for any consequence of its use. Publication thereof does not convey nor imply any license under patent- or other industrial or intellectual property rights.

Printed in The Netherlands

753503/02/pp20

Date of release: 2001 Jul 11

Document order number: 9397 750 08543

Let's make things better.

**Philips
Semiconductors**



PHILIPS