

NON-ISOLATED DC/DC CONVERTERS

8 Vdc - 14 Vdc Input 0.8 Vdc - 3.63 Vdc / 30 A Outputs



Jan. 12, 2010

Bel Power Inc., a subsidiary of Bel Fuse Inc.


VRBG-30A1A0

RoHS Compliant

Rev.B

Features

- Non-Isolated
- Fixed Frequency
- High Efficiency
- Wide Trim
- Low Cost
- Remote Sense
- Input Under Voltage Lockout
- Over Temperature Shutdown
- Short Circuit Protection
- Remote On/Off
- Industrial Temperature Range
- UL60950-1 Recognized (UL/cUL)

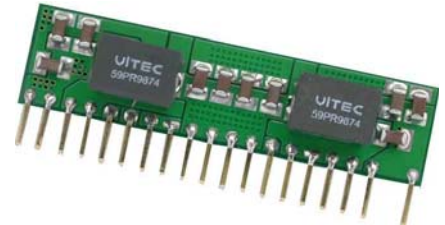

Applications

- Networking
- Computers and peripherals
- Telecommunications

Description

The Bel VRBG-30A1A0 is part of the non-isolated dc/dc converter Power Module series. The modules use a SIP package. These converters are available in a range of output voltages from 0.8 Vdc to 3.63 Vdc over a wide range of input voltage ($V_{in} = 8 \text{ Vdc} - 14 \text{ Vdc}$). The efficiency is typically 91% at 12 Vdc input and 3.3 Vdc output at full load.

Part Selection

| Output Voltage | Input Voltage | Max. Output Current | Max. Output Power | Typical Efficiency | Model Number |
|-------------------|----------------|---------------------|-------------------|--------------------|--------------|
| 0.8 Vdc - 3.3 Vdc | 8 Vdc - 14 Vdc | 30 A | 99 W | 91% | VRBG-30A1A0 |

Note: Add "G" or "R" suffix at the end of the model number to indicate Tray or Tape and Reel packaging.

Part Number Explanation

$\frac{V}{1} \frac{R}{2} \frac{BG}{3} - \frac{30}{4} \frac{A}{5} \frac{1A}{6} \frac{0}{7}$

- 1---Vertical mount
- 2---RoHS 6, change "R" to "7" means RoHS 5
- 3---Series name
- 4---Series code (output current 30A)
- 5---Input range (8-14v)
- 6---Output voltage, wide trim
- 7---Suffix

NON-ISOLATED DC/DC CONVERTERS

8 Vdc - 14 Vdc Input 0.8 Vdc - 3.63 Vdc / 30 A Outputs



Jan. 12, 2010

Bel Power Inc., a subsidiary of Bel Fuse Inc.

Absolute Maximum Ratings

| Parameter | Min | Typ | Max | Notes |
|--------------------------------|--------|-----|--------|-------|
| Input Voltage (continuous) | -0.3 V | - | 15 V | |
| Output Enable Terminal Voltage | -0.3 V | - | 15 V | |
| Ambient Temperature | -40 °C | - | 85 °C | |
| Storage Temperature | -55 °C | - | 125 °C | |

Input Specifications

| Parameter | Min | Typ | Max | Notes |
|---|-----|--------|--------------------|---|
| Input Voltage | 8 V | 12 V | 14 V | |
| Input Current (full load) | - | - | 15 A | An input line fuse must always be used. |
| Input Current (no load) | - | 240 mA | - | |
| Remote Off Input Current | - | 20 mA | - | |
| Input Reflected Ripple Current (rms) | - | - | 10 mA | With a 1000 uF AL-Cap at the input. |
| Input Reflected Ripple Current (pk-pk) | - | - | 40 mA | |
| I ² t Inrush Current Transient | - | - | 1 A ² s | |
| Turn On Voltage Threshold | - | 6.7 V | - | |
| Turn Off Voltage Threshold | - | 6.3 V | - | |

Note: All specifications are typical at nominal input, full load at 25 °C unless otherwise stated.

Output Specifications

| Parameter | Min | Typ | Max | Notes | | |
|---|---------------|--------------------|--------------------|--|---|--------|
| Output Voltage Set Point | -1.5%Vo, set | - | 1.5%Vo, set | Vin=12 V, Io=half load | | |
| Line Regulation | - | - | 0.5%Vo, set | | | |
| Load Regulation | - | - | 1.5%Vo, set | | | |
| Temperature Regulation (-40 °C to +85 °C) | - | - | 1%Vo, set | | | |
| Ripple and Noise (rms) | - | 4 mA | 20 mV | 0-20 MHz BW, with a 20 µF ceramic capacitor and a 150 uF tantalum capacitor at the output. | | |
| Ripple and Noise (pk-pk) | - | 15 mV | 100 mV | | | |
| Output Current | 0 A | - | 30 A | | | |
| Short Circuit Surge Transient | - | 1 A ² s | 3 A ² s | | | |
| Turn on Time | - | 2 mS | 10 mS | | | |
| Overshoot at Turn On | - | - | 5% | | | |
| Output Capacitance | 150 uF | - | 10000 uF | | | |
| Transient Response | | | | | | |
| 50% ~ 75% Max Load | Overshoot | Vo=3.3 V | - | 65 mV | di/dt=0.5 A/us, Vin=12 Vdc, with a 20 µF ceramic capacitor and a 150 uF tantalum capacitor at the output. | |
| | Settling Time | | - | 20 uS | | 45 uS |
| 75% ~ 50% Max Load | Overshoot | | - | 65 mV | | 150 mV |
| | Settling Time | | - | 20 uS | | 45 uS |

Note: All specifications are typical at nominal input, full load at 25 °C unless otherwise stated.

NON-ISOLATED DC/DC CONVERTERS

8 Vdc - 14 Vdc Input 0.8 Vdc - 3.63 Vdc / 30 A Outputs



Jan. 12, 2010

Bel Power Inc., a subsidiary of Bel Fuse Inc.

General Specifications

| Parameter | Min | Typ | Max | Notes |
|---------------------------|----------------------|---------|--------|--|
| Efficiency | | | | Vin=12 V, full load |
| Vo=0.8 V | - | 80% | - | |
| Vo=1.8 V | - | 87% | - | |
| Vo=2.5 V | - | 90% | - | |
| Vo=3.3 V | - | 91% | - | |
| Switching Frequency | - | 600 kHz | - | |
| Output Voltage Trim Range | 0.8 V | - | 3.63 V | |
| Over Temperature Shutdown | - | 130 °C | - | |
| Remote Sense Compensation | - | - | 0.5 V | |
| MTBF | TBD | | | Calculated Per Bell Core SR-332 (Io = Nominal; Ta = 25 °C) |
| Dimensions | | | | |
| Inches (L x W x H) | 2.0 x 0.50 x 0.433 | | | |
| Millimeters (L x W x H) | 50.80 x 12.70 x 11.0 | | | |
| Weight | - | TBD | - | |

Note: All specifications are typical at 25 °C unless otherwise stated.

Control Specifications


| Parameter | Min | Typ | Max | Notes |
|-----------------------|--------|-----|----------|---------------------------------|
| Remote On/Off | | | | |
| Signal Low (Unit Off) | -0.3 V | - | 0.8 V | Remote on/off pin open, unit on |
| Signal High (Unit On) | 2.8 V | - | Vin, max | |

Output Trim Equations

Equations for calculating the trim resistor are shown below (Unit: Ω). The Trim resistor should be connected between the Trim pin and Ground pin.

$$R_{trim} = \left[\frac{9680}{V_o - 0.8} - 715 \right]$$

Vo is the desired output voltage

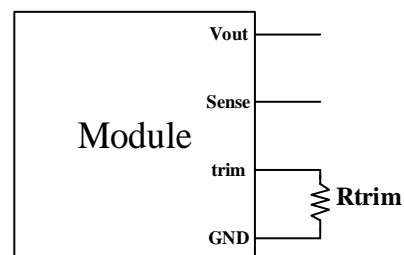

NON-ISOLATED DC/DC CONVERTERS





8 Vdc - 14 Vdc Input 0.8 Vdc - 3.63 Vdc / 30 A Outputs



Jan. 12, 2010

Bel Power Inc., a subsidiary of Bel Fuse Inc.

Efficiency Data

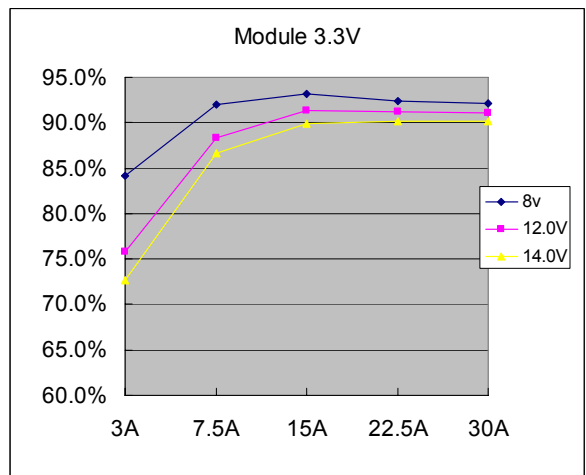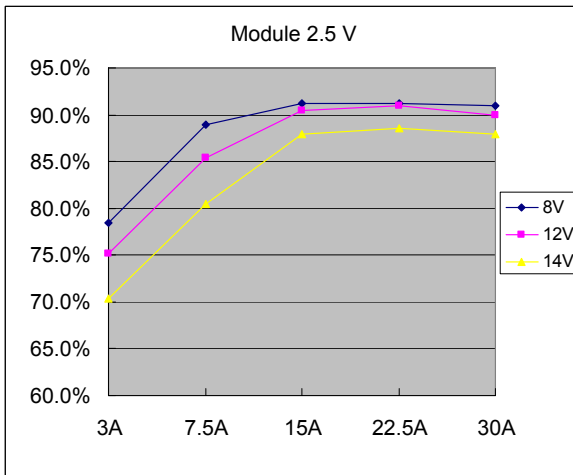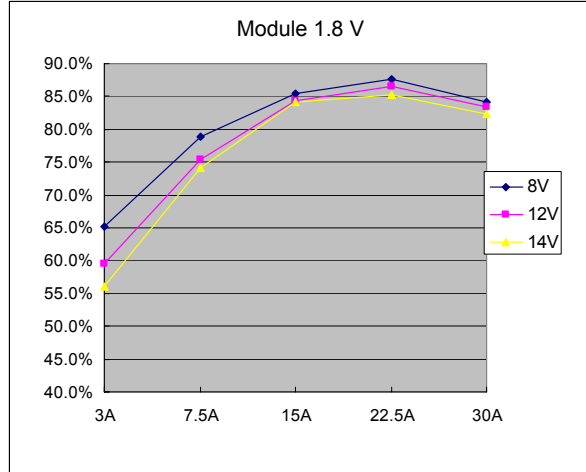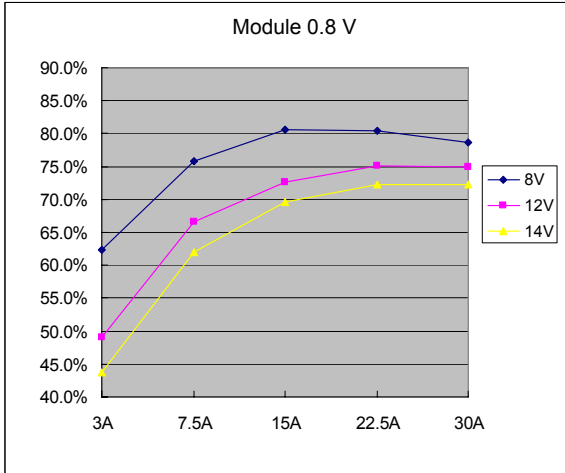

NON-ISOLATED DC/DC CONVERTERS

8 Vdc - 14 Vdc Input 0.8 Vdc - 3.63 Vdc / 30 A Outputs





Jan. 12, 2010


Bel Power Inc., a subsidiary of Bel Fuse Inc.

Thermal Derating Curves


The maximum acceptable temperature measured at the thermal ref points is 110 deg, the thermal ref point is shown in Figure. All the derating curves were tested with two electronic loads connected in parallel.

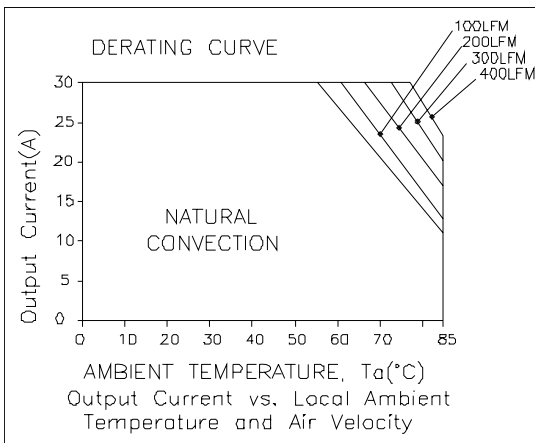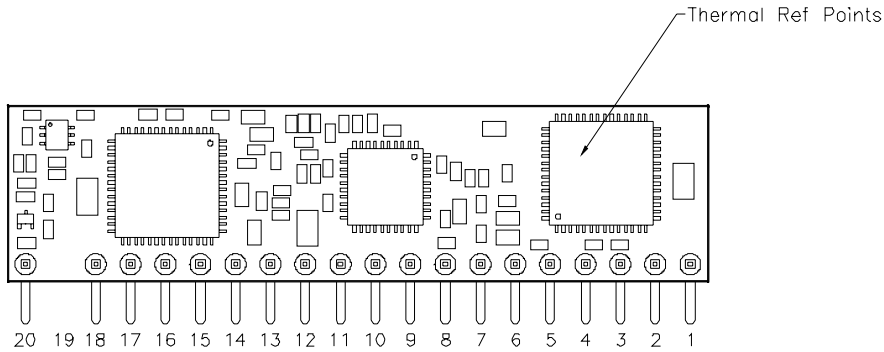


Vin=12 V, Vo=3.3 V

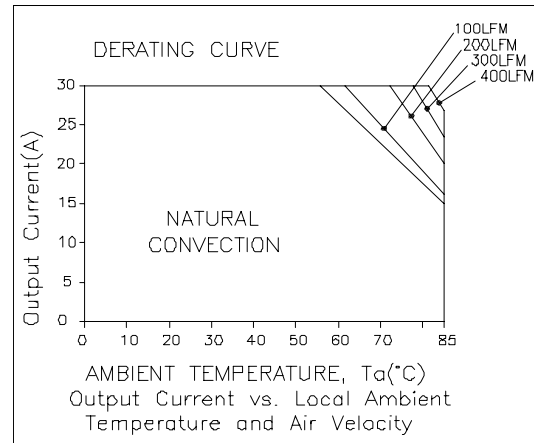

Vin=12 V, Vo=2.5 V

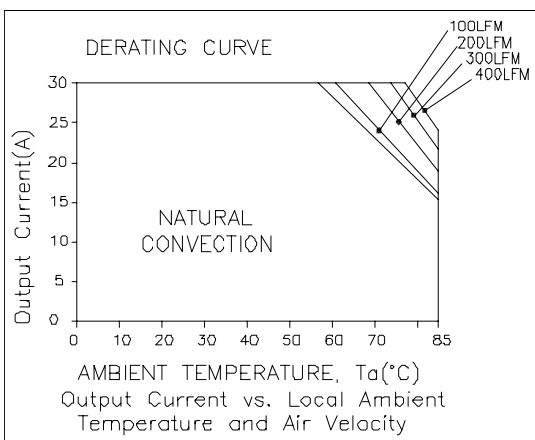

Vin=12 V, Vo=1.8 V

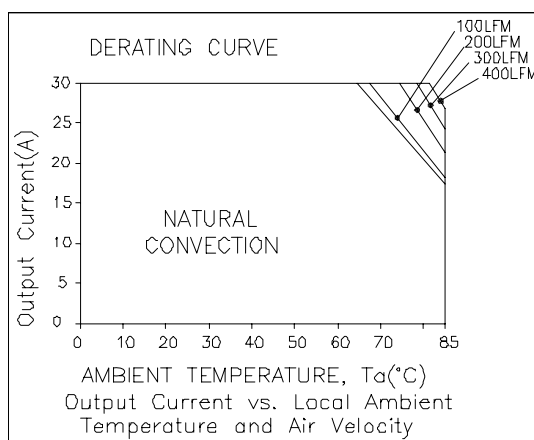

Vin=12 V, Vo=0.8 V

NON-ISOLATED DC/DC CONVERTERS


8 Vdc - 14 Vdc Input 0.8 Vdc - 3.63 Vdc / 30 A Outputs




Jan. 12, 2010

Bel Power Inc., a subsidiary of Bel Fuse Inc.


Ripple and Noise Waveforms

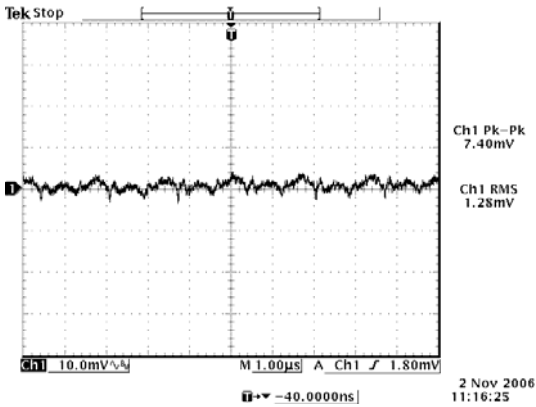


12 Vdc input, 0.8 Vdc output

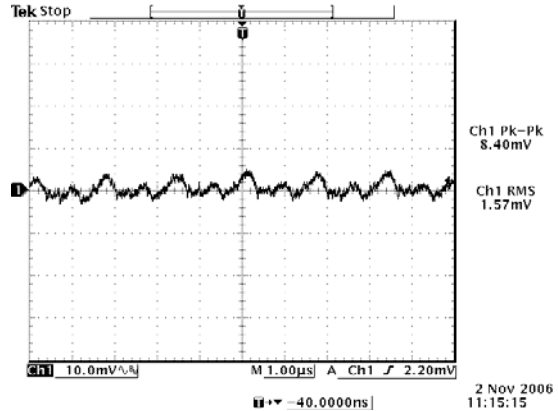

12 Vdc input, 1.8 Vdc output

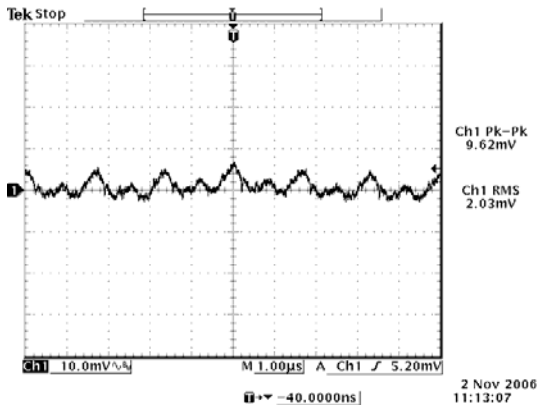


12 Vdc input, 2.5 Vdc output

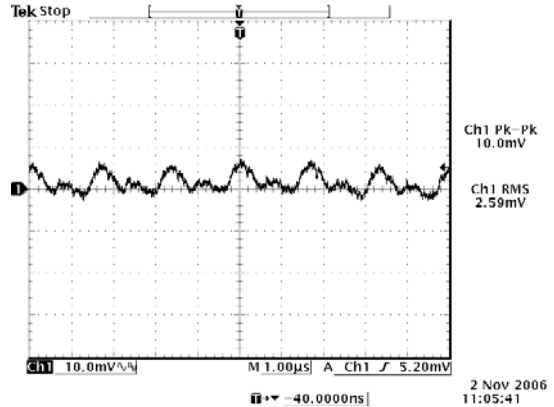


12 Vdc input, 3.3 Vdc output

Note: Ripple and noise at full load, external load with 150 uF tantalum cap and 20 uF ceramic at the output, and Ta=25 deg C.

Transient Response Waveforms

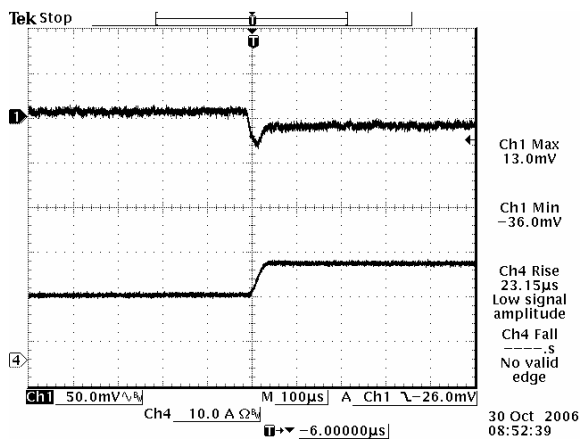

50% to 75% load Transient at 0.8 Vdc output

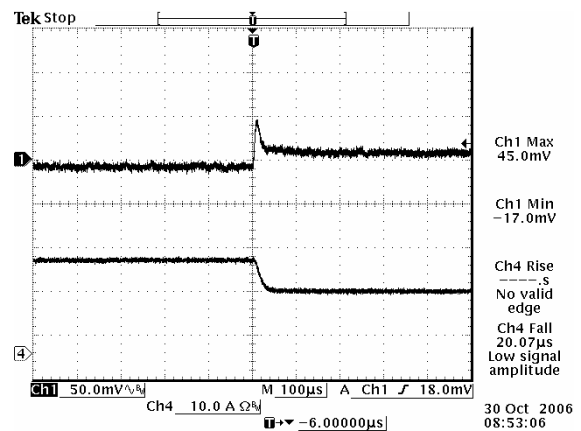

75% to 50% load Transient at 0.8 Vdc output

NON-ISOLATED DC/DC CONVERTERS



8 Vdc - 14 Vdc Input 0.8 Vdc - 3.63 Vdc / 30 A Outputs



Jan. 12, 2010



Bel Power Inc., a subsidiary of Bel Fuse Inc.

Transient Response Waveforms (continued)

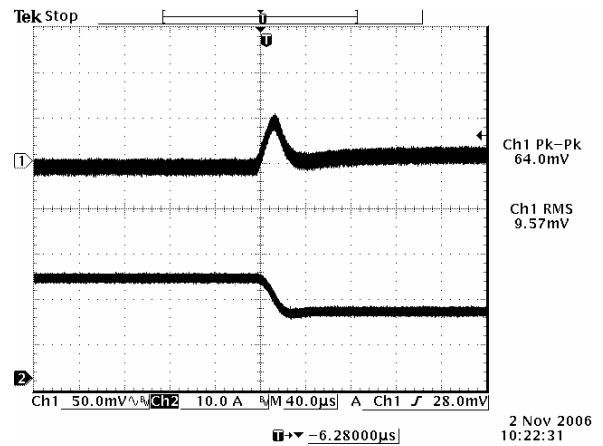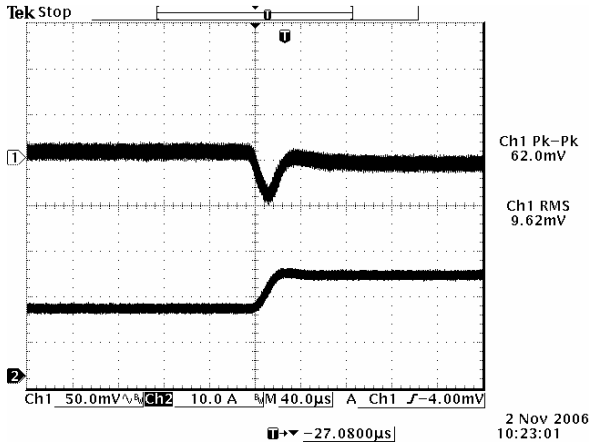



50% to 75% load Transient at 1.8 Vdc output

75% to 50% load Transient at 1.8 Vdc output

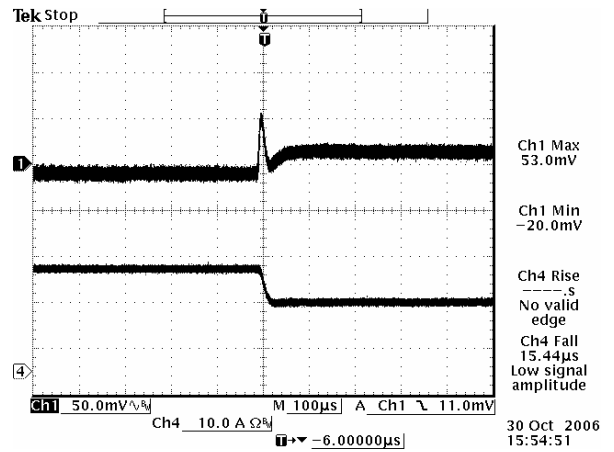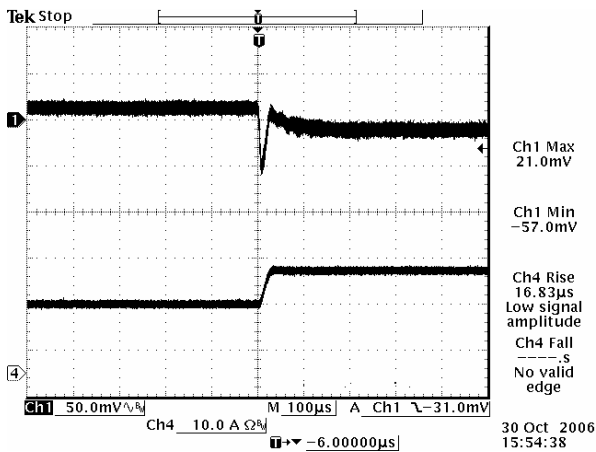

50% to 75% load Transient at 2.5 Vdc output

75% to 50% load Transient at 2.5 Vdc output

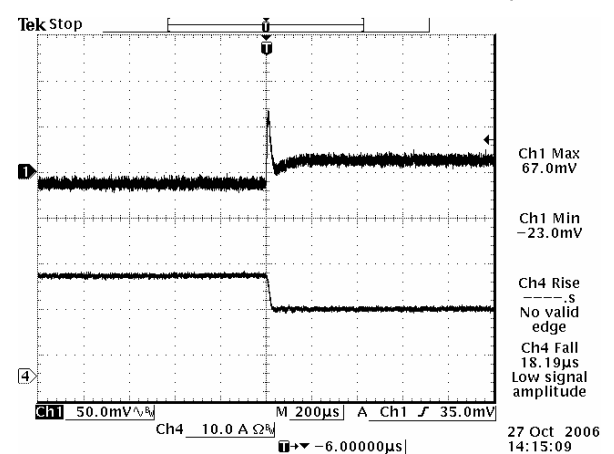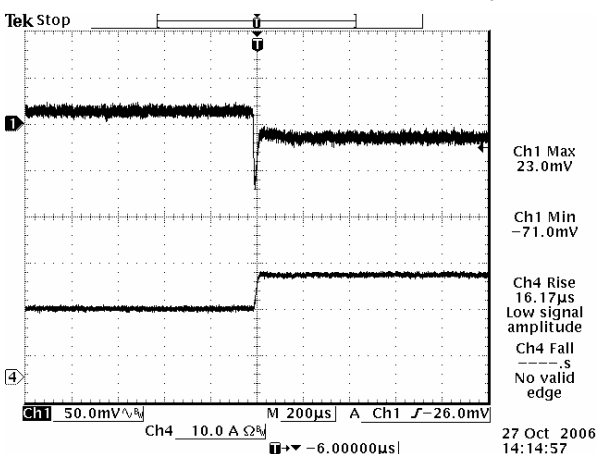

50% to 75% load Transient at 3.3 Vdc output

75% to 50% load Transient at 3.3 Vdc output

Note: Transient response at 12 Vdc input, di/dt=0.5 A/uS, with a 20 µF ceramic capacitor and a 150 uF tantalum capacitor at the output, Ta=25 deg C.

NON-ISOLATED DC/DC CONVERTERS




8 Vdc - 14 Vdc Input 0.8 Vdc - 3.63 Vdc / 30 A Outputs



Jan. 12, 2010

Bel Power Inc., a subsidiary of Bel Fuse Inc.

Mechanical Outline

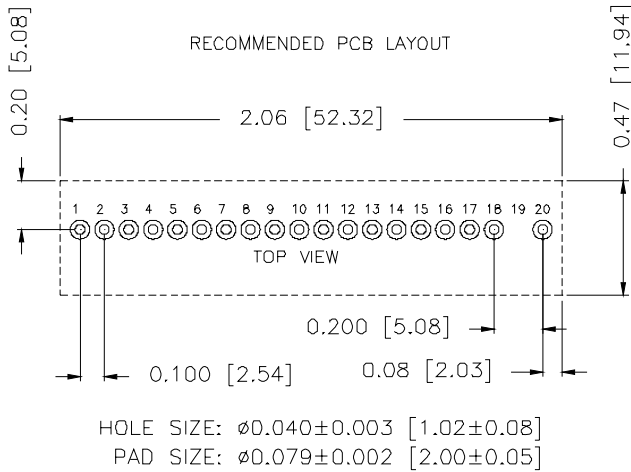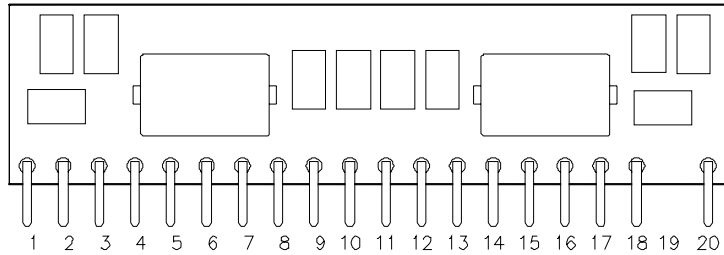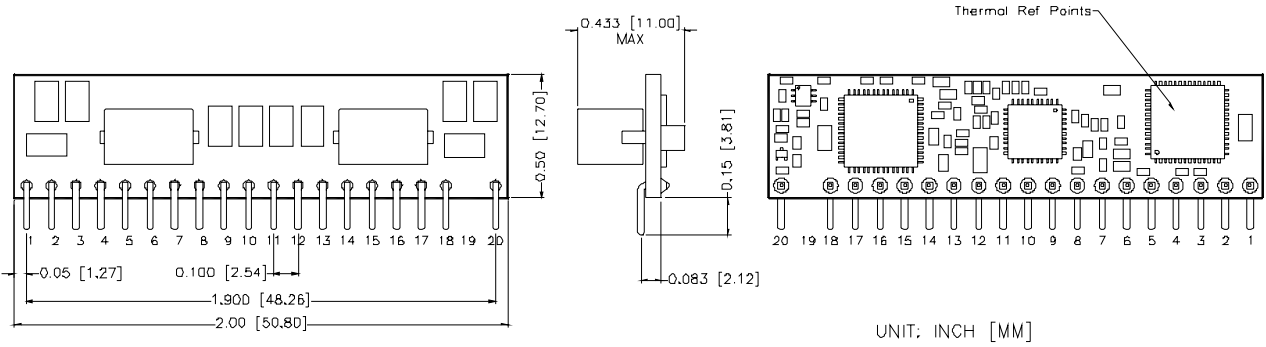

Pin Connections

| Pin | Function | Pin | Function |
|-----|---------------|-----|---------------|
| 1 | Vin | 11 | Vout |
| 2 | Vin | 12 | Vout |
| 3 | Ground | 13 | Remote On/Off |
| 4 | Ground | 14 | Ground |
| 5 | Trim | 15 | Ground |
| 6 | Remote Sense+ | 16 | Ground |
| 7 | Ground | 17 | Ground |
| 8 | Ground | 18 | Vin |
| 9 | Vout | 19 | N/C |
| 10 | Vout | 20 | Vin |

NON-ISOLATED DC/DC CONVERTERS

8 Vdc - 14 Vdc Input 0.8 Vdc - 3.63 Vdc / 30 A Outputs



Jan. 12, 2010

Bel Power Inc., a subsidiary of Bel Fuse Inc.

Revision History

| Date | Revision | Changes Detail | Approval |
|-----------|----------|--|----------|
| 2007-1-18 | A | First release | HL Lu |
| 2010-1-12 | B | 1. Update to Bel new datasheet format; 2. Output line regulation; 3. Efficiency curve for 3.3Vout; 4. Thermal derating curves. | Jack Fan |

RoHS Compliance

Complies with the European Directive 2002/95/EC, calling for the elimination of lead and other hazardous substances from electronic products.



©2010 Bel Fuse Inc. Specifications subject to change without notice. 011210

CORPORATE

Bel Fuse Inc.
206 Van Vorst Street
Jersey City, NJ 07302
Tel 201-432-0463
Fax 201-432-9542
www.belfuse.com

FAR EAST

Bel Fuse Ltd.
8F/ 8 Luk Hop Street
San Po Kong
Kowloon, Hong Kong
Tel 852-2328-5515
Fax 852-2352-3706
www.belfuse.com

EUROPE

Bel Fuse Europe Ltd.
Preston Technology Management Centre
Marsh Lane, Suite G7, Preston
Lancashire, PR1 8UD, U.K.
Tel 44-1772-556601
Fax 44-1772-888366
www.belfuse.com