



**Ultra Low Noise Precision, High-Speed
Operational Amplifier**

FEATURES

- Low offset Vos 10 μ V Max.
- Low drift vs. temperature:..... 0.2 μ V/ $^{\circ}$ C
- High CMMR..... 126dB @ V_{CM} of \pm 11V
- Low noise.....3nV/ \sqrt Hz.@ 1kHz..
-80 nVpp(0.1Hz to 10Hz) ..
- High open loop gain..... 1.8 Million
- Slew rate..... 17V/ μ S
- Gain bandwidth.....63 MHz
- Direct replacement for 725, OP05, OP06, OP07, AD510, AD517
SE5534 in gains > 5

APPLICATIONS

- Precision Instrumentation
- Data Acquisition
- Test Equipment
- Professional Audio Equipment
- Transducer Amplifier

PRODUCT DESCRIPTION



The AS OP-37 offers the same high performance as the OP27 but the design is optimized for circuits with gains greater than five. This design change increases slew rate to 17V/ μ Sec and gain bandwidth product to 63MHZ. The OP37 provides low noise combined with low offset and high speed operation. OP37 is ideal for precision instrumentation applications through offering low offset down to 25 μ V and drift of 0.6 μ V/ $^{\circ}$ C maximum. The low bias current of \pm 10nA and offset current of 7nA are achieved by using a bias-current cancellation circuit. Over the military temperature range, this circuitry typically holds I_B and I_{OS} to \pm 20nA and 15nA respectively.

The output stage has good load driving capability. A guaranteed swing of \pm 10V into 600 Ω and low output distortion make the OP37 an excellent choice for professional audio applications. PSRR and CMRR exceed 120dB. These characteristics, coupled with long-term drift of 0.2 μ V/month, allow the circuit designer to achieve performance levels previously attained only by discrete designs.

ORDERING INFORMATION

| TO-99 8-PIN | PLASTIC DIP 8-PIN | PLASTIC SOIC 8-PIN | TA=25 $^{\circ}$ C V _{OS} Max (mv) | Oper. Temp. Range |
|----------------|----------------------|-----------------------|--|----------------------|
| OP37AJ | | | 25 | MIL. |
| OP37EJ | OP37EP | OP37ES | 25 | IND/COM |
| OP37BJ | | | 60 | MIL. |
| OP37FJ | OP37FP | OP37FS | 60 | IND/COM |
| OP37CJ | | | 100 | MIL. |
| OP37GJ | OP37GP | OP37GS | 100 | IND/COM |

PIN CONNECTIONS



ABSOLUTE MAXIMUM RATINGS

| | |
|--|---------------|
| Input Voltage..... | ±22V |
| Internal Power Dissipation (Note 1)..... | 500mW |
| Input Voltage (Note 3) | ±22V |
| Output Short-Circuit Duration..... | Indefinite |
| Differential Input Voltage (Note 2)..... | ±0.7V |
| Differential Input Voltage (Note 2)..... | ±25mA |
| Storage Temperature Range | -65 to +150° |
| Operating Temperature Range | |
| OP37A, OP37B, OP37C (J)..... | -55 to +125°C |
| OP37E, OP37F, OP37G (J) | -25 to +85°C |
| OP37E, OP37F, OP37G(P,S) | 0 to +70°C |
| Dice Junction Temperature(Tj) | -65 to +150°C |
| Lead Temperature (Soldering, 60 Sec.)..... | 300°C |

NOTES:

1. See Table for maximum ambient temperature rating and derating factor.
2. The OP37's inputs are protected by back to back diodes. Current limiting resistors are not used in order to achieve low noise. If differential input voltage exceeds ±0.7V the input current should be limited to 25mA.
3. For supply voltage less than ±22V, the absolute maximum input voltage is equal to the supply voltage.

| PACKAGE TYPE | MAXIMUM AMBIENT TEMPERATURE FOR RATING | DERATE ABOVE MAXIMUM AMBIENT TEMPERATURE |
|------------------------|--|--|
| TO-99(J) | 80°C | 7.1 mW/°C |
| 8-Pin Plastic SOIC (S) | 62°C | 5.6mW/°C |
| 9-Pin Plastic DIP (P) | 62°C | 5.7mW/°C |

ELECTRICAL CHARACTERISTICS at $V_s = \pm 15V$, $T_a = 25^\circ C$, unless otherwise specified.

| Parameter | Symbol | Conditions | OP-37A/E | | | OP-37B/F | | | OP-37C/G | | | Units |
|------------------------------------|---------------|---------------------------------------|----------|-------|------|----------|-------|------|----------|------------|------|---------------|
| | | | Min. | Typ. | Max. | Min. | Typ. | Max. | Min. | Typ. | Max. | |
| Input Offset Voltage | V_{os} | (Note 1) | | 10 | 25 | | 20 | 60 | | 30 | 100 | mV |
| Long-Term V_{os} Stability | $V_{os}/Time$ | (Note 2,3) | | 0.2 | 1.0 | | 0.3 | 1.5 | | 0.4 | 2.0 | $\mu V/M_o$ |
| Input Offset Current | I_{os} | | | 7 | 35 | | 9 | 50 | | 12 | 75 | nA |
| Input Bias Current | I_B | | | ±10 | ±40 | | ±12 | ±55 | | ±15 | ±80 | nA |
| Input Noise Voltage | e_{npp} | 0.1Hz to 10Hz (Note 3,5) | | 0.08 | 0.18 | | 0.08 | 0.18 | | 0.09 | 0.25 | μV_{p-p} |
| Input Noise Voltage Density | e_n | $f_o = 10Hz$ (Note 3) | | 3.5 | 5.5 | | 3.5 | 5.5 | | 3.8 | 8.0 | nV/√Hz |
| Input Noise Voltage Density | e_n | $f_o = 30Hz$ (Note 3) | | 3.1 | 4.5 | | 3.1 | 4.5 | | 3.3 | 5.6 | nV/√Hz |
| Input Noise Voltage Density | e_n | $f_o = 1000Hz$ (Note 3) | | 3.0 | 3.8 | | 3.0 | 3.8 | | 3.0 | 3.8 | nV/√Hz |
| Input Noise Current Density | i_n | $f_o = 10Hz$ (Note 3,6) | | 1.7 | 4.0 | | 1.7 | 4.0 | | 1.7 | | pV/√Hz |
| Input Noise Current Density | i_n | $f_o = 30Hz$ (Note 3,6) | | 1.0 | 2.3 | | 1.0 | 2.3 | | 1.0 | | pV/√Hz |
| Input Noise Current Density | i_n | $f_o = 1000Hz$ (Note 3,6) | | 0.4 | 0.6 | | 0.4 | 0.6 | | 0.4 | 0.6 | pV/√Hz |
| Input Resistance-Differential-Mode | R_{in} | (Note 3) | 1.3 | 6 | | 0.94 | 5 | | 0.7 | 4 | | MΩ |
| Input Resistance-Common-Mode | R_{inCM} | | | 3 | | | 2.5 | | | 2 | | GΩ |
| Input Voltage Range | IVR | | ±11.0 | ±12.3 | | ±11.0 | ±12.3 | | ±11.0 | ±12.3 | | V |
| Common-Mode Rejection Ratio | CMRR | $V_{CM} = \pm 11.0$ | 114 | 126 | | 106 | 123 | | 100 | 120 | | dB |
| Power Supply Rejection Ratio | PSRR | $V_S = \pm 4$ to ± 18 | | 1 | 10 | | 1 | 10 | | 2 | 20 | $\mu V/V$ |
| Large-Signal Voltage Gain | AV_O | $R_L \geq 2k\Omega$ $V_o = \pm 10V$ | 1000 | 1800 | | 1000 | 1800 | | 700 | 1500 | | V/mV |
| Large-Signal Voltage Gain | AV_O | $R_L \geq 1k\Omega$ $V_o = \pm 10V$ | 800 | 1500 | | 800 | 1500 | | 400 | 1500 | | V/mV |
| Large-Signal Voltage Gain | AV_O | $R_L \geq 600k\Omega$ $V_o = \pm 10V$ | 250 | 700 | | 250 | 700 | | 250 | 700 | | V/mV |
| Output Voltage Swing | V_o | $R_L \geq 2k\Omega$ | ±12.0 | ±13.8 | | ±12.0 | ±13.8 | | ±11.5 | ±13.5 | | V |
| Output Voltage Swing | V_o | $R_L \geq 600k\Omega$ | ±10.0 | ±11.5 | | ±10.0 | ±11.5 | | ±10.0 | ±11.5 | | V |
| Slew Rate | SR | $R_L \geq 2k\Omega$ (Note 4) | 111 | 17 | | 11 | 17 | | 11 | 17 | | V/μs |
| Gain Bandwidth Prod. | GBW | (Note 4) | 45 | 63 | | 45 | 63 | | 45 | 63 | | MHz |
| Open-Loop Output Resistance | R_o | $V_o = 0, I_o = 0$ | | 70 | | | 70 | | | 70 | | Ω |
| Power Consumption | P_d | V_o | | 90 | 140 | | 90 | 140 | | 1001 70 | | mW |
| Offset Adjustment Range | | $R_p = 21k\Omega$ | | ±4.0 | | | ±4.0 | | | ±4.0 | | mV |

1. Input Offset voltage measurements are performed by automated test equipment approximately 0.5 seconds after application of power. A F grades guaranteed fully warmed up.
2. Long term input offset voltage stability refers to the average trend line of Vos vs. Time over extended periods after the first 30 days of operation, changes in Vos during the first 30 days are typically 2.5mV.
3. Sample tested
4. Guaranteed by Design
5. See test circuit and frequency response curve for 0.1 Hz tester
6. See test circuit for current noise measurement
7. Guaranteed by input bias current.

ELECTRICAL CHARACTERISTICS at $V_s = \pm 15V$, $-55^\circ C \leq T_a \leq +125^\circ C$, unless otherwise specified.

| Parameter | Symbol | Conditions | OP-37A | | | OP-37B | | | OP-37C | | | Units |
|------------------------------|------------|---------------------------------------|------------|------------|----------|------------|------------|----------|-----------|------------|-----------|------------------|
| | | | Min. | Typ. | Max. | Min. | Typ. | Max. | Min. | Typ. | Max. | |
| Input Offset Voltage | V_{os} | (Note 1) | | 30 | 60 | | 50 | 200 | | 70 | 300 | μV |
| Average Input Offset Drift | TCV_{os} | (Note 2) | | 0.2 | 0.6 | | 0.3 | 1.3 | | 0.4 | 1.8 | $\mu V/^\circ C$ |
| Average Input Offset Drift | TCV_{os} | (Note 3) | | 0.2 | 0.6 | | 0.3 | 1.3 | | 0.4 | 1.8 | $\mu V/^\circ C$ |
| Input Offset Current | I_{os} | | | 15 | 50 | | 22 | 85 | | 30 | 135 | nA |
| Input Bias Current | I_{os} | | | ± 20 | ± 60 | | ± 28 | ± 95 | | ± 35 | ± 150 | nA |
| Input Voltage Range | IVR | | ± 10.3 | ± 11.5 | | ± 10.3 | ± 11.5 | | ± 10 | ± 11.5 | | V |
| Common-Mode Rejection Ratio | CMRR | $V_{CM} = \pm 10V$ | 108 | 122 | | 100 | 119 | | 94 | 116 | | dB |
| Power Supply Rejection Ratio | PSSR | $V_s \pm 4.5V$ to $\pm 18V$ | 2 | 16 | | 2 | 20 | | 4 | 51 | | $\mu V/V$ |
| Large-Signal Voltage Gain | A_{vo} | $R_I \geq 2k\Omega$, $V_o = \pm 10V$ | 600 | 1200 | | 500 | 1000 | | 300 | 800 | | V/mV |
| Output Voltage Swing | V_o | $R_I \geq 2k\Omega$ | ± 11.5 | ± 13.5 | | ± 11.0 | ± 13.2 | | ± 1.5 | ± 13.0 | | V |

ELECTRICAL CHARACTERISTICS at $V_s = \pm 15V$, $-25^\circ C \leq T_a \leq +85^\circ C$, for OP37J and OP37Z, $0^\circ C \leq T_a \leq +70^\circ C$ for OP37P and OP37 unless otherwise specified.

| Parameter | Symbol | Conditions | OP-37E | | | OP-37F | | | OP-37G | | | Units |
|------------------------------|------------|---------------------------------------|------------|------------|----------|------------|------------|----------|------------|------------|-----------|------------------|
| | | | Min. | Typ. | Max. | Min. | Typ. | Max. | Min. | Typ. | Max. | |
| Input Offset Voltage | V_{os} | (Note 1) | | 20 | 50 | | 40 | 140 | | 55 | 220 | μV |
| Average Input Offset Drift | TCV_{os} | (Note 2) | | 0.2 | 0.6 | | 0.3 | 1.3 | | 0.4 | 1.8 | $\mu V/^\circ C$ |
| Average Input Offset Drift | TCV_{os} | (Note 3) | | 0.2 | 0.6 | | 0.3 | 1.3 | | 0.4 | 1.8 | $\mu V/^\circ C$ |
| Input Offset Current | I_{os} | | | 10 | 50 | | 14 | 85 | | 20 | 135 | nA |
| Input Bias Current | I_{os} | | | ± 14 | ± 60 | | ± 18 | ± 95 | | ± 25 | ± 150 | nA |
| Input Voltage Range | IVR | | ± 10.5 | ± 11.8 | | ± 10.5 | ± 11.8 | | ± 10.5 | ± 11.8 | | V |
| Common-Mode Rejection Ratio | CMRR | $V_{CM} = \pm 10V$ | 110 | 124 | | 102 | 121 | | 96 | 118 | | dB |
| Power Supply Rejection Ratio | PSSR | $V_s \pm 4.5V$ to $\pm 18V$ | 2 | 15 | | 2 | 16 | | 2 | 32 | | $\mu V/V$ |
| Large-Signal Voltage Gain | A_{vo} | $R_I \geq 2k\Omega$, $V_o = \pm 10V$ | 750 | 1500 | | 700 | 1300 | | 450 | 1000 | | V/mV |
| Output Voltage Swing | V_o | $R_I \geq 2k\Omega$ | ± 11.7 | ± 13.6 | | ± 11.4 | ± 13.5 | | ± 11.0 | ± 13.3 | | V |

Notes:

1. Input offset voltage measurements are performed by automated test equipment approximately 0.5 seconds after application of power A F Grades guaranteed fully warmed up.
2. The TCV_{os} performance is within the specifications unnullled or when nulled with $R_p = 8k\Omega$. TCV_{os} is 100% tested for A/E grades. Sample tested for B C F G grades
3. Guaranteed by Design.

ELECTRICAL CHARACTERISTICS at $V_S = \pm 15V$, $T_a = 25^\circ C$, unless otherwise specified.










| Parameter | Symbol | Conditions | OP-37N/NT Typical | OP-37G/GT Typical | OP-37GR Typical | Units |
|------------------------------------|------------|-----------------------|----------------------|----------------------|--------------------|------------------|
| Average Input Offset Voltage Drift | TCV_{OS} | Nullled or Unnullled | 0.2 | 0.3 | 0.4 | $\mu V/^\circ C$ |
| Average Input Offset Voltage Drift | TCV_{OS} | $R_p = 8kW$ to $20kW$ | 0.2 | 0.3 | 0.4 | $\mu V/^\circ C$ |
| Average Input Offset Current Drift | TCI_{OS} | | 80 | 130 | 180 | $pA/^\circ C$ |
| Average Input Offset Current Drift | TCI_B | | 100 | 160 | 200 | $pA/^\circ C$ |
| Average Input Bias Current Drift | TCI_B | | 160 | 160 | 200 | $pA/^\circ C$ |
| Input Noise Voltage Density | e_n | $f_o = 10Hz$ | 3.5 | 3.5 | 3.8 | nV/\sqrt{Hz} |
| Input Noise Voltage Density | e_n | $f_o = 30Hz$ | 3.1 | 3.1 | 3.3 | nV/\sqrt{Hz} |
| Input Noise Voltage Density | e_n | $f_o = 1000Hz$ | 3.0 | 3.0 | 3.2 | nV/\sqrt{Hz} |
| Input Noise Current Density | i_n | $f_o = 10Hz$ | 1.7 | 1.7 | 1.7 | pA/\sqrt{Hz} |
| Input Noise Current Density | i_n | $f_o = 30Hz$ | 1.0 | 1.0 | 1.0 | pA/\sqrt{Hz} |
| Input Noise Current Density | i_n | $f_o = 1000Hz$ | 0.4 | 0.4 | 0.4 | pA/\sqrt{Hz} |
| Input Noise Voltage | e_{npp} | 0.1Hz to 10Hz | 0.08 | 0.08 | 0.09 | μV_{pp} |
| Slew Rate | SR | $R \leq 2kW$ | 17 | 17 | 17 | $V/\mu s$ |
| Gain Bandwidth Product | GBW | | 63 | 63 | 63 | MHz |

Note:

- Input offset voltage measurements are performed by automated test equipment approximately 0.5 second after application of power.


TYPICAL CHARACTERISTICS

TYPICAL CHARACTERISTICS (continued)




TYPICAL CHARACTERISTICS (continued)


OFFSET VOLTAGE DRIFT OF EIGHT REPRESENTATIVE UNITS vs TEMPERATURE




LONG-TERM OFFSET VOLTAGE DRIFT OF SIX REPRESENTATIVE UNITS




WARM-UP OFFSET VOLTAGE DRIFT




OFFSET VOLTAGE CHANGE DUE TO THERMAL SHOCK




INPUT BIAS CURRENT vs TEMPERATURE




INPUT OFFSET CURRENT vs TEMPERATURE




OPEN-LOOP GAIN vs FREQUENCY



SLEW RATE, GAIN BANDWIDTH PRODUCT, PHASE MARGIN vs TEMPERATURE




GAIN, PHASE SHIFT vs FREQUENCY




TYPICAL CHARACTERISTICS (continued)


OFFSET VOLTAGE DRIFT OF EIGHT REPRESENTATIVE UNITS vs TEMPERATURE




LONG-TERM OFFSET VOLTAGE DRIFT OF SIX REPRESENTATIVE UNITS




WARM-UP OFFSET VOLTAGE DRIFT




OFFSET VOLTAGE CHANGE DUE TO THERMAL SHOCK




INPUT BIAS CURRENT vs TEMPERATURE




INPUT OFFSET CURRENT vs TEMPERATURE




OPEN-LOOP GAIN vs FREQUENCY






SLEW RATE, GAIN BANDWIDTH PRODUCT, PHASE MARGIN vs TEMPERATURE



GAIN, PHASE SHIFT vs FREQUENCY



TYPICAL CHARACTERISTICS (continued)




APPLICATION HINTS

OP-37 series devices can be fitted directly to 725 and OP-06, OP-07 & OP-05 Series sockets with or without removal of external compensation components. Additionally, the OP-37 may be fitted to unnullled 741 series. However, if conventional 741 nulling circuitry is in use, it should be modified or removed to enable proper OP-37 operation. The OP-37 provides stable operation with load capacitance of up to 500pF and ±10V swings; larger capacitances should be decoupled with a 50Ω resistor.

Offset stability can be degraded by stray thermoelectric voltages arising from dissimilar metals at the contacts to the input terminals. Best operation will be obtained when both input contacts are maintained at the same temperature, preferably close to the temperature of the device's package.

OP-37 OFFSET VOLTAGE ADJUSTMENT


The OP-37 offset voltage is trimmed at wafer level. However if further adjustment of V_{OS} is necessary, a 10kΩ trim potentiometer may be used. Other potentiometer values from 1kΩ to 1MΩ can be used with a slight degradation. Trimming to a value other than zero creates a drift of approx. $V_{OS}/300 \mu V / ^\circ C$.

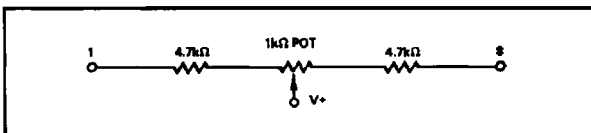

OP-37 COMPENSATION

The OP-37 is internally compensated for unity-gain. However, it may still require a small value capacitor in parallel with the feedback resistor. The capacitor can compensate for the pole generated by R_f and input capacitance and eliminate oscillation.

OFFSET NULLING CIRCUIT

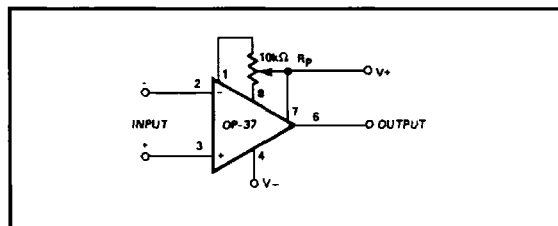

INPUT PROTECTION OF OP-37

For input protection of the OP-37, back to back diodes can be used. Over a few hundred mV differential input signals will make current flow and without external current limiting resistors at the input, it will be destroyed.

The amplifier can be damaged by any static discharge as well as high current input. The OP-37 can still be functional but for any precision amplifier such as OP-37 the input offset, drift, and noise can be permanently damaged.

