

## PAW3101DB CMOS OPTICAL MOUSE SENSOR

### General Description

The PAW3101DB is a CMOS process optical mouse sensor with DSP integration chip that serves as a non-mechanical motion estimation engine for implementing a computer mouse.

#### Features

- Single 5.0/3.3 volt power supply
- Precise optical motion estimation technology
- Complete 2-D motion sensor
- No mechanical parts
- Accurate motion estimation over a wide range of surfaces
- High speed motion detection up to 21 inches/sec
- High resolution up to 800 CPI
- Register setting for low power dissipation
- Power saving mode during times of no movement
- Serial Interface for programming and data transfer
- I/O pin 5.0 volt tolerance

#### Key Specification

|                          |   |
|--------------------------|---|
| <b>Power Supply</b>      | <b>Wide operating supply range<br/>3.0V ~ 3.6V (VDD, VREF)<br/>4.25V ~ 5.5V (VDD)</b>           |
| <b>Optical Lens</b>      | <b>1:1</b>  |
| <b>System Clock</b>      | <b>18.432 MHz</b>   |
| <b>Speed</b>             | <b>21 inches/sec</b>  |
| <b>Resolution</b>        | <b>400/800 CPI</b>  |
| <b>Frame Rate</b>        | <b>3000 frames/sec</b>  |
| <b>Operating Current</b> | <b>10mA @Mouse moving (Normal)<br/>5mA @Mouse not moving (Sleep)<br/>100uA @Power down mode</b> |
| <b>Package</b>           | <b>Staggered DIP8</b>   |

### Ordering Information

| Order Number | I/O         | Resolution |
|--------------|-------------|------------|
| PAW3101DB    | CMOS output | 800 CPI    |

**1. Pin Configuration**

**1. Pin Description**

| Pin No. | Name    | Type   | Definition  |
|---------|---------|--------|---|
| 1       | OSCIN   | IN     | Resonator input   |
| 2       | OSCOOUT | OUT    | Resonator output  |
| 3       | SDIO    | I/O    | Serial interface bi-direction data (5.0 volt tolerance and 3.3V output) |
| 4       | SCLK    | IN     | Serial interface clock (5.0 volt tolerance)                             |
| 5       | LED     | OUT    | LED control   |
| 6       | VSS     | GND    | Chip ground   |
| 7       | VDD     | PWR    | Chip power, 3.0V ~ 3.6V( $V_{dd1}$ ) or 4.25V ~ 5.5( $V_{dd2}$ )        |
| 8       | VREF    | BYPASS | Voltage reference, 3.3V   |

**1.2 Pin Assignment**

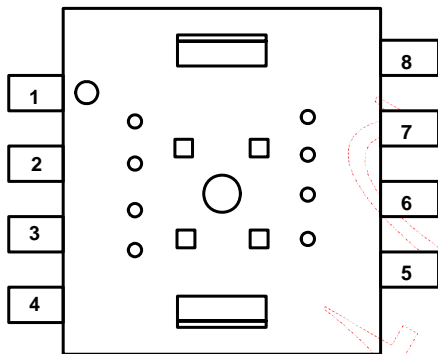


Figure 1. Top View Pinout

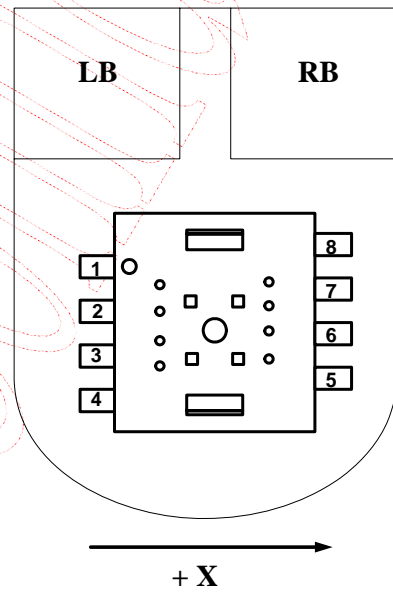


Figure 2. Top View of Mouse

2. Block Diagram and Operation

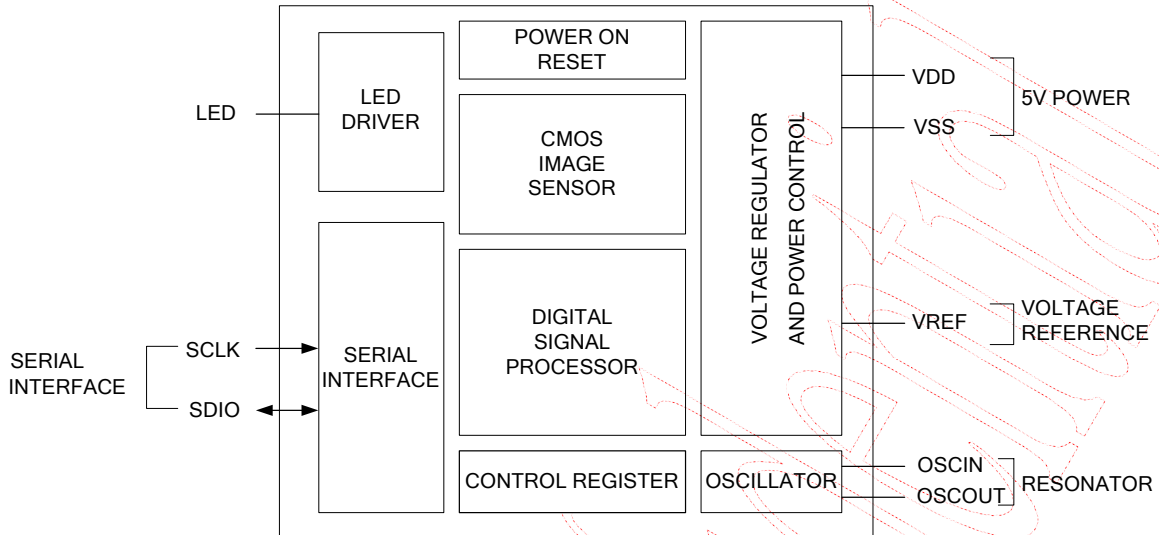


Figure 3. Block Diagram

The PAW3101DB is a CMOS-process optical mouse sensor with DSP integration chip that serves as a non-mechanical motion estimation engine for implementing a computer mouse. It is based on new optical navigation technology, which measures changes in position by optically acquiring sequential surface images (frames) and mathematically determining the direction and magnitude of movement. The mouse sensor is in a 8-pin optical package. The current X and Y information are available in registers accessed via a serial port. The word "mouse sensor," instead of PAW3101DB, is used in the document.

### 3. Registers and Operation

The released registers of the mouse sensor can be programmed via a serial port interface. The user can modify released DSP configuration and read motion data from these registers. Some registers not being listed are reserved not allowed to be modified.

#### 3.1 Registers

| Address           | Name            | R/W | Reset Value | Data Type  |
|-------------------|-----------------|-----|-------------|--|
| 0x00              | Operation_Mode1 | R/W | 0x00        | Bit field  |
| 0x01              | Product_ID1     | R   | 0x01        | Bit field  |
| 0x02              | Delta_Y         | R   | -           | Eight bits 2's complement number   |
| 0x03              | Delta_X         | R   | -           | Eight bits 2's complement number   |
| 0x04              | Image_Quality   | R   | -           | Eight bits unsigned integer  |
| 0x05<br> <br>0x13 | -               | -   | -           | Reserved for future use  |
| 0x14              | Product_ID2     | R   | 0x10        | Eight bits 11:4] number with the product identifier  |
| 0x15              | Product_ID3     | R   | 0x1X        | Four bits[3:0] number with the product identifier<br>Reserved[3:0] number is reserved for future use |
| 0x16              | Motion_Status   | R   | -           | Bit field  |
| 0x17              | Delta_X         | R   | -           | Eight bits 2's complement number   |
| 0x18              | Delta_Y         | R   | -           | Eight bits 2's complement number   |
| 0x19              | Image_Quality   | R   | -           | Eight bits unsigned integer  |
| 0x1A              | Operation_Mode2 | R/W | -           | Bit field  |
| 0x1B              | Configuration   | R/W | -           | Bit field  |
| 0x1C<br> <br>0x3F | -               | -   | -           | Reserved for future use  |
| 0x40              | Operation_Mode3 | R/W | 0x20        | Bit field  |
| 0x41              | Product_ID4     | R   | 0x41        | Bit field  |
| 0x42              | Delta_Y         | R   | -           | Eight bits 2's complement number   |
| 0x43              | Delta_X         | R   | -           | Eight bits 2's complement number   |
| 0x44              | Image_Quality   | R   | -           | Eight bits unsigned integer  |

3.2 Register Descriptions

| 0x00  | Operation_Model  |  |    |               |    |    |    |         |  |
|-------|--|--|----|---------------|----|----|----|---------|--|
| Bit   | 7  | 6  | 5  | 4             | 3  | 2  | 1  | 0       |  |
| Field | Reset  | PD_enh   | 0  | 0             | 0  | 0  | 0  | Slp_enl |  |
| Usage | Register 0x00 allows the user to change the operation of the mouse sensor. Shown below are the bits, their default values, and optional values.<br><br>If Slp_enl = 0, after 1 sec not moving during normal mode, the mouse sensor will enter sleep mode, and keep on sleep mode until moving is detected or wakeup is asserted. |  |    |               |    |    |    |         |  |
| Notes | <b>Field Name</b>  | <b>Description</b>   |    |               |    |    |    |         |  |
|       | Reset  | Full chip reset<br><b>0 = Normal operation mode (Default)</b><br>1 = Full chip reset |    |               |    |    |    |         |  |
|       | PD_enh   | Power down mode<br><b>0 = Normal operation mode (Default)</b><br>1 = Power down mode |    |               |    |    |    |         |  |
|       | Bit [5:1]  | MUST always be <b>00000</b>  |    |               |    |    |    |         |  |
|       | Slp_enl  | Sleep mode enable/disable<br><b>0 = Enable (Default)</b><br>1 = Disable              |    |               |    |    |    |         |  |
| 0x01  | Product_ID1  |  |    |               |    |    |    |         |  |
| Bit   | 7  | 6  | 5  | 4             | 3  | 2  | 1  | 0       |  |
| Field | PID1[2:0]  |  |    | Reserved[3:0] |    |    |    | Opstate |  |
| Usage | Product ID of the mouse sensor and operation state of the mouse sensor.  |  |    |               |    |    |    |         |  |
| Notes | <b>Field Name</b>  | <b>Description</b>   |    |               |    |    |    |         |  |
|       | PID1[2:0]  | The product ID is 000  |    |               |    |    |    |         |  |
|       | Reserved[3:0]  | Reserved for future use  |    |               |    |    |    |         |  |
|       | Opstate  | Operation state<br>0 = Sleep state<br>1 = Normal state                               |    |               |    |    |    |         |  |
| 0x02  | Delta_Y  |  |    |               |    |    |    |         |  |
| Bit   | 7  | 6  | 5  | 4             | 3  | 2  | 1  | 0       |  |
| Field | Y7   | Y6   | Y5 | Y4            | Y3 | Y2 | Y1 | Y0      |  |
| Usage | Y movement is counts since last report. Absolute value is determined by resolution. Reading clears the register. Report range -128 ~ +127.   |  |    |               |    |    |    |         |  |

| <b>0x03</b> |   | <b>Delta_X</b>                                    |    |    |               |    |    |    |
|-------------|---|---|----|----|---------------|----|----|----|
| Bit         | 7   | 6   | 5  | 4  | 3             | 2  | 1  | 0  |
| Field       | X7  | X6  | X5 | X4 | X3            | X2 | X1 | X0 |
| Usage       | X movement is counts since last report. Absolute value is determined by resolution. Reading clears the register. Report range -128 ~ +127.  |   |    |    |               |    |    |    |
| <b>0x04</b> |   | <b>Image_Quality</b>                              |    |    |               |    |    |    |
| Bit         | 7   | 6   | 5  | 4  | 3             | 2  | 1  | 0  |
| Field       | Imgqa[7:0]  |   |    |    |               |    |    |    |
| Usage       | Image Quality is a quality level of the mouse sensor in the current frame. Report range 0 ~ 255.  |   |    |    |               |    |    |    |
| Notes       | <b>Field Name</b>   | <b>Description</b>                                |    |    |               |    |    |    |
|             | Imgqa[7:0]  | Image quality report range: 0(worst) ~ 255(best). |    |    |               |    |    |    |
| <b>0x14</b> |   | <b>Product_ID2</b>                                |    |    |               |    |    |    |
| Bit         | 7   | 6   | 5  | 4  | 3             | 2  | 1  | 0  |
| Field       | PID2[11:4]  |   |    |    |               |    |    |    |
| Usage       | The value in this register is fixed. It can be used to verify if the status of the serial communications link is OK.  |   |    |    |               |    |    |    |
| <b>0x15</b> |   | <b>Product_ID3</b>                                |    |    |               |    |    |    |
| Bit         | 7   | 6   | 5  | 4  | 3             | 2  | 1  | 0  |
| Field       | PID2[3:0]   |   |    |    | Reserved[3:0] |    |    |    |
| Usage       | The value in this register is fixed. PID2[3:0] can be used to verify if the status of the serial communications link is OK. Reserved[3:0] is a value between 0x0 and 0xF, but it can't be used to verify the status of the serial communications. |   |    |    |               |    |    |    |

| 0x16  |  | Motion_Status  |    |       |       |               |    |     |
|-------|--|--|----|-------|-------|---------------|----|-----|
| Bit   | 7  | 6  | 5  | 4     | 3     | 2             | 1  | 0   |
| Field | Motion   | Reserved[3:2]  |    | DYOVF | DXOVF | Reserved[1:0] |    | RES |
| Usage | <p>Register 0x16 allows the user to determine if motion has occurred since the last time it was read. If so, then the user should read registers 0x17 and 0x18 to get the accumulated motion. It also tells if the motion buffers have overflowed since the last reading. The current resolution is also shown.</p> <p>Reading this register freezes the <i>Delta_X</i> and <i>Delta_Y</i> register values. Read this register before reading the <i>Delta_X</i> and <i>Delta_Y</i> registers. If <i>Delta_X</i> and <i>Delta_Y</i> are not read before the motion register is read a second time, the data in <i>Delta_X</i> and <i>Delta_Y</i> will be lost.</p> |  |    |       |       |               |    |     |
| Notes | Field Name   | Description  |    |       |       |               |    |     |
|       | Motion   | Motion since last report or PD<br><b>0 = No motion (Default)</b><br>1 = Motion occurred, data ready for reading in <i>Delta_X</i> and <i>Delta_Y</i> registers |    |       |       |               |    |     |
|       | Reserved[3:2]  | Reserved for future use  |    |       |       |               |    |     |
|       | DYOVF  | Motion Delta Y overflow, $\Delta Y$ buffer has overflowed since last report<br><b>0 = No overflow (Default)</b><br>1 = Overflow has occurred                   |    |       |       |               |    |     |
|       | DXOVF  | Motion Delta X overflow, $\Delta X$ buffer has overflowed since last report<br><b>0 = No overflow (Default)</b><br>1 = Overflow has occurred                   |    |       |       |               |    |     |
|       | Reserved[1:0]  | Reserved for future use  |    |       |       |               |    |     |
|       | RES  | Resolution in counts per inch<br><b>0 = 800 (Default)</b><br>1 = 400   |    |       |       |               |    |     |
| 0x17  |  | Delta_X  |    |       |       |               |    |     |
| Bit   | 7  | 6  | 5  | 4     | 3     | 2             | 1  | 0   |
| Field | X7   | X6   | X5 | X4    | X3    | X2            | X1 | X0  |
| Usage | X movement is counts since last report. Absolute value is determined by resolution. Reading clears the register. Report range -128 ~ +127.   |  |    |       |       |               |    |     |
| 0x18  |  | Delta_Y  |    |       |       |               |    |     |
| Bit   | 7  | 6  | 5  | 4     | 3     | 2             | 1  | 0   |
| Field | Y7   | Y6   | Y5 | Y4    | Y3    | Y2            | Y1 | Y0  |
| Usage | Y movement is counts since last report. Absolute value is determined by resolution. Reading clears the register. Report range -128 ~ +127.   |  |    |       |       |               |    |     |

| 0x19  |  | Image_Quality   |   |   |            |         |           |        |
|-------|--|---|---|---|------------|---------|-----------|--------|
| Bit   | 7  | 6   | 5 | 4 | 3          | 2       | 1         | 0      |
| Field | Imgqa[7:0]   |   |   |   |            |         |           |        |
| Usage | Image Quality is a quality level of the mouse sensor in the current frame. Report range 0 ~ 255.   |   |   |   |            |         |           |        |
| Notes | Field Name   | Description   |   |   |            |         |           |        |
|       | Imgqa[7:0]   | Image quality report range: 0(worst) ~ 255(best).   |   |   |            |         |           |        |
| 0x1A  |  | Operation_Mode2   |   |   |            |         |           |        |
| Bit   | 7  | 6   | 5 | 4 | 3          | 2       | 1         | 0      |
| Field | Reset  | PD_enh  | 0 | 0 | LEDsht_enh | Slp_enh | Slpmu_enh | Wakeup |
| Usage | <p>Register 0x1A allows the user to change the operation of the mouse sensor. Shown below are the bits, their default values, and optional values.</p> <p><b>Operation_Mode2[2:0]</b><br/>                     “0xx” = Disable sleep mode<br/>                     “110” = Force enter sleep<br/>                     “101” = Force wakeup from sleep mode</p> <p>Notes:<br/>                     1. After 1 sec not moving during normal mode, the mouse sensor will enter sleep mode, and keep on sleep mode until moving is detected or wakeup is asserted.<br/>                     2. Only one of these two bits <i>Slpmu_enh</i> and <i>Wakeup</i> can be set to 1 at the one time, and the other one has to be set to 0. Note that these bits are self-clear.</p> |   |   |   |            |         |           |        |
| Notes | Field Name   | Description   |   |   |            |         |           |        |
|       | Reset  | Full chip reset<br><b>0 = Normal operation mode (Default)</b><br>1 = Full chip reset        |   |   |            |         |           |        |
|       | PD_enh   | Power down mode<br><b>0 = Normal operation mode (Default)</b><br>1 = Power down mode        |   |   |            |         |           |        |
|       | Bit [5:4]  | Must always be <b>00</b>  |   |   |            |         |           |        |
|       | LEDsht_enh   | LED shutter enable/disable<br>0 = Disable<br><b>1 = Enable (Default)</b>                    |   |   |            |         |           |        |
|       | Slp_enh  | Sleep mode enable/disable<br>0 = Disable<br><b>1 = Enable (Default)</b>                     |   |   |            |         |           |        |
|       | Slpmu_enh  | Manual enter sleep mode, set “1” will enter sleep and this bit will be reset to “0”         |   |   |            |         |           |        |
|       | Wakeup   | Manual wake up from sleep mode, set “1” will enter wakeup and this bit will be reset to “0” |   |   |            |         |           |        |



| <b>0x1B</b> |  | <b>Configuration</b>   |            |          |          |          |          |          |
|-------------|--|--|------------|----------|----------|----------|----------|----------|
| Bit         | 7  | 6  | 5          | 4        | 3        | 2        | 1        | 0        |
| Field       | RES  | <b>0</b>   | <b>1</b>   | <b>0</b> | <b>0</b> | <b>1</b> | <b>0</b> | <b>0</b> |
| Usage       | The <i>Configuration</i> register allows the user to change the configuration of the mouse sensor. Shown below are the bits, their default values, and optional values.  |  |            |          |          |          |          |          |
| Notes       | Field Name   | Description  |            |          |          |          |          |          |
|             | RES  | Output resolution setting<br><b>0 = 800 (Default)</b><br>1 = 400                     |            |          |          |          |          |          |
|             | Bit [6:0]  | Must always be <b>0100100</b>  |            |          |          |          |          |          |
| <b>0x40</b> |  | <b>Operation_Mode3</b>   |            |          |          |          |          |          |
| Bit         | 7  | 6  | 5          | 4        | 3        | 2        | 1        | 0        |
| Field       | Reset  | PD_enh   | LEDsht_enh | <b>0</b> | <b>0</b> | <b>0</b> | <b>0</b> | Slp_enl  |
| Usage       | Register 0x40 allows the user to change the operation of the mouse sensor. Shown below are the bits, their default values, and optional values.<br>If Slp_enl = 0, after 1 sec not moving during normal mode, the mouse sensor will enter sleep mode, and keep on sleep mode until moving is detected or wakeup is asserted. |  |            |          |          |          |          |          |
| Notes       | Field Name   | Description  |            |          |          |          |          |          |
|             | Reset  | Full chip reset<br><b>0 = Normal operation mode (Default)</b><br>1 = Full chip reset |            |          |          |          |          |          |
|             | PD_enh   | Power down mode<br><b>0 = Normal operation mode (Default)</b><br>1 = Power down mode |            |          |          |          |          |          |
|             | LEDsht_enh   | LED shutter enable/disable<br>0 = Disable<br><b>1 = Enable (Default)</b>             |            |          |          |          |          |          |
|             | Bit [4:1]  | Must always be <b>0000</b>   |            |          |          |          |          |          |
|             | Slp_enl  | Sleep mode enable/disable<br><b>0 = Enable (Default)</b><br>1 = Disable              |            |          |          |          |          |          |

| 0x41  |  | Product_ID4  |    |               |    |    |         |    |
|-------|--|--|----|---------------|----|----|---------|----|
| Bit   | 7  | 6  | 5  | 4             | 3  | 2  | 1       | 0  |
| Field | PID3[3:0]  |  |    | Reserved[3:0] |    |    | Opstate |    |
| Usage | Product ID of the mouse sensor and operation state of the mouse.   |  |    |               |    |    |         |    |
| Notes | <b>Field Name</b>  | <b>Description</b>                                     |    |               |    |    |         |    |
|       | PID3[3:0]  | The product ID is 010                                  |    |               |    |    |         |    |
|       | Reserved[3:0]  | Reserved for future use                                |    |               |    |    |         |    |
|       | Opstate  | Operation state<br>0 = Sleep state<br>1 = Normal state |    |               |    |    |         |    |
| 0x42  |  | Delta_Y  |    |               |    |    |         |    |
| Bit   | 7  | 6  | 5  | 4             | 3  | 2  | 1       | 0  |
| Field | Y7   | Y6   | Y5 | Y4            | Y3 | Y2 | Y1      | Y0 |
| Usage | Y movement is counts since last report. Absolute value is determined by resolution. Reading clears the register. Report range -128 ~ +127. |  |    |               |    |    |         |    |
| 0x43  |  | Delta_X  |    |               |    |    |         |    |
| Bit   | 7  | 6  | 5  | 4             | 3  | 2  | 1       | 0  |
| Field | X7   | X6   | X5 | X4            | X3 | X2 | X1      | X0 |
| Usage | X movement is counts since last report. Absolute value is determined by resolution. Reading clears the register. Report range -128 ~ +127. |  |    |               |    |    |         |    |
| 0x44  |  | Image_Quality  |    |               |    |    |         |    |
| Bit   | 7  | 6  | 5  | 4             | 3  | 2  | 1       | 0  |
| Field | Imgqa[7:0]   |  |    |               |    |    |         |    |
| Usage | Image Quality is a quality level of the mouse sensor in the current frame. Report range 0 ~ 255.   |  |    |               |    |    |         |    |
| Notes | <b>Field Name</b>  | <b>Description</b>                                     |    |               |    |    |         |    |
|       | Imgqa[7:0]   | Image quality report range: 0(worst) ~ 255(best).      |    |               |    |    |         |    |

## 4. Specifications

### 4.1 Absolute Maximum Ratings

| Symbol           | Parameter             | Min  | Max | Unit | Notes  |
|------------------|-----------------------|------|-----|------|--|
| T <sub>STG</sub> | Storage Temperature   | -40  | 85  | °C   |  |
| TA               | Operating Temperature | -15  | 55  | °C   |  |
|                  | Lead Solder Temp      |      | 260 | °C   | For 10 seconds, 1.6mm below seating plane.     |
| V <sub>DC</sub>  | DC Supply Voltage     | -0.5 | 5.5 | V    |  |
| ESD              |                       |      | 2   | kV   | All pins, human body model MIL 883 Method 3015 |
| V <sub>IN</sub>  | DC Input Voltage      | -0.5 | 5.5 | V    | SDIO, SCLK, VDD                                |

### 4.2 Recommend Operating Condition

| Symbol           | Parameter                                     | Min. | Typ.   | Max.     | Unit     | Notes  |
|------------------|---|------|--------|----------|----------|--|
| T <sub>A</sub>   | Operating Temperature                         | 0    |        | 40       | °C       |  |
| V <sub>dd1</sub> | Power Supply Voltage                          | 3.0  | 3.3    | 3.6      | V        | VDD, VREF short  |
| V <sub>dd2</sub> |   | 4.25 | 5.0    | 5.5      |          | VDD  |
| V <sub>N</sub>   | Supply Noise                                  |      |        | 100      | mV       | Peak to peak within 0 - 100 MHz  |
| Z                | Distance From Lens Reference Plane to Surface | 2.3  | 2.4    | 2.5      | mm       | Refer to Figure 4.   |
| R                | Resolution                                    |      |        | 800      | CPI      |  |
| A                | Acceleration                                  | 0.1  |        | 20       | g        |  |
| SCLK             | Serial Port Clock Frequency                   |      |        | 10       | MHz      |  |
| F <sub>CLK</sub> | Clock Frequency                               |      | 18.432 | 24.576   | MHz      | Set by ceramic resonator   |
| FR               | Frame Rate                                    |      | 3000   | 4000     | frames/s | 3000 frames/s @ F <sub>CLK</sub> = 18.432 MHz<br>4000 frames/s @ F <sub>CLK</sub> = 24.567 MHz |
| S                | Speed   | 0    |        | 21<br>28 | inches/s | 21 inches/s @ F <sub>CLK</sub> = 18.432 MHz<br>28 inches/s @ F <sub>CLK</sub> = 24.567 MHz     |

### 4.3 AC Operating Condition

Electrical Characteristics over recommended operating conditions. Typical values at 25 °C,  $V_{DD} = 5.0\text{ V}$ ,  $F_{CLK} = 18.432\text{ MHz}$

| Symbol       | Parameter                                    | Min. | Typ.      | Max. | Unit | Notes  |
|--------------|--|------|-----------|------|------|--|
| $t_{HOLD}$   | SDIO Read Hold Time                          |      | 3         |      | us   | Minimum hold time for valid data (refer to Figure 8)   |
| $t_{RESYNC}$ | Serial Interface RESYNC.                     | 1    |           |      | us   | @3000 frame/sec (refer to Figure 9)  |
| $t_{SIWTT}$  | Serial Interface Watchdog Timer Timeout      | 1.7  |           |      | ms   | @3000 frame/sec (refer to Figure 9)  |
| $t_{PDR}$    | PD Pulse Register                            |      |           | 333  | us   | One frame time maximum after setting <b><i>PD_enh</i></b> bit in the <b><i>Operation Mode</i></b> register @3000 frame/sec (refer to Figure 10). |
| $t_{PUPD}$   | Power Up from Deactivate the Power Down Mode | 3    |           | 30.5 | ms   | After $t_{PUPD}$ , all registers contain valid data from first image after deactivate power down mode.<br>@3000 frame/sec                        |
| $t_{PU}$     | Power Up from $V_{DD}\uparrow$               | 3    |           | 30.5 | ms   | @3000 frame/sec  |
| $t_r, t_f$   | Rise and Fall Times: SDIO                    |      | 25,<br>20 |      | ns   | $C_L = 30\text{ pF}$   |
| $t_r, t_f$   | Rise and Fall Times: ILED                    |      | 10,<br>10 |      | ns   | LED bin grade: R; $R1 = 100\text{ ohm}$  |

#### 4.4 DC Electrical Characteristics

Electrical Characteristics over recommended operating conditions. Typical values at 25 °C,  $V_{DD} = 5.0\text{ V}$ ,  $F_{CLK} = 18.432\text{ MHz}$

| Symbol                  | Parameter                                   | Min. | Typ. | Max. | Unit |                                      |
|-------------------------|---|------|------|------|------|--------------------------------------|
| <b>Type: PWR</b>        |   |      |      |      |      |                                      |
| $I_{DD}$                | Supply Current<br>Mouse Moving (Normal)     |      | 10   |      | mA   | SCLK, SDIO = no load                 |
| $I_{DD}$                | Supply Current<br>Mouse Not Moving (Sleep1) |      | 5    |      | mA   |                                      |
| $I_{DDPD}$              | Supply Current<br>(Power Down)              |      | 100  |      | uA   | SCLK, SDIO = high                    |
| <b>Type: SCLK, SDIO</b> |   |      |      |      |      |                                      |
| $V_{IH}$                | Input Voltage HIGH                          | 2.0  |      |      |      |                                      |
| $V_{IL}$                | Input Voltage LOW                           |      |      | 0.7  | V    |                                      |
| $V_{OH}$                | Output Voltage HIGH                         | 2.4  |      |      | V    | @ $I_{OH} = 2\text{mA}$ (SDIO only)  |
| $V_{OL}$                | Output Voltage LOW                          |      |      | 0.6  | V    | @ $I_{OL} = 2\text{mA}$ (SDIO only)  |
| <b>Type: OSCIN</b>      |   |      |      |      |      |                                      |
| $V_{IH}$                | Input Voltage HIGH                          | 2.0  |      |      | V    | When driving from an external source |
| $V_{IL}$                | Input Voltage LOW                           |      |      | 0.7  | V    | When driving from an external source |
| <b>Type: LED</b>        |   |      |      |      |      |                                      |
| $V_{OL}$                | Output Voltage LOW                          |      |      | 150  | mV   | @ $I_{OL} = 25\text{mA}$             |

5. Z and 2D Assembly

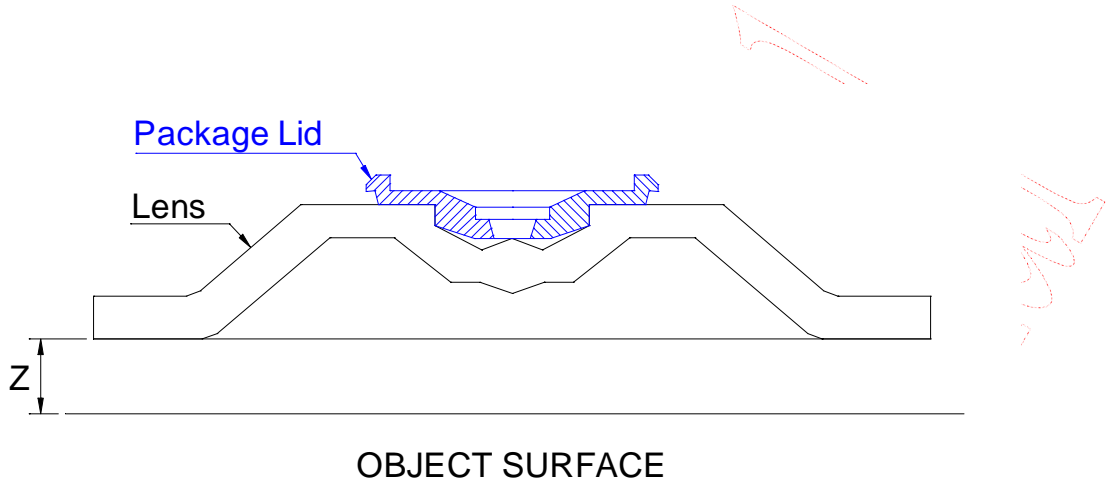


Figure 4. Distance from Lens Reference Plane to Surface

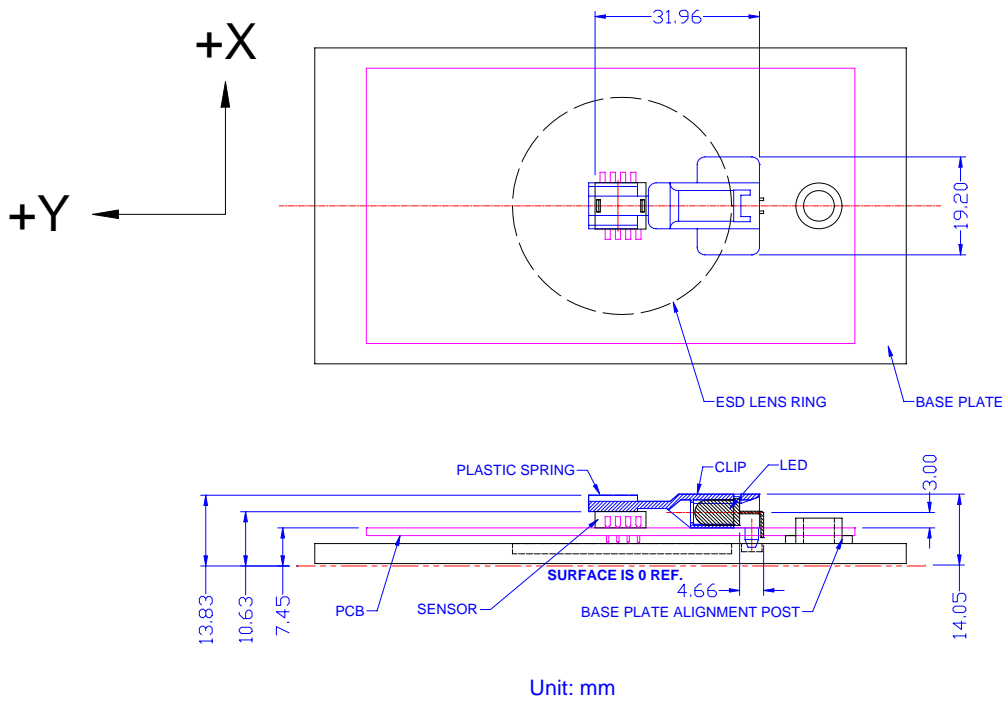


Figure 5. 2D Assembly

**6. Serial Interface**

The synchronous serial port is used to set and read parameters in the mouse sensor.

**SCLK:** The serial clock line. It is always generated by the mouse controller.

**SDIO:** The serial data line is used to write and read data.


**6.1 Transmission Protocol**

The transmission protocol is a two-wire link, half duplex protocol between the mouse controller and the mouse sensor. All data changes on SDIO are initiated by the falling edge on SCLK. The mouse controller instead of the mouse sensor has the ability to initiates communication.

The transmission protocol consists of the two operation modes:

- Write Operation.
- Read Operation.


Both of the two operation modes consist of two bytes. The first byte contains the address (seven bits) and has a bit7 as its MSB to indicate data direction. The second byte contains the data.

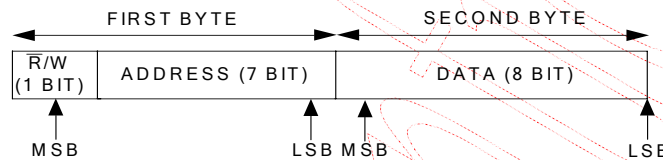

**Figure 6. Transmission Protocol**

**6.1.1 Write Operation**


A write operation, which means that data is going from the mouse controller to the mouse sensor, is always initiated by the mouse controller and consists of two bytes. The first byte contains the address (seven bits) and has a “1” as its MSB to indicate data direction. The second byte contains the data. The transfer is synchronized by SCLK. The mouse controller changes SDIO on falling edges of SCLK. The mouse sensor reads SDIO on rising edges of SCLK.

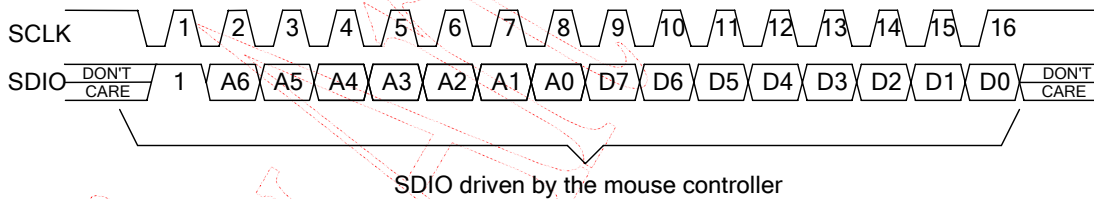


**Figure 7. Write Operation**

### 6.1.2 Read Operation

A read operation, which means that data is going from the mouse sensor to the mouse controller, is always initiated by the mouse controller and consists of two bytes. The first byte contains the address, is written by the mouse controller, and has a “0” as its MSB to indicate data direction. The second byte contains the data and is driven by the mouse sensor. The transfer is synchronized by SCLK. SDIO is changed on falling edges of SCLK and read on every rising edge of SCLK. The mouse controller must go to a high Z state after the last address data bit. The mouse sensor will go to the high Z state after the last data bit.

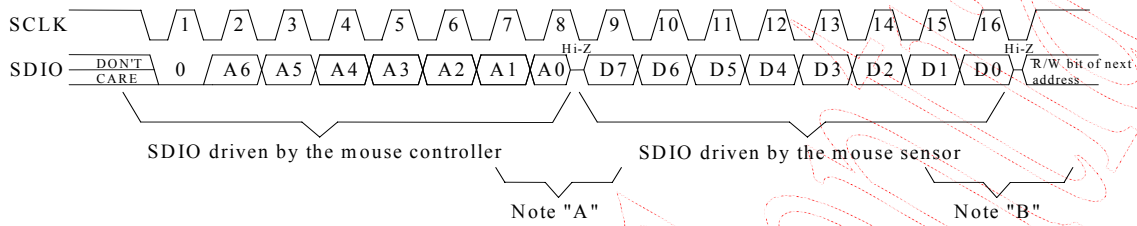

- Note "A" 1. The mouse controller sends address to the mouse sensor.  
 2. The mouse controller releases and set SDIO to Hi-Z after the last address bit.

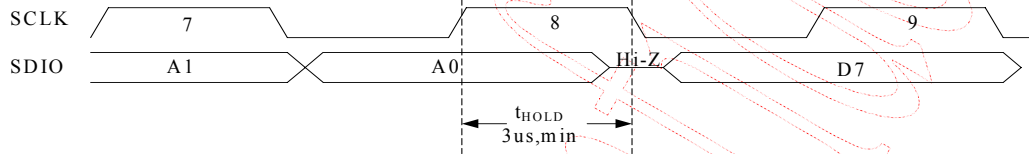

- Note "B" 1. The mouse sensor sends data to the mouse controller.  
 2. The mouse sensor releases and set SDIO to Hi-Z after the last data bit.

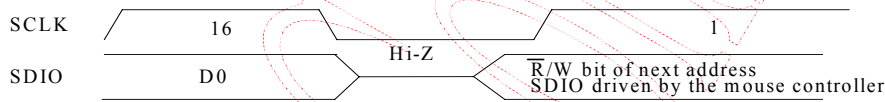


Figure 8. Read Operation

### 6.2 Re-Synchronous Serial Interface

If the mouse controller and the mouse sensor get out of synchronization, then the data either written or read from the registers will be incorrect. In such a case, an easy way to solve this condition is to toggle the SCLK line from high to low to high and wait at least  $t_{SIWTT}$  to re-synchronous the parts after an incorrect read. This method is called by “watchdog timer timeout”. The mouse sensor will reset the serial port but will not reset the registers and be prepared for the beginning of a new transmission.

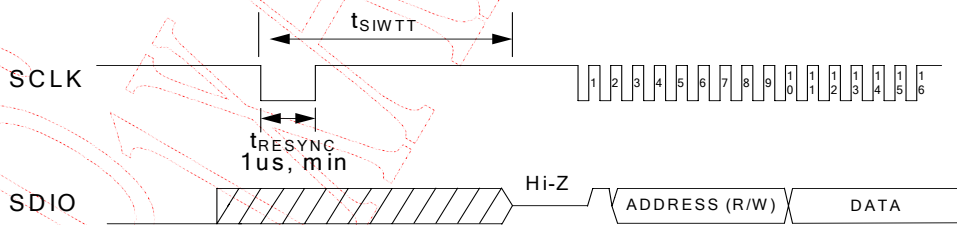


Figure 9. Re-synchronous Serial Interface Using Watchdog Timer Timeout

Note that this function is disabled when the mouse sensor is in the power down mode. If the user uses this function during the power down mode, it will get out of synchronization. The mouse sensor and the mouse controller also might get out of synchronization due to following conditions.



- Power On Problem - The problem occurs if the mouse sensor powers up before the mouse controller sets the SCLK and SDIO lines to be output. The mouse sensor and the mouse controller might get out of synchronization due to power on problem. An easy way to solve this is to use “watchdog timer timeout”.
- ESD Events - The mouse sensor and the mouse controller might get out of synchronization due to ESD events. An easy way to solve this is to use “watchdog timer timeout”.

### 6.3 Collision Detection on SDIO

The only time that the mouse sensor drives the SDIO line is during a READ operation. To avoid data collisions, the mouse controller should release SDIO before the falling edge of SCLK after the last address bit. The mouse sensor begins to drive SDIO after the next falling edge of SCLK. The mouse sensor release SDIO of the rising SCLK edge after the last data bit. The mouse controller can begin driving SDIO any time after that. In order to maintain low power consumption in normal operation, the mouse controller should not leave SDIO floating until the next transmission (although that will not cause any communication difficulties).

### 6.4 Power Down Mode

The mouse sensor can be placed in a power-down mode by setting *PD\_enh* bit in the *Operation\_Mode* register via a serial port write operation. After setting the *Operation\_Mode* register, wait at least 1 frame times. To get the chip out of the power down mode, clear *PD\_enh* bit in the *Operation\_Mode* register via a serial port write operation. In the power down mode, the serial interface watchdog timer (see Section 5.2) is not available. But, the serial interface still can read/write normally. For an accurate report after leave the power down mode, wait about 3ms before the mouse controller is able to issue any write/read operation to the mouse sensor.

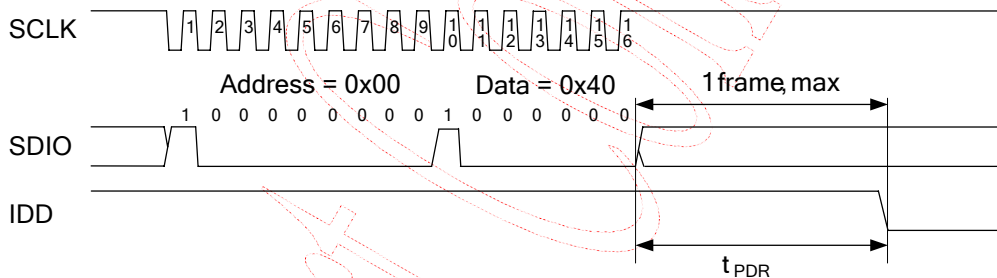


Figure 10. Power-down Configuration Register Writing Operation

### 6.5 Error Detection

1. The mouse controller can verify success of write operations by issuing a read command to the same address and comparing written data to read data.
2. The mouse controller can verify the synchronization of the serial port by periodically reading the product ID register.

7. Referencing Application Circuit

7.1 5V Application Circuit with External LED Control

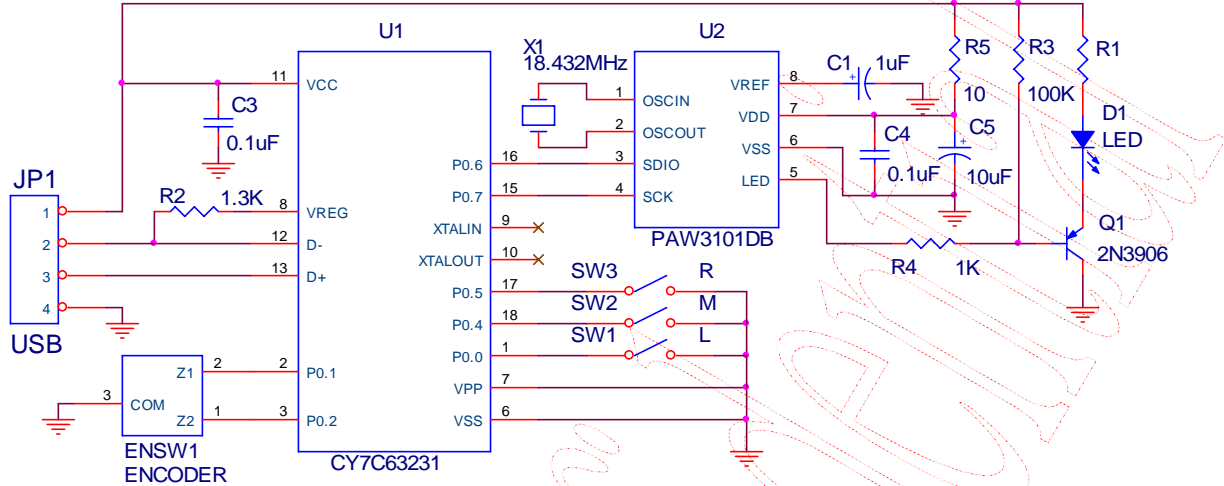


Figure 11. 5V Application Circuit with External LED Control

7.2 5V Application Circuit with Internal LED Control

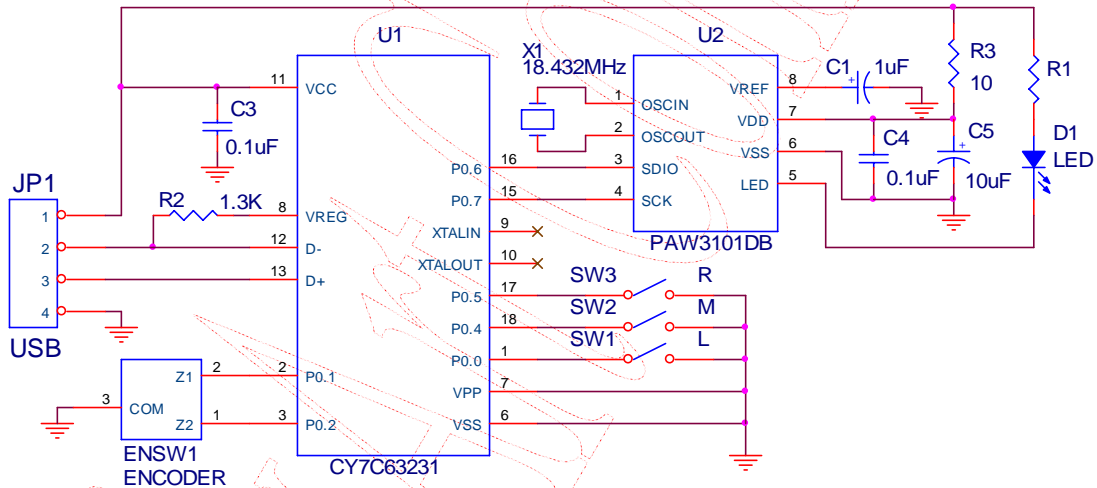


Figure 12. 5V Application Circuit with Internal LED Control

7.3 3.3V Application Circuit with Internal LED Control

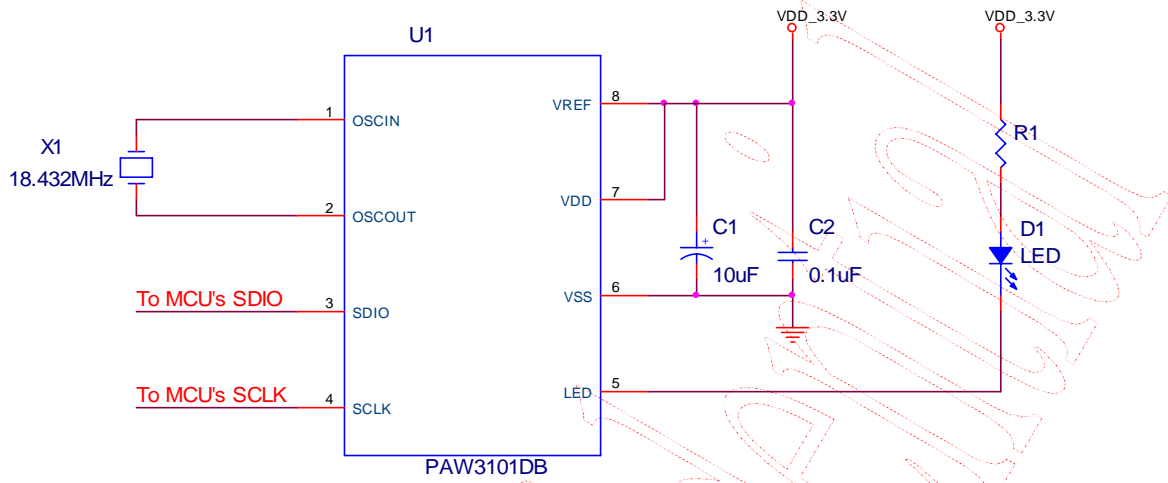


Figure 13. 3.3V Application Circuit with Internal LED Control

**7.4 PCB Layout Consideration**

- Caps for pins 7, 8 must have trace lengths less than **5 mm**.
- The trace lengths of OSCOUT, OSCIN must less than **6 mm**.

**7.5 Recommended Value for R1**

- Radiometric intensity of LED  
Bin limits (mW/Sr at 20 mA)

| LED Bin Grade | Min. | Typ. | Max. |
|---------------|------|------|------|
| N             | 14.7 |      | 17.7 |
| P             | 17.7 |      | 21.2 |
| Q             | 21.2 |      | 25.4 |

Note: Tolerance for each bin will be  $\pm 15\%$

**7.5.1 5V Application**

- R1 value (ohm) for external LED control, VDD = 5.0V (refer to Figure 11)

| LED Bin Grade | Min. | Typ. | Max. |
|---------------|------|------|------|
| N             | 27   | 47   |      |
| P             | 27   | 47   |      |
| Q             | 27   | 47   |      |

- R1 value (ohm) for internal LED control, VDD = 5.0V (refer to Figure 12)

| LED Bin Grade | Min. | Typ. | Max. |
|---------------|------|------|------|
| N             | 47   | 100  |      |
| P             | 47   | 100  |      |
| Q             | 47   | 100  |      |

**7.5.2 3.3V Application**

- R1 value (ohm) for internal LED control, VDD = VREF = VDD\_LED = 3.3V (refer to Figure 13)

| LED Bin Grade | Min. | Typ. | Max. |
|---------------|------|------|------|
| N             | 22   | 100  |      |
| P             | 22   | 100  |      |
| Q             | 22   | 100  |      |

8. Package Information

8.1 Package Outline Drawing

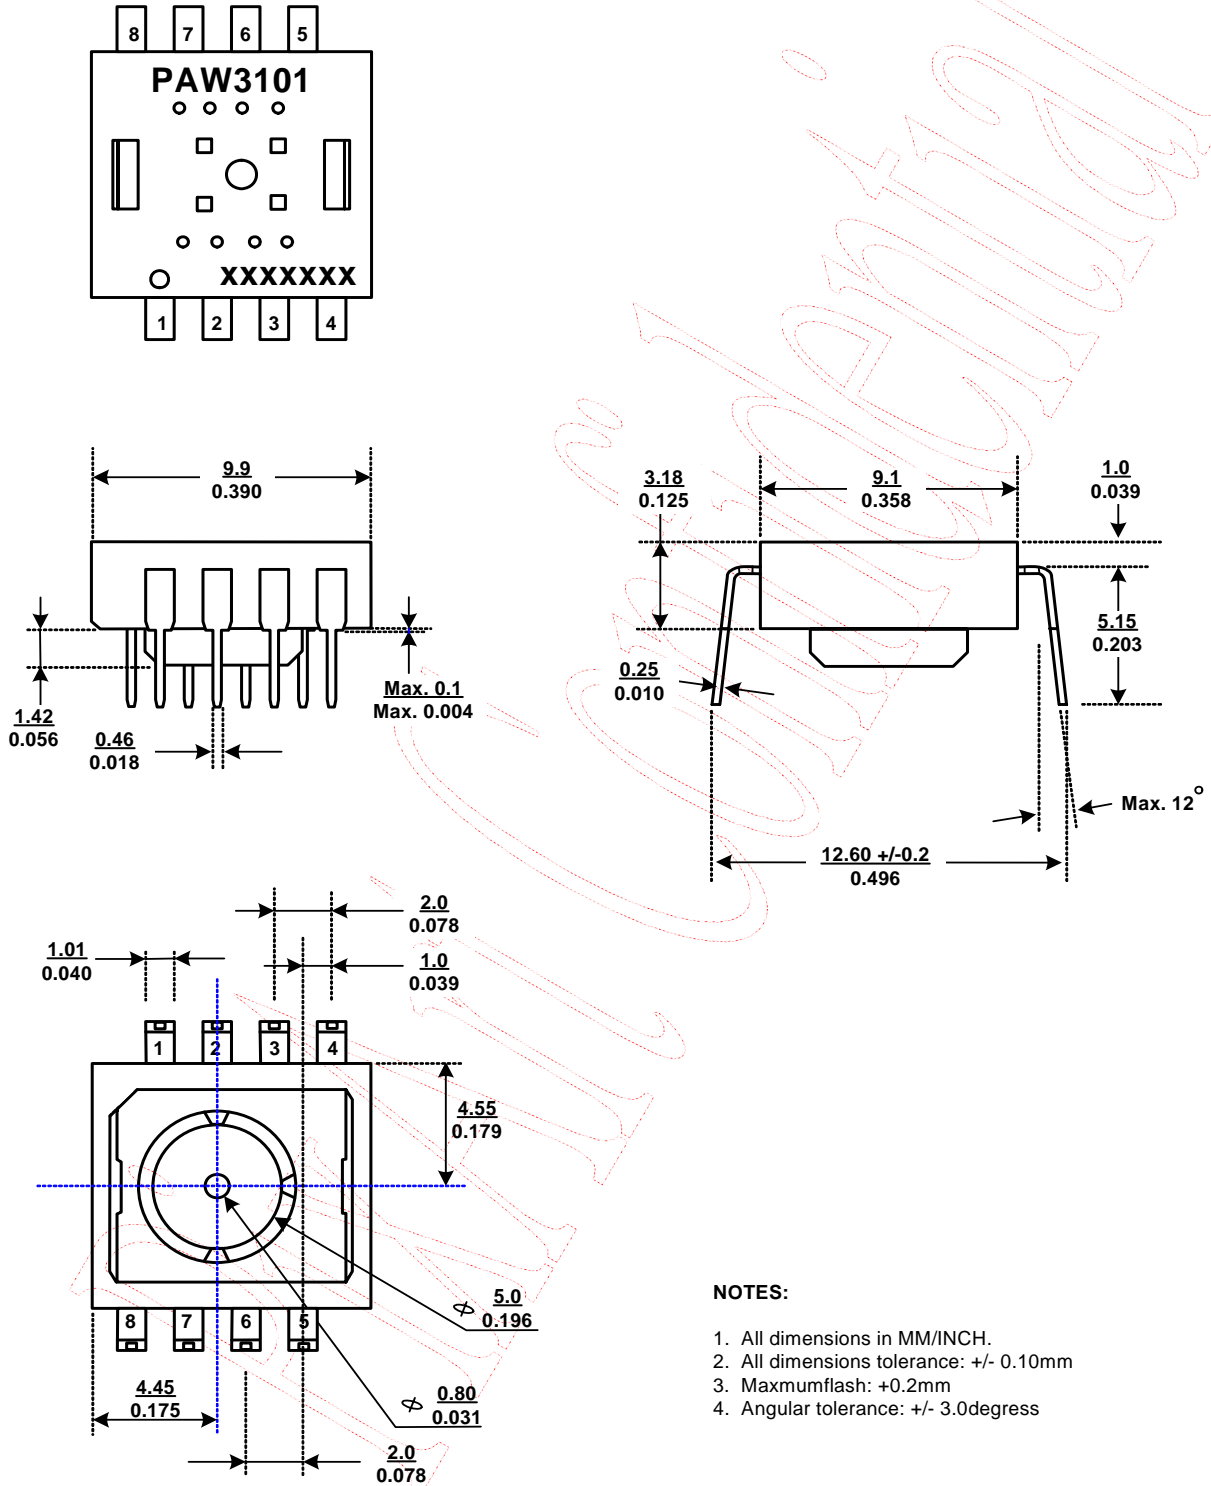


Figure 14. Package Outline Drawing

8.2 Recommended PCB Mechanical Cutouts and Spacing

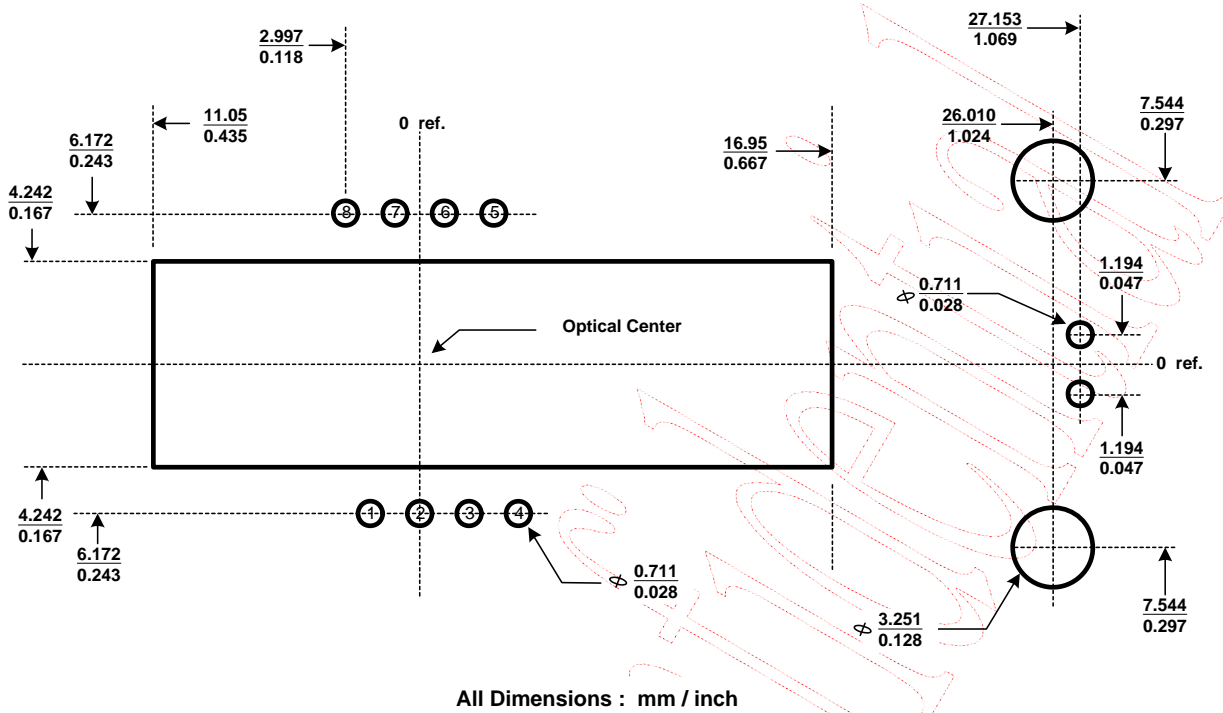


Figure 15. Recommended PCB Mechanical Cutouts and Spacing

9. Update History

| Version | Update   | Date       |
|---------|--|------------|
| V2.0    | Creation, Preliminary 1 <sup>st</sup> version  | 08/11/2006 |
| V2.1    | Re-typesetting                                 | 09/08/2006 |
| V2.2    | Revise words                                   | 12/04/2006 |
| V3.0    | Add an application for 3.3V operation voltage. | 05/09/2008 |
| V3.1    | Content revise                                 | 05/26/2008 |

Note: The Part No. of the Mouse Product with Prefix "PAN" shall NOT be made, sold, offered to sell, imported or used in or into USA, Canada, Japan and EU. For "PAN", PixArt has only gained territory-limited patent license from Avago. Avago reserve right to take legal action against our customers who fails to comply the above term. PLEASE NOTE THAT PixArt will NOT defend, indemnify, or provide any assistance to our customers who fail to comply the term. IF YOU DO NOT AGREE THE TERM, PIXART WILL NOT DELIVER "PAN" PRODUCTS TO YOU.