



SANYO Semiconductors

DATA SHEET

LA6245P — Monolithic Linear IC For CD Player 4ch Bridge (BTL) Motor Driver

Overview

The LA6245P is a 4channel motor driver IC for home and car CD players. It provides a pin for switching the channel 1 input.

Functions and Features

- Four bridge-connected (BTL) power amplifier circuits.
- I_O max: 1A.
- Built-in level shifter circuits.
- Muting circuit (on/off control for all outputs).
- Independent operational amplifier.
- Variable regulator (uses an external pnp transistor for output).
- Regulator includes an on/off switching function.
- Thermal shutdown operation monitor pin.

Specifications

Maximum Ratings at $T_a = 25^\circ\text{C}$

Parameter	Symbol	Conditions	Ratings	Unit	
Supply voltage	V_{CC_S}	*1	14	V	
	V_{CCP}	V_{CCP1}, V_{CCP2}	*1	14	V
	V_{CCREG}	*1	14	V	
Allowable power dissipation	P_d max	Independent IC	0.8	W	
		Mounted on the specified PCB	*2	2.0	W
Maximum input voltage	V_{INB}		13	V	
Maximum output current	I_O max	Channel 1 to 4 output	1.0	A	
MUTE pin voltage	V_{MUTE}		13	V	
Operating temperature	T_{opr}		-40 to +85	$^\circ\text{C}$	
Storage temperature	T_{stg}		-55 to +150	$^\circ\text{C}$	

Note *1: All of the power supply pins, V_{CC_S} , V_{CCP1} , V_{CCP2} , and V_{CCREG} must be connected to the power supply system externally to the IC.

Note *2: Mounted on the specified PCB 114.3×76.1×1.6mm³, glass epoxy board.

■ Any and all SANYO Semiconductor products described or contained herein do not have specifications that can handle applications that require extremely high levels of reliability, such as life-support systems, aircraft's control systems, or other applications whose failure can be reasonably expected to result in serious physical and/or material damage. Consult with your SANYO Semiconductor representative nearest you before using any SANYO Semiconductor products described or contained herein in such applications.

■ SANYO Semiconductor assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all SANYO Semiconductor products described or contained herein.

SANYO Semiconductor Co., Ltd.

TOKYO OFFICE Tokyo Bldg., 1-10, 1 Chome, Ueno, Taito-ku, TOKYO, 110-8534 JAPAN

LA6245P

Recommended Operating Conditions at $T_a = 25^\circ\text{C}$

Parameter	Symbol	Conditions	Ratings	Unit
Supply voltage	V_{CC}		5 to 13	V

Electrical Characteristics at $T_a = 25^\circ\text{C}$, $V_{CC_S} = V_{CCP1} = V_{CCP2} = V_{CCREG} = 8\text{V}$, $V_{REF} = 2.5\text{V}$, $MUTE = 5\text{V}$

Parameter	Symbol	Conditions	Ratings			Unit	
			min	typ	max		
[Overall]							
Quiescent current 1	I_{CC-ON}	All channel outputs on, MUTE pin: high		30	45	mA	
Quiescent current 2	I_{CC-OFF}	All channel outputs off, MUTE pin: low		5	10	mA	
Muting function on voltage	MUTE-ON		2.5			V	
Muting function off voltage	MUTE-OFF				0.5	V	
Switch on voltage	SW-ON		2.5			V	
Switch off voltage	SW-OFF				0.5	V	
REGSW on voltage	REG-ON		2.5			V	
REGSW off voltage	REG-OFF				0.5	V	
[BTL Amplifier] (Channel 1 to 4) (Output Amplifier Block)							
Input amplifier offset voltage	V_{OFF1}		*2	-50	50	mV	
Output voltage	V_{O1}	$R_L = 8\Omega$	*1	5.7	6.2	V	
I/O gain	V_{G1}		*2	5.4	6	6.6	Multiplier
Slew rate	SR1	With the amplifier operating independently, between outputs	*3	2.0		V/ μs	
[Front End Operational Amplifier]							
OP-AMP_SINK 1	OP_SINK	Input operational amplifier sink current	2			mA	
OP-AMP_SOURCE 1	OP_SOURCE	Input operational amplifier source current	300	500		μA	
Input bias current	I_{BOP}				300	μA	
Input voltage range	V_{IN}		0.5		5	V	
High-level output voltage	V_{OHOP}		7.5	7.8		V	
Low-level output voltage	V_{OLOP}			0.2	0.5	V	
[VREF-IN Amplifier]							
Input voltage range	$V_{REF-VIN}$		1.3		4	V	
[Independent Operational Amplifier]							
Output offset voltage	OP_VOFF		-6		6	mV	
OP-AMP_SINK	OP_SINK	Input operational amplifier sink current	2			mA	
OP-AMP_SOURCE	OP_SOURCE	Input operational amplifier source current	300	500		μA	
Input bias current	IBOP				300	μA	
Input voltage range	OP_VIN		0		V_{CC} -1.5	V	
High-level output voltage	V_{OHOP}		7.5	7.8		V	
Low-level output voltage	V_{OLOP}			0.2	0.5	V	
[Power Supply Block] (uses an external pnp transistor: 2SB632K)							
Power supply output	V_{OUT}	$I_O = 200\text{mA}$	1.2	1.25	1.3	V	
REG-IN sink current	REG-IN-SINK	The base current of the external PNP transistor	5.0	10		mA	
Line regulation	ΔV_{OLN}	$6\text{V} \leq V_{CCREG} \leq 12\text{V}$, $I_O = 200\text{mA}$		10	50	mV	
Load regulation	ΔV_{OLD}	$5\text{mA} \leq I_O \leq 200\text{mA}$		10	50	mV	

Note *1: The channel 1 input operational amplifier has a 0dB gain, i.e. it is a buffer amplifier.

*2: With the output in the saturated state.



*3: Design guarantee value

LA6245P

Package Dimensions


unit : mm

3251

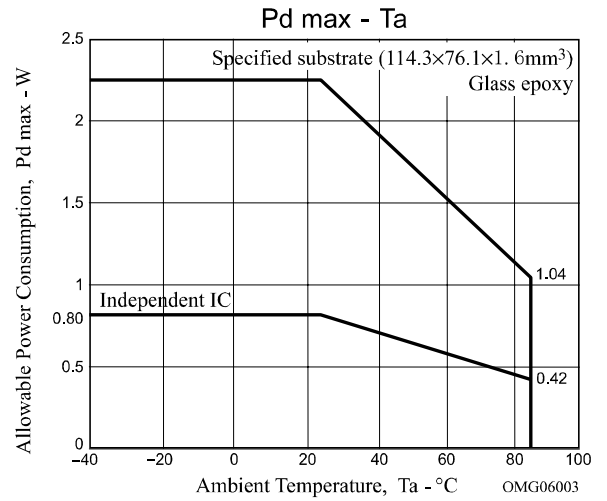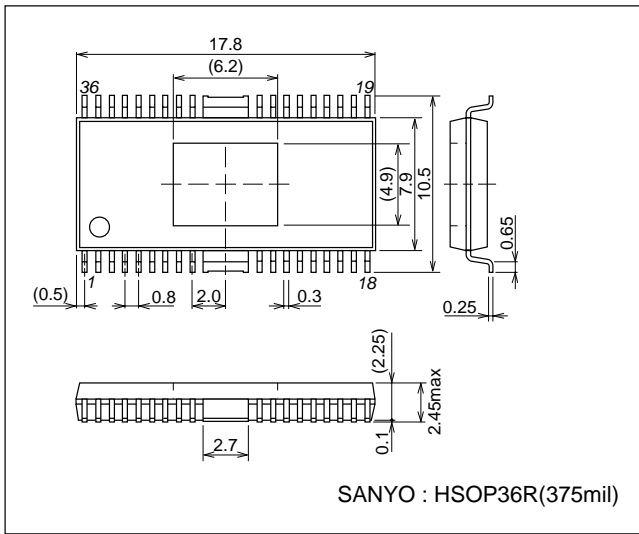

Pin Assignment

LA6245P

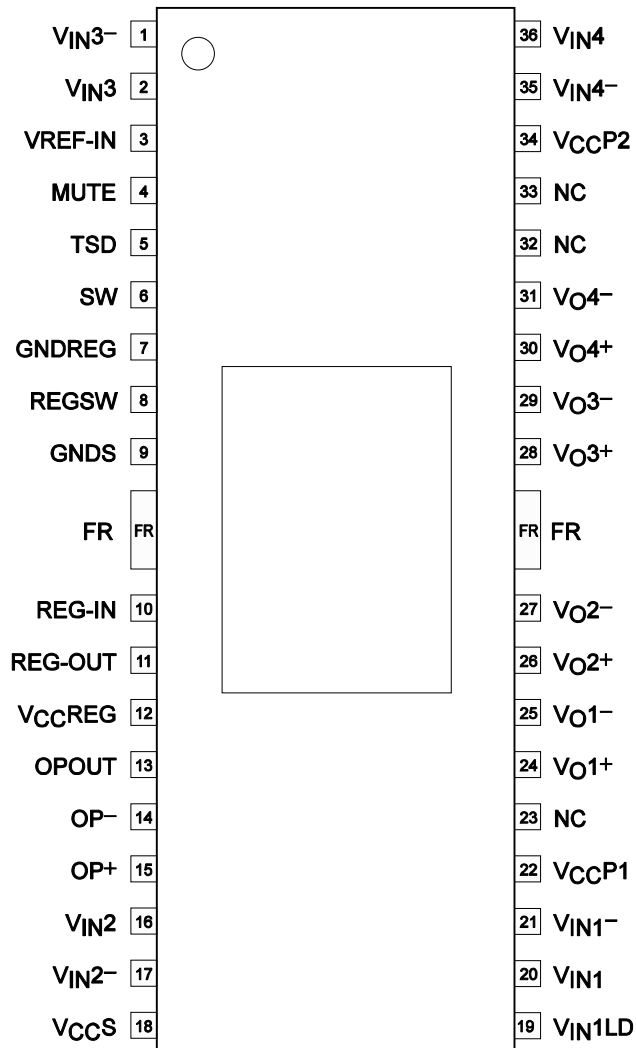

Top view

LA6245P


Pin Functions

Pin No.	Symbol	Pin description
1	V _{IN3} ⁻	Front end amplifier, channel 3 Input (-)
2	V _{IN3}	Front end amplifier, channel 3 Output
3	VREF-IN	Reference voltage input
4	MUTE	Muting control
5	TSD	This pin outputs a low level when the thermal shutdown circuit operates.
6	SW	Switches between the loading and sled inputs.
7	GNDREG	Regulator system ground
8	REGSW	Regulator on/off control
9	GNDS	Signal system ground
10	REG-IN	Connection for the voltage divider output used to set the regulator voltage
11	REG-OUT	Base connection of external PNP transistor
12	VCCREG	Regulator power supply
13	OPOUT	Independent operational amplifier output pin
14	OP ⁻	Independent operational amplifier (-)
15	OP ⁺	Independent operational amplifier (+)
16	V _{IN2}	Front end amplifier, channel 2 Output
17	V _{IN2} ⁻	Front end amplifier, channel 2 Input (-)
18	V _{CC-S}	Signal system power supply
19	V _{IN1LD}	Front end amplifier for the loading system input
20	V _{IN1}	Front end amplifier, channel 1 Output
21	V _{IN1} ⁻	Front end amplifier, channel 1 Input (-)
22	V _{CCP1}	Power stage power supply for channels 1 and 2
23	NC	No connection
24	V _{O1} ⁺	Channel 1 output (+)
25	V _{O1} ⁻	Channel 1 output (-)
26	V _{O2} ⁺	Channel 2 output (+)
27	V _{O2} ⁻	Channel 2 output (-)
28	V _{O3} ⁺	Channel 3 output (+)
29	V _{O3} ⁻	Channel 3 output (-)
30	V _{O4} ⁺	Channel 4 output (+)
31	V _{O4} ⁻	Channel 4 output (-)
32	NC	No connection
33	NC	No connection
34	V _{CCP2}	Channels 3 and 4 : power stage power supply
35	V _{IN4} ⁻	Front end amplifier, channel 4 Input (1)
36	V _{IN4}	Front end amplifier, channel 4 Output

Note: • The center frame (FR) is used as the power system ground (GNDP). Along with the signal system ground (GNDS), this level must be the lowest potential in the system.

- The V_{CC-S} (signal system power supply), V_{CCP1}, and V_{CCP2} (output stage power supplies) must be shorted together externally.

Block Diagram

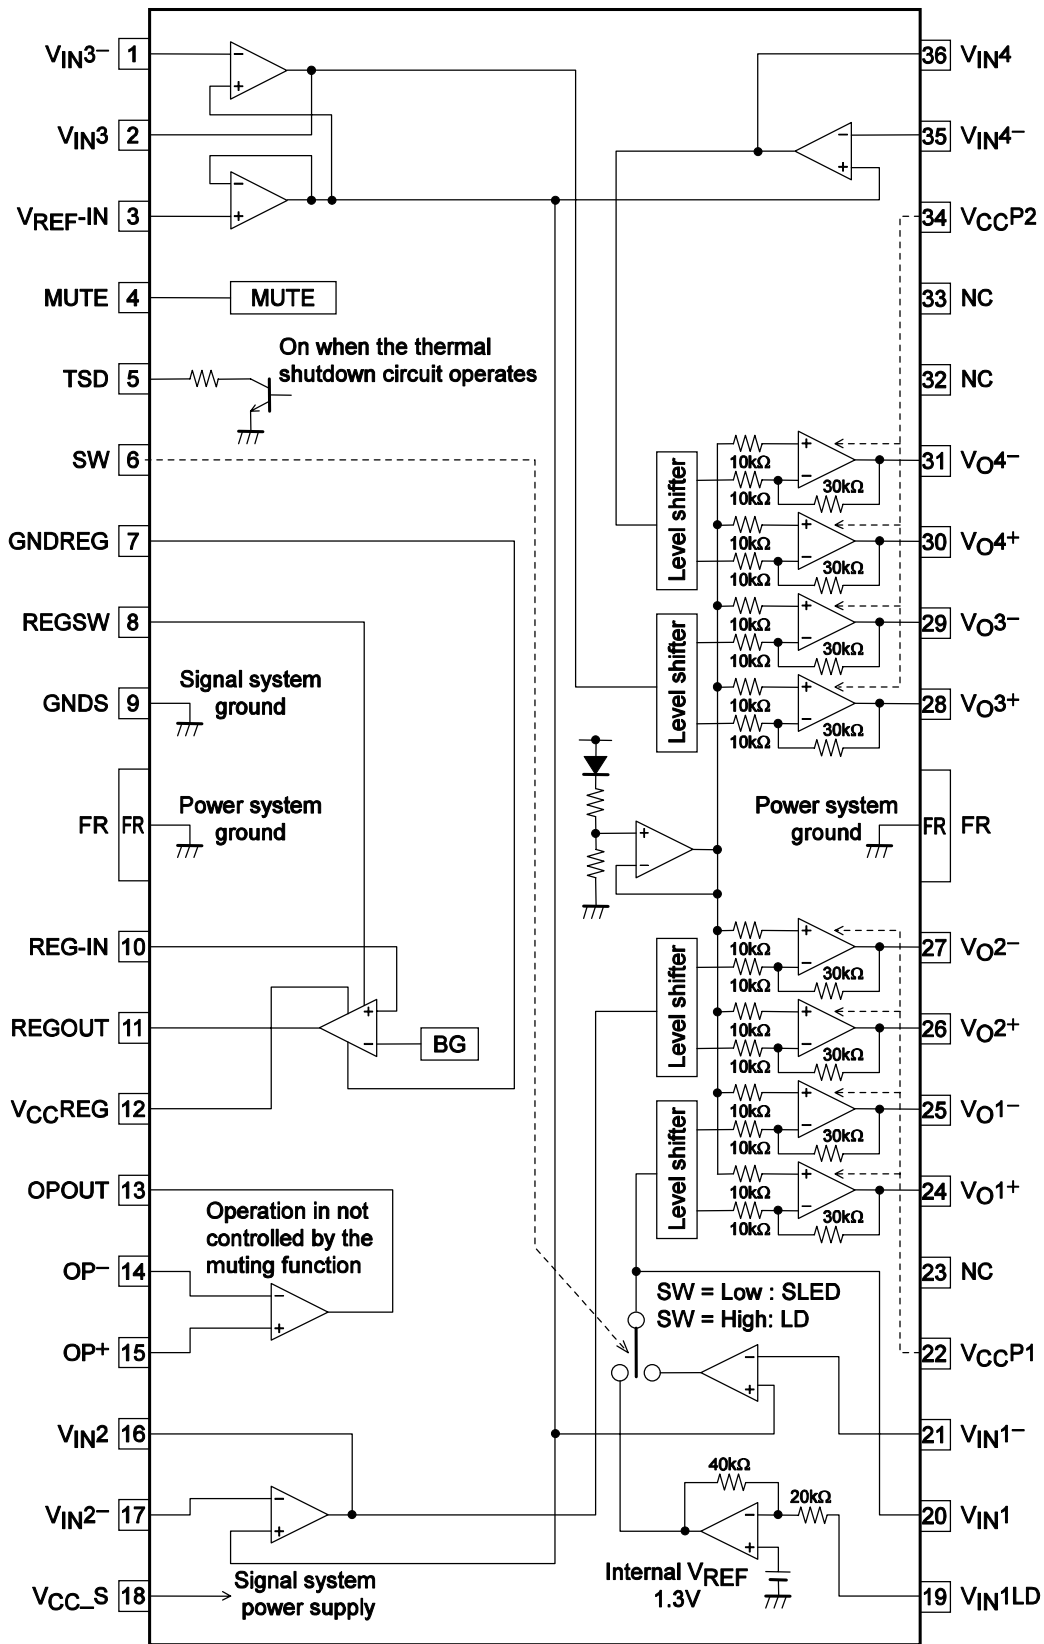

MSB08021

LA6245P

Pin Functions

Pin No.	Symbol	Pin description	Equivalent circuit
21 20 17 16 1 2 35 36	V_{IN1-} V_{IN1} V_{IN2-} V_{IN2} V_{IN3-} V_{IN3} V_{IN4-} V_{IN4}	Channel 1 to 4 inputs	
24 25 26 27 28 29 30 31	V_{O1+} V_{O1-} V_{O2+} V_{O2-} V_{O3+} V_{O3-} V_{O4+} V_{O4-}	Channel 1 to 4 outputs	
4 6	MUTE SW	MUTE pin SW pin	
3	V_{REF-IN}	Reference voltage	

Continued on next page.

LA6245P

Continued from preceding page.

Pin No.	Symbol	Pin description	Equivalent circuit
5	TSD	<p>Thermal shutdown detection</p> <p>During normal operation: the transistor will be in the off state</p> <p>When the thermal shutdown circuit operates: the transistor will be in the on state</p>	
19	V_{IN1LD}	Loading system input	
15 14 13	OP+ OP- OPOUT	<p>Independent operational amplifier</p> <p>Operation is not controlled by the muting function.</p>	
8 12 10 11 7	REGSW V_{CCREG} REG-IN REG-OUT GNDREG	<p>Variable regulator</p> <p>Connect the REG-OUT pin to the base of the external pnp transistor.</p> <p>Connect the output of the external voltage divider to REG-IN.</p>	


LA6245P

Relationship between the MUTE pin and SW


MUTE	SW	ch1	ch2 to ch4
H	H	LD ON	MUTE = OFF
H	L	SLED ON	MUTE = OFF
L	H	LD ON	MUTE = ON
L	L	MUTE = ON	MUTE = ON

The MUTE = off state is the operating state (play), and the MUTE = on state is the stopped state.

Internal reference voltage and external reference voltage

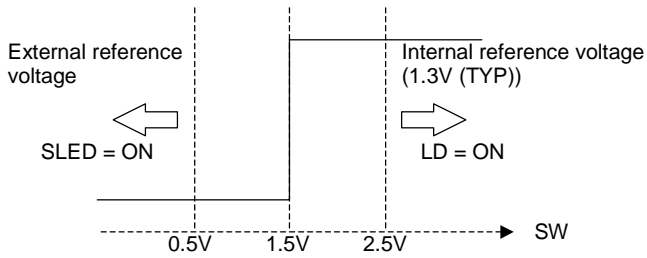

Overview of the input/output relationship

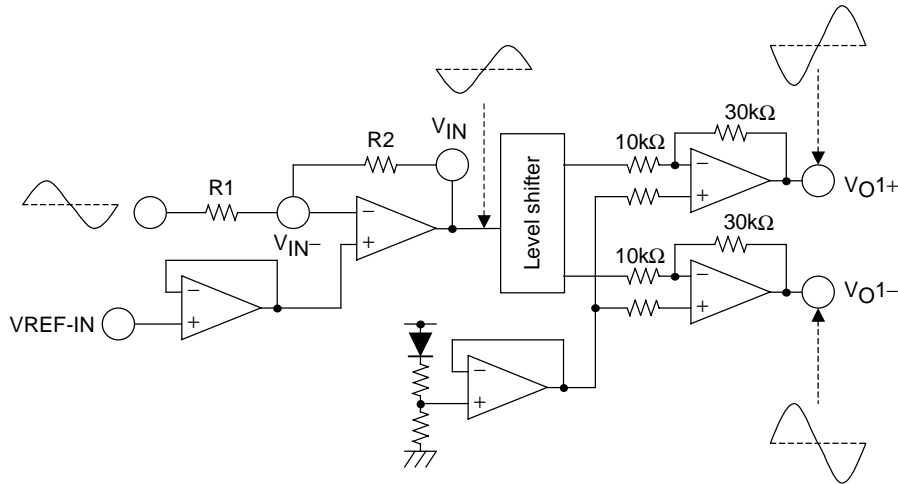


The resistors R1 and R2 in the V_{IN1LD} input block are internal to the IC.

REGSW Pin Operation

REGSW	REG
H	REG = ON
L	REG = OFF

LA6245P

Sample Application Circuit

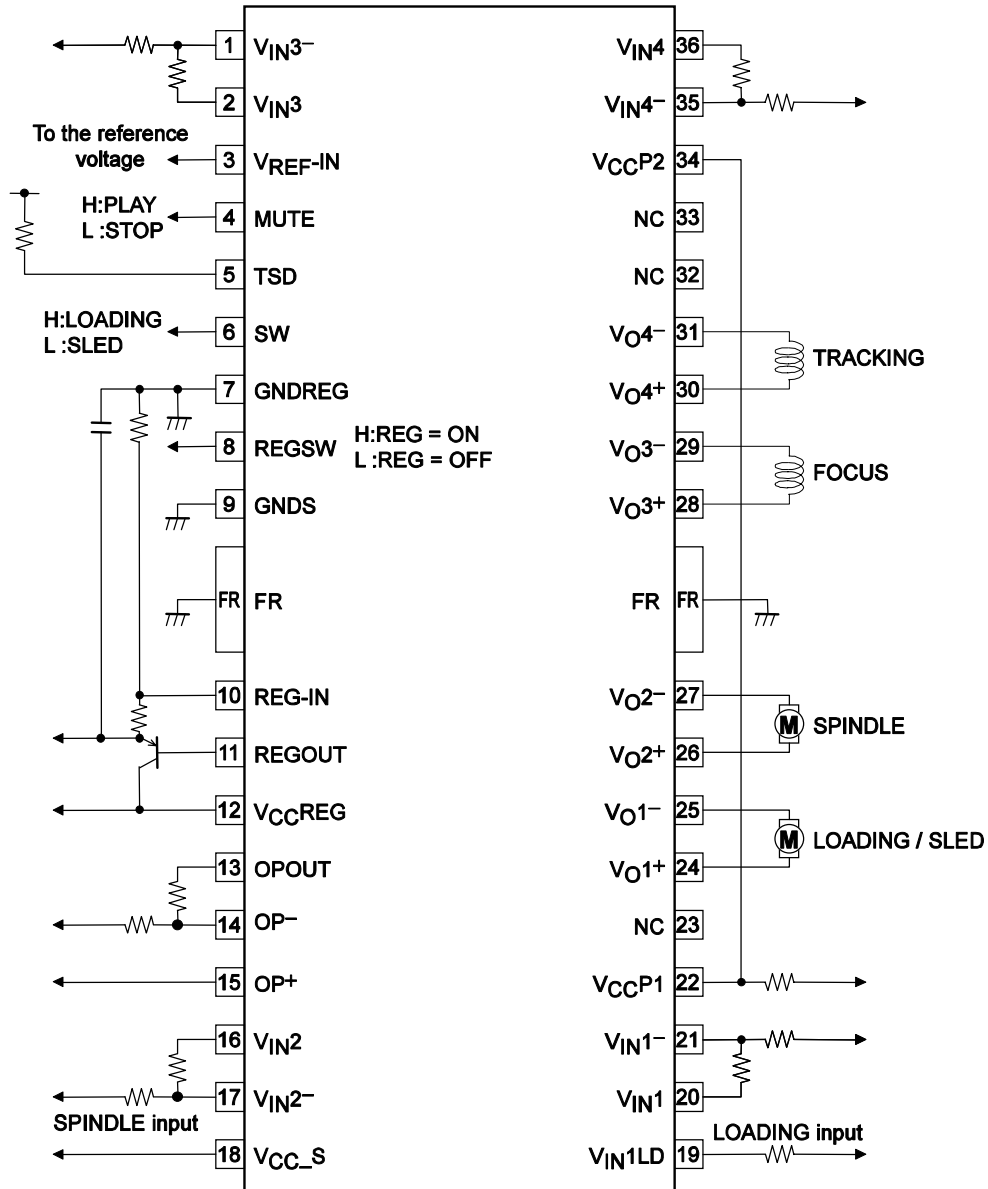

MSB06022

- Specifications of any and all SANYO Semiconductor products described or contained herein stipulate the performance, characteristics, and functions of the described products in the independent state, and are not guarantees of the performance, characteristics, and functions of the described products as mounted in the customer's products or equipment. To verify symptoms and states that cannot be evaluated in an independent device, the customer should always evaluate and test devices mounted in the customer's products or equipment.
- SANYO Semiconductor Co., Ltd. strives to supply high-quality high-reliability products. However, any and all semiconductor products fail with some probability. It is possible that these probabilistic failures could give rise to accidents or events that could endanger human lives, that could give rise to smoke or fire, or that could cause damage to other property. When designing equipment, adopt safety measures so that these kinds of accidents or events cannot occur. Such measures include but are not limited to protective circuits and error prevention circuits for safe design, redundant design, and structural design.
- In the event that any or all SANYO Semiconductor products (including technical data, services) described or contained herein are controlled under any of applicable local export control laws and regulations, such products must not be exported without obtaining the export license from the authorities concerned in accordance with the above law.
- No part of this publication may be reproduced or transmitted in any form or by any means, electronic or mechanical, including photocopying and recording, or any information storage or retrieval system, or otherwise, without the prior written permission of SANYO Semiconductor Co., Ltd.
- Any and all information described or contained herein are subject to change without notice due to product/technology improvement, etc. When designing equipment, refer to the "Delivery Specification" for the SANYO Semiconductor product that you intend to use.
- Information (including circuit diagrams and circuit parameters) herein is for example only; it is not guaranteed for volume production. SANYO Semiconductor believes information herein is accurate and reliable, but no guarantees are made or implied regarding its use or any infringements of intellectual property rights or other rights of third parties.

This catalog provides information as of March, 2006. Specifications and information herein are subject to change without notice.