

NPN SILICON RF POWER TRANSISTOR

DESCRIPTION:

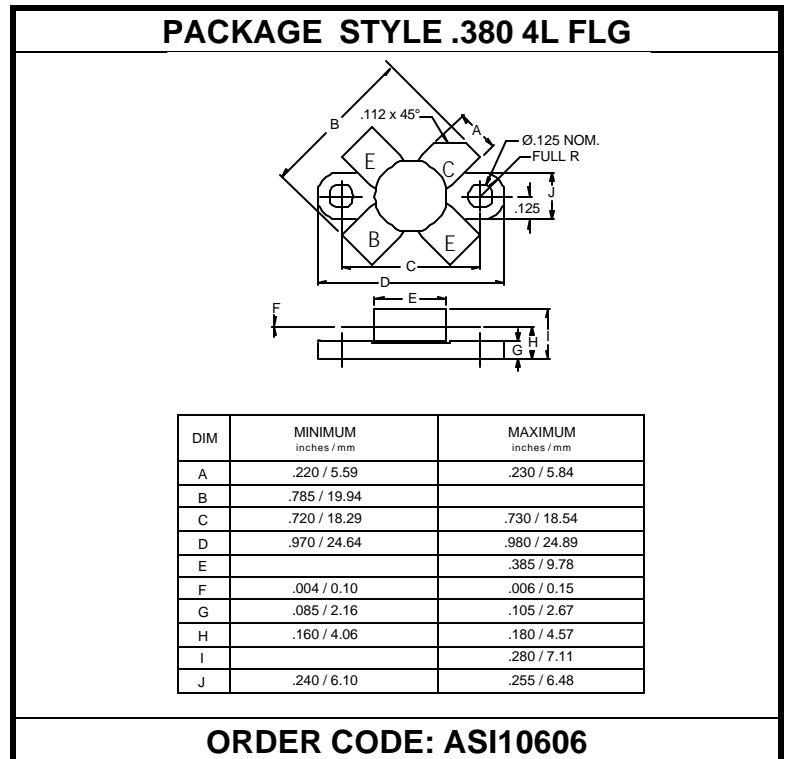
The ASI HF75-28F is Designed for

FEATURES:

- $P_G = 18$ dB min. at 75 W/30 MHz
- $IMD_3 = -30$ dBc max. at 75 W (PEP)
- *Omnigold*TM Metalization System

MAXIMUM RATINGS

I_C	10 A
V_{CB}	60 V
V_{CE}	35 V
P_{DISS}	140 W @ $T_C = 25^\circ C$
T_J	$-65^\circ C$ to $+200^\circ C$
T_{STG}	$-65^\circ C$ to $+150^\circ C$
q_{JC}	1.05 $^\circ C/W$


CHARACTERISTICS $T_C = 25^\circ C$

SYMBOL	TEST CONDITIONS	MINIMUM	TYPICAL	MAXIMUM	UNITS
BV_{CEO}	$I_C = 50$ mA	35			V
BV_{CER}	$I_C = 50$ mA $R_{BE} = 10 \Omega$	60			V
BV_{EBO}	$I_E = 10$ mA	4.0			V
I_{CES}	$V_E = 28$ V			5	mA
h_{FE}	$V_{CE} = 5.0$ V $I_C = 1.0$ A	10		100	---
C_{ob}	$V_{CB} = 28$ V $f = 1.0$ MHz			80	pF
G_{PE}	$V_{CE} = 25$ V $I_{CQ} = 3.2$ A $f = 225$ MHz	13.5	14.5		dB
IMD_3	$P_{REF} = 16$ W Vision = -8 dB Side Band = -16 dB Snd. = -7 dB			-55	dBc