

FEATURES

- ◆ RoHS compliant
- ◆ Efficiency up to 84%
- ◆ SIP Package
- ◆ Wide temperature performance at full 2 Watt load, -40°C to 85°C
- ◆ UL 94V-0 package material
- ◆ No heatsink required
- ◆ Low ripple and good EMC Features
- ◆ Industry standard pinout
- ◆ Power sharing on output
- ◆ 3KVDC isolation
- ◆ Continuous Short Circuit Protection
- ◆ Internal SMD construction
- ◆ No external components required
- ◆ Good dynamic feature

MODEL SELECTION

IF^①05^②05^③X^④S^⑤-2W^⑥

- ① Product Series
- ② Input Voltage
- ③ Output Voltage
- ④ Fixed Input
- ⑤ SIP Package
- ⑥ Rated Power

DESCRIPTION

The IF_XS-2W series are specially designed for applications where a group of polar power supplies are isolated from the input power supply in a distributed power supply system on a circuit board.

These products apply to:

- 1) where the voltage of the input power supply is fixed (voltage variation $\leq \pm 5\%$);
- 2) where isolation is necessary between input and output (isolation voltage $\leq 3000\text{VDC}$);
- 3) where the regulation of the output voltage and the output ripple noise are demanded.



SELECTION GUIDE

Order code	Input Voltage(VDC)		Output Voltage (VDC)	Output Current(MA)		Efficiency (% Typ)	Switching Frequency (KHz Typ)
	Nominal	Range		Max	Min		
	IF0505XS-2W	5	4.75-5.25	5	400		
IF1205XS-2W	12	11.4-12.6	5	400	40	70	58
IF2405XS-2W	24	22.8-25.2	5	400	40	71	66

ISOLATION SPECIFICATIONS

Parameter	Test conditions	Min.	Typ.	Max.	Units
Isolation test voltage	Flash tested for 1 minute and 1mA max	3000			VDC
Isolation resistance	Test at $V_{iso}=500\text{VDC}$	1000			MΩ
Isolation capacitance			60		PF

OUTPUT SPECIFICATIONS

Parameter	Test conditions	Min	Typ.	Max.	Units
Output power		0.2		2	W
Line regulation	For V_{in} change of $\pm 5\%$			± 0.5	%
Load regulation	10% to 100% full load			± 1.5	%
Output voltage accuracy	100% full load			± 3	%
Temperature drift	100% full load			0.03	%/°C
Output Ripple*	20MHz Bandwidth		20	30	MV p-p
Output Noise*	20MHz Bandwidth		50	150	MV p-p
Switching frequency	Full load, nominal input		100		Khz

* Test ripple and noise by "parallel cable" method. See detailed operation instructions at Testing of Power Converter section, application notes.


TEMPERATURE CHARACTERISTICS

Parameter	Conditions	Min.	Typ.	Max.	Units
Storage humidity range				95	%
NO-load power consumption			10		°C
Operating temperature		-40		85	°C
Storage temperature		-55		125	°C
Lead temperature	1.5mm from case for 10 seconds			300	
Temp.rise at full load			40	58	°C
Cooling		Free air convection			
Case material		Plastic(UL94-V0)			
Short circuit protection		Continuous			
MTBF		3500		1	s
Weight			2.8		g

*Supply voltage must be discontinued at the end of short circuit duration.

TYPICAL CHARACTERISTICS


Temperature Derating Graph

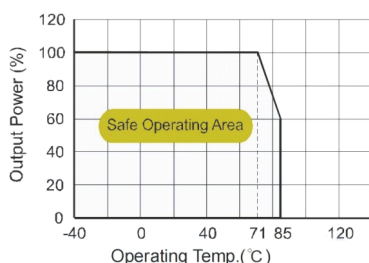


OUTLINE DIMENSIONS & PIN CONNECTIONS

IF-XS-2W SIP

SIZE Graph

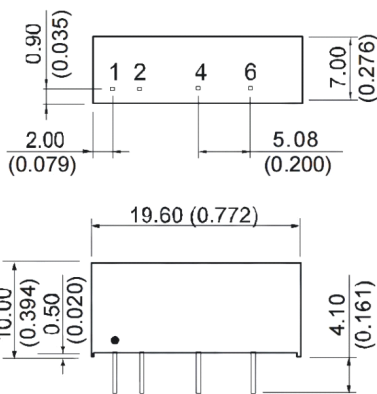

RECOMMENDED FOOTPRINT
Top view,grid:2.54mm(0.1inch)
diameter:1.00mm(0.039inch)

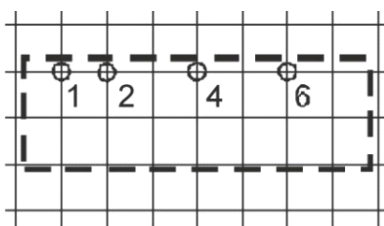


FOOTPRINT DETAILS

Pin	Function
1	Vin
2	GND
4	0V
6	+Vo

Note:
Unit:mm(inch)
Pin section:0.50*0.3mm(0.020*0.012inch)
Pin section tolerances:±0.10mm(±0.004inch)
General tolerances:±0.25mm(±0.010inch)

Recommended circuit

If you want to further decrease the input/output ripple,an "LC"filtering network may be connected to the input and output ends of the DC/DC converter. see (Figure 1).

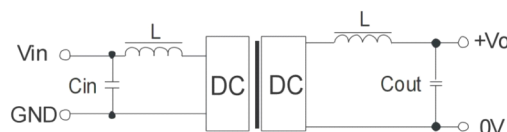

(Figure 1)

It should also be noted that the inductance and the frequency of the "LC"filtering network should be staggered with the DC/DC frequency to avoid mutual interference.However, the capacitance of the output filter capacitor must be proper. If the capacitance is too big, a startup problem might arise. For every channel of output, provided the safe and reliable operation is ensured, the greatest capacitance of its filter capacitor sees (Table 1).

EXTERNAL CAPACITOR TABLE (TABLE 1)

Vin (VDC)	Cin (μF)	Vout (VDC)	Cout (μF)
5	4.7	5	4.7
12	2.2	-	-
24	0.47	-	-


It's not recommend to connect any external capacitor in the application field with less than 0.5 watt output.

Overload Protection

Under normal operating conditions, the output circuit of these products has no protection against over-current and short-circuits.The simplest method is to connect a self-recovery fuse in series at the input end or add a circuit breaker to the circuit.

Input Over-voltage Protection Circuit

The simplest device for input over-voltage protection is a linear voltage regulator with overheat protection that is connected to the input end in series(Figure 2).



(Figure 2)

When the environment temperature is higher than 71° C, the product output power should be less then 60% of the rated power.

No parallel connection or plug and play.

Use dual output simultaneously,forbid opening output pin (0V) to use as single output.