


Pin Configuration & Marking Information

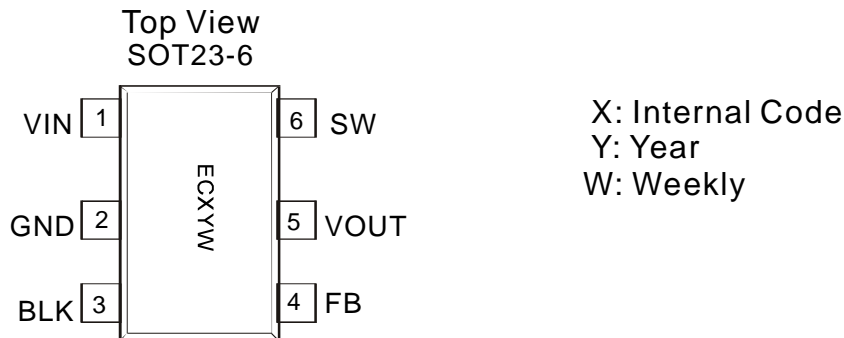

Pin Number	Name	Function
1	VIN	Input Voltage
2	GND	Power Ground
3	BLK	Connect A 1uF CAP for Blinking
4	FB	Feedback
5	VOUT	Output Voltage
6	SW	Connected to an internal NMOS switch

Absolute Maximum Ratings

These are stress ratings only and functional operation is not implied. Exposure to absolute maximum ratings for prolonged time periods may affect device reliability. All voltages are with respect to ground.

Supply Voltage.....6V	Storage Temperature Range..... -65°C to 150°C
Output Voltage.....6V	Lead Temperature (Soldering, 5 sec)300°C

Recommended Operating Conditions

Junction Temperature.....-40°C to 125°C	Operating Temperature Range-40°C to 85°C
---	--

Thermal Information

Parameter	Package	Symbol	Maximum	Unit
Thermal Resistance (Junction to Case)	SOT23-6	θ_{JC}	130	°C/W
Thermal Resistance (Junction to Ambient)	SOT23-6	θ_{JA}	250	
Internal Power Dissipation @TA=25°C	SOT23-6	P_D	400	mW



Electrical Characteristic

$T_A=25^{\circ}\text{C}$, $L=2.2\mu\text{H}$, $C_{\text{IN}}=10\mu\text{F}$, $C_{\text{OUT}}=10\mu\text{F}$, $C_{\text{BLK}}=1\mu\text{F}$, $V_F=3.4\text{V}$, unless otherwise noted.


Parameter	Symbol	Conditions	Min	Typ	Max	Unit
Input Voltage Range	V_{IN}		0.9		$V_F-0.2$ (note 1)	V
Feedback Voltage	V_{FB}		90	95	100	mV
Start-up Voltage	V_{START}	$V_{\text{IN}}: 0\text{V}\rightarrow 3\text{V}$ $I_{\text{LED}}=200\text{mA}$		0.9		V
Hold Voltage	V_{HOLD}	$V_{\text{IN}}: 3\text{V}\rightarrow 0\text{V}$ $I_{\text{LED}}:750\text{mA}\rightarrow 100\text{mA}$		0.7		V
Oscillator Frequency	F_{OSC}		0.85	1.0	1.15	MHz
Over Temperature Shutdown	OTS			150		$^{\circ}\text{C}$
Over Temperature Hysteresis	OTH			30		$^{\circ}\text{C}$
Maximum Output Current Range	$I_{\text{O(MAX)}}$	$V_{\text{IN}}=2.4\text{V}$	750			mA
Quiescent Current	I_{Q}	$I_{\text{LED}}=0\text{mA}$, $V_{\text{O}}=3.4\text{V}$, Device Switching at 1MHz		1	3	mA
Switch on Resistance	R_{DSON}	$V_{\text{O}}=3.4\text{V}$		0.1		Ω
Current Limit	I_{LIM}	$V_{\text{O}}=3.4\text{V}$	2			A
Over Voltage Protection(VOUT)	V_{OVP}			4.5		V
Blinking Frequency	F_{BLK}	$C_{\text{BLK}}=1\mu\text{F}$	7	8.5	10	Hz

Note1: V_F --- LED Forward Voltage


Typical Performance Characteristics

$T_A=25^{\circ}\text{C}$, $L=2.2\mu\text{H}$, $C_{IN}=10\mu\text{F}$, $C_{OUT}=10\mu\text{F}$, $C_{BLK}=1\mu\text{F}$, unless otherwise noted.


1. LED Power Efficiency vs Input Voltage

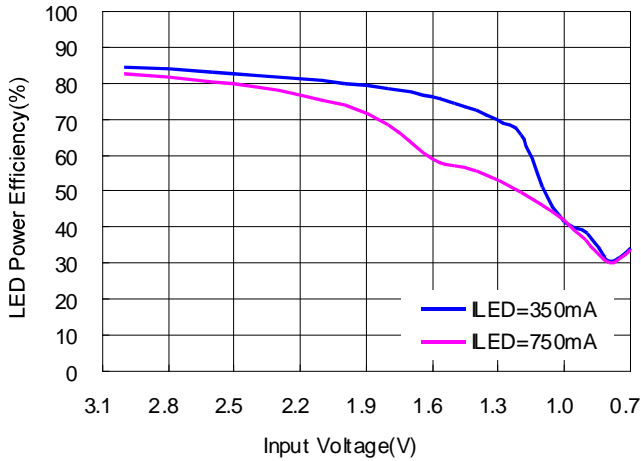


2. LED Current vs Input Voltage

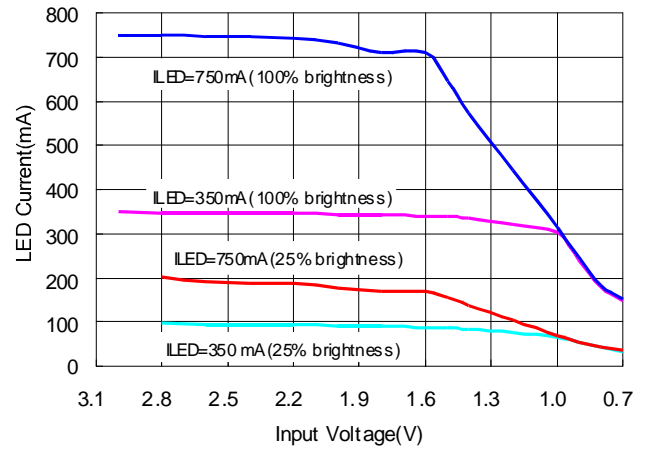

3. DC Input Current vs Input Voltage

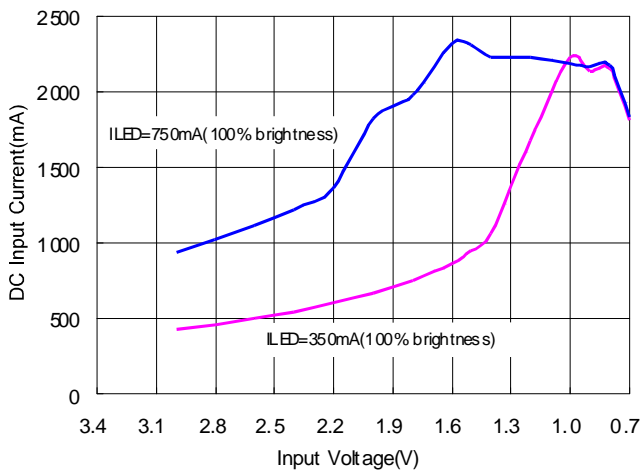


4. Feedback Voltage vs Input Voltage

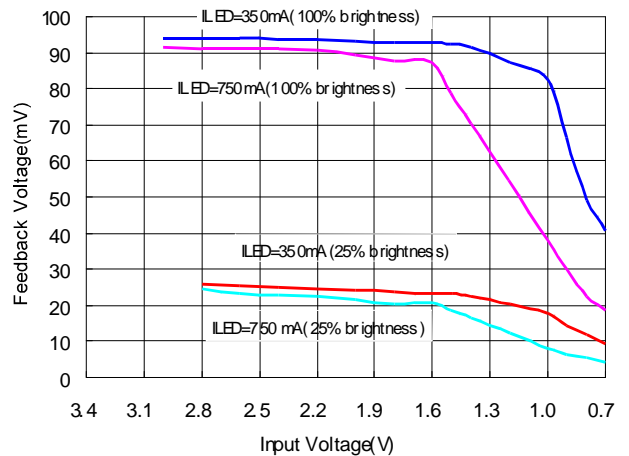


Typical Performance Characteristics

$T_A=25^{\circ}\text{C}$, $L=2.2\mu\text{H}$, $C_{\text{IN}}=10\mu\text{F}$, $C_{\text{OUT}}=10\mu\text{F}$, $C_{\text{BLK}}=1\mu\text{F}$, unless otherwise noted.


5. 3 Modes Change

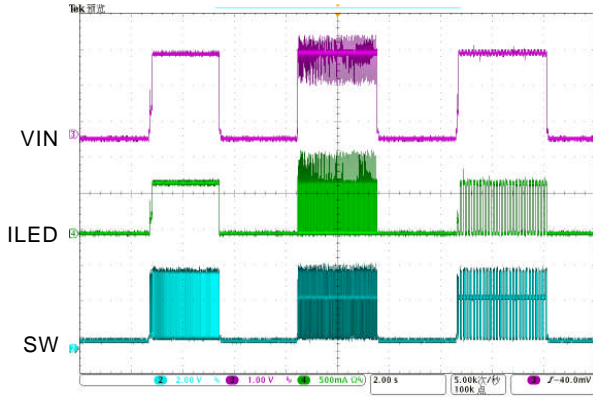


6. Start-Up Waveform

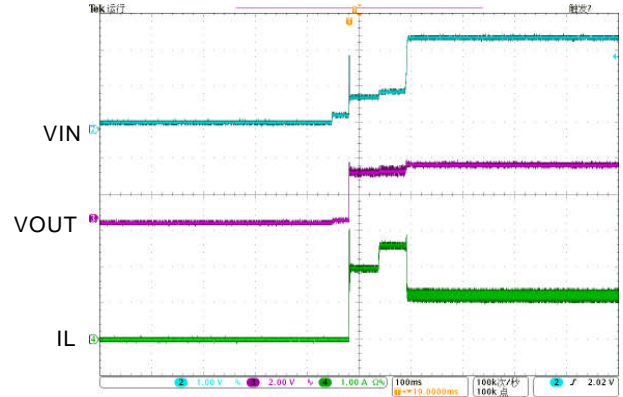

7. Overvoltage Protection

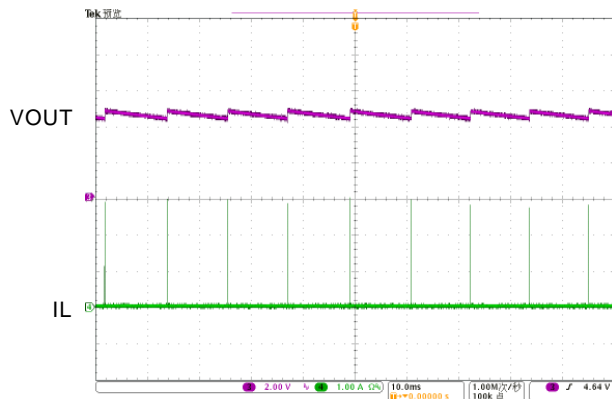

8. Switching Waveform

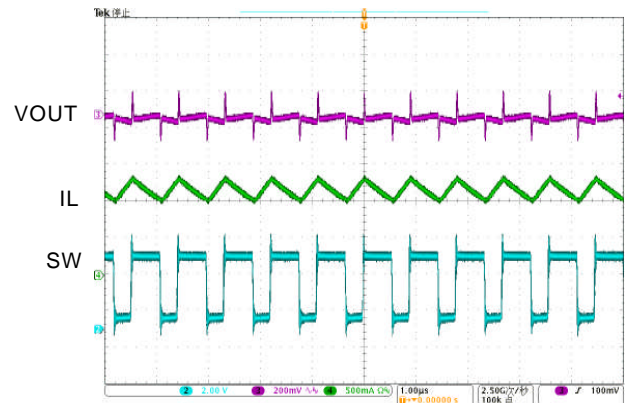



Application Information

Inductor Selection

The PAM2805 can use small value inductors due to its switching frequency of 1 MHz. The value of inductor will focus in the range of 2.2uH to 4.7uH for most PAM2805 applications. In typical high current white LED applications, it is recommended to use a 4.7uH inductor. The inductor should have low DCR (DC resistance) to minimize the I^2R power loss, and it requires a current rating of 2A to handle the peak inductor current without saturating.

Capacitor Selection

An input capacitor is required to reduce the input ripple and noise for proper operation of the PAM2805. For good input decoupling, Low ESR (equivalent series resistance) capacitors should be used at the input. At least 2.2uF input capacitor is recommended for most applications.

A minimum output capacitor value of 6.8uF is recommended under normal operating conditions, while a 10uF-22uF capacitor may be required for higher power LED current. A reasonable value of the output capacitor depends on the LED current. The ESR of the output capacitor is the important parameter to determine the output voltage ripple of the converter, so low ESR capacitors should be used at the output to reduce the output voltage ripple. The small size of ceramic capacitors is an excellent choice for PAM2805 applications. The X5R and X7R types are preferred because they maintain capacitance over wide voltage and temperature ranges.

Diode Selection

It's indispensable to use a Schottky diode rated at 2A with the PAM2805. Using a Schottky diode with a lower forward voltage drop is better to improve the power LED efficiency, and its voltage rating should be greater than the output voltage. SS22 is recommended Schottky diode for rectifier.

LED Current Setting

The LED current is set by the single external R_s resistor connected to the FB pin as shown in the typical application circuit on page 1. The typical FB reference is internally regulated to 95mV. The LED current is $95mV/R_1$. It's recommended to use a 1% or better precision resistor for the better LED current accuracy. The formula for R_s

selection is shown as follows:

$$R_s(\text{Ohm})=95mV/I_{LED}(\text{mA}) \text{ at } V_{IN}=3V.$$

Typically, for 1W(330mA) and 3W(750mA) LED light applications, the R_s are 0.288ohm and 0.127Ohm respectively.

3 Modes Cycling

The PAM2805 has three modes: 100% brightness, 25% brightness and blinking(typical 8.5Hz).

The mode change is triggered by power on/off actions and cycles in the following sequence: bright, dimming, blinking and back to bright mode.

The PAM2805 will reset to the bright mode after being power off for more than 5 seconds.

Low Voltage Startup and Soft Start

The PAM2805 has a build-in low voltage startup circuit for the best battery life solution. It can start up at 0.9V V_{IN} typically when the preset LED current is 200mA.

The soft-start function is made by clamping the output voltage of error amplifier with another voltage source which increases slowly from zero to near V_{IN} during the soft-start period. Therefore, the duty cycle of the PWM will be increased from zero to maximum in this period. The charging time of the inductor will be limited by the smaller duty so that the inrush current can be reduced to an acceptable value.

Over Voltage Protection

The output voltage of PAM2805 is monitored by Over Voltage Protection circuit. Once V_{OUT} goes over V_{OVP} , typically 4.5V, the power NMOS is turned off and SW pin stops switching. Then, the V_{OUT} is clamped to around V_{OVP} .



Application Information

Over Current Protection

The inductor current during charging period is detected by a current sensing circuit. When the value is larger than current limiting I_{LIM} , the power NMOS is turned off so that the inductor will be forced to leave charging stage and enter discharging stage. Therefore, the inductor peak current will not exceed I_{LIM} , whose minimum value is 2A.

PCB Layout Guidelines


As for all switching power supplies, the layout and components placement of the PAM2805 is an important step in the design; especially at high peak currents and high switching frequencies.

The input capacitor and output capacitor should be placed respectively as close as possible to the input pin and output pin of the IC; the inductor and schottky diode should be placed as close as possible to the switch pin by using wide and short traces for the main current path; the current sense resistor should be placed as close as possible between the ground pin and feedback pin.



Ordering Information


PAM2805 X X X X

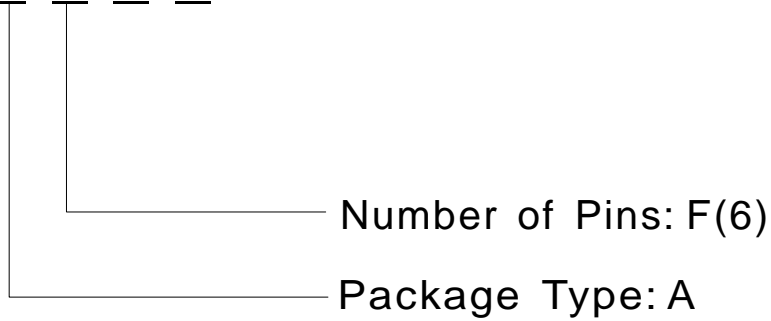

Part Number	Marking	Package Type	Standard Package
PAM2805AF	ECXYW	SOT23-6	3,000Units/Tape&Reel

Outline Dimensions

SOT23-6

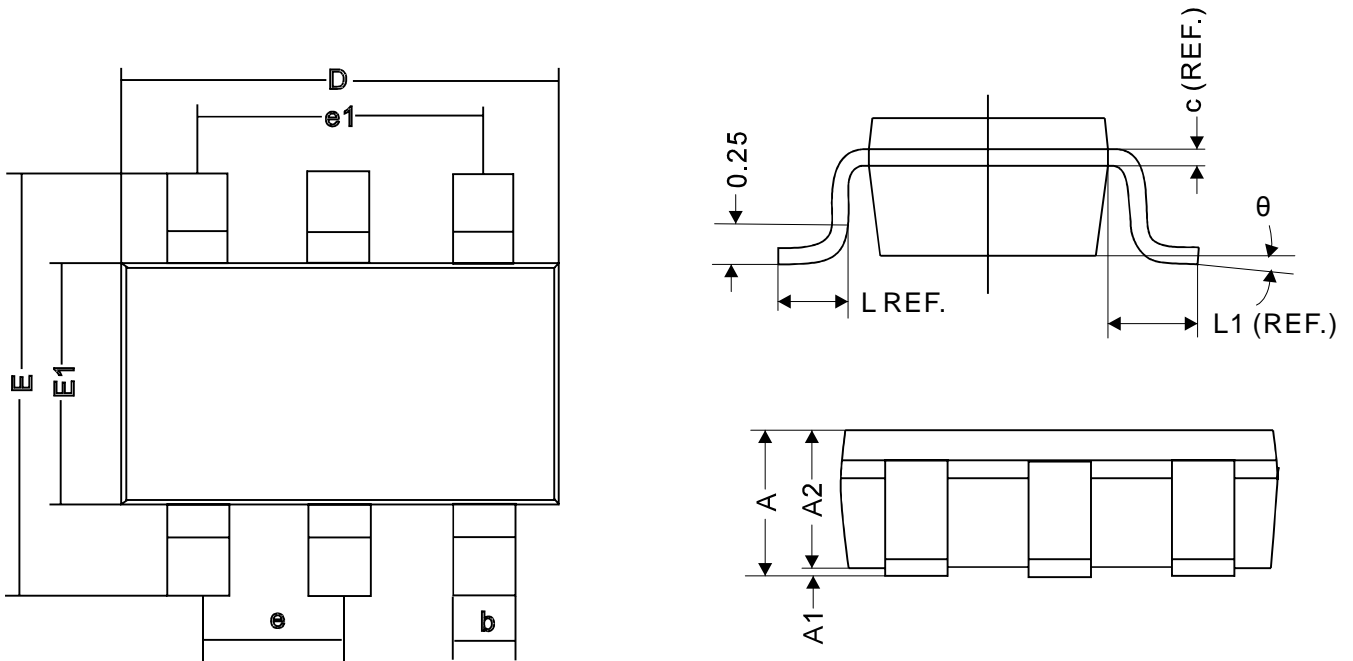

REF.	Millimeter	
	Min	Max
A	-	1.35
A1	0.04	0.15
A2	0.70	1.2
c	0.12REF.	
D	2.70	3.10
E	2.60	3.00
E1	1.40	1.80
L	0.45REF.	
L1	0.60REF.	
θ	0°	10°
b	0.30	0.50
e	0.95REF.	
e1	1.90REF.	