


HIGH EFFICIENCY RED HLMP-2300/2600 SERIES
YELLOW HLMP-2400/2700 SERIES
HIGH EFFICIENCY GREEN HLMP-2500/2800 SERIES

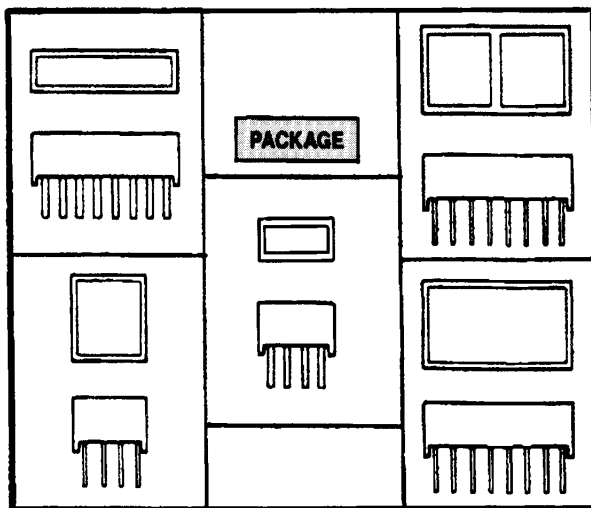

DESCRIPTION

These LED Light Bar series are bright, large emitting area, rectangular devices that are designed for backlighting legend/message annunciators.

These devices are offered in single-in-line and dual-in-line packages that contain single or segmented light-emitting area. Each package style is offered in High Efficiency Red, Yellow, or Green emission color.

FEATURES

- Large area, uniform, bright light-emitting surfaces
- Select from six package styles
- Choice of three colors
- Categorized for intensity and color
- X-Y stackable
- Easily driven with I.C.s
- Alternate source for popular backlighting components

MODEL NUMBERS

PART NO.	COLOR	DESCRIPTION		PACKAGE	PIN OUT
HLMP-2300	High Efficiency Red	2 LED Single-in-line 0.35 in. x 0.15 in. Area		A	A
HLMP-2400	Yellow				
HLMP-2500	High Efficiency Green				
HLMP-2350	High Efficiency Red	4 LED Single-in-line 0.75 in. x 0.15 in. Area		B	B
HLMP-2450	Yellow				
HLMP-2550	High Efficiency Green				
HLMP-2655	High Efficiency Red	4 LED Dual-in-line 0.35 in. x 0.35 in. Area		C	C
HLMP-2755	Yellow				
HLMP-2855	High Efficiency Green				
HLMP-2670	High Efficiency Red	Dual 0.35 in. x 0.35 in. Area Dual-in-line package		D	D
HLMP-2770	Yellow				
HLMP-2870	High Efficiency Green				
HLMP-2685	High Efficiency Red	8 LED 0.35 in. x 0.75 in. Area Dual-in-line package		E	D
HLMP-2785	Yellow				
HLMP-2885	High Efficiency Green				


ABSOLUTE MAXIMUM RATINGS $T_A=25^\circ\text{C}$ (Unless Otherwise Stated)

	HIGH EFFICIENCY RED HIGH EFFICIENCY GREEN HLMP-2300/-2500 -2600/-2800 SERIES	YELLOW HLMP-2400/ -2700 SERIES
Power dissipation per LED chip (See Note 1)	135 mW	85 mW
Peak forward current per LED chip, $T_A=50^\circ\text{C}$ (max. pulse width=2 ms) (See Notes 1 and 2)	90 mA	60 mA
Average forward per LED chip pulsed conditions, $T_A=50^\circ\text{C}$ (See Note 2)	25 mA	20 mA
DC forward current per LED chip, $T_A=50^\circ\text{C}$ (See Note 3)	30 mA	25 mA
Reverse voltage per LED chip	6V	6V
Storage and operating temperature range	-40°C to $+85^\circ\text{C}$	-40°C to $+85^\circ\text{C}$
Soldering time at 260°C (See Note 4)	260°C for 3 sec.	260°C for 3 sec.

NOTES

- For HLMP-2300/-2500/-2600/-2800 Series, derate above $T_A=25^\circ\text{C}$ at $1.8\text{ mW}/^\circ\text{C}$ per LED chip. For HLMP-2400/-2700 Series, derate above $T_A=50^\circ\text{C}$ at $1.8\text{ mW}/^\circ\text{C}$ per LED chip.
- See Figure 1/2 to establish pulse operating conditions.
- For HLMP-2300/-2500/-2600/-2800 Series, derate above $T_A=50^\circ\text{C}$ at $0.5\text{ mA}/^\circ\text{C}$ per LED chip. For HLMP-2400/-2700 Series derate above $T_A=60^\circ\text{C}$ at $9.5\text{ mA}/^\circ\text{C}$ per LED chip.
- Lead immersed to 1/16 in. from body of the device. Maximum unit surface temperature is 140°C .

PACKAGE DIMENSIONS

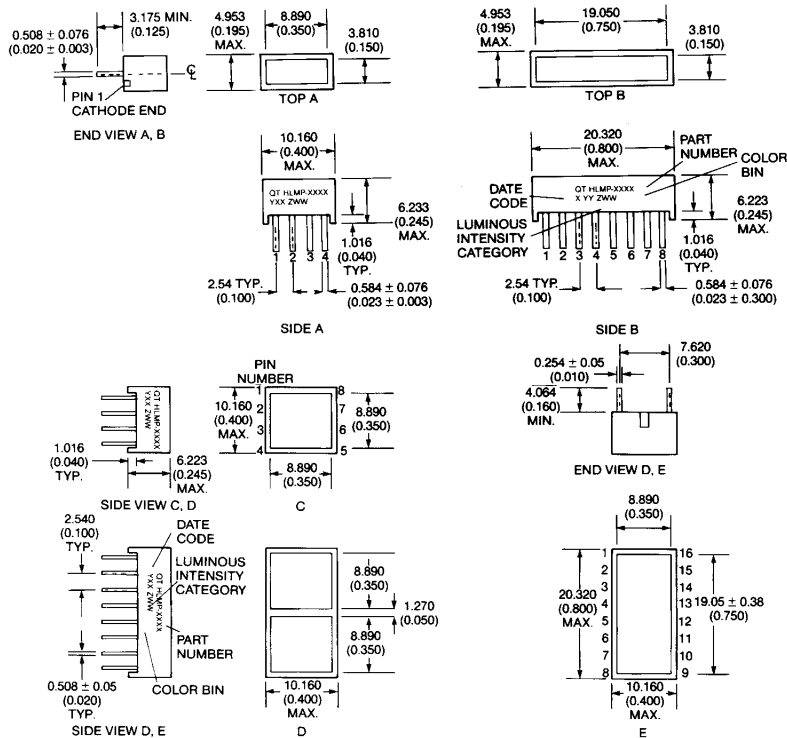

NOTE: DIMENSIONS IN MILLIMETERS (INCHES). TOLERANCES ± 0.25 (± 0.010) UNLESS OTHERWISE INDICATED

ELECTRO-OPTICAL CHARACTERISTICS (T_A=25°C)									
HIGH EFFICIENCY RED									
PARAMETER	SYMBOL	HLMP					UNIT	TEST CONDITIONS	
		-2300	-2350	-2655	-2670	-2685			
Luminous Intensity	min.		6.0	13	13	13	22	mcd	I _F =20 mA
	typ.	I _V	23	45	43	45	80	mcd	I _F =20 mA
Forward voltage	typ.		30	50	50	50	100	mcd	I _F =60 mA pK, 1:3 D.F.
	max.	V _F	2.6	2.6	2.6	2.6	2.6	V	I _F =20 mA
Peak wavelength	typ.	λ _p	2.0	2.0	2.0	2.0	2.0	V	I _F =20 mA
			630	630	630	630	630	nm	
Dominant wavelength	typ.	λ _d	630	630	630	630	630	nm	
			626	626	626	626	626	nm	
Capacitance	typ.	C	45	45	45	45	45	pF	V _F =0, f=1 MHz
Reverse voltage	min.	V _R	6	6	6	6	6	V	I _R =100 μA
Thermal resistance	typ.	θ _{JL}	150	150	150	150	150	°C/W/ LED chip	

ELECTRO-OPTICAL CHARACTERISTICS (T_A=25°C)									
YELLOW									
PARAMETER	SYMBOL	HLMP					UNIT	TEST CONDITIONS	
		-2400	-2450	-2755	-2770	-2785			
Luminous Intensity	min.		6	13	13	13	26	mcd	I _F =20 mA
	typ.	I _V	20	38	35	35	70	mcd	I _F =20 mA
Forward voltage	typ.		33	60	60	60	115	mcd	I _F =60 mA pK, 1:3 D.F.
	max.	V _F	2.6	2.6	2.6	2.6	2.6	V	I _F =20 mA
Peak wavelength	typ.	λ _p	2.1	2.1	2.1	2.1	2.1	V	I _F =20 mA
			585	585	585	585	585	nm	
Dominant wavelength	typ.	λ _d	585	585	585	585	585	nm	
			588	588	588	588	588	nm	
Capacitance	typ.	C	35	35	35	35	35	pF	V _F =0, f=1 MHz
Reverse voltage	min.	V _R	6	6	6	6	6	V	I _R =100 μA
Thermal resistance	typ.	θ _{JL}	150	150	150	150	150	°C/W/ LED chip	

ELECTRO-OPTICAL CHARACTERISTICS (T_A=25°C)									
HIGH EFFICIENCY GREEN									
PARAMETER	SYMBOL	HLMP					UNIT	TEST CONDITIONS	
		-2500	-2550	-2855	-2870	-2885			
Luminous Intensity	min.		5	11	11	11	22	mcd	I _F =20 mA
	typ.	I _V	25	50	50	50	100	mcd	I _F =20 mA
Forward voltage	typ.		38	75	75	75	150	mcd	I _F =60 mA pK, 1:3 D.F.
	max.	V _F	2.6	2.6	2.6	2.6	2.6	V	I _F =20 mA
Peak wavelength	typ.	λ _p	2.2	2.2	2.2	2.2	2.2	V	I _F =20 mA
			565	565	565	565	565	nm	
Dominant wavelength	typ.	λ _d	565	565	565	565	565	nm	
			567	567	567	567	567	nm	
Capacitance	typ.	C	40	40	40	40	40	pF	V _F =0, f=1 MHz
Reverse voltage	min.	V _R	6	6	6	6	6	V	I _R =100 μA
Thermal resistance	typ.	θ _{JL}	150	150	150	150	150	°C/W/ LED chip	

TYPICAL ELECTRO-OPTICAL CHARACTERISTIC CURVES
(25°C Free Air Temperature Unless Otherwise Specified)

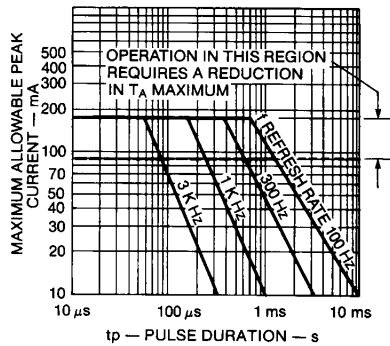


Fig. 1. Maximum Tolerable Peak Current per LED Chip vs. Pulse Duration for HLMP-23X0/-26XX/-25X0/-28XX

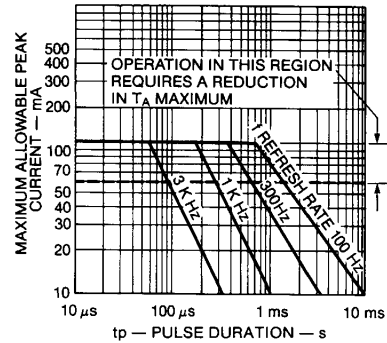


Fig. 2. Maximum Tolerable Peak Current per LED Chip vs. Pulse Duration for HLMP-24X0/-27XX Devices

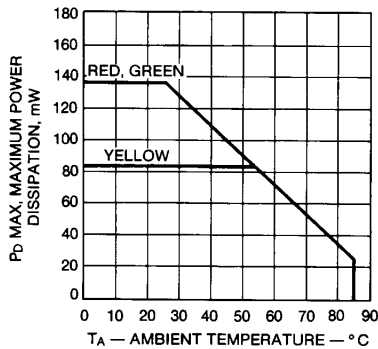


Fig. 3. Maximum Power Dissipation per LED vs. Ambient Temperature

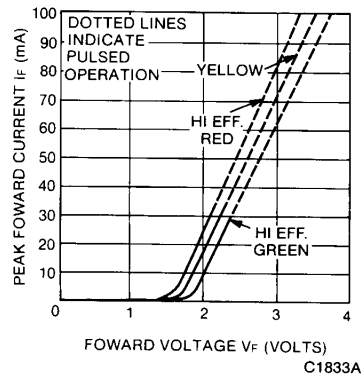


Fig. 4. Forward Current vs. Forward Voltage

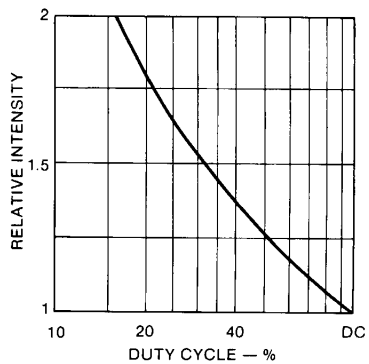


Fig. 5. Luminous Intensity vs. Duty Cycle


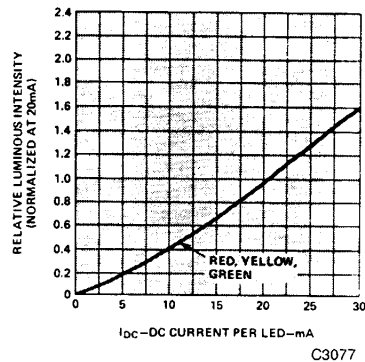


Fig. 6. Luminous Intensity vs. Forward Current

TYPICAL ELECTRO-OPTICAL CHARACTERISTIC CURVES
(25°C Free Air Temperature Unless Otherwise Specified) (Cont'd)

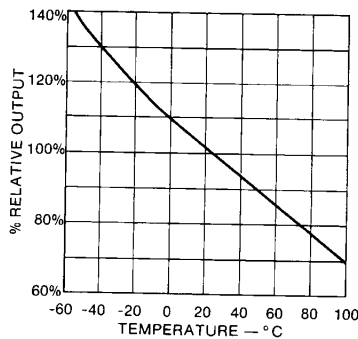


C654B

Fig. 7. Output vs. Temperature

PIN CONNECTIONS TO ELECTRICAL SCHEMATIC

PIN	ELECTRICAL CONNECTION			
	HLMP-2X00	HLMP-2X50	HLMP-2X55	HLMP-2X70/-2X85
1	1 Cathode	1 Cathode	1 Cathode	1 Cathode
2	1 Anode	1 Anode	1 Anode	1 Anode
3	2 Cathode	2 Cathode	2 Cathode	2 Cathode
4	2 Anode	2 Anode	2 Anode	2 Anode
5		3 Cathode	3 Cathode	3 Cathode
6		3 Anode	3 Anode	3 Anode
7		4 Cathode	4 Cathode	4 Cathode
8		4 Anode	4 Cathode	4 Anode
9				4 Cathode
10				5 Cathode
11				5 Anode
12				6 Anode
13				6 Cathode
14				7 Cathode
15				7 Anode
16				8 Anode
				8 Cathode

ELECTRICAL SCHEMATIC

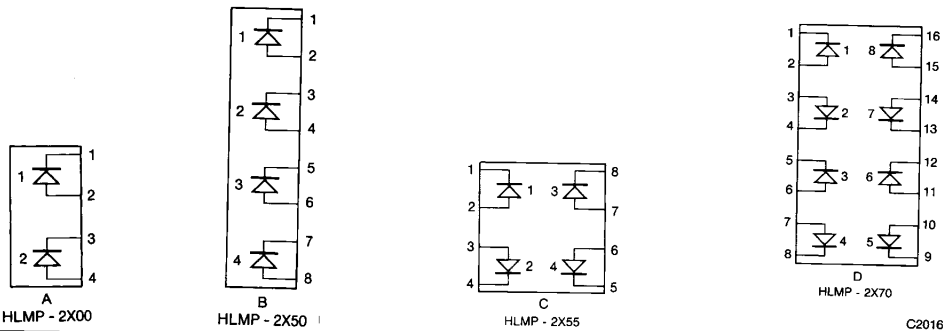

DISCLAIMER

FAIRCHILD SEMICONDUCTOR RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION OR DESIGN. FAIRCHILD DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICENSE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS.

LIFE SUPPORT POLICY

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF THE PRESIDENT OF FAIRCHILD SEMICONDUCTOR CORPORATION. As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury of the user.
2. A critical component in any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.