


Keysight Technologies

Infiniium DCA-X 86100D

Wide-Bandwidth Oscilloscope

Mainframe and Modules

Data Sheet

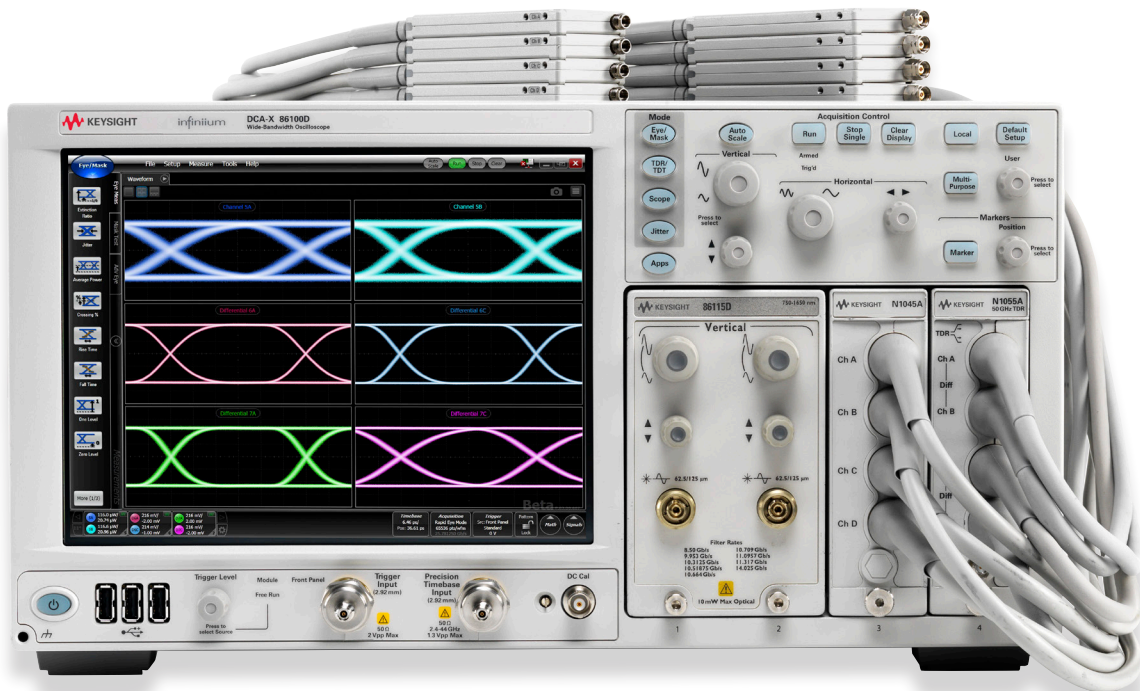



Introduction

See the TRUE performance of your designs.

The 86100D DCA-X performs precision measurements on high-speed digital designs from 50 Mb/s to more than 80 Gb/s on up to 16 channels simultaneously. Applications include:

Optical

- Transceiver design and manufacturing

Electrical

- ASIC/FPGA/IC design and characterization

TDR/TDT/S-Parameter

- Serial bus designs, cables, and PCB characterization


Table of Contents

Overview of Infiniium DCA-X	4
Specifications	5
General and mainframe	5
Comparing specifications	5
General specifications	5
Mainframe specifications	5
Computer system and storage	7
Precision time base operation and integrated precision timebase	8
Precision time base (86108 configurations)	9
Modules Selection Table	10
86100 family plug-in module matrix	10
Modules Specifications	12
Single-mode and multimode optical/electrical	12
Single-mode optical/electrical	17
Dual electrical	19
Dual/quad electrical	22
TDR system	22
Clock recovery	23
Typical System Configurations	24
Software Applications	25
Measurements	27
Ordering Information	31

Overview of the Infiniium DCA-X


The 86100D DCA-X can be viewed as four powerful instruments in one:

Scope mode

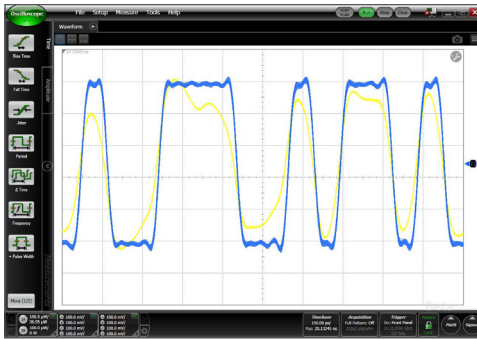


High-fidelity waveform characterization (Yellow: raw trace, Blue: de-embedded waveform)

Jitter mode

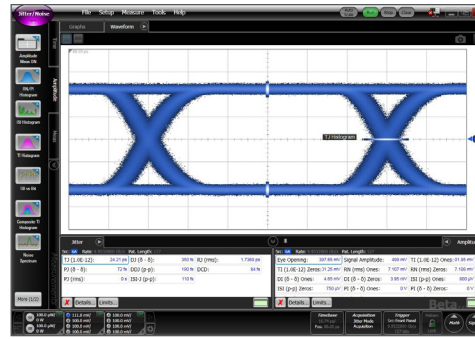


Precision jitter, amplitude, and frequency analysis capability

Eye/Mask mode

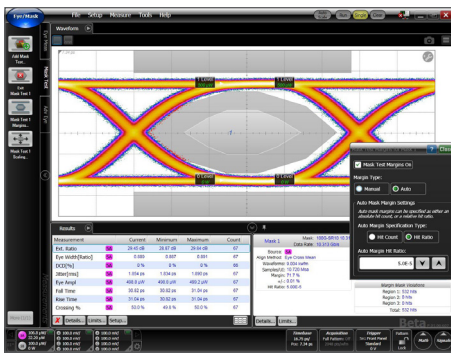

Fast transmitter characterization using eye diagram analysis and automated mask margin measurements

TDR/TDT mode

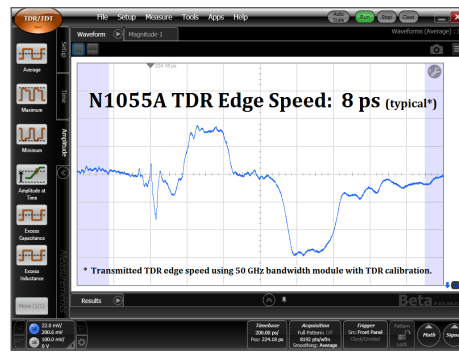

Accurate time domain reflectometry/transmission and S-Parameter measurements

These modes are further complimented by the following features that provide additional insight and analysis capability:

- De-embedding, embedding, equalizer capability
- Phase noise/Jitter spectrum analysis
- Phase locked loop (PLL) analysis
- And more...

Precision measurements, more margin, and more insight

The 86100D DCA-X oscilloscope combines high analog bandwidth, low jitter, and low noise performance to accurately characterize optical and electrical designs from 50 Mb/s to over 80 Gb/s. The mainframe provides the foundation for powerful insight and measurement capability, such as de-embedding of cables and fixtures, that improve margins and allow engineers to see the true performance of their designs.

Modular

The modular system means that the instrument can grow to meet your needs, when you need it. There's no need to purchase capability that you don't need now. The DCA-X supports a wide range of modules for testing optical and electrical designs. Select modules to get the specific bandwidth, filtering, and sensitivity you need. The DCA-X supports all modules in the DCA family and is 100% backwards compatible with the 86100C mainframe.

High channel count

The DCA-X can measure from one to 16 channels simultaneously with no significant loss in throughput. Create an affordable high-capacity test system by measuring multiple signals in parallel.

Software

The DCA-X provides powerful analysis capability that is enabled through licensed software options.

Examples include 86100D-200 for fast and accurate jitter analysis, 86100D-SIM for de-embedding and/or embedding of fixtures and cables, and the N1012A/N1014A/N108XA Series test applications.

Specifications

General and mainframe

Specifications describe warranted performance over the temperature range of +10 to +40 °C (unless otherwise noted). The specifications are applicable for the temperature after the instrument is turned on for one hour, and while self-calibration is valid. Many performance parameters are enhanced through frequent, simple user calibrations. Characteristics provide useful, non-warranted information about the functions and performance of the instrument. Characteristics are printed in italic typeface. Product specifications and descriptions in this document are subject to change without notice.

General specifications

Temperature	Operating	10 to +40 °C (50 to +104 °F)
	Non-operating	-40 to +65 °C (-40 to +158 °F)
Altitude	Operating	Up to 4,600 meters (15,000 feet)
Power (max)	100/120 Vac 50/60/400 Hz	With typical modules: 150 to 230 VA at 25 °C
	220/240 Vac 50/60 Hz, 700 W maximum	
Weight	Mainframe without modules	20.5 kg (43 lbs)
	Typical module	1.2 kg (2.6 lbs)
Mainframe dimensions (excluding handle)	Without front connectors and rear feet	221 mm (H) x 426 mm (W) x 530 mm (D) (7 in x 16.76 in x 20.9 in)
	With front connectors and rear feet	234 mm (H) x 426 mm (W) x 601 mm (D) (9.23 in x 16.76 in x 23.67 in)
	With front cover and rear feet	234 mm (H) x 426 mm (W) x 612 mm (D) (9.23 in x 16.76 in x 24.1 in)
Max relative humidity	80% for temperatures up to 31 °C decreasing linearly to 50% relative humidity at 40 °C	
Supply voltage variation	86100D system can operate with supply voltage fluctuations up to $\pm 10\%$ of the nominal voltage	

Mainframe specifications

Horizontal system (time base)		Pattern lock
Scale factor (full scale is ten divisions)		
Minimum	2 ps/div (with 86107A or 86100D-PTB: 500 fs/div)	
Maximum	1 s/div	250 ns/div
Delays ¹		
Minimum	24 ns	40.1 ns default, 24 ns min
Maximum	1000 screen diameters or 10 s whichever is smaller	1000 screen diameters or 25.401 μ s whichever is smaller
Time interval accuracy ²	1 ps + 1.0% of Δ time reading ³ or 8 ps, whichever is smaller	
Jitter mode operation ⁴	Time interval accuracy - jitter mode operation 1 ps	
Time interval resolution	\leq (screen diameter)/(record length) or 62.5 fs, whichever is larger	
Display units	Bits or time (TDR mode-meters)	
Vertical system (channels)		
Number of channels	16 (simultaneous acquisition)	
Vertical resolution	54xxx, 83xxx, 86xxx: 14 bit A/D converter (16 or more bits with averaging). N10xx: 16 bit A/D converter	
Full resolution channel	Adjusts in a 1-2-5-10 sequence for coarse adjustment or fine adjustment resolution from the front panel knob	
Adjustments	Scale, offset, activate filter, sampler bandwidth, attenuation factor, transducer conversion factors	
Record length	Legacy UI: 16 to 16 K samples	
	FlexDCA without pattern lock: 16 to 64 K samples	
	FlexDCA with pattern lock: 16 up to 32 M samples ⁵	

1. Time offset relative to the front panel trigger input on the instrument mainframe.
2. Dual marker measurement performed at a temperature within 5 °C of horizontal calibration temperature.
3. The maximum delay setting is 100 ns and delta time does not span across $(28 + N \times 4)$ ns \pm 100 ps delay setting, where N=0,1,2,...18. If delta time measurement span exceeds above criteria, time interval accuracy is 8 ps + 0.1% of Δ time reading.
4. Characteristic performance. Test configuration: PRBS of length 127 bits, Data and Clock 10 Gb/s.
5. Maximum number of samples depends on pattern, number of active channels and available memory.

Comparing specifications

When comparing performance attributes between instruments, ensure you compare the same type of parameter. For example, compare warranted specifications from both instruments, or compare characteristics or typical performance. Warranted specifications include measurement uncertainties and are conservative compared to other types of unwarranted attributes.

Factory calibration cycle - For optimum performance, the instrument should have a complete verification of specifications once every twelve months.

Specifications (Continued)

Mainframe specifications (Continued)

	Option STR (standard trigger)	Option ETR (enhanced trigger)
Trigger modes		
Internal trigger ¹	Free run	Free run
External direct trigger ²		DC to 100 MHz
Limited bandwidth ³	DC to 100 MHz	DC to 3.2 GHz
Full bandwidth	DC to 3.2 GHz	
External divided trigger	N/A	3 to 13 GHz (15 GHz, 32 GHz with Option PTB)
PatternLock	N/A	50 MHz to 13 GHz (50 MHz to 15 GHz)
Module bay trigger ⁷	N/A	Yes, supported
Jitter		
Characteristic	< 1.0 ps RMS + 5*10E-5 of delay setting ⁴	1.2 ps (750 fs Option PTB) RMS for time delays less than 100 ns ⁶ 1.7 ps (1.2 ps Option PTB) RMS for time delays less than 100 ns ⁶
Maximum	1.5 ps RMS + 5*10E-5 of delay setting ⁴	1.2 ps (750 fs) (50 MHz to 32 GHz) in PTB mode ⁸ : 200 fs (2.4 to 4 GHz) 120 fs (4 to 9 GHz) 90 fs (9 to 44 GHz)
Option PTB	N/A	
Trigger sensitivity		
	200 mV _{pp} (sinusoidal input or 200 ps minimum pulse width)	200 mV _{pp} sinusoidal input: 50 MHz to 13 GHz, (to 32 GHz with Option PTB)
Trigger configuration		
Trigger level adjustment	-1 to +1 V	AC coupled
Edge select	Positive or negative	N/A
Hysteresis ⁵	Normal or High sensitivity	N/A
Trigger gating		
Gating input levels (TTL compatible)	Disable: 0 to 0.6 V, Enable: 3.5 to 5 V Pulse width > 500 ns, period > 1 μs	
Gating delay		
	Disable: 27 μs + trigger period + Maximum time displayed Enable: 100 ns	
Trigger impedance		
Nominal impedance	50 Ω	
Reflection	< 10% for 100 ps rise time	
Connector type	3.5 mm (male)	
Maximum trigger signal		
	2 V peak-to-peak	

1. The freerun trigger mode internally generates an asynchronous trigger that allows viewing the sampled signal amplitude without an external trigger signal but provides no timing information unless a precision timebase is used in Eye/Mask mode. Freerun is useful in troubleshooting external trigger problems.
2. The sampled input signal timing is recreated by using an externally supplied trigger signal that is synchronous with the sampled signal input.
3. The DC to 100 MHz mode is used to minimize the effect of high frequency signals or noise on a low frequency trigger signal.
4. Measured at 2.5 GHz with the triggering level adjusted for optimum trigger.
5. High Sensitivity Hysteresis mode improves the high frequency trigger sensitivity but is not recommended when using noisy, low frequency signals that may result in false triggers without normal hysteresis enabled.
6. Slew rate ≥ 2 V/ns.
7. The Module Bay Trigger routes trigger signals from the module's rear panel to the mainframe. 86100D-ETR is recommended when using a DCA module equipped with a rear-panel trigger circuit. Examples include 54754A, 83496x, and 86108A/B modules. If operating these modules in an 86100D with Option STR, an external cable (such as P/N 5062-6690) must be connected from the module's front panel trigger/clock output to the 86100D's trigger input.
8. In precision timebase (PTB) operation with 750 mV input (500 mV input, 9 to 44 GHz).

Specifications (Continued)

Computer system and storage

Computer system and storage	
CPU	Intel Core i5 3550S CPU at 3.0 GHz
Mass storage	80 GB internal hard drive (default) or 80 GB removable hard drive (Option 090)
Operating system	Microsoft Windows 7 embedded standard (64 bit)
Display ¹	
Display area	210.4 mm x 157.8 mm (10.4 inch diagonal color active matrix LCD module incorporating amorphous silicon TFTs)
Entire display resolution	1024 pixels horizontally x 768 pixels vertically
Waveform colors	Select from over 16 colors; user may change color assignment of all traces (channels, waveform memory and signal processing functions)
Persistence modes	Gray scale, color grade, variable, infinite
Waveform overlap	When two waveforms overlap, a third color distinguishes the overlap area (classic DCA-J interface only)
Connect-the-dots	On/Off selectable
Persistence	Minimum, variable (100 ms to 40 s), infinite
Graticule	On/Off
Grid intensity	0 to 100%
Dialog boxes	Opaque or transparent
Front panel inputs and outputs	
Cal output	BNC (female) and test clip, banana plug
Trigger input	2.92 mm ⁴ , 50 Ω , 2 V _{pp} base max
USB ²	Three low-power USB 2.0 ports; Voltage: 5.00 \pm 0.25 V; Current: 100 mA each
Precision timebase input (Option PTB only)	2.92 mm ⁴ , 50 Ω , 2 V _{pp} max
Rear panel inputs and outputs	
Gated trigger input	TTL compatible
Video output	VGA, full color, 15 pin D-sub (female) 10
GPIB ³	Fully programmable, complies with IEEE 488.2
RS-232	9 pin D-sub (male)
LAN	
USB ²	Four USB 2.0 ports; Voltage: 5.00 \pm 0.25 V; Current: 500 mA each
Precision timebase delay path (Option PTB only)	Two female SMA connectors, nominal length jumper cable included

1. Supports external display. Supports multiple display configurations via Windows XP Pro display utility.
2. USB Keyboard and mouse included with mainframe.
3. The GPIB card interface is optional. To include this interface, order 86100D-GPI.
4. Mainframe ships with 2.92 mm female-female connector saver (P/N 1250-4105).

Specifications (Continued)

Precision time base operation and integrated precision timebase

Measurement performance can be further enhanced by adding precision time base capability to the 86100 mainframe. The precision time base reduces the intrinsic jitter of the scope and is recommended when analyzing high-speed data signals. Precision timebase capability is achieved using the 86107A precision timebase plug-in module or integrating the precision timebase system within the 86100D mainframe (86100D Option PTB). 86100D-PTB does not consume a mainframe plug-in slot. ⁶

Precision time base 86100D option PTB or 86107A				
	86107A Option 010	86107A Option 020	86107A Option 040	86100D-PTB
Trigger bandwidth	2.0 to 15.0 GHz	2.4 to 25.0 GHz	2.4 to 48.0 GHz	2.4 to 44 GHz
Typical jitter (RMS) using 86100D mainframe ⁴	2.4 GHz: < 150 fs	2.4 GHz: < 150 fs	2.4 GHz: < 150 fs	2.4 to 4 GHz < 200 fs
	10 GHz: < 100 fs	10, 20 GHz: < 100 fs	10, 20, 40 GHz: < 100 fs	4 to 9 GHz < 120 fs 9 to 44 GHz < 90 fs
Typical jitter (RMS) using 86100D mainframe ⁵	2.4 GHz: < 280 fs	2.4 GHz: < 280 fs	2.4 GHz: < 280 fs	2.4 to 5 GHz < 400 fs
	10 GHz: < 200 fs	10, 20 GHz: < 200 fs	10, 20, 40 GHz: < 200 fs	5 to 10 GHz < 300 fs 10 to 44 GHz < 200 fs
Time base linearity error	< 200 fs			
Input signal type	Synchronous clock ¹			
Input signal level	0.5 to 1.0 V _{pp} 0.2 to 1.5 V _{pp} (typical functional performance)			
DC offset range	± 200 mV ²			
Required trigger signal-to-noise ratio	≥ 200: 1			
Trigger impedance (nominal)	50 Ω			
Connector type ³	3.5 mm (male)		3.5 mm (male)	2.92 mm ⁴
				2.4 mm (male)

1. Filtering provided for Option 010 bands 2.4 to 4.0 GHz and 9.0 to 12.6 GHz, for Option 020 9.0 to 12.6 GHz and 18 to 25.0 GHz, for Option 40 9.0 to 12.6 GHz, 18.0 to 25.0 GHz, and 39.0 to 48.0 GHz. Within the filtered bands, a synchronous clock signal should be provided (Clock, sinusoid, BERT trigger, etc.). Outside these bands, filtering is required to minimize harmonics and sub harmonics and provide a sinusoid to the 86107 input. (Not required for 86100D-PTB).
2. For the 86107A with Option 020, the Keysight 11742A (DC block) is recommended if the DC offset magnitude is greater than 200 mV.
3. Ships with female-female connector saver(s).
4. With 86107A module, or 86100D-PTB, and an 861xx, N1045 Option LOJ, or N1055A module (electrical channel).
5. With 86107A module, or 86100D-PTB, and 54xxx, 8348x, and N1045A plug-in modules.
6. If an 86107A module is used in an 86100D frame with Option PTB, the internal precision timebase is disabled.

Specifications (Continued)

Precision time base (86108 configurations)

The 86108 has an integrated precision timebase within the plug-in module. The 86108A/B can be triggered through clock recovery of the observed signal, through an external reference clock into the precision timebase section, or with the precision timebase operating on the clock signal recovered from the observed signal. The following specifications indicate the 86100 system timebase specifications achieved when using the 86108A/B plug-in module. (The 86100 mainframe and the 86108A/B module can also be triggered with a signal into the mainframe. In this configuration, the basic mainframe specifications are achieved.) If the 86108A/B is placed in a mainframe that has an integrated precision timebase (86100D-PTB), the integrated mainframe precision timebase is disabled.

Precision time base 86108A/B	86108A	86108B-LBW	86108B-HBW
Typical jitter (clock recovery (CR) and precision timebase (PTB) configuration)	< 60 fs	< 60 fs	< 50 fs
Maximum jitter (clock recovery and precision timebase configuration) ¹	< 90 fs	< 90 fs	< 70 fs
Typical jitter (clock recovery without precision timebase active)	< 1.25 ps	< 1.25 ps	< 1.25 ps
Effective trigger-to-sample delay (CR and PTB configuration, typical)	< 200 ps	< 200 ps	< 200 ps
Typical jitter (trigger signal applied to precision timebase input)	< 60 fs	< 60 fs	< 60 fs
Maximum jitter (trigger signal supplied to precision timebase input) ¹	< 100 fs	< 100 fs	< 100 fs
Precision timebase trigger bandwidth	2 to 13.5 GHz (1 to 17 GHz)	1 to 18 GHz	1 to 18 GHz
Precision timebase external reference amplitude characteristic	1.0 to 1.6 Vpp	1.0 to 1.6 Vpp	1.0 to 1.6 Vpp
Precision timebase input signal type ²	Sinusoid	Sinusoid	Sinusoid
Precision timebase maximum input level	± 2 V (16 dBm)	± 2 V (16 dBm)	± 2 V (16 dBm)
Precision timebase maximum DC offset level	± 200 mV	± 200 mV	± 200 mV
Precision timebase input impedance	50 Ω	50 Ω	50 Ω
Precision timebase connector type ³	3.5 mm male	3.5 mm male	3.5 mm male
Timebase resolution (with precision timebase active)	0.5 ps/div	0.5 ps/div	0.5 ps/div
Timebase resolution (precision timebase disabled)	2 ps/div	2 ps/div	2 ps/div

1. Verified with maximum level input signal (~800 mVpp)


2. The precision timebase performs optimally with a sinusoidal input. Non-sinusoidal signals will operate with some degradation in timebase linearity.

3. 86108B-LBW are shipped with a 3.5 mm (female) to 3.5 mm (female) connector saver on the input channels (P/N 5061-5311). The 86108B-HBW is shipped with 2.4 mm female to 2.4 mm female connector savers on the input channels.

Modules Selection Table (Continued)

86100 family plug-in module matrix (Continued)

The 86100 has a family of plug-in modules designed for a broad range of precision optical, electrical, and TDR/TDT measurements. The 86100D can accommodate up to 4 modules for a total of 16 measurement channels.

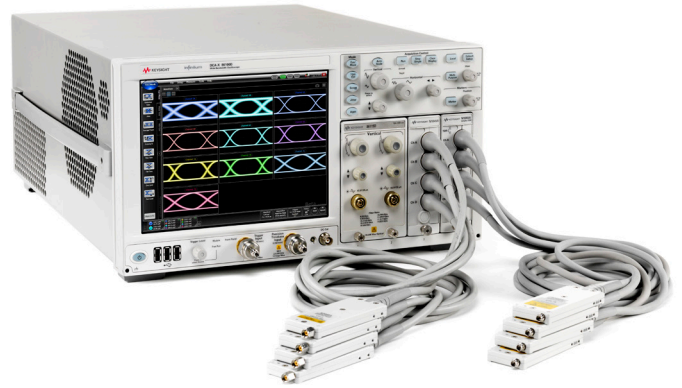

Module	Option	No. of optical channels	No. of electrical channels	TDR/TDT/S-parameters	Probe power ¹	Electrical bandwidth (GHz)
54754A		0	2	●	●	18
86108A ^{3,4}		0	2		●	32
86108B ^{3,4}	LBW	0	2		●	35
	HBW	0	2		●	50
86112A		0	2		●	20
	HBW	0	2		●	30
86117A		0	2			50
86118A		0	2			70
N1045A ⁴	02F/02M	0	2			60
N1045A ⁴	04F/04M	0	4			60
N1055A ⁴	32F/32M	0	2	●		35
N1055A ⁴	34F/34M	0	4	●		35
N1055A ⁴	52F/52M	0	2	●		50
N1055A ⁴	54F/54M	0	4	●		50



1. Module has receptacle to supply power for external probe.
2. This module is not compatible with the 86100A and 86100B Digital Communication Analyzer (DCA) mainframes. If you would like to upgrade older DCA's contact Keysight Technologies and ask for current trade-in deals.
3. The 86108A/B uses all module slots and includes internal clock recovery and precision timebase capabilities.
4. Requires 86100D mainframe (not compatible with 86100A/B/C).

Modules Specifications

Single-mode and multimode optical/electrical

Multiple and single-mode optical/electrical modules	86105C	86105D	86105D Option 281
Optical channel specifications			
Optical channel unfiltered bandwidth	8.5 GHz (9 GHz)	20 GHz (22 GHz)	34 GHz
Wavelength range	750 to 1650 nm	750 to 1650 nm	750 to 1650 nm
Calibrated wavelengths	850 nm/1310 nm/1550 nm	850 nm/1310 nm/1550 nm	850 nm/1310 nm/1550 nm
Optical sensitivity ¹	850 nm: – ≤ 2.666 Gb/s, -20 dBm – > 2.666 to ≤ 4.25 Gb/s, -19 dBm – > 4.25 to 11.3 Gb/s, -16 dBm	850 nm: – 8.5 to 11.3 Gb/s, -9 dBm – 14.025 Gb/s, -6 dBm	850 nm: – 15 Gb/s, -9 dBm – 25.78 Gb/s, -6 dBm – 27.85 to 28.05 Gb/s, -5 dBm
	1310 nm/1550 nm: – ≤ 2.666 Gb/s, -21 dBm – > 2.666 to ≤ 4.25 Gb/s, -20 dBm – > 4.25 to 11.3 Gb/s, -17 dBm	1310 nm/1550 nm: – 8.5 to 11.3 Gb/s, -12 dBm – 14.025 Gb/s, -9 dBm	1310 nm/1550 nm: – 15 Gb/s, -8 dBm – 25.78 Gb/s, -7 dBm – 27.95 to 28.05 Gb/s, -6 dBm
			1550 nm: – 15 Gb/s, -8 dBm – 25.78 Gb/s, -8 dBm – 27.95 to 28.05 Gb/s, -7 dBm
Transition time (10 to 90% calculated from TR = 0.48/BW optical)	56 ps	24 ps	15 ps
RMS noise			
Characteristic	850 nm: – ≤ 2.666 Gb/s, 1.3 μW – > 2.666 to ≤ 4.25 Gb/s, 1.5 μW – > 4.25 to 11.3 Gb/s, 2.5 μW	850 nm: – 8.5 to 11.3 Gb/s, 10 μW – 14.025 Gb/s, 16 μW	850 nm: – 15 Gb/s, 9 μW – 25.78 Gb/s, 17 μW – 27.95 to 28.05 Gb/s, 18 μW – Unfiltered, 25 μW
	1310 nm/1550 nm: – ≤ 2.666 Gb/s, 0.8 μW – > 2.666 to ≤ 4.25 Gb/s, 1.0 μW – > 4.25 to 11.3 Gb/s, 1.4 μW	1310/1550 nm: – 8.5 to 11.3 Gb/s, 5 μW – 14.025 Gb/s, 8 μW	1310 nm: – 25.78 Gb/s, 13 μW – Unfiltered, 18 μW
			1550 nm: – 15 Gb/s, 8 μW – 25.78 Gb/s, 15 μW – 27.95 to 28.05 Gb/s, 17 μW – Unfiltered, 21 μW
Maximum	850 nm: – ≤ 2.666 Gb/s, 2.0 μW – > 4.25 Gb/s to 11.3 Gb/s, 4.0 μW	850 nm: – 8.5 to 11.3 Gb/s, 12 μW – 14.025 Gb/s, 24 μW	850 nm: – 15 Gb/s, 15 μW – 25.78 Gb/s, 25 μW – 27.95 to 28.05 Gb/s, 25 μW – Unfiltered, 35 μW
	1310 nm/1550 nm: – ≤ 2.666 Gb/s, 1.3 μW – > 2.666 to ≤ 4.25 Gb/s, 1.5 μW – > 4.25 to 11.3 Gb/s, 2.5 μW	1310/1550 nm: – 8.5 to 11.3 Gb/s, 7 μW – 14.025 Gb/s, 12 μW	1310 nm: – 15 Gb/s, 12 μW – 25.78 Gb/s, 20 μW – 27.95 to 28.05 Gb/s, 20 μW – Unfiltered, 25 μW
			1550 nm: – 15 Gb/s, 14 μW – 25.78 Gb/s, 23 μW – 27.95 to 28.05 Gb/s, 23 μW – Unfiltered, 30 μW

1. Generally represents the power level where an ideal eye diagram will approach 0% mask margin due to noise of the oscilloscope. Provides a non-specified figure of merit to compare sensitivities of various optical channels.
2. Options 102 and 104 do not include filters for 14.025 Gb/s. Options 142 and 144 include filters for 14.025 Gb/s and no other rates.

Modules Specifications (Continued)

Single-mode and multimode optical/electrical (Continued)

Multiple and single-mode optical/electrical modules	86115D Option 002, 102, 142 ²	86115D Option 004, 104, 144 ²	86115D Option 282
Optical channel specifications			
Optical channel unfiltered bandwidth	20 GHz (22 GHz)	20 GHz (22 GHz)	34 GHz
Wavelength range	750 to 1650 nm	750 to 1650 nm	750 to 1650 nm
Calibrated wavelengths	850 nm/1310 nm/1550 nm	850 nm/1310 nm/1550 nm	850 nm/1310 nm/1550 nm
Optical sensitivity ¹	850 nm: – 8.5 to 11.3 Gb/s, -9 dBm – 14.025 Gb/s, -6 dBm	850 nm: – 8.5 to 11.3 Gb/s, -8 dBm – 14.025 Gb/s, -5 dBm	850 nm: – 15 Gb/s, -9 dBm – 25.78 Gb/s, -6 dBm – 27.85 to 28.05 Gb/s, -5 dBm
	1310 nm/1550 nm: – 8.5 to 11.3 Gb/s, -12 dBm – 14.025 Gb/s, -9 dBm	1310/1550 nm: – 8.5 to 11.3 Gb/s, -11 dBm – 14.025 Gb/s, -8 dBm	1310 nm/1550 nm: – 15 Gb/s, -8 dBm – 25.78 Gb/s, -7 dBm – 27.95 to 28.05 Gb/s, -6 dBm
			1550 nm: – 15 Gb/s, -8 dBm – 25.78 Gb/s, -8 dBm – 27.95 to 28.05 Gb/s, -7 dBm
Transition time (10 to 90% calculated from TR = 0.48/BW optical)	24 ps	24 ps	15 ps
RMS noise			
Characteristic	850 nm: – 8.5 to 11.3 Gb/s, 10 μ W – 14.025 Gb/s, 16 μ W	850 nm: – 8.5 to 11.3 Gb/s, 12 μ W – 14.025 Gb/s, 20 μ W	850 nm: – 15 Gb/s, 9 μ W – 25.78 Gb/s, 17 μ W – 27.95 to 28.05 Gb/s, 18 μ W – Unfiltered, 25 μ W
	1310/1550 nm: – 8.5 to 11.3 Gb/s, 5 μ W – 14.025 Gb/s, 8 μ W	1310/1550 nm: – 8.5 to 11.3 Gb/s, 6 μ W – 14.025 Gb/s, 10 μ W	1310 nm: – 25.78 Gb/s, 13 μ W – Unfiltered, 18 μ W
			1550 nm: – 15 Gb/s, 8 μ W – 25.78 Gb/s, 15 μ W – 27.95 to 28.05 Gb/s, 17 μ W – Unfiltered, 21 μ W
Maximum	850 nm: – 8.5 to 11.3 Gb/s, 12 μ W – 14.025 Gb/s, 24 μ W	850 nm: – 8.5 to 11.3 Gb/s, 14 μ W – 14.025 Gb/s, 30 μ W	850 nm: – 15 Gb/s, 15 μ W – 25.78 Gb/s, 25 μ W – 27.95 to 28.05 Gb/s, 25 μ W – Unfiltered, 35 μ W
	1310/1550 nm: – 8.5 to 11.3 Gb/s, 7 μ W – 14.025 Gb/s, 12 μ W	1310/1550 nm: – 8.5 to 11.3 Gb/s, 8.5 μ W – 14.025 Gb/s, 14 μ W	1310 nm: – 15 Gb/s, 12 μ W – 25.78 Gb/s, 20 μ W – 27.95 to 28.05 Gb/s, 20 μ W – Unfiltered, 25 μ W
			1550 nm: – 15 Gb/s, 14 μ W – 25.78 Gb/s, 23 μ W – 27.95 to 28.05 Gb/s, 23 μ W – Unfiltered, 30 μ W

1. Generally represents the power level where an ideal eye diagram will approach 0% mask margin due to noise of the oscilloscope. Provides a non-specified figure of merit to compare sensitivities of various optical channels.
2. Options 102 and 104 do not include filters for 14.025 Gb/s. Options 142 and 144 include filters for 14.025 Gb/s and no other rates.

Modules Specifications (Continued)

Single-mode and multimode optical/electrical (Continued)

Multiple and single-mode optical/electrical modules	86105C	86105D	86105D Option 281	86115D Option 002, 102, 142 ²	86115D Option 004, 104, 144 ²
Optical channel specifications (Continued)					
Scale factor (per division)					
Minimum	2 μ W	20 μ W	20 μ W	20 μ W	20 μ W
Maximum	100 μ W	500 μ W	500 μ W	500 μ W	500 μ W
CW ¹ accuracy (single marker, referenced to average power monitor)	Single-mode: $\pm 25 \mu\text{W} \pm 3\%$	Single-mode: $-\pm 25 \mu\text{W} \pm 2\%$ (8/10 Gb/s) $- 4\%$ (14 Gb/s) $- 6\%$ (Unfiltered)	$-\pm 25 \mu\text{W} \pm 4\%$ (14.025 Gb/s) $-\pm 25 \mu\text{W} \pm 4\%$ (15.0 Gb/s) $-\pm 25 \mu\text{W} \pm 6\%$ (25.78125 Gb/s) $-\pm 25 \mu\text{W} \pm 6\%$ (27.7393 Gb/s to 28.05 Gb/s) $-\pm 25 \mu\text{W} \pm 6\%$ (Unfiltered)	Single-mode: $-\pm 25 \mu\text{W} \pm 2\%$ (8/10 Gb/s) $- 4\%$ (14 Gb/s) $- 6\%$ (Unfiltered)	Single-mode: $-\pm 25 \mu\text{W} \pm 2\%$ (8/10 Gb/s) $- 4\%$ (14 Gb/s) $- 6\%$ (Unfiltered)
	Multimode: $\pm 25 \mu\text{W} \pm 10\%$	Multimode: $\pm 25 \mu\text{W} \pm 10\%$		Multimode: $\pm 25 \mu\text{W} \pm 10\%$	Multimode: $\pm 25 \mu\text{W} \pm 10\%$
CW offset range (referenced two divisions from screen bottom)	+0.2 to -0.6 μ W	+1 μ W/-3 μ W	+1 to -3 mW	+1 μ W/-3 μ W	+1 μ W/-3 μ W
Average power monitor (specified operating range)	-30 to 0 dBm	-30 to +3 dBm	-30 to +3 dBm	-30 to +3 dBm	-30 to +3 dBm
Average power monitor accuracy					
Single-mode	$\pm 5\% \pm 200 \text{ nW}$	$\pm 5\% \pm 200 \text{ nW}$	$\pm 5\% \pm 200 \text{ nW}$	$\pm 5\% \pm 100 \text{ nW}$	$\pm 5\% \pm 200 \text{ nW}$
	\pm Connector	\pm Connector	\pm Connector	\pm Connector	\pm Connector
	Uncertainty	Uncertainty	Uncertainty	Uncertainty (20 to 30 °C)	Uncertainty
Multimode (characteristic)	$\pm 10\% \pm 200 \text{ nW}$	$\pm 5\% \pm 200 \text{ nW}$	$\pm 10\% \pm 200 \text{ nW}$	$\pm 5\% \pm 200 \text{ nW}$	$\pm 5\% \pm 200 \text{ nW}$
	\pm Connector	\pm Connector	\pm Connector	\pm Connector	\pm Connector
	Uncertainty	Uncertainty	Uncertainty	Uncertainty	Uncertainty

1. CW refers to an unmodulated optical signal.

2. Options 102 and 104 do not include filters for 14.025 Gb/s. Options 142 and 144 include filters for 14.025 Gb/s and no other rates.

Modules Specifications (Continued)

Single-mode and multimode optical/electrical (Continued)

Multiple and single-mode optical/electrical modules	86105C	86105D	86105D Option 281	86115D Option 002, 102, 142 ¹	86115D Option 004, 104, 144 ¹
Optical channel specifications (Continued)					
User calibrated accuracy					
Single-mode	$\pm 3\% \pm 200$ nW	$\pm 2\% \pm 100$ nW	$\pm 3\% \pm 200$ nW	$\pm 2\% \pm 100$ nW	$\pm 2\% \pm 100$ nW
	\pm Power meter	\pm Power meter	\pm Power meter	\pm Power meter	\pm Power meter
	Uncertainty	Uncertainty	Uncertainty	Uncertainty	Uncertainty
	< 5 °C change		< 5 °C change		
Multimode (characteristic)	$\pm 10\% \pm 200$ nW	$\pm 10\% \pm 200$ nW	$\pm 10\% \pm 200$ nW	$\pm 10\% \pm 200$ nW	$\pm 10\% \pm 200$ nW
	\pm Power meter	\pm Power meter	\pm Power meter	\pm Power meter	\pm Power meter
	Uncertainty	Uncertainty	Uncertainty	Uncertainty	Uncertainty
	< 5 °C change		< 5 °C change		
Maximum input power					
Maximum non-destruct average	0.5 mW (-3 dBm)	5 mW (7 dBm)	5 mW (+7 dBm) 1310/1550 nm	5 mW (7 dBm)	5 mW (7 dBm)
			Single mode: 6 mW (+8 dBm) 850 nm		
			Multimode: 3 mW (+5 dBm)		
Maximum non-destruct peak	5 mW (+7 dBm)	10 mW (10 dBm)	10 mW (+10 dBm)	10 mW (10 dBm)	10 mW (10 dBm)
Fiber input	62.5/125 μ m	62.5/125 μ m	62.5/125 μ m	62.5/125 μ m	62.5/125 μ m
		User-selectable	User-selectable	User-selectable	User-selectable
		Connector	Connector	Connector	Connector
Polarization dependent loss at 1550 nm			0.2 dB (characteristic)		
Input return loss (HMS-10 connector fully filled fiber)	850 nm > 13 dB	27 dB single-mode	> 24 dB (1550 nm single mode)	27 dB single-mode	27 dB single-mode
	1310 nm/1550 nm	14 dB multimode	> 24 dB (1310 nm single mode)	14 dB multimode	14 dB multimode
	> 24 dB		> 13 dB (850 nm multimode)		

1. Options 102 and 104 do not include filters for 14.025 Gb/s. Options 142 and 144 include filters for 14.025 Gb/s and no other rates.

Modules Specifications (Continued)

Single-mode and multimode optical/electrical (Continued)

Multiple and single-mode optical/electrical modules	86105C	86105D	86105D Option 281	86115D Option 002, 102, 142 ¹	86115D Option 004, 104, 144 ¹
Electrical channel specifications					
Electrical channel bandwidth	12.4 and 20 GHz	25 and 35 GHz	25 and 35 GHz		
Transition time (10 to 90% calculated from TR = 0.35/BW)	28.2 ps (12.4 GHz)	14 ps (25 GHz)	12 ps (25 GHz)		
	17.5 ps (20 GHz)	10 ps (35 GHz)	7 ps (50 GHz)		
RMS noise					
Characteristic	0.25 mV (12.4 GHz)	0.25 mV (25 GHz)	0.25 mV (25 GHz)		
	0.5 mV (20 GHz)	0.5 mV (35 GHz)	0.6 mV (50 GHz)		
Maximum	0.5 mV (12.4 GHz)	0.5 mV (25 GHz)	0.5 mV (25 GHz)		
	1 mV (20 GHz)	1 mV (35 GHz)	1 mV (50 GHz)		
Scale factor (per division)					
Minimum	1 mV/division				
Maximum	100 mV/division				
DC accuracy (single marker)	$\pm 0.4\%$ of full scale ± 2 mV $\pm 1.5\%$ of (reading-channel offset), 12.4 GHz				
	$\pm 0.4\%$ of full scale ± 2 mV $\pm 3\%$ of (reading-channel offset), 20 GHz				
DC offset range (referenced to center of screen)	± 500 mV				
Input dynamic range (relative to channel offset)	± 400 mV				
Maximum input signal	± 2 V (+16 dBm)				
Nominal impedance	50 Ω				
Reflections (for 30 ps rise time)	5%				
Electrical input	3.5 mm (male)		2.4 mm (male)		

1. Options 102 and 104 do not include filters for 14.025 Gb/s. Options 142 and 144 include filters for 14.025 Gb/s and no other rates.

Modules Specifications (Continued)

Single-mode optical/electrical

High bandwidth single-mode optical/electrical modules		86116C Option 025	86116C Option 041	
Optical channel specifications				
Optical channel unfiltered bandwidth		45 GHz	65 GHz	
Wavelength range		1300 to 1620 nm ³		
Calibrated wavelengths		1300 nm/1550 nm		
Optical sensitivity ²	1310 nm	-9 dBm (17 Gb/s)	-3 dBm (39.8/43.0 Gb/s)	
		-8 dBm (25.8 Gb/s)		
		-7 dBm (27.7 Gb/s)		
	1550 nm	-10 dBm (17 Gb/s)		-5 dBm (39.8/43.0 Gb/s)
		-9 dBm (25.8 Gb/s)		
		-8 dBm (27.7 Gb/s)		
Transition time (10 to 90% calculated from $T_r = 0.48/BW$ optical)		7.4 ps (FWHM) ¹		
RMS noise				
Characteristic	1310 nm	13 μ W (17 Gb/s)	54 μ W (39.8/43.0 Gb/s)	
		17 μ W (25.8 Gb/s)		
		20 μ W (27.7 Gb/s)		
		60 μ W (40 GHz)		
	1550 nm	10 μ W (17 Gb/s)	36 μ W (39.8/43.0 Gb/s)	
		12 μ W (25.87 Gb/s)		
		14 μ W (27.7 Gb/s)		
		40 μ W (40 GHz)		
	Maximum	1310 nm	18 μ W (17 Gb/s)	102 μ W (39.8/43.0 Gb/s)
			20 μ W (25.8 Gb/s)	
			30 μ W (27.7 Gb/s)	
			120 μ W (40 GHz)	
1550 nm	15 μ W (17 Gb/s)	68 μ W (39.8/43.0 Gb/s)		
	18 μ W (25.8 Gb/s)			
	21 μ W (27.7 Gb/s)			
	80 μ W (40 GHz)			

1. FWHM (full width half max) as measured from optical pulse with 700 fs FWHM, 5 MHz repetition rate and 10 mW peak power.
2. Generally represents the power level where an ideal eye diagram will approach 0% mask margin due to noise of the oscilloscope. Provides a non-specified figure of merit to compare sensitivities of various optical channels.
3. Contact Keysight for broader wavelength specifications.

Modules Specifications (Continued)

Single-mode and multimode optical/electrical

High bandwidth single-mode optical/electrical modules		86116C
Optical channel specifications (Continued)		
Scale factor		
Minimum		200 μ W/division
Maximum		5 mW/division
CW ¹ accuracy (single marker, reference to average power monitor)		$\pm 150 \mu\text{W} \pm 4\%$ (reading-channel offset)
CW offset range (referenced two divisions from screen button)		+8 to -12mW
Average power monitor (specified operating range)		-23 to +9 dBm
Factory calibrated accuracy		$\pm 5\% \pm 100 \text{ nW} \pm$ connector uncertainty, 20 to 30 °C
User calibrated accuracy		$\pm 2\% \pm 100 \text{ nW} \pm$ power meter uncertainty, < 5 °C change
Maximum input power		
Maximum non-destruct average		10 mW (+10 dBm)
Maximum non-destruct peak		50 mW (+17 dBm)
Fiber input		9/125 μ m, user-selectable connector
Input return loss (HMS-10 connector fully filled fiber)		20 dB
Electrical channel specifications		
Electrical channel bandwidth		80 (93), 55 and 30 GHz
Transition time (10 to 90% calculated from $T_r = 0.35/BW$)		6.4 ps (55 GHz) 4.4 ps (80 GHz)
RMS noise		
Characteristic		0.5 mV (30 GHz) 0.6 mV (55 GHz) 1.1 mV (80 GHz)
Maximum		0.8 mV (30 GHz) 1.1 mV (55 GHz) 2.2 mV (80 GHz)
Scale factor (per division)		
Minimum		2 mV/division
Maximum		100 mV/division
DC accuracy (single marker)		$\pm 0.4\%$ of full scale $\pm 3 \text{ mV} \pm 2\%$ of (reading-channel offset) $\pm 2\%$ of offset (all bandwidths)
DC offset range (referenced to center of screen)		$\pm 500 \text{ mV}$
Input dynamic range (relative to channel offset)		$\pm 400 \text{ mV}$
Maximum input signal		$\pm 2 \text{ V}$ (+16 dBm)
Nominal impedance		50 Ω
Reflections (for 20 ps rise time)		10% (DC to 70 GHz) 20% (70 to 100 GHz)
Electrical input		1.85 mm (male)

1. CW refers to an unmodulated optical signal.

Modules Specifications (Continued)

Dual electrical

Dual electrical channel modules	86112A	54754A
Electrical channel bandwidth	12.4 and 20 GHz (30 GHz ¹)	12.4 and 18 GHz
Transition time (10 to 90% calculated from TR = 0.35/BW)	28.2 ps (12.4 GHz) 17.5 ps (20 GHz)	28.2 ps (12.4 GHz) 19.4 ps (18 GHz)
RMS noise		
Characteristic	0.25 mV (12.4 GHz) 0.5 mV (20 GHz)	0.25 mV (12.4 GHz) 0.5 mV (18 GHz)
Maximum	0.5 mV (12.4 GHz) 1 mV (20 GHz)	0.5 mV (12.4 GHz) 1 mV (18 GHz)
Scale factor (per division)		
Minimum	1 mV/division	
Maximum	100 mV/division	
DC accuracy (single marker)	± 0.4% of full scale ± 2 mV ± 1.5% of (reading-channel offset) (12.4 GHz) ± 0.4% of full scale ± 2 mV ± 3% of (reading-channel offset) (20 GHz)	± 0.4% of full scale ± 2 mV ± 0.6% of (reading-channel offset) (12.4 GHz) ± 0.4% of full scale or marker reading (whichever is greater) ± 2 mV ± 1.2% of (reading-channel offset) (18 GHz)
DC offset range (referenced from center of screen)	± 500 mV	
Input dynamic range (relative to channel offset)	± 400 mV	
Maximum input signal	± 2 V (+16 dBm)	
Nominal impedance	50 Ω	
Reflections (for 30 ps rise time)	5%	
Electrical input	3.5 mm (male)	
Dual electrical channel modules	86117A	86118A
Electrical channel bandwidth	30 and 50 GHz	50 and 70 GHz
Transition time (10 to 90% calculated from TR = 0.35/BW)	11.7 ps (30 GHz) 7 ps (50 GHz)	
RMS noise		
Characteristic	0.4 mV (30 GHz) 0.6 mV (50 GHz)	0.7 mV (50 GHz) 1.3 mV (70 GHz)
Maximum	0.7 mV (30 GHz) 1.0 mV (50 GHz)	1.8 mV (50 GHz) 2.5 mV (70 GHz)
Scale factor (per division)		
Minimum	1 mV/division	
Maximum	100 mV/division	
DC accuracy (single marker)	± 0.4% of full scale ± 2 mV ± 1.2% of (reading-channel offset), (30 GHz) ± 0.4% of full scale ± 2 mV ± 2% of (reading-channel offset), (50 GHz)	± 0.4% of full scale ± 2 mV ± 2% of (reading-channel offset), (50 GHz) ± 0.4% of full scale ± 2 mV ± 4% of (reading-channel offset), (70 GHz)
DC offset range (referenced from center of screen)	± 500 mV	
Input dynamic range (relative to channel offset)	± 400 mV	
Maximum input signal	± 2 V (+16 dBm)	
Nominal impedance	50 Ω	
Reflections (for 30 ps rise time)	5%	20%
Electrical input	2.4 mm (male)	1.85 mm (male)

1. A special option, 86112-HBW, extends the bandwidth from 20 to 30 GHz. All other specifications remain unchanged.

Modules Specifications (Continued)

Dual electrical (Continued)

Dual electrical channel modules	86108A	86108B-LBW	86108B-HBW
Bandwidth (low/high BW setting)	16 and > 32 GHz, (35 GHz)	20 and 35 GHz	35 and 50 GHz
Transition time (10 to 90% calculated from $T_r = 0.35/BW$)	10 ps	10 ps	7ps
RMS noise			
Characteristic (low/high BW setting)	240 μ V/420 μ V	300 μ V/500 μ V	600 μ V/750 μ V
Maximum (low/high BW setting)	350 μ V/700 μ V	350 μ V/700 μ V	800 μ V/980 μ V
Scale factor (per division)			
Minimum	2 mV/division	1 mV/division	1 mV/division
Maximum	100 mV/division	140 mV/division	140 mV/division
DC accuracy (single marker)			
Low BW setting	$\pm 0.7\%$ of full scale, ± 2 mV $\pm 1.5\%$ of (reading-channel offset) (16 GHz)		
High BW setting	$\pm 0.7\%$ of full scale, ± 2 mV $\pm 3\%$ of (reading-channel offset) (32 GHz)		
CW offset range (referenced from center of screen)	± 500 mV	± 700 mV	± 700 mV
Input dynamic range (relative to channel offset)	± 400 mV	± 560 mV	± 560 mV
Maximum input signal	± 2 V (+16 dBm)	± 2.5 V (+18 dBm)	± 2.5 V (+18 dBm)
Nominal impedance	50 Ω	50 Ω	50 Ω
Reflections (for 30 ps rise time)	5%	5%	5%
Electrical input	3.5 mm	3.5 mm	2.4 mm
CH1 to CH2 skew	< 12 ps	< 10 ps	< 10 ps

Modules Specifications (Continued)

Dual electrical (Continued)

Clock recovery	86108A	86108B-216	86108B-232
Data rate input range (continuous tuning)	0.05 to 14.2 Gb/s (requires FW revision 8.1 or higher)	0.05 to 16 Gb/s	0.05 to 32 Gb/s
Clock frequency input range (continuous tuning)	0.025 to 6.75 GHz	0.025 to 8 GHz	0.025 to 16 GHz
Minimum input level to acquire lock	175 mV _{pp}	175 mV _{pp}	175 mV _{pp}
Recovered clock random jitter (used as internal trigger) ¹	Internal recovered clock trigger < 500 fs at 2 Gb/s < 400 fs at 5 and 10 Gb/s	< 350 fs at data rate < 2 Gb/s < 300 fs at data rate ≥ 2 Gb/s	< 350 fs at data rate < 2 Gb/s < 300 fs at data rate ≥ 2 Gb/s
Clock recovery adjustable loop bandwidth range (user selectable)	0.015 to 10 MHz	0.015 to 20 MHz	0.015 to 20 MHz
Clock recovery loop peaking range	Up to 4 settings (dependent on loop BW)		
Loop bandwidth accuracy	± 30%		
Tracking range (includes spread spectrum tracking)	± 2500 ppm ± 0.25%		
Acquisition range	± 5000 ppm		
Maximum consecutive identical digits to lock	150		
Auto relocking	If signal lock is lost, system can automatically attempt to regain phase-lock. User selectable to enable/disable		
Residual spread spectrum	-72 ± 3 dB at 33 kHz	-84 ± 3 dB at 33 kHz	-84 ± 3 dB at 33 kHz
Front panel recovered clock amplitude	0.15 to 1.0 V _{pp} (0.3 to 1.0 V _{pp})		
Front panel recovered clock divide ratio (user selectable)	1, 2, 4, 8, 16 2, 4, 8, 16	1, 2, 4, 8, 16 2, 4, 8, 16	1, 2, 4, 8, 16 2, 4, 8, 16
Recovered clock front panel connector type	SMA		
Internal frequency counter accuracy	± 10 ppm		

1. These values indicate performance with the internal precision timebase disabled. With precision timebase enabled, system jitter performance is dramatically decreased. See page 9.

Phase trimmers	86108B-PT3 (= qty 2 N1027A-PT3)	86108B-PT2 (= qty 2 N1027A-PT2)
Nominal impedance	50 Ω	50 Ω
Frequency range	DC to 26 GHz	DC to 50 GHz
Insertion loss (at f max)	0.8 dB	0.8 dB
Time delay	238 to 293 ps	172 to 195 ps
Connectors	SMA (m-f)	2.4 mm (m-f)

Modules Specifications (Continued)

Dual/quad electrical

Dual/Quad electrical channel modules	N1045A ¹		N1055A ¹			
Channel options (number of channels; F = female; M = male)	02F/02M	04F/04M	32F/32M	34F/34M	52F/52M	54F/54M
Number of channels ²	2	4	2	4	2	4
Electrical channel bandwidth	20/35/45/60 GHz		35 GHz ^{4,5}	35 GHz ^{4,5}	35/50 GHz ⁵	35/50 GHz ⁵
Transition time (characteristic) (10 to 90% calculated from TR = 0.35/BW)	17.5/10/7.8/5.8 ps		10 ps		10 / 7 ps	
Channel-to-channel skew range	± 100 ps		± 150 ps			
RMS noise						
Characteristic	275/425/500/750 µV		600 µV		600/750 µV	
Maximum	950 µV (60 GHz)		730 µV		950 µV	
Scale factor (per division)						
Minimum	1 mV/division		1 mV/division			
Maximum	100 mV/division		100 mV/division			
DC accuracy (single marker)	± 2 mV ± 4% of (reading-channel offset), (60 GHz)		± 2 mV ± 4% of (reading-channel offset), (50 GHz)			
DC offset range (referenced from center of screen)	± 500 mV		± 500 mV			
Input dynamic range (relative to channel offset)	± 400 mV		± 400 mV			
Maximum input signal	± 2 V (+16 dBm)		+2 V/-1 V			
Nominal impedance	50 Ω		50 Ω			
Reflections (for 30 ps rise time)	20%		20%			
Electrical input ³	1.85 mm (female or male option)		2.92 mm (female or male option)		1.85 mm (female or male option)	

TDR system

TDR system (Mainframe with 54754A module)	Oscilloscope/TDR performance		Normalized characteristics	
Rise time	40 ps nominal < 25 ps normalized		Adjustable from larger of 17 ps or 0.08 x time/div Maximum: 5 x time/div	
TDR step flatness	≤ ± 1% after 1 ns from edge ≤ ± 5%, -3% < 1 ns from edge		≤ 0.1%	
Low level	0.00 V ± 2 mV			
High level	± 200 mV +2 mV			
TDR system (Mainframe with N1055A module)	N1055A - 3xx (35 GHz bandwidth)		N1055A - 5xx (50 GHz bandwidth)	
	Without TDR calibration	With TDR calibration	Without TDR calibration	With TDR calibration
Step rise/fall time (transmitted ⁶)	< 18 ps	Adjustable from 15 ps, characteristic	< 7 ps	Adjustable from 6 ps, characteristic

1. Module is supported by 86100D DCA-X mainframe and later.
2. Upgradable from two channel to four channel after purchase (return to Keysight).
3. Connector style is the same on all channels and is selected at time of order.
4. Upgradable from 35 to 50 GHz after purchase (return to Keysight).
5. Tuned to be -3 dB (± measurement uncertainty) at stated bandwidth(s) using NIST traceable swept-sine test system.
6. Defined as the transition time at the output of the remote head. It is calculated by deconvolving the receiver transition time from the measured transition time when the remote head is terminated with a short. Measured on a negative TDR step.

Modules Specifications (Continued)

Clock recovery

The DCA platform offers clock recovery capability in the form of DCA plug-in modules such as the 83496B or standalone clock recovery solutions such as the N1076A/N1077A. Specifications for 83496B modules are summarized below. For more information on standalone clock recovery solutions, please download the N1076A/N1077A data sheet from www.keysight.com/find/N1077A.

Clock recovery modules	83496B-100	83496B-101
Channel type	Differential or single-ended electrical	Single-mode or multimode optical, differential or single-ended electrical (no internal electrical splitters)
Data rates (divide by 2 for clock signals)	Standard: 50 Mb/s to 7.1 Gb/s continuous tuning Option 200: 50 Mb/s to 14.2 Gb/s continuous tuning Option 201: 7.1 to 14.2 Gb/s continuous tuning For rates above 14 Gb/s, the N1076A and N1077A operate from 50 Mb/s to 32 Gb/s	
Minimum input level to acquire lock (voltage or OMA ¹)	150 m Vpp	Single-mode (OMA ¹): -11 dBm to 50 Mb/s to 11.4 Gb/s -8 dBm to > 11.4 Gb/s -12 dBm to 7.1 to 14.2 Gb/s (with Option 200) -14 dBm to 1 to 7.1 Gb/s -15 dBm to 50 Mb/s to 1 Gb/s Multimode 1310 nm (OMA ¹): -10 dBm to 50 Mb/s to 11.4 Gb/s -7 dBm to > 11.4 Gb/s -11 dBm to 7.1 to 14.2 Gb/s (with Option 200) -13 dBm to 1 to 7.1 Gb/s -14 dBm to 50 Mb/s to 1 Gb/s Multimode 850 nm (OMA ¹): -8 dBm to 50 Mb/s to 11.4 Gb/s -7 dBm to > 11.4 Gb/s -9 dBm to 7.1 to 14.2 Gb/s (with Option 200) -11 dBm to 1 to 7.1 Gb/s -12 dBm to 50 Mb/s to 1 Gb/s Electrical: 150 m Vpp
Output random jitter (RMS) ²	Internal recovered clock trigger: < 500 fs 7.2 to 11.4 Gb/s (300 fs to 10 Gb/s) < 700 fs 4.2 to 7.2 Gb/s, 11.4 Gb/s to 14.2 Gb/s (400 fs to 4.25 Gb/s, 500 fs to 2.5 Gb/s) < 3 mUI 50 Mb/s to 4.2 Gb/s (700 fs to 1.25 Gb/s) Front panel recovered clock: < 700 fs 7.2 to 11.4 Gb/s (300 fs to 10 Gb/s) < 900 fs 4.2 to 7.2 Gb/s, 11.4 to 14.2 Gb/s (400 fs to 4.25 Gb/s, 500 fs to 2.5 Gb/s) < 4 mUI 50 Mb/s to 4.2 Gb/s (700 fs to 1.25 Gb/s)	
Clock recovery adjustable loop bandwidth range (user selectable)	Standard: 270 kHz or 1.5 MHz ³ Option 300: 15 kHz to 10 MHz ⁴ continuous tuning (fixed value or a constant rate/N ratio)	
Loop bandwidth accuracy	Standard: ± 30% Option 300: ± 25% for transition density = 0.5 and data rate 155 Mb/s to 11.4 Gb/s (± 30% for 0.25 ≤ transition density ≤ 1.0 and all data rates)	
Tracking range	± 2500 ppm, 83496B	± 1000 ppm, 83496A
Acquisition range	± 5000 ppm	
Internal splitter ratio	50/50	50/50 single-mode 30/70 multimode Electrical signals have input only (no internal power dividers)
Input return loss	22 dB (DC to 12 GHz) electrical 16 dB (12 to 20 GHz) electrical	20 dB single-mode, 16 dB multimode 22 dB min (DC to 12 GHz) electrical 16 dB min (12 to 20 GHz) electrical
Input insertion loss	7.2 dB max (DC to 12 GHz) electrical 7.8 dB max (12 to 20 GHz) electrical	4 dB max single-mode optical 4 dB max multimode optical (no electrical data output signal path)


See footnotes on next page.

Modules Specifications (Continued)

Clock recovery (Continued)

Clock recovery modules (Continued)	83496B-100	83496B-101
Electrical through-path digital amplitude attenuation ⁵	7.5 dB	No electrical data output signal path
Wavelength range		830 to 860 nm and 1260 to 1360 nm multimode 1260 to 1360 nm and 1490 to 1600 nm single mode Electrical: 150 m Vpp
Front panel recovered clock output amplitude	1 Vpp max, 220 mVpp min, 300 mVpp	
Consecutive identical digits (CID)	150 max	
Front panel recovered clock output divide ratio (user selectable) ⁶	N=1 to 16 at data rates 50 Mb/s to 7.1 Gb/s N=2 to 16 at data rates 7.1 to 14.2 Gb/s	
Data input/output connectors	3.5 mm male	FC/PC7 9/125 μm single-mode optical FC/PC7 62.5/125 μm multimode optical 3.5 mm male electrical (input only)
Front panel recovered clock output connector	SMA	

- To convert from OMA to average power with an extinction ratio of 8.2 dB use: $P_{avgdBm} = OMA_{dBm} - 1.68 \text{ dB}$.
- Verified with PRBS7 pattern, electrical inputs > 150 mVp-p and optical inputs > 3 dB above specification for minimum input level to acquire lock. Output jitter verification results of the 83496B can be affected by jitter on the input test signal. The 83496B will track jitter frequencies inside the loop bandwidth, and the jitter will appear on the recovered clock output. Vertical noise (such as laser RIN) on the input signal will be converted to jitter by the limit amplifier stage on the input of the clock recovery. These effects can be reduced by lowering the loop bandwidth setting.
- At rates below 1 Gb/s, loop bandwidth is fixed at 30 kHz when Option 300 is not installed.
- Without Option 200 loop bandwidth is adjustable from 15 kHz to 6 MHz. Available loop bandwidth settings also depend on the data rate of the input signal. For transition density from 0.25 to 1, the Loop Bandwidth vs Rate chart shows available loop bandwidth settings. Higher loop bandwidths can be achieved when average data transition density is maintained at or above 50%.
- $20 \cdot \log(\text{Vampout/Vampin})$ measured with PRBS23 at 14.2 Gb/s.
- Minimum frequency of divided front panel clock output is 25 MHz.
- Other types of optical connectors are also available.

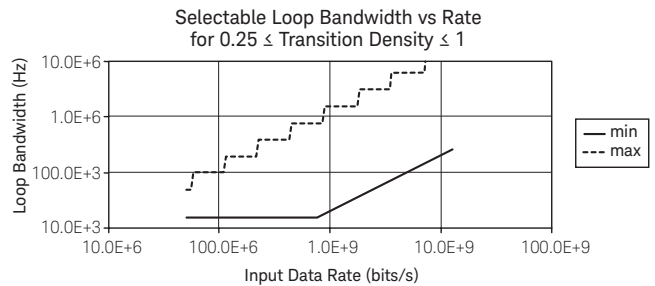

Typical System Configurations

86100D Infiniium DCA-X Mainframe

86100D hardware options

Trigger Options (select one only):
 STR – Standard – for basic eye measurements only
 ETR – Enhanced – for pattern waveforms, jitter analysis and some TDR applications
 PTB – Integrated precision timebase for low residual jitter

Remote Connection Options (select one only):
 GPI – GPIB card interface installed
 GPN – No GPIB card

86100D software options (select any):

061/062 – Add matlab analysis package
 200 – Enhanced jitter analysis
 201 – Advanced waveform analysis
 202 – Enhanced Impedance and S-Parameters
 300 – Advanced amplitude analysis/RIN/Q-scale
 500 – Productivity package
 SIM – InfiniiSim-DCA de-embedding/embedding
 86100DU – 400 PLL and jitter spectrum analysis
 86100D – 401 advanced eye analysis (Jitter on PRBS31)

DCA plug-in modules (for typical ¹ applications)

Electrical/PLL 1 to 12 Gb/s 86112A Dual channels BW > 20 GHz each 83496B Electrical clock recovery (#100, 200, 300)	Electrical/PLL 1 to 16/32 Gb/s (high performance) 86108B Dual channels BW > 35/50 GHz with integrated precision timebase & clock recovery	Electrical 20, 40 Gb/s (high performance) 86118A Dual remote heads BW > 70 GHz each 86107A or 86100D-PTB precision timebase (#40)	Optical 1 to 12Gb/s 86105C 9 GHz optical channel 20 GHz electrical channel	Optical 20, 40 Gb/s 86105D-281 34 GHz optical channel (780 to 1630 nm) 86116C 65 GHz optical channel 80 GHz electrical channel 86107A (#40) or 86100D-PTB precision timebase	TDR/TDT Single-ended, differential 54754A Dual 18 GHz channels N1055A 2 or 4 channels 35 or 50 GHz channels Note - TDR/TDT modules also perform as electrical-only receivers
---------------------------------------------------------------------------------------------------------------------------------------------------------------	------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	------------------------------------------------------------------------------------------------------	-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

- Contact your local Keysight sales representative to help configure a system for your specific application.

Low Cost Manufacturing Solutions

Get 86100 DCA accuracy with a test solution designed specifically for manufacturing. The Keysight 86100 DCA family is recognized as the industry standard for verifying optical transmitter compliance to communications standards. For years engineers have trusted the DCA for easy and accurate measurement of their digital communications waveforms. The new N1090A/B/C and N1092A/B/D build on that legacy by using the high-performance elements of both the 86100 oscilloscope mainframe acquisition system and the optical channels. Designed specifically for high-volume manufacturing test applications, the N109X provides the measurement accuracy of the 86100 but without the extra cost associated with an R&D test solution. The N109X is a complete measurement system in a compact low-cost form factor. The N1090A is used for testing optical signals from 1 to 11 Gb/s. The N1092A/B/D are used for testing optical signals from 20 to 28 Gb/s. Be confident that your test results will never be questioned when performed with the N109X as end users of your transceivers are likely to use similar accurate, high-quality test systems to verify component performance. The N109X is intended to operate as a standalone system, but can also be operated as an extended 86100D module connected by USB to a DCA-X mainframe.



Software Applications

86100D-200 enhanced jitter analysis

Option 200 provides extensive and accurate jitter decomposition, which is increasingly important as data rates increase and margins reduce. Quickly customize your view of many parameters and take advantage of advanced features such as jitter spectrum analysis.

86100D-201 advanced waveform analysis

Take advantage of powerful features in Option 201 to generate much deeper waveform files, integrate MATLAB analysis, and use the built-in linear feed-forward equalizer.

86100D-202 enhanced impedance and S-parameter

Option 202 works in TDR mode and provides live S-parameter responses, including magnitude (return loss, insertion loss, etc.), phase and group delay. Single-ended, differential and mixed-mode responses are available simultaneously. Also enables quick and easy saving of measurement results in Touchstone files (.s2p, .s4p, etc.).

86100D-300 amplitude analysis/RIN/Q-factor

Extend the many capabilities from jitter mode into the amplitude domain and see the decomposition of the amplitude into several factors. Option 300 also reports relative intensity noise (RIN) and Q-factor.

86100D-400 PLL and jitter spectrum

Option 400 quickly characterizes key parameters of phase-locked loops and provides the jitter spectrum of your signal including spread spectrum clocks. Control of the jitter source and receiver is integrated to ensure fast results.

86100D-401 advanced EYE analysis

For device testing with long patterns and to obtain BER-contour mask testing, Option 401 integrates with the classic or FlexDCA interfaces to decompose the jitter and amplitude interference measurements into the key parameters. When using the embedded capability within FlexDCA or the included automation application, you may characterize jitter on simultaneous multiple lanes and obtain concise and visual results.

86100D-9FP PAM-N analysis software

Accurately and quickly analyze Pulse Amplitude Modulation (PAM) signals as described in IEEE 802.3bj Clause 94 and developing standards such as OIF-CEI-56G and IEEE 400G.

Software Applications (Continued)

86100D-SIM InfiniiSim-DCA

At higher data rates, the effect of measurement fixtures and channels is prominent and can be accounted for through the de-embedding capabilities within Option SIM. You may also view measurements on live and simulated signals, allowing you to compare design intent to actual performance.

N1012A OIF CEI compliance and debug application

The N1012A application lets you fully characterize the ~120 transmitter test parameters (including 28G-VSR), reducing your test time from hours to minutes. Included are return loss tests and several utilities to improve your test productivity. Debug mode enables you to characterize your devices well beyond the parameters prescribed in the implementation agreements.

N1014A SFF-8431 compliance and debug application

The N1014A application lets you fully characterize ~70 test parameters including all transmitter tests for host, module and host copper and all test signals for receiver testing. Return loss tests and utilities are also included.

N1019A user-defined application

You may create your own test application or suite of tests using the DCA-X and other instruments. Quickly and intuitively create groups of tests, test descriptions, user prompts and test limits. Use concise HTML reports to share your multiple test results with your users.

N1081-4A IEEE802.3 Ethernet applications

The extensive requirements for IEEE802.3-2012, 802.3bj and 802.3bm are covered in these four applications, which comprise > 400 tests. Characterize your device for one, four or ten lanes, and analyze trends over time/temperature and between devices.

86100D-BFP Automatic Fixture Removal (AFR)

When measuring physical layer devices with non-coaxial interfaces, test fixtures or probes are often used to connect the device under test (DUT) to the measurement equipment. For accurate measurements of the DUT, the fixtures or probes need to be characterized and their effects removed from the composite measurement of the DUT plus test fixture or probe combination. This option adds the Automatic Fixture Removal (AFR) capability from Keysight's powerful N1930B Physical Layer Test System (PLTS) software to help you characterize a fixture or probe with non-coaxial interfaces. Fixtures and probes to be characterized can be single-ended or differential.

Measurements

The 86100D DCA-X features two user interfaces for optimum ease-of-use. It includes the classic DCA interface for complete backwards compatibility with earlier DCA mainframes. It also includes the new FlexDCA interface that provides new measurements and powerful analysis capability in a fully customizable application.

The following measurements are available from the tool bar, as well as the pull down menus. The available measurements depend on the DCA-X operating mode.

Oscilloscope mode

- Time
Rise time, fall time, jitter RMS, jitter p-p, period, frequency, + pulse width, - pulse width, duty cycle, delta time, [Tmax, Tmin, Tedge—remote commands only]
- Amplitude
Overshoot, average power, V amptd, V p-p, V rms, V top, V base, V max, V min, V avg, OMA (optical modulation amplitude)

Eye/mask mode

- NRZ eye measurements
Extinction ratio, jitter RMS, jitter p-p, average power, crossing percentage, rise time, fall time, one level, zero level, eye height, eye width, signal to noise, duty cycle distortion, bit rate, eye amplitude
- RZ eye measurements
Extinction ratio, jitter RMS, jitter p-p, average power, rise time, fall time, one level, zero level, eye height, eye amplitude, opening factor, eye width, pulse width, signal to noise, duty cycle, bit rate, contrast ratio

Mask test

- Open mask, start mask test, exit mask test, filter, mask test margins, mask margin to a hit ratio, mask test scaling, create NRZ mask

Option 200 enhanced jitter analysis software

- Measurements
Total jitter (TJ), random jitter (RJ), deterministic jitter (DJ), periodic jitter (PJ), data dependent jitter (DDJ), duty cycle distortion (DCD), intersymbol interference (ISI), sub-rate jitter (SRJ), asynchronous periodic jitter frequencies, subrate jitter components
- FlexDCA adds the following measurements:
Data dependent pulse width shrinkage (DDPWS), uncorrelated jitter (UJ), J2, J9
- Data displays
TJ histogram, RJ/PJ histogram, DDJ histogram, composite histogram, DDJ versus bit position, bathtub curve (log or Q scale)

Option 201 advanced waveform analysis

- Measurements
Deep memory pattern waveform, user-defined measurements through MATLAB interface
- Data displays
Equalized waveform

Option 202 enhanced impedance and S-parameters

- Markers and delta markers on live frequency domain responses such as S-parameter magnitude, phase and group delay

Option 300 amplitude analysis/RIN/Q-factor (requires Option 200)

- Measurements
Total interference (TI), deterministic interference (dual-dirac model, DI), random noise (RN), periodic interference (PI), and Inter-symbol interference (ISI), RIN (dBm or dB/Hz), Q-factor
- Data displays
TI histogram, RN/PI histogram, ISI histogram

Option 400 PLL and jitter spectrum measurement software

- Jitter spectrum/phase noise measurements integrated jitter: Total jitter (TJ), random jitter (RJ), deterministic jitter (DJ); DJ amplitude/frequency, jitter spectrum graph, jitter versus time graph, frequency versus time graph, jitter histogram, post processed jitter measurements, phase noise graph dBc/Hz versus frequency
- Phase locked loop (PLL) measurements PLL bandwidth, PLL peaking, data rate, jitter transfer function (JTF) graph, observed jitter transfer (OJTF) graph, JTF model.

Option 401 advanced eye analysis

- * Jitter analysis on long patterns

FlexDCA version: Total jitter (TJ), deterministic jitter (DJ), random jitter (RJ), J2, J5, J9. Jitter can be measured on long patterns such as PRBS23, PRBS31, live traffic.

Microsoft Excel version: All of the above, plus BER contour mask testing.

Measurements (Continued)

Option 500 productivity package including TDEC

Option 500 enables Rapid Eye acquisition and TDEC (transmitter dispersion and eye closure) measurements. Rapid Eye achieves two significant benefits. First, unlike conventional sampling and data display, when an eye mask test is performed, every acquired sample will be compared to the mask, as the central eye is composed of all acquired samples. Effective throughput is improved at least 60%. Second, incomplete eye diagram displays that can occur when triggering at sub-rates are eliminated. TDEC is a complex eye diagram measurement required for new high data rate standards deployed over multimode fiber. It is easily and quickly achieved with the automated TDEC measurement. (IEEE 802.3bm and T11 FC-PI-6P require a specific TDEC channel bandwidth, achieved with 86105D/86115D-Option 168.)

- Time at max
- Time at min
- Time at amplitude
- Limit lines
- Time at edge

Option 401 advanced EYE analysis

- Jitter measurements
 - Total jitter (TJ), random jitter (RJ), deterministic jitter (DJ), J2 jitter (J2), J5 jitter (J5), J9 jitter (J9)
- Amplitude measurements
 - Total interference (TI), random noise (RN), deterministic interference (DI), eye opening
- Mask test
 - Pass/fail status, BER limit

Option SIM InfiniiSim-DCA

2-port de-embedding and embedding; 4-port de-embedding and embedding; add simulated random jitter and noise

Option 9FP PAM-N analysis software

- Electrical and optical signals
- Eye width, eye height, eye skew
- Level amplitude, level noise, level skew
- Linearity measurements

TDR/TDT mode (requires TDR module)

Some also usable within measurement regions:

Prior to average add:

- Time domain responses available in volts, percent reflection and ohms (where applicable)
- X-axis in time or distance
- Average
- Min
- Max
- Amplitude at time
- Excess capacitance
- Excess inductance
- Rise time
- Fall time
- Delta time

Additional capabilities

Standard functions

- Standard functions are available through pull down menus and soft keys, and some functions are also accessible through the front panel knobs.

Markers

- Two vertical and two horizontal (user-selectable)

Limit tests

- Acquisition limits
- Limit test "Run Until" conditions – Off, # of Waveforms, # of Samples
- Report action on completion – Save waveform to memory, save screen image
- Measurement limit test
- Specify number of failures to stop limit test
- When to fail selected measurement – Inside limits, outside limits, always fail, never fail
- Report action on failure – Save waveform to memory, save screen image, save summary
- Mask limit test
- Specify number of failed mask test samples
- Report action on failure – Save waveform to memory, save screen image, save summary

Limit lines

- With the limit line editor, you can modify an existing limit line or create a new limit line from a current waveform or manual data entry.
- Limit lines are displayed boundaries used for pass/fail testing in oscilloscope and TDR/TDT instrument modes, and they are similar to masks in Eye/Mask mode.
- Any data point that occurs above an upper limit line or below a lower limit line causes a failed condition. A failed portion of a waveform that is beyond the limit line boundary is displayed in red.

Waveform autoscaling

Autoscaling provides quick horizontal and vertical scaling of both pulse and eye-diagram (RZ and NRZ) waveforms.

Gated triggering

Trigger gating port allows easy external control of data acquisition for circulating loop or burst-data experiments. Use TTL-compatible signals to control when the instrument does and does not acquire data.

Measurements (Continued)

Configure measurements

- Thresholds
 - 10%, 50%, 90% or 20%, 50%, 80% or custom
- Eye boundaries
 - Define boundaries for eye measurements
 - Define boundaries for alignment
- Format units for
 - Duty cycle distortion – Time or percentage
 - Extinction/Contrast ratio – Ratio, decibel or percentage
 - Eye height – Amplitude or decibel (dB)
 - Eye width – Time or ratio
 - Average power – Watts or decibels (dBm)
- Top base definition

Automatic or custom

- Δ time definition
 - First edge number, edge direction, threshold
 - Second edge number, edge direction, threshold
- Jitter mode
 - Units (time or unit interval, watts, volts, or unit amplitude)
 - Signal type (data or clock)
 - Measure based on edges (all, rising only, falling only)
 - Graph layout (single, split, quad)

Quick measure configuration

When using the classic DCA interface, “Quick Measure” measurements are initiated by pressing the <Multi-Purpose> button on the front panel.

- Four user-selectable measurements for each mode, eye-mask, TDR, etc.
- Default settings (Eye/Mask mode) extinction ratio, jitter RMS, average power, crossing percentage
- Default settings (Oscilloscope mode) rise time, fall time, period, V amptd

Histograms

Configure

- Histogram scale (1 to 8 divisions)
- Histogram axis (vertical or horizontal)
- Histogram window (adjustable window via marker knob)

Math measurements – classic DCA user interface

- Four user-definable functions operator – Magnify, invert, subtract, versus, min, max
- Source – Channel, function, memory, constant, response (TDR)

Signal processing measurements – FlexDCA

- Math – Add, subtract, multiply, average, invert, maximum, minimum, median
- Signal processing – Difference (differentiate), summation (integrate), interpolation (linear, $\text{Sin}(x)/x$), filters: 4th order besel, butterworth, gaussian
- Transforms – FFT, versus
- Equalizer (Option 201) – Linear feed-forward
- Equalizer (LFE, up to 64 taps)
- Simulation (Option SIM) – De-embedding, embedding, random jitter, random noise

Calibrate – classic DCA user interface

- All calibrations
 - Module (amplitude)
 - Horizontal (time base)
 - Extinction ratio
 - Probe
 - Optical channel
- Front panel calibration output level
 - User selectable –2 to 2 V

Utilities

- Set time and date
- Remote interface
 - Set GPIB interface
- Touch screen configuration/calibration
 - Calibration
 - Disable/enable touch screen
- Upgrade software
 - Upgrade mainframe
 - Upgrade module

Measurements (Continued)

Easier calibrations

Calibrating your instrument has been simplified by placing all the performance level indicators and calibration procedures in a single high-level location. This provides greater confidence in the measurements made and saves time in maintaining equipment.

Stimulus response testing using the Keysight Technologies, Inc. N490X, M8000 Series BERTs

Error performance analysis represents an essential part of digital transmission test products. Together, the Keysight 86100D and BERT products create a powerful test solution. If stimulus only is needed, the 81133A and 81134A pattern generators work seamlessly with the 86100D.

Transitioning from the Keysight 83480A and 86100A/B/C to the 86100D

While the 86100D has powerful new functionality that its predecessors don't have, it has been designed to maintain compatibility with the Keysight 86100A, 86100B, 86100C and Keysight 83480A digital communications analyzers and Keysight 54750A wide-bandwidth oscilloscope. All modules used in the Keysight 86100A/B/C, 83480A and 54750A can also be used in the 86100D. Since the 86100D includes the classic DCA interface, the remote programming command set for the 86100D designed for the 86100A/B/C will work directly. Some code modifications are required when transitioning from the 83480A and 54750A, but the command set is designed to minimize the level of effort required.

IVI-COM capability

Interchangeable Virtual Instruments (IVI) is a group of new instrument device software specifications created by the IVI Foundation to simplify interchangeability, increase application performance, and reduce the cost of test program development and maintenance through design code reuse. The 86100D IVI-COM drivers are available for download from the Keysight website.

VXII.2 and VXII.3 instrument control

The 86100D DCA-X provides LAN based instrument control.

Ordering Information

86100D	Infiniium DCA-X mainframe
86100D	Hardware options
86100D-STR	Standard trigger
86100D-ETR	Enhanced trigger
86100DU-ETR	Enhanced trigger upgrade kit
86100D-PTB	Precision timebase integrated in the mainframe
86100DU-PTB	Upgrade mainframe with integrated precision timebase
86100D-GPI	GPIO card interface installed (default)
86100D-GPN	No GPIO card interface
86100D-090	Removable hard drive
86100D-092	Internal hard drive (default)
86100D software options	
86100D-xxx	Are permanent fixed-node licenses installed by the factory
86100DU-xxx	Are permanent fixed-node licenses installed by the customer (software upgrades)
86100DT-xxx	Are permanent transportable licenses installed by the customer
The “-xxx” option code provides the same functionality independent of the prefix (i.e., 86100D or 86100DU or 86100DT)	
86100D-BFP	Automatic fixture removal
86100D-061	MATLAB - Basic Oscilloscope package
86100D-062	MATLAB - Standard Oscilloscope package
86100D-200	Enhanced jitter analysis software
86100D-201	Advanced waveform analysis software
86100D-202	Enhanced impedance and S-parameter software
86100D-300	Amplitude analysis/RIN/Q-factor
86100DU-400	PLL and jitter spectrum software ¹
86100D-401	Advanced EYE analysis software ¹
86100D-SIM	InfiniiSim-DCA software
86100D-500	Productivity package software
86100D-9FP	PAM-N analysis software, fixed perpetual license
N1012A	OIF CEI compliance and debug application
N1014A	SFF-8431 compliance and debug application
N1019A	User-defined application
N1081A	IEEE 802.3 KR/KR4 application
N1082A	IEEE 802.3bj XLAUI, CAUI-10 and nPPI; IEEE 802.3bm CAUI-4 (Option -4TP)
N1083A	IEEE 802.3 40GBASE-CR4 and 100GBASE-CR10
N1084A	IEEE802.3 KR4/CR4 application
Misc options	
86100D-AFP	Module slot filler panel
86100D-AX4	Rack mount flange kit
86100D-AXE	Rack mount flange kit with handles
86100D-UK6	Commercial cal certificate with test data
86100DU-WN7	Upgrade to Windows 7 operating system

Note:

- Option BFP requires Option 202.
- For complete PAM4 analysis capability, Option 9FP requires Options 200/201/300/401.
- Options 200, 201, and SIM require Option ETR (enhanced trigger).
- Option 300 requires Options 200 and ETR.
- Option 400 requires Microsoft Office Excel 2007/2010.

Optical/electrical modules

86105C	9 GHz optical channel; single-mode and multimode, amplified (750 to 1650 nm) 20 GHz electrical channel
86105C-100	155 Mb/s through 8.5 Gb/s (choose 4 filter rates from Options 86105C-110 through 86105C-195)
86105C-110	155 Mb/s
86105C-120	622 Mb/s (also covers 614 Mb/s)
86105C-130	1.063 Gb/s
86105C-140	1.244/1.250 Gb/s (also covers 1.229 Mb/s)

Optical/electrical modules (Continued)

86105C-150	2.125 Gb/s
86105C-160	2.488/2.500 Gb/s (also covers 2.458 Gb/s)
86105C-170	2.666 Gb/s
86105C-180	3.125 Gb/s (also covers 3.072 Gb/s)
86105C-190	4.250 Gb/s
86105C-193	5.0 Gb/s
86105C-195	6.250 Gb/s (also covers 6.144 Gb/s)
86105C-200	8.5, 9.953, 10.3125, 10.519, 10.664, 10.709, 11.096, 11.317 Gb/s
86105C-300	Combination of rates available in 86105C-100 and 86105C-200
86105D ²	20 GHz optical channel; single-mode and multimode, (750 to 1650 nm); filters for 8.5, 9.953, 10.3125, 10.519, 10.664, 10.709, 11.096, 11.317, 14.025 Gb/s; 35 GHz electrical channel
86105D-100	Identical capability as 86105D, 14.025 Gb/s filter not included
86105D-200	Identical capability as 86105D, only filter provided is 14.025 Gb/s
86105D-IRC ³	System impulse response correction calibration
86105D-281	34 GHz optical channel, filters for 15, 25.78, 27.95, 28.05 Gb/s (contact Keysight for additional 14.025 Gb/s filter) ⁴ . 50 GHz electrical channel
86115D ²	20 GHz multi-optical port plug-in module; single-mode and multimode (750 to 1650 nm); filters for 8.5, 9.953, 10.3125, 10.519, 10.664, 10.709, 11.096, 11.317, 14.025 Gb/s
86115D-002	Two optical channels with filters for all rates listed (8.5 to 14.025 Gb/s)
86115D-102	Identical capability as 86115D-002, 14.025 Gb/s filters not included
86115D-142	Identical capability as 86115D-002, only filters provided are 14.025 Gb/s
86115D-282	Two optical channels with filters for 15, 25.78, 27.95, 28.05 Gb/s (contact Keysight for 14.025 Gb/s filter) ⁴
86115D-004	Four optical ports with filters for all rates listed (8.5 to 14.025 Gb/s) multiplexed to two optical channels through 2 integral 1X2 optical switches
86115D-104	Identical capability as 86115D-004, 14.025 Gb/s filters not included
86115D-144	Identical capability as 86115D-004, only filters provided are 14.025 Gb/s
86115D-IRC	System impulse response correction calibration
86116C ²	40 to 65 GHz optical/80 GHz electrical sampling module, 1300 to 1620 nm
86116C-IRC ³	System impulse response correction calibration

This module is not compatible with the 86100A and 86100B DCA mainframes. If you want to upgrade older DCAs, contact Keysight Technologies to discuss current trade-in deals. All optical modules have FC/PC connectors installed on each optical port. Other connector adapters available as options are: Diamond HMS-10, DIN, ST and SC.

1. Fixed node customer installed or transportable customer installed (86100DU or 86100DT). Not available as a factory-installed license.
2. This module is not compatible with the 86100A and 86100B DCA mainframes. If you want to upgrade older DCAs, contact Keysight Technologies to discuss current trade-in deals.
3. System impulse response correction calibration provides a unique calibration file for the optical channel(s). The FlexDCA user interface uses this calibration file to create ideal reference receiver responses for more accurate and consistent transceiver compliance testing. IRC also allows reference receivers to be defined at any data rate within $\pm 50\%$ of the hardware response. This allows optical receivers to significantly extend their operating range.
4. A 15 Gb/s filter is provided with Option 281 and 282 that closely approximates the response required for 16X Fibre Channel compliance testing. Contact Keysight for a special option that verifies compliance of the 86105D-281 and 86115D-282 to the 16X Fibre Channel reference receiver specification.

Ordering Information (Continued)

86116C ¹	40 to 65 GHz optical/80 GHz electrical sampling module, 1300 to 1620 nm
---------------------	-------------------------------------------------------------------------

Select exactly one reference receiver option:

86116C-025	40 GHz optical/80 GHz electrical channels, 17.0/25.8/27.7 Gb/s reference receiver
86116C-041	65 GHz optical/80 GHz electrical channels, 39.81/41.25/43.02 Gb/s reference receiver

Dual/Quad electrical channel modules

86112A	Dual 20 GHz electrical channels
86112A-HBW	Dual 30 GHz electrical channels
86117A	Dual 50 GHz electrical channels
86118A	Dual 70 GHz electrical remote sampling channels
86118A-H01	Differential de-skew
N1045A ²	2/4 port 60 GHz electrical remote head
N1045A-02F	2 channel remote head, 1.85 mm, female
N1045A-02M	2 channel remote head, 1.85 mm, male
N1045A-04F	4 channel remote head, 1.85 mm, female
N1045A-04M	4 channel remote head, 1.85 mm, male

TDR/TDT modules

54754A ^{1,5}	Differential TDR module with dual 18 GHz TDR/electrical channels
N1055A ^{1,2}	35/50 GHz, 2/4 port, TDR/TDT remote head
N1055A-FS1	Fast sampling, mandatory option
N1055A-32F	35 GHz, 2 channel remote head, 2.92 mm, female
N1055A-32M	35 GHz, 2 channel remote head, 2.92 mm, male
N1055A-34F	35 GHz, 4 channel remote head, 2.92 mm, female
N1055A-34M	35 GHz, 4 channel remote head, 2.92 mm, male
N1055A-52F	50 GHz, 2 channel remote head, 1.85 mm, female
N1055A-52M	50 GHz, 2 channel remote head, 1.85 mm, male
N1055A-54F	50 GHz, 4 channel remote head, 1.85 mm, female
N1055A-54M	50 GHz, 4 channel remote head, 1.85 mm, male
N1055A-FS1	Fast sampling

Precision timebase module

86107A	Precision timebase reference module
86107A-010	2.5 and 10 GHz clock input capability
86107A-020	10 and 20 GHz clock input capability
86107A-040	10, 20 and 40 GHz clock input capability

Clock recovery modules¹

The following modules provide a recovered clock from the data signal for triggering at indicated data rates:

83496B	50 Mb/s to 7.1 Gb/s Clock recovery module. This module is not compatible with the 86100A and 86100B DCA mainframes. If you want to upgrade older DCAs, contact Keysight Technologies and ask for current trade-in deals.
83496B-100	Single-ended and differential electrical with integrated signal taps
83496B-101	Single mode (1260 to 1360 nm and 1490 to 1600 nm) and multimode (830 to 860 nm and 1260 to 1360 nm) optical. Integrated signal taps. Single-ended or differential electrical inputs (no signal taps)
83496B-200	Increase operating range to 50 Mb/s to 14.2 Gb/s
83496BU-200	Data rate 0.05 to 14.2 Gb/s upgrade
83496B-201	Shift operating range to 7.1 to 14.2 Gb/s
83496BU-201	Shift operating range to 7.1 to 14.2 Gb/s upgrade
83496B-300	Add tunable loop bandwidth "golden PLL" capability
83496BU-300	Adjustable loop bandwidth upgrade

External clock recovery solutions⁴

N1076A electrical clock recovery

N1076A-216	Clock recovery range: 50 MBd to 16 GbD
N1076A-232	Clock recovery range: 50 MBd to 16 GbD
N1076A-JSA	Jitter spectrum analysis

N1077A optical/electrical clock recovery

N1077A-216	Clock recovery range: 50 MBd to 16 GbD
N1077A-232	Clock recovery range: 50 MBd to 16 GbD
N1077A-SMS	Internal SM and MM splitters
N1077A-SXT	No splitter (supplied by user)
N1077A-JSA	Jitter spectrum analysis

Precision waveform analyzer module^{1,3}

Dual electrical channel module with integrated clock recovery and precision timebase.

86108A-100	Dual 32 GHz electrical channels, integrated clock recovery (50 Mb/s to 14.2 Gb/s) with integrated precision timebase
86108A-001	Two 3.5 mm phase trimmers for skew adjustment
86108A-002	Two precision 3.5 mm 18 inch cables
86108A-400	Auxiliary clock recovery Input

86108B options

86108B-LBW	Dual 35 GHz electrical channels
86108B-HBW	Dual 50 GHz electrical channels
86108B-216	Clock recovery 50 Mb/s to 16 Gb/s
86108B-232	Clock recovery 50 Mb/s to 32 Gb/s
86108B-300	Adjustable loop bandwidth/peaking
86108B-400	Auxiliary clock recovery input
86108B-PTB	Integrated precision timebase
86108B-JSA	Jitter spectrum analysis and software clock recovery emulation
86108B-A23	Two adapters, 2.4 mm (f) to 3.5 mm (f)
86108B-CA2	Matched cable pair, 2.4 to 2.4 mm, 24 inch
86108B-CA3	Matched cable pair, 3.5 to 3.5 mm, 18 inch
86108B-DC2	Two DC blocks, 2.4 mm, 16 V, 50 kHz to 50 GHz
86108B-DC3	Two DC blocks, 3.5 mm, 16 V, 50 kHz to 26.5 GHz
86108B-PT2	Two 2.4 mm phase trimmers for ext. skew adjustment

Phase trimmers

Nominal impedance
Frequency range
Insertion loss (at f max)
Time delay
Connectors

86108B-PT3	Two 3.5 mm phase trimmers for ext. skew adjustment
------------	----------------------------------------------------

Phase trimmers

Nominal impedance
Frequency range
Insertion loss (at f max)
Time delay
Connectors

- 86100D-ETR is recommended when;
 - More than 1 TDR module is connected to the same DUT.
 - Using a DCA module equipped with a rear-panel trigger circuit. Examples include 54754A, 83496x, and 86108A/B modules. If operating these modules in an 86100D with Option STR, an external cable (such as P/N 5062-6690) must be connected from the module's front panel trigger/clock output to the 86100D's trigger input.
- Requires 86100D mainframe (not compatible with 86100A/B/C).
- This module is not compatible with the 86100A and 86100B DCA mainframes. If you want to upgrade older DCAs, contact Keysight Technologies to discuss current trade-in deals.
- Supports both DCA-X and DCA-M platforms. For detailed N1076A/N1077A specifications, refer to the data sheet located at www.keysight.com/find/N1077A. Standalone clock recovery instruments are controlled via a USB connection to an 86100D DCA-X mainframe or a user-supplied PC running N1010A FlexDCA software.
- Included with each of these TDR modules is a TDR trigger cable, two 50 Ω SMA terminations and one SMA short.

Ordering Information (Continued)

Warranty options (for all products)	
R1280A	Customer return repair service
R1282A	Customer return calibration service
Accessories	
N1000-40008	Front cover
86101-60017	Filler panel (1/4 of module bay)
0960-2929	USB keyboard (included with 86100D)
1150-7913	USB mouse (included with 86100D)
9300-1308	ESD heel strap
9300-1367	ESD wrist strap
9300-1484	ESD desk mat
9300-0980	ESD wrist strap ground cord
Optical connector adapters	
Note: Optical modules come standard with one FC/PC connector adapter	
81000FI	FC/PC connector interface
81000SI	DIN connector interface
81000HI	E2000 connector interface
81000LI	LC connector interface
81000MI	MU connector interface
81000VI	ST connector interface
81000KI	SC connector interface
N9355CK01	DC coupled limiter for overload and ESD protection (3.5 mm only)
RF/Microwave accessories ¹	
11636B	Power divider, DC to 26.5 GHz, APC 3.5 mm
N4910A	2.4 mm male-to-male matched coaxial cable pair, 61 cm
N4871A	3.5 mm male-to-male matched coaxial cable pair, 91 cm
11636C	Power divider, DC to 50 GHz, 2.4 mm
11742A	45 MHz to 26.5 GHz DC blocking capacitor
N9398G	1.85 mm male-to-female DC block 16 V 700 kHz to 67 GHz
N9398F	2.4 mm male-to-female DC block 16 V 50 kHz to 50 GHz
N9398C	3.5 mm male-to-female DC block 16 V 50 kHz to 26.5 GHz
11742A-K01	50 GHz DC blocking capacitor
8493C-003	3.5 mm 3 dB attenuator
8493C-006	3.5 mm 6 dB attenuator
8493C-010	3.5 mm 10 dB attenuator
8493C-020	3.5 mm 20 dB attenuator
8490D-003	2.4 mm 3 dB attenuator
8490D-006	2.4 mm 6 dB attenuator
8490D-010	2.4 mm 10 dB attenuator
8490D-020	2.4 mm 20 dB attenuator
11900A	2.4 mm male to 2.4 mm male adapter/connector saver
11900B	2.4 mm female to 2.4 mm female adapter/connector saver
11900C	2.4 mm female to 2.4 mm male connector saver
11901A	2.4 mm male to 3.5 mm male adapter
11901B	2.4 mm (f) to 3.5 mm (f) adapter
11901C	2.4 mm (m) to 3.5 mm (f) adapter
11901D	2.4 mm (f) to 3.5 mm (m) adapter
5061-5311	3.5 mm (f-f) connector saver (e.g., for 86100C/D trigger input)
85130-60010	2.4 mm female to 3.5 mm male NMD bulkhead adapter
1250-1158	SMA (f-f) adapter
83059A	3.5 mm male to 3.5 mm male adapter/connector saver
83059B	3.5 mm female to 3.5 mm female adapter/connector saver
83059C	3.5 mm female to 3.5 mm male connector saver
909D-011	3.5 mm female 50 Ω load
909D-301	3.5 mm male 50 Ω load
85138A	2.4 mm male 50 Ω load

RF/Microwave accessories ¹ (Continued)	
85138B	2.4 mm female 50 Ω load
85140A	2.4 mm male short
85140B	2.4 mm female short
TDR/TDT accessories	
See N1055A data sheet	
Infiniimax I active probes (1.5 to 7 GHz)	
Note: The N1022B probe adapter is required to use these probes with the 86100 DCA	
Infiniimax I probe amplifiers	
Note: Order one or more Infiniimax I probe head or connectivity kit for each amplifier	
1130A	1.5 GHz probe amp
1131A	3.5 GHz probe amp
1132A	5 GHz probe amp
1134A	7 GHz probe amp
Infiniimax I probe heads	
E2675A	InfiniMax differential browser probe head and accessories. Includes 20 replaceable tips and ergonomic handle. Order E2658A for replacement accessories.
E2676A	InfiniMax single-ended browser probe head and accessories. Includes two ground collar assemblies, 10 replaceable tips, a ground lead socket and ergonomic browser handle. Order E2663A for replacement accessories.
E2677A	InfiniMax differential solder-in probe head and accessories. Includes 20 full bandwidth and 10 medium bandwidth damping resistors. Order E2670A for replacement accessories.
E2678A	InfiniMax single-ended/differential socketed probe head and accessories. Includes 48 full bandwidth damping resistors, six damped wire accessories, four square pin sockets and socket heatshrink. Order E2671A for replacement accessories.
E2679A	InfiniMax single-ended solder-in probe head and accessories. Includes 16 full bandwidth and eight medium bandwidth damping resistors and 24 zero ohm ground resistors. Order E2672A for replacement accessories.

- 2.4 mm connectors are mechanically compatible with 1.85 mm. 2.92 mm connectors are mechanically compatible with 3.5 mm and SMA connectors.

Ordering Information (Continued)

Infiniimax I connectivity kits (popular collections of the above probe heads)

E2669A	InfiniMax connectivity kit for differential measurements
E2668A	InfiniMax connectivity kit for single-ended measurements

Infiniimax II active probes (10 to 13 GHz)

Note: The N1022B probe adapter is required to use these probes with the 86100 DCA

Infiniimax II probe amplifiers

Note: Order 1 or more Infiniimax II probe heads for each amplifier. Infiniimax I probe heads and connectivity kits can also be used but will have limited bandwidth

1168A	10 GHz probe amp
1169A	13 GHz probe amp

Infiniimax II probe heads

N5380A	InfiniMax II 12 GHz differential SMA adapter
N5381A	InfiniMax II 12 GHz solder-in probe head
N5382A	InfiniMax II 12 GHz differential browser

Infiniimax III active probes (16 to 30 GHz)

Note: The N5477A probe adapter is required to use these probes with the 86100 DCA

Infiniimax III probe amplifiers

N2800A	16 GHz probe amp
N2801A	20 GHz probe amp
N2802A	25 GHz probe amp
N2803A	30 GHz probe amp

Infiniimax III probe heads

N5439A	ZIF probe head
N5440A	450 Ω ZIF tip
N5447A	200 Ω ZIF tip
N5444A	2.92 mm/3.5 mm/SMA
N5448A	2.92 mm extension cables
N5441A	Solder-in probe head
N5445A	Browser probe head

www.keysight.com/find/infiniimax3

Probe adapters

N5477A	Sampling scope adapter. Adapts the Infiniimax III system probes to the 86100 Infiniium DCA
N1022B	Adapts 113x/115x/116x active probes to 86100 Infiniium DCA

The N1022A/B and N5477A adapters are powered by connecting it to the built-in probe power connector available on some DCA modules or to an external probe power supply. On modules that do not have a built-in probe power connector, use an 1143A external power supply. It is recommended to order option 001 on the 1143A, which provides a 5-foot power extension cable (01143-61602). The 1143A power supply can power two probes. The N1022A/B and N5477A adapters are compatible with male 3.5 mm NMD bulkhead inputs. Insert an 85130-60010 2.4 mm female NMD to 3.5 mm male NMD adapter in order to use them for 2.4 mm NMD bulkhead inputs.

Connectivity solutions

For a wide range of test adapters to connect to one or more lanes for SFP+, QSFP+, fibre channel, PCIe and many others, please see adapters information from Wilder Technologies at: <http://www.wilder-tech.com/> Call Keysight for connectivity and probing solutions not listed above.

Firmware and software


Firmware and software upgrades are available through the Web or your local sales office. www.keysight.com/find/dcac

N1010A FlexDCA Remote Access Software FlexDCA Pro runs on the 86100D as well as on a PC or laptop. Software licenses allow connectivity to an 86100C or D mainframe, advanced analysis or productivity packages, and more. http://www.keysight.com/find/flexdca_download

FlexDCA express is the same as FlexDCA Pro except that it does not include any functionality requiring a license. It is available free of charge from http://www.keysight.com/find/flexdca_express

86100D DCA-X brochure

For more information on the features and benefits of the 86100D DCA-X and DCA modules, download the 86100D DCA-X brochure. Go to: www.keysight.com and search on 5989-5822EN.

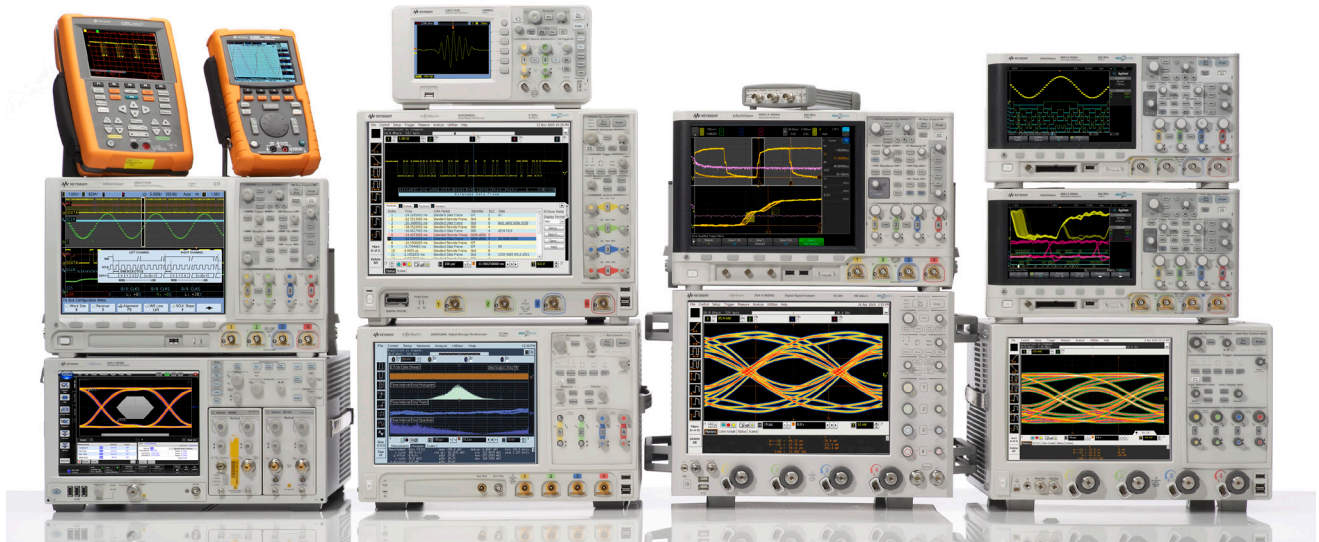

Keysight Oscilloscopes

Multiple form factors from 20 MHz to > 90 GHz | Industry leading specs | Powerful applications



www.axiestandard.org

AdvancedTCA® Extensions for Instrumentation and Test (AXIe) is an open standard that extends the AdvancedTCA for general purpose and semiconductor test. The business that became Keysight was a founding member of the AXIe consortium. ATCA®, AdvancedTCA®, and the ATCA logo are registered US trademarks of the PCI Industrial Computer Manufacturers Group.



www.lxistandard.org

LAN eXtensions for Instruments puts the power of Ethernet and the Web inside your test systems. The business that became Keysight was a founding member of the LXI consortium.




www.pxisa.org

PCI eXtensions for Instrumentation (PXI) modular instrumentation delivers a rugged, PC-based high-performance measurement and automation system.

Evolving

Our unique combination of hardware, software, support, and people can help you reach your next breakthrough. **We are unlocking the future of technology.**

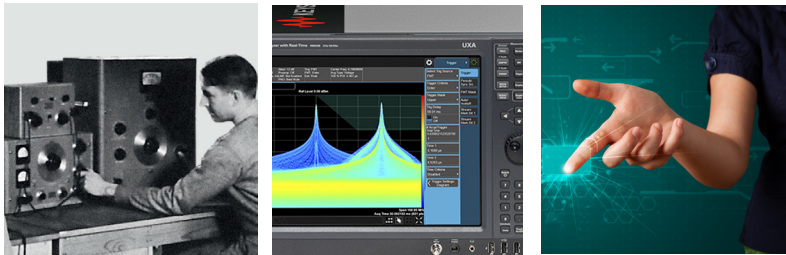

From Hewlett-Packard to Agilent to Keysight

myKeysight

myKeysight
www.keysight.com/find/mykeysight
 A personalized view into the information most relevant to you.

Keysight Infoline

Keysight Infoline

www.keysight.com/find/Infoline
 Keysight's insight to best in class information management. Free access to your Keysight equipment company reports and e-library.

KEYSIGHT SERVICES

Keysight Services
www.keysight.com/find/service
 Our deep offering in design, test, and measurement services deploys an industry-leading array of people, processes, and tools. The result? We help you implement new technologies and engineer improved processes that lower costs.



Three-Year Warranty
www.keysight.com/find/ThreeYearWarranty
 Keysight's committed to superior product quality and lower total cost of ownership. Keysight is the only test and measurement company with three-year warranty standard on all instruments, worldwide. And, we provide a one-year warranty on many accessories, calibration devices, systems and custom products.



Keysight Assurance Plans
www.keysight.com/find/AssurancePlans
 Up to ten years of protection and no budgetary surprises to ensure your instruments are operating to specification, so you can rely on accurate measurements.

Keysight Channel Partners
www.keysight.com/find/channelpartners
 Get the best of both worlds: Keysight's measurement expertise and product breadth, combined with channel partner convenience.

www.keysight.com/find/86100D

For more information on Keysight Technologies' products, applications or services, please contact your local Keysight office. The complete list is available at: www.keysight.com/find/contactus

Americas

Canada (877) 894 4414
 Brazil 55 11 3351 7010
 Mexico 001 800 254 2440
 United States (800) 829 4444

Asia Pacific

Australia 1 800 629 485
 China 800 810 0189
 Hong Kong 800 938 693
 India 1 800 11 2626
 Japan 0120 (421) 345
 Korea 080 769 0800
 Malaysia 1 800 888 848
 Singapore 1 800 375 8100
 Taiwan 0800 047 866
 Other AP Countries (65) 6375 8100

Europe & Middle East

Austria 0800 001122
 Belgium 0800 58580
 Finland 0800 523252
 France 0805 980333
 Germany 0800 6270999
 Ireland 1800 832700
 Israel 1 809 343051
 Italy 800 599100
 Luxembourg +32 800 58580
 Netherlands 0800 0233200
 Russia 8800 5009286
 Spain 800 000154
 Sweden 0200 882255
 Switzerland 0800 805353
 Opt. 1 (DE)
 Opt. 2 (FR)
 Opt. 3 (IT)
 United Kingdom 0800 0260637

For other unlisted countries:
www.keysight.com/find/contactus
 (BP-06-08-16)



www.keysight.com/go/quality
 Keysight Technologies, Inc.
 DEKRA Certified ISO 9001:2015
 Quality Management System