

Legacy Device: Motorola MC12009, MC12011

These devices are two-modulus prescalers which will divide by 5 and 6, 8 and 9, respectively. A MECL-to-MTTL translator is provided to interface directly with the Motorola MC12014 Counter Control Logic. In addition, there is a buffered clock input and MECL bias voltage source.


- ML12009 480 MHz ($\div 5/6$), ML12011 550 MHz ($\div 8/9$)
- MECL to MTTL Translator on Chip
- MECL and MTTL Enable Inputs
- 5.0 or -5.2 V Operation*
- Buffered Clock Input — Series Input RC Typ, $20\ \Omega$ and $4.0\ pF$
- VBB Reference Voltage
- 310 mW (Typ)

* When using a 5.0 V supply, apply 5.0 V to Pin 1 (VCCO), Pin 6 (MTTL VCC), Pin 16 (VCC), and ground Pin 8 (VEE). When using -5.2 V supply, ground Pin 1 (VCCO), Pin 6 (MTTL VCC), and Pin 16 (VCC) and apply -5.2 V to Pin 8 (VEE). If the translator is not required, Pin 6 may be left open to conserve DC power drain.

MAXIMUM RATINGS

Characteristic	Symbol	Rating	Unit
(Ratings above which device life may be impaired)			
Power Supply Voltage ($V_{CC} = 0$)	V_{EE}	-8.0	Vdc
Input Voltage ($V_{CC} = 0$)	V_{in}	0 to V_{EE}	Vdc
Output Source Current Continuous Surge	I_O	< 50 < 100	mAdc
Storage Temperature Range	T_{stg}	-65 to 175	C
(Recommended Maximum Ratings above which performance may be degraded)			
Operating Temperature Range ML12009, ML12011	T_A	-30 to 85	C
DC Fan-Out (Note 1) (Gates and Flip-Flops)	n	70	—

NOTES: 1. AC fan-out is limited by desired system performance.



CROSS REFERENCE/ORDERING INFORMATION

PACKAGE	MOTOROLA	LANSDALE
P DIP 16	MC12009P	ML12009EP
SOIC 16	MC12009D	ML12009-5P
P DIP 16	MC12011P	ML12011EP
SO 16W	MC12011D	ML12011-5P

Note: Lansdale lead free (**Pb**) product, as it becomes available, will be identified by a part number prefix change from **ML** to **MLE**.

PIN CONNECTIONS

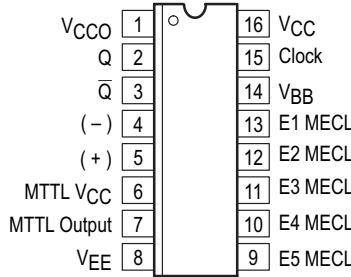


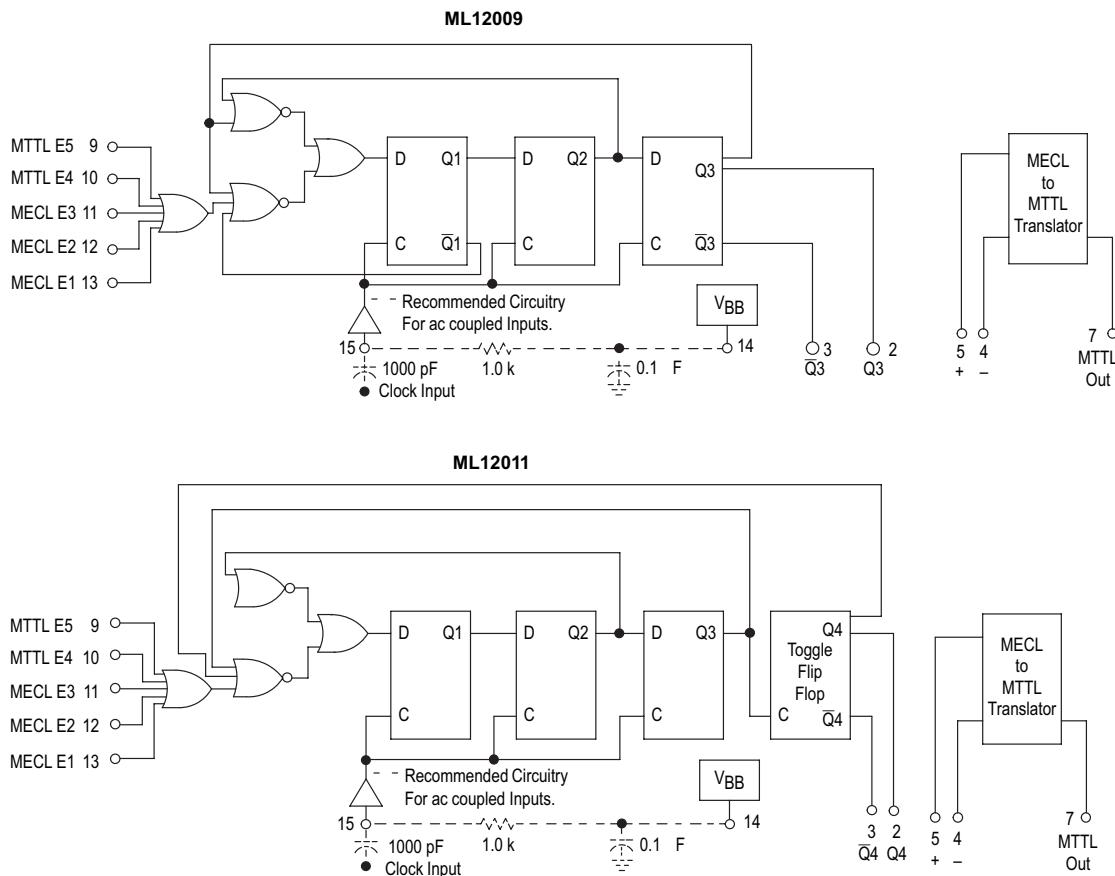
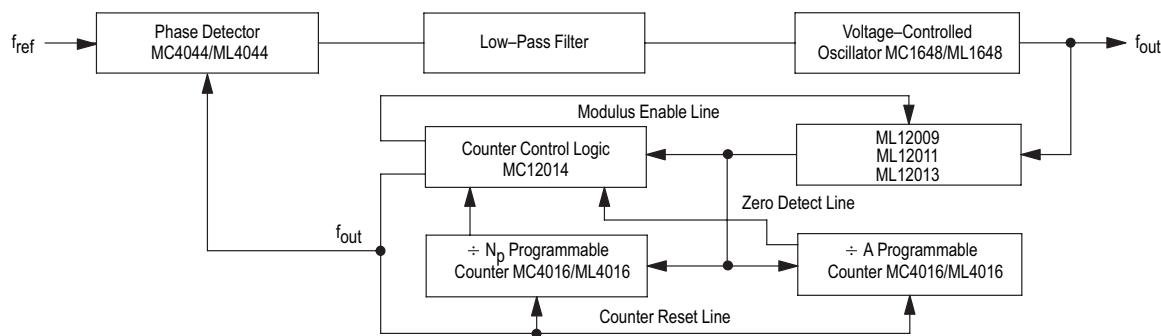
Figure 1. Logic Diagrams**Figure 2. Typical Frequency Synthesizer Application**

Figure 2b Generic block diagram showing prescaler connection to PLL Device


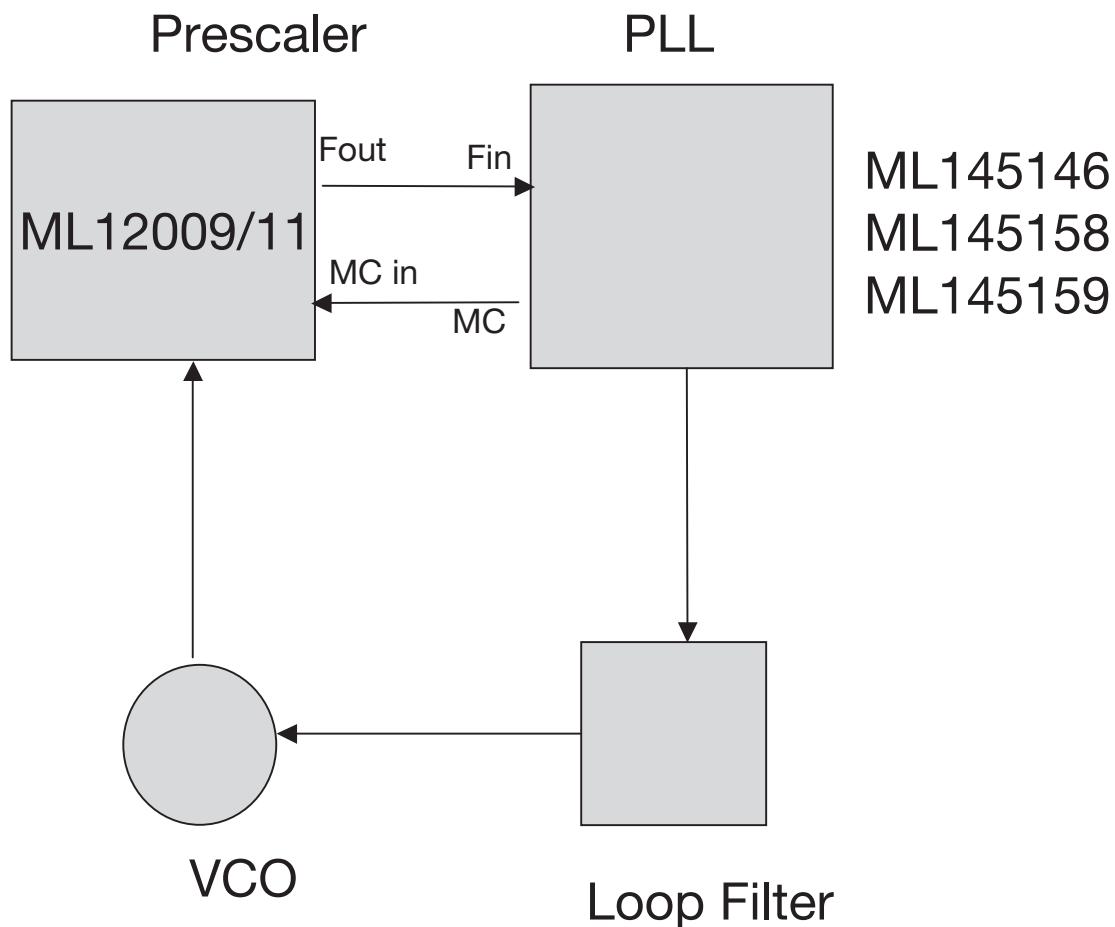


Figure 2b shows a generic block diagram of connecting a prescaler to a PLL device that supports dual modulus controls. Application note AN535 describes using a two-modulus prescaler technique. By using prescaler higher frequencies can be achieved than by a single CMOS PLL device.

ELECTRICAL CHARACTERISTICS (Supply Voltage = -5.2 V, unless otherwise noted.)

Characteristic	Symbol	Pin Under Test	Test Limits						Unit	
			-30 C		25 C		85 C			
			Min	Max	Min	Max	Min	Max		
Power Supply Drain Current	I _{CC1}	8	-88		-80		-80		mAdc	
	I _{CC2}	6		5.2		5.2		5.2	mAdc	
Input Current	I _{inH1}	15 11 12 13		375 375 375 375		250 250 250 250		250 250 250 250	Adc	
	I _{inH2}	4 5	1.7 1.7	6.0 6.0	2.0 2.0	6.0 6.0	2.0 2.0	6.4 6.4	mAdc	
	I _{inH3}	5	0.7	3.0	1.0	3.0	1.0	3.6		
	I _{inH4}	9 10		100 100		100 100		100 100	Adc	
	I _{inL1}	15 11 12 13	-10 -10 -10 -10		-10 -10 -10 -10		-10 -10 -10 -10		Adc	
	I _{inL2}	9 10	-1.6 -1.6		-1.6 -1.6		-1.6 -1.6		mAdc	
Reference Voltage	V _{BB}	14			-1.360	-1.160			Vdc	
Logic '1' Output Voltage	V _{OH1} (Note 1)	2 3	-1.100 -1.100	-0.890 -0.890	-1.000 -1.000	-0.810 -0.810	-0.930 -0.930	-0.700 -0.700	Vdc	
	V _{OH2}	7	-2.8		-2.6		-2.4			
Logic '0' Output Voltage	V _{OL1} (Note 1)	2 3	-1.990 -1.990	-1.675 -1.675	-1.950 -1.950	-1.650 -1.650	-1.925 -1.925	-1.615 -1.615	Vdc	
	V _{OL2}	7		-4.26		-4.40		-4.48		
Logic '1' Threshold Voltage	V _{OHA} (Note 2)	2 3	-1.120 -1.120		-1.020 -1.020		-0.950 -0.950		Vdc	
Logic '0' Threshold Voltage	V _{OLO} (Note 3)	2 3		-1.655 -1.655		-1.630 -1.630		-1.595 -1.595	Vdc	
Short Circuit Current	I _{OS}	7	-65	-20	-65	-20	-65	-20	mAdc	

NOTES: 1. Test outputs of the device must be tested by sequencing through the truth table. All input, power supply and ground voltages must be maintained between tests. The clock input is the waveform shown.



2. In addition to meeting the output levels specified, the device must divide by 5 or 8 during this test. The clock input is the waveform shown.


3. In addition to meeting the output levels specified, the device must divide by 6 or 9 during this test. The clock input is the waveform shown.

Each MECL 10,000 series circuit has been designed to meet the dc specifications shown in the test table, after thermal equilibrium has been established. The circuit is in a test socket or mounted on a printed circuit board and transverse air flow greater than 500 linear fpm is maintained. Outputs are terminated through a 50 Ω resistor to -2.0 V. Test procedures are shown for only one gate. The other gates are tested in the same manner.

ELECTRICAL CHARACTERISTICS (continued) (Supply Voltage = -5.2 V, unless otherwise noted.)

@ Test Temperature			TEST VOLTAGE/CURRENT VALUES						Gnd
			Volts						
-30 C		V _{IHmax}	V _{ILmin}	V _{IHAMin}	V _{ILAmax}	V _{IH}	V _{IL}		
25 C		-0.890	-1.990	-1.205	-1.500	-2.8	-4.7		
85 C		-0.810	-1.950	-1.105	-1.475	-2.8	-4.7		
		-0.700	-1.925	-1.035	-1.440	-2.8	-4.7		
Characteristic	Symbol	Pin Under Test	TEST VOLTAGE APPLIED TO PINS LISTED BELOW						
			V _{IHmax}	V _{ILmin}	V _{IHAMin}	V _{ILAmax}	V _{IH}	V _{IL}	
Power Supply Drain Current	I _{CC1}	8							1,16
	I _{CC2}	6	4	5					6
Input Current	I _{inH1}	15 11 12 13	15 11 12 13						1,16 1,16 1,16 1,16
	I _{inH2}	4 5	5 5	4 4					6 6
	I _{inH3}	5	4	5					6
	I _{inH4}	9 10					9 10		1,16 1,16
Leakage Current	I _{inL1}	15 11 12 13							1,16 1,16 1,16 1,16
	I _{inL2}	9 10						9 10	1,16 1,16
Reference Voltage	V _{BB}	14							1,16
Logic '1' Output Voltage	V _{OH1} (Note 1)	2 3		11,12,13 11,12,13					9,10 9,10
	V _{OH2}	7	5	4					6
Logic '0' Output Voltage	V _{OL1} (Note 1)	2 3		11,12,13 11,12,13				9,10 9,10	1,16 1,16
	V _{OL2}	7	4	5					6
Logic '1' Threshold Voltage	V _{OHA} (Note 2)	2 3			11,12,13 11,12,13				1,16 1,16
Logic '0' Threshold Voltage	V _{OLO} (Note 3)	2 3				11,12,13 11,12,13			1,16 1,16
Short Circuit Current	I _{OS}	7	5	4				7	6

NOTES: 1. Test outputs of the device must be tested by sequencing through the truth table. All input, power supply and ground voltages must be maintained between tests. The clock input is the waveform shown.




2. In addition to meeting the output levels specified, the device must divide by 5 or 8 during this test. The clock input is the waveform shown.

3. In addition to meeting the output levels specified, the device must divide by 6 or 9 during this test. The clock input is the waveform shown.

ELECTRICAL CHARACTERISTICS (continued) (Supply Voltage = -5.2 V, unless otherwise noted.)

@ Test Temperature			TEST VOLTAGE/CURRENT VALUES						Gnd	
			Volts			mA				
V _{IHT}	V _{ILT}	V _{EE}	I _L	I _{OL}	I _{OH}					
-30 C	-3.2	-4.4	-5.2	-0.25	16	-0.40				
25 C	-3.2	-4.4	-5.2	-0.25	16	-0.40				
85 C	-3.2	-4.4	-5.2	-0.25	16	-0.40				
Characteristic	Symbol	Pin Under Test	TEST VOLTAGE APPLIED TO PINS LISTED BELOW							
			V _{IHT}	V _{ILT}	V _{EE}	I _L	I _{OL}	I _{OH}		
Power Supply Drain Current	I _{CC1}	8			8				1,16	
	I _{CC2}	6			8				6	
Input Current	I _{inH1}	15 11 12 13	9,10 9,10 9,10		8 8 8 8				1,16 1,16 1,16 1,16	
	I _{inH2}	4 5			8 8				6 6	
	I _{inH3}	5			8				6	
	I _{inH4}	9 10			8 8				1,16 1,16	
	I _{inL1}	15 11 12 13			8,15 8,11 8,12 8,13				1,16 1,16 1,16 1,16	
	I _{inL2}	9 10			8 8				1,16 1,16	
	V _{BB}	14			8	14			1,16	
	V _{OH1} (Note 1)	2			8				1,16	
		3			8				1,16	
Logic '1' Output Voltage	V _{OH2}	7			8			7	6	
	V _{OL1} (Note 1)	2			8				1,16	
		3			8				1,16	
	V _{OL2}	7			8		7		6	
Logic '1' Threshold Voltage	V _{OHA} (Note 2)	2	9,10		8				1,16	
	3	9,10		8				1,16		
Logic '0' Threshold Voltage	V _{OLA} (Note 2)	2		9,10	8				1,16	
	3		9,10	8				1,16		
Short Circuit Current	I _{OS}	7			8				6	

NOTES: 1. Test outputs of the device must be tested by sequencing through the truth table. All input, power supply and ground voltages must be maintained between tests. The clock input is the waveform shown.



2. In addition to meeting the output levels specified, the device must divide by 5 or 8 during this test. The clock input is the waveform shown.

3. In addition to meeting the output levels specified, the device must divide by 6 or 9 during this test. The clock input is the waveform shown.


ELECTRICAL CHARACTERISTICS (Supply Voltage = 5.0 V, unless otherwise noted.)

Characteristic	Symbol	Pin Under Test	Test Limits						Unit	
			-30 C		25 C		85 C			
			Min	Max	Min	Max	Min	Max		
Power Supply Drain Current	I _{CC1}	8	-88		-80		-80		mAdc	
	I _{CC2}	6		5.2		5.2		5.2	mAdc	
Input Current	I _{inH1}	15 11 12 13		375 375 375 375		250 250 250 250		250 250 250 250	Adc	
	I _{inH2}	4 5	1.7 1.7	6.0 6.0	2.0 2.0	6.0 6.0	2.0 2.0	6.4 6.4	mAdc	
	I _{inH3}	5	0.7	3.0	1.0	3.0	1.0	3.6		
	I _{inH4}	9 10			100 100	100 100		100 100	Adc	
	I _{inL1}	15 11 12 13	-10 -10 -10 -10		-10 -10 -10 -10		-10 -10 -10 -10		Adc	
	I _{inL2}	9 10	-1.6 -1.6		-1.6 -1.6		-1.6 -1.6		mAdc	
Reference Voltage	V _{BB}	14			3.67	3.87			Vdc	
Logic '1' Output Voltage	V _{OH1} (Note 1)	2 3	3.900 3.900	4.110 4.110	4.000 4.000	4.190 4.190	4.070 4.070	4.300 4.300	Vdc	
	V _{OH2}	7	2.4		2.6		2.8			
Logic '0' Output Voltage	V _{OL1} (Note 1)	2 3	3.070 3.070	3.385 3.385	3.110 3.110	3.410 3.410	3.135 3.135	3.445 3.445	Vdc	
	V _{OL2}	7		0.94		0.80		0.72		
Logic '1' Threshold Voltage	V _{OHA} (Note 2)	2 3	3.880 3.880		3.980 3.980		4.050 4.050		Vdc	
Logic '0' Threshold Voltage	V _{OLO} (Note 3)	2 3		3.405 3.405		3.430 3.430		3.465 3.465	Vdc	
Short Circuit Current	I _{OS}	7	-65	-20	-65	-20	-65	-20	mAdc	

NOTES: 1. Test outputs of the device must be tested by sequencing through the truth table. All input, power supply and ground voltages must be maintained between tests. The clock input is the waveform shown.

2. In addition to meeting the output levels specified, the device must divide by 5 or 8 during this test. The clock input is the waveform shown.

3. In addition to meeting the output levels specified, the device must divide by 6 or 9 during this test. The clock input is the waveform shown.



Each MECL 10,000 series circuit has been designed to meet the dc specifications shown in the test table, after thermal equilibrium has been established. The circuit is in a test socket or mounted on a printed circuit board and transverse air flow greater than 500 linear fpm is maintained. Outputs are terminated through a 50 Ω resistor to -2.0 V. Test procedures are shown for only one gate. The other gates are tested in the same manner.


ELECTRICAL CHARACTERISTICS (continued) (Supply Voltage = 5.0 V, unless otherwise noted.)

@ Test Temperature			TEST VOLTAGE/CURRENT VALUES						(V _{EE}) Gnd
			Volts						
Characteristic	Symbol	Pin Under Test	V _{IHmax}	V _{ILmin}	V _{IHMin}	V _{ILAmax}	V _{IH}	V _{IL}	
			4.110	3.070	3.795	3.500	2.4	0.5	
			4.190	3.110	3.895	3.525	2.4	0.5	
			4.300	3.135	3.965	3.560	2.4	0.5	
Power Supply Drain Current	I _{CC1}	8	TEST VOLTAGE APPLIED TO PINS LISTED BELOW						(V _{EE}) Gnd
			V _{IHmax}	V _{ILmin}	V _{IHMin}	V _{ILAmax}	V _{IH}	V _{IL}	
Input Current	I _{inH1}	15	15						8
		11	11						8
		12	12						8
		13	13						8
	I _{inH2}	4	5	4					8
		5	5	4					8
	I _{inH3}	5	4	5					8
	I _{inH4}	9					9		8
		10					10		8
Leakage Current	I _{inL1}	15							8,15
		11							8,11
		12							8,12
		13							8,13
	I _{inL2}	9						9	8
		10						10	8
Reference Voltage	V _{BB}	14							8
Logic '1' Output Voltage	V _{OH1} (Note 1)	2		11,12,13				9,10	8
		3		11,12,13				9,10	8
	V _{OH2}	7	5	4					8
Logic '0' Output Voltage	V _{OL1} (Note 1)	2		11,12,13				9,10	8
		3		11,12,13				9,10	8
	V _{OL2}	7	4	5					8
Logic '1' Threshold Voltage	V _{VOHA} (Note 2)	2			11,12,13				8
		3			11,12,13				8
Logic '0' Threshold Voltage	V _{VOLO} (Note 3)	2				11,12,13			8
		3				11,12,13			8
Short Circuit Current	I _{OS}	7	5	4				7	8

NOTES: 1. Test outputs of the device must be tested by sequencing through the truth table. All input, power supply and ground voltages must be maintained between tests. The clock input is the waveform shown.

2. In addition to meeting the output levels specified, the device must divide by 5 or 8 during this test. The clock input is the waveform shown.

3. In addition to meeting the output levels specified, the device must divide by 6 or 9 during this test. The clock input is the waveform shown.




ELECTRICAL CHARACTERISTICS (continued) (Supply Voltage = 5.0 V, unless otherwise noted.)

@ Test Temperature			TEST VOLTAGE/CURRENT VALUES						(V _{EE}) Gnd	
			Volts			mA				
			V _{IHT}	V _{ILT}	V _{CC}	I _L	I _{OL}	I _{OH}		
			2.0	0.8	5.0	-0.25	16	-0.40		
			2.0	0.8	5.0	-0.25	16	-0.40		
			2.0	0.8	5.0	-0.25	16	-0.40		
			TEST VOLTAGE APPLIED TO PINS LISTED BELOW							
			V _{IHT}	V _{ILT}	V _{CC}	I _L	I _{OL}	I _{OH}		
			I _{CC1}	8			1,16			8
			I _{CC2}	6			6			8
Input Current	I _{inH1}	15 11 12 13	9,10 9,10 9,10 9,10			1,16 1,16 1,16 1,16				8 8 8 8
	I _{inH2}	4 5				6 6				8 8
	I _{inH3}	5				6				8
	I _{inH4}	9 10				1,16 1,16				8 8
	I _{inL1}	15 11 12 13				1,16 1,16 1,16 1,16				8,15 8,11 8,12 8,13
	I _{inL2}	9 10				1,16 1,16				8 8
Reference Voltage	V _{BB}	14				1,16	14			8
Logic '1' Output Voltage	V _{OH1} (Note 1)	2 3				1,16 1,16				8 8
	V _{OH2}	7				6			7	8
	V _{OL1} (Note 1)	2 3				1,16 1,16				8 8
Logic '0' Output Voltage	V _{OL2}	7				6		7		8
	V _{OH} A (Note 2)	2 3	9,10 9,10			1,16 1,16				8 8
Logic '0' Threshold Voltage	V _{OL} A (Note 3)	2 3			9,10 9,10	1,16 1,16				8 8
Short Circuit Current	I _{OS}	7				6				8

NOTES: 1. Test outputs of the device must be tested by sequencing through the truth table. All input, power supply and ground voltages must be maintained between tests. The clock input is the waveform shown.

2. In addition to meeting the output levels specified, the device must divide by 5 or 8 during this test. The clock input is the waveform shown.

3. In addition to meeting the output levels specified, the device must divide by 6 or 9 during this test. The clock input is the waveform shown.



SWITCHING CHARACTERISTICS

Characteristic	Symbol	Pin Under Test	ML12509, ML12511, ML12513									TEST VOLTAGES/WAVEFORMS APPLIED TO PINS LISTED BELOW:									
			-30 C			25 C			85 C			Unit	Pulse Gen.1	Pulse Gen.2	Pulse Gen.3	V_{IHmin}	V_{ILmin}	V_F	V_{EE}	V_{CC}	
			Min	Typ	Max	Min	Typ	Max	Min	Typ	Max										
Propagation Delay (See Figures 3 and 5)	t_{15+}^{+2+} t_{15+}^{-2-} t_5^{+7+} t_5^{-7-}	2 2 7 7	— — — —	— — — —	8.1 7.5 8.4 6.5	— — — —	— — — —	8.1 7.5 8.1 6.5	— — — —	— — — —	8.9 8.2 8.9 7.1	ns A A	15 15 —	— — —	— — —	— — —	11,12,13 11,12,13 — —	9,10 9,10 — —	8 8 8 8	1,6,16 1,6,16 1,6,16 1,6,16	
Setup Time (See Figures 4 and 5)	$t_{\text{setup}1}$ $t_{\text{setup}2}$	11 9	5.0 5.0	— —	— —	5.0 5.0	— —	— —	5.0 5.0	— —	— —	ns ns	15 15	*	*	—	*	9,10 11,12,13	8 8	1,6,16 1,6,16	
Release Time (See Figures 4 and 5)	$t_{\text{rel}1}$ $t_{\text{rel}2}$	11 9	5.0 5.0	— —	— —	5.0 5.0	— —	— —	5.0 5.0	— —	— —	ns ns	15 15	*	*	—	*	9,10 11,12,13	8 8	1,6,16 1,6,16	
Toggle Frequency (See Figure 6) ML12509 : 5/6 ML12511 : 8/9	f_{max}	2	440 500	— —	— —	480 550	— —	— —	440 500	— —	— —	MHz	— —	— —	— —	— —	11 11	— —	— —	8 8	16 16

*Test inputs sequentially, with Pulse Generator 2 or 3 as indicated connected to input under test, and the voltage indicated applied to the other input(s) of the same type (i.e., MECL or MTTL).

	-30 C	25 C	85 C	
t_{VHmin}	1.03	1.115	1.20	Vdc
t_{VLmin}	0.175	0.200	0.235	Vdc

Figure 3. AC Voltage Waveforms

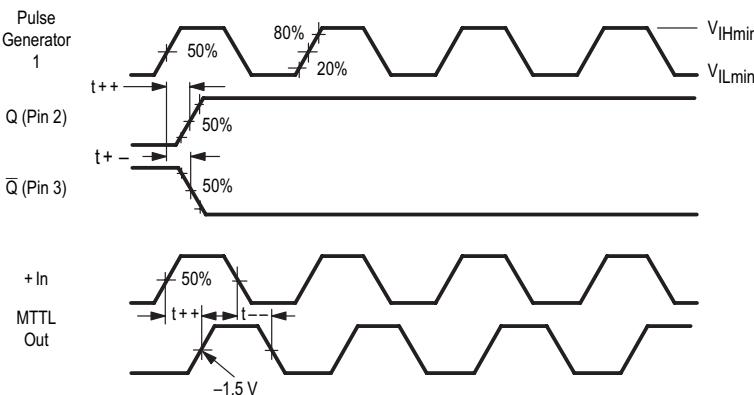


Figure 4. Setup and Release Time Waveforms

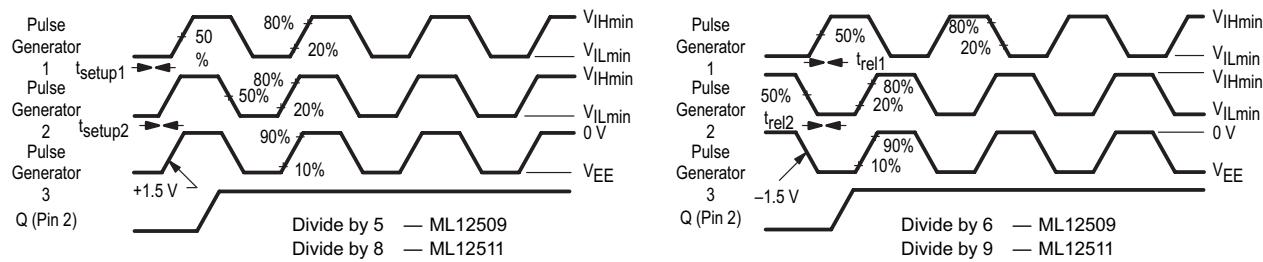


Figure 5. AC Test Circuit

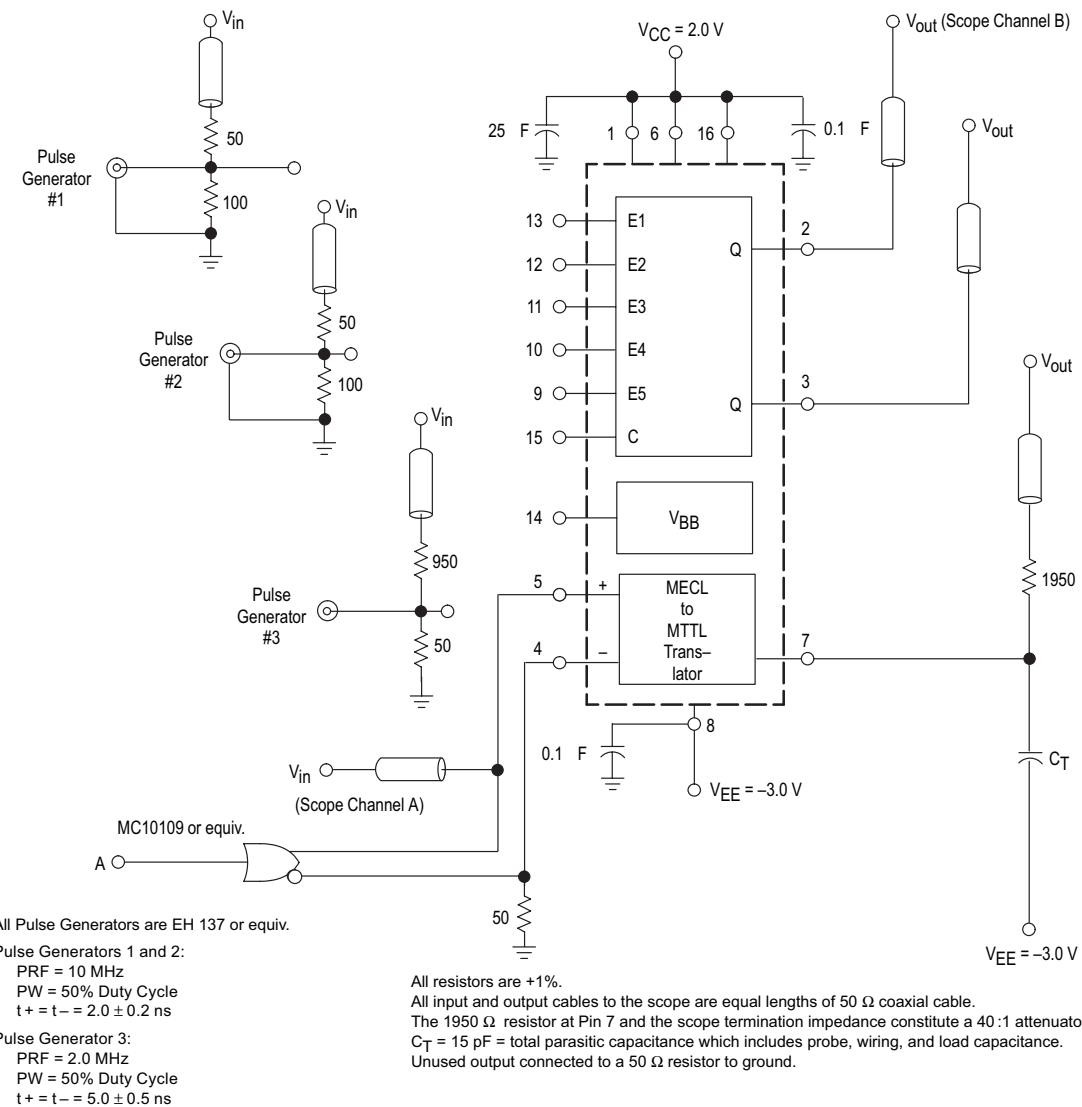



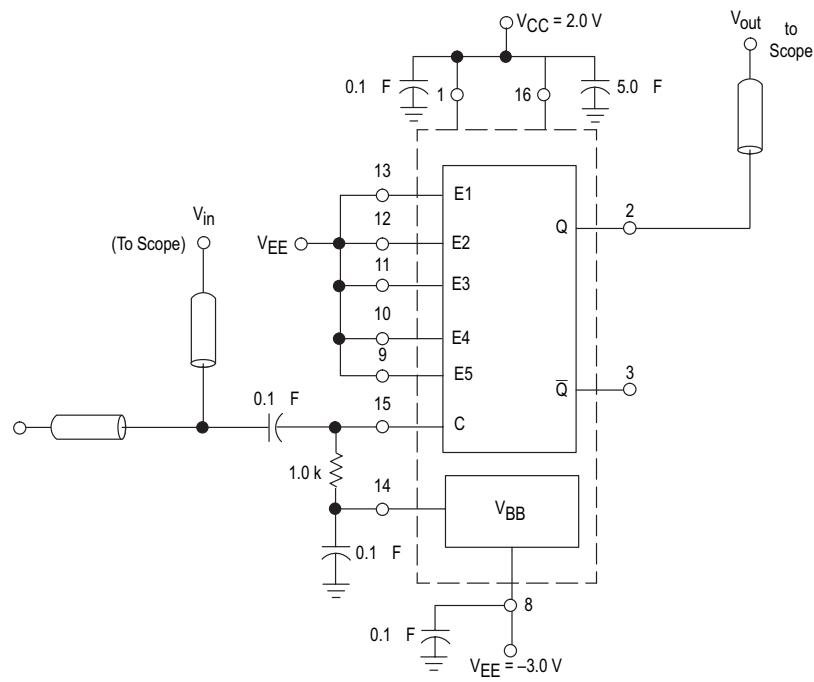
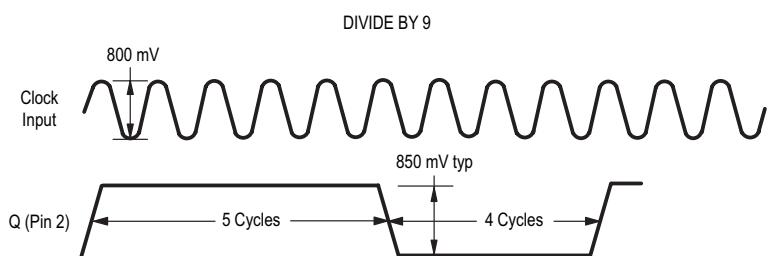
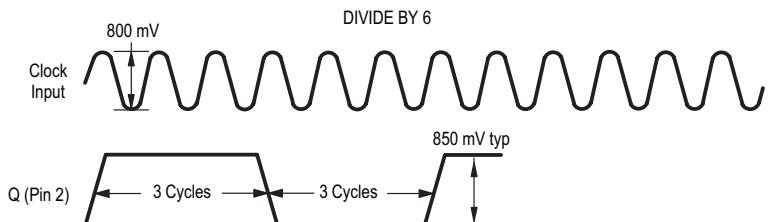
Figure 6. Maximum Frequency Test CircuitUnused output connected to a $50\ \Omega$ resistor to ground

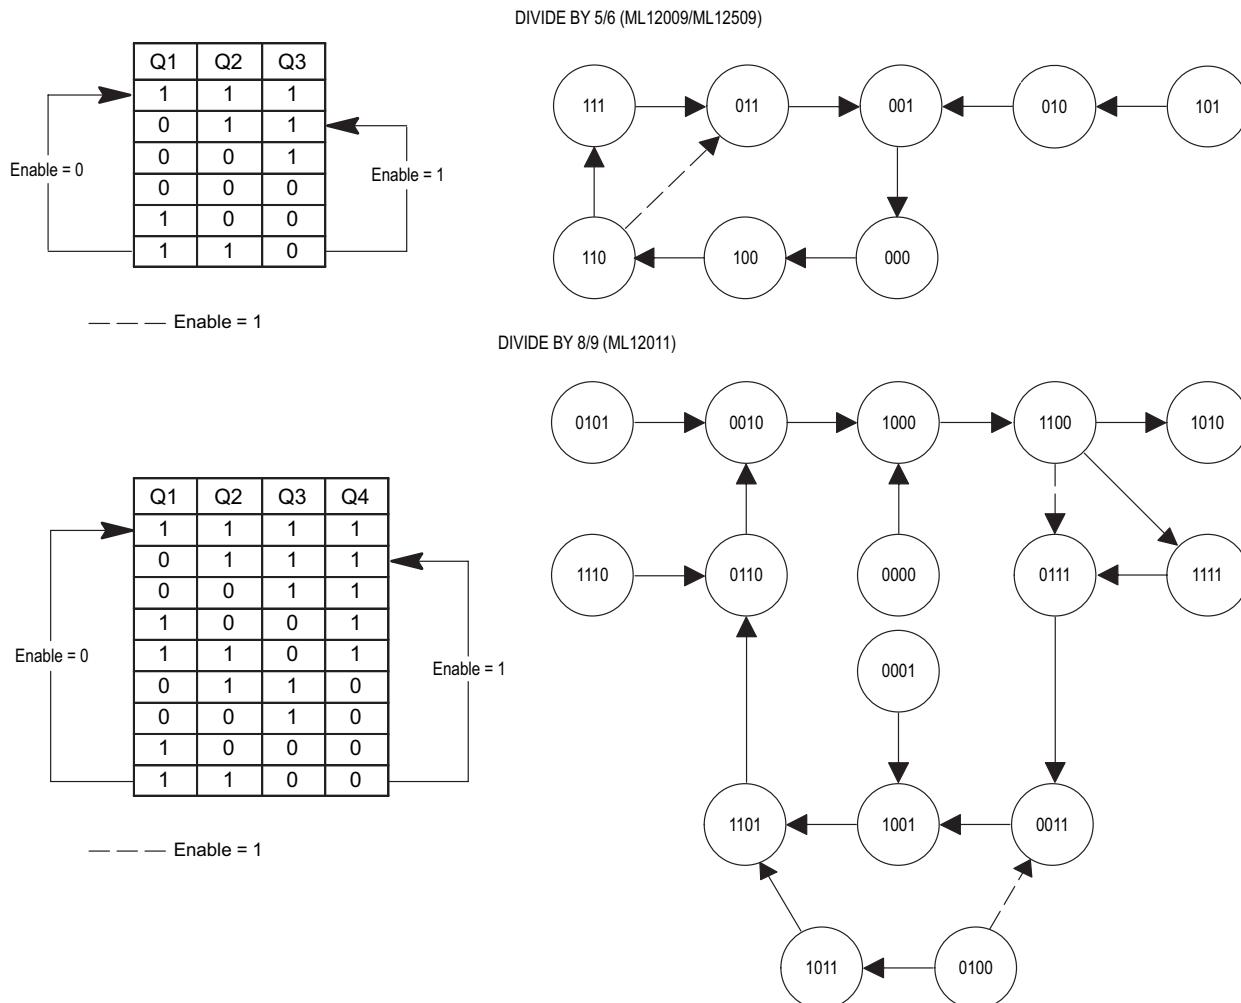Figure 7. State Diagram



APPLICATIONS INFORMATION

The primary application of these devices is as a high-speed variable modulus prescaler in the divide by N section of a phase-locked loop synthesizer used as the local oscillator of two-way radios.

Proper VHF termination techniques should be followed when the clock is separated from the prescaler by any appreciable distance.

In their basic form, these devices will divide by 5/6 or 8/9. Division by 5, or 8 occurs when any one or all of the five gate inputs E1 through E5 are high. Division by 6, or 9 occurs when all inputs E1 through E5 are low. (Unconnected MTTL inputs are normally high, unconnected MECL inputs are normally low). With the addition of extra parts, many different division configurations may be obtained.

OUTLINE DIMENSIONS

	SO 16 = -5P PLASTIC PACKAGE (ML12009-5P, ML12011-5P) CASE 751B-05 (SO-16) ISSUE J	NOTES: 1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982. 2. CONTROLLING DIMENSION: MILLIMETER. 3. DIMENSIONS A AND B DO NOT INCLUDE MOLD PROTRUSION. 4. MAXIMUM MOLD PROTRUSION 0.15 (0.006) PER SIDE. 5. DIMENSION D DOES NOT INCLUDE DAMBAR PROTRUSION. ALLOWABLE DAMBAR PROTRUSION SHALL BE 0.127 (0.005) TOTAL IN EXCESS OF THE D DIMENSION AT MAXIMUM MATERIAL CONDITION.
	P DIP 16 = EP PLASTIC PACKAGE (ML12009EP, ML12011EP) CASE 648-08 ISSUE R	NOTES: 1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982. 2. CONTROLLING DIMENSION: INCH. 3. DIMENSION L TO CENTER OF LEADS WHEN FORMED PARALLEL. 4. DIMENSION B DOES NOT INCLUDE MOLD FLASH. 5. ROUNDED CORNERS OPTIONAL.
	P DIP 16 = EP PLASTIC PACKAGE (ML12009EP, ML12011EP) CASE 648-08 ISSUE R	NOTES: 1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982. 2. CONTROLLING DIMENSION: INCH. 3. DIMENSION L TO CENTER OF LEADS WHEN FORMED PARALLEL. 4. DIMENSION B DOES NOT INCLUDE MOLD FLASH. 5. ROUNDED CORNERS OPTIONAL.

Lansdale Semiconductor reserves the right to make changes without further notice to any products herein to improve reliability, function or design. Lansdale does not assume any liability arising out of the application or use of any product or circuit described herein; neither does it convey any license under its patent rights nor the rights of others. "Typical" parameters which may be provided in Lansdale data sheets and/or specifications can vary in different applications, and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by the customer's technical experts. Lansdale Semiconductor is a registered trademark of Lansdale Semiconductor, Inc.