



EF-1277-6D


This filter was designed for use with the Vicor HAM module and also provides the same frequency attenuation as the HH-1055-6.3

There is an additional MOV across the input to the filter in order to provide the recommended transient protection for the HAM module.

This packaging provides another option for the mechanical designer and frees space on the board.

Other options are also available and our engineering department is always willing to help with design modifications.

Order P/N: EF-1277-6D

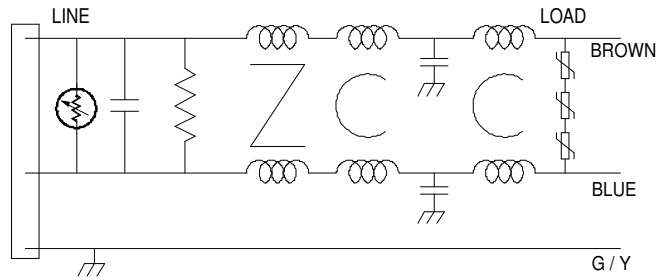

Operating Voltage: _____ 85 to 250 V
 Operating Current: _____ 6.0 Amp
 Operating Frequency: _____ 50/60 Hz
 Operating Temperature: _____ -20 to 50°C

Diel. Withstanding (line - case): _____ 1500 Vac
 Diel. Withstanding (line - line): _____ 1500 Vdc

Leakage Current: _____ 1.0 mA @ 220 Vac; 50 Hz
 Max Residual Voltage after 1 sec: _____ 34 Volts

Calculated MTBF: _____ 2,430,895 Hrs @ 30°C GB

