

2SC4518/4518A

Silicon NPN Triple Diffused Planar Transistor (High Voltage Switching Transistor) Application : Switching Regulator, Lighting Inverter and General Purpose

Absolute maximum ratings (Ta=25°C)

| Symbol | 2SC4518 | 2SC4518A | Unit |
|------------------|-------------|----------|------|
| V _{CB0} | 900 | 1000 | V |
| V _{CE0} | 550 | | V |
| V _{EBO} | 7 | | V |
| I _c | 5(Pulse10) | | A |
| I _B | 2.5 | | A |
| P _c | 35(Tc=25°C) | | W |
| T _j | 150 | | °C |
| T _{stg} | -55 to +150 | | °C |


Electrical Characteristics (Ta=25°C)

| Symbol | Conditions | 2SC4518 | 2SC4518A | Unit |
|----------------------|--|----------|----------|------|
| I _{CB0} | V _{CB} =800V | 100max | | μA |
| I _{EBO} | V _{EB} =7V | 100max | | μA |
| V _{(BR)CEO} | I _c =10mA | 550min | | V |
| h _{FE} | V _{CE} =4V, I _c =1.8A | 10 to 25 | | |
| V _{CE(sat)} | I _c =1.8A, I _B =0.36A | 0.5max | | V |
| V _{BE(sat)} | I _c =1.8A, I _B =0.36A | 1.2max | | V |
| f _r | V _{CE} =12V, I _E =-0.35A | 6typ | | MHz |
| COB | V _{CB} =10V, f=1MHz | 50typ | | pF |


Typical Switching Characteristics (Common Emitter)

| V _{CC} (V) | R _L (Ω) | I _c (A) | V _{BB1} (V) | V _{BB2} (V) | I _{B1} (A) | I _{B2} (A) | t _{on} (μs) | t _{stg} (μs) | t _r (μs) |
|---------------------|--------------------|--------------------|----------------------|----------------------|---------------------|---------------------|----------------------|-----------------------|---------------------|
| 250 | 139 | 1.8 | 10 | -5 | 0.27 | -0.9 | 0.7max | 4max | 0.5max |


External Dimensions FM20(TO220F)

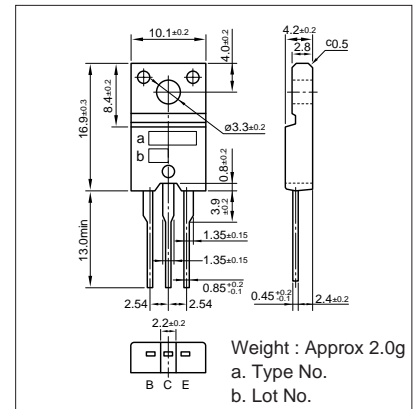


I_c-V_{CE} Characteristics (Typical)

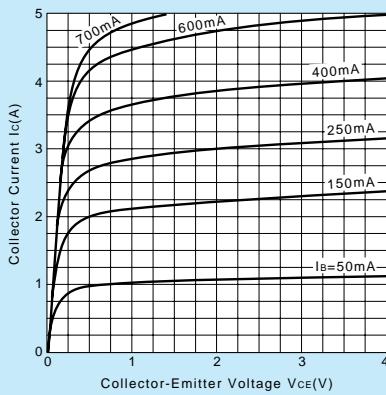


V_{CE(sat)}, V_{BE(sat)}-I_c Temperature Characteristics (Typical)

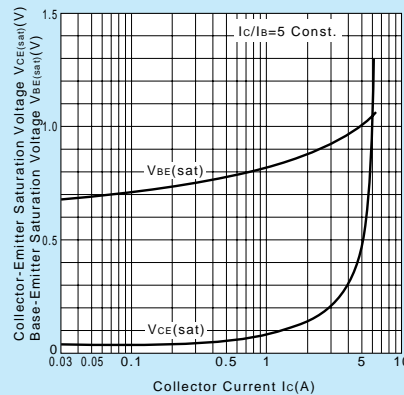


I_c-V_{BE} Temperature Characteristics (Typical)

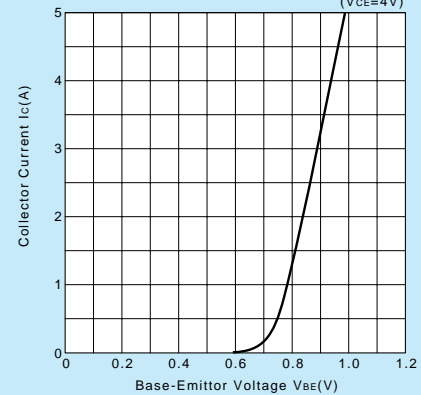


h_{FE}-I_c Temperature Characteristics (Typical)

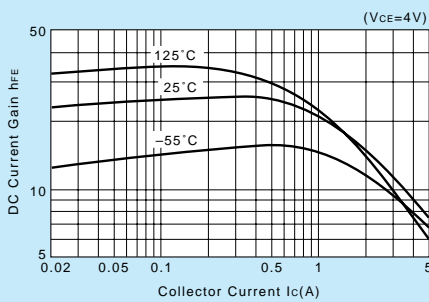


t_{on}*t_{stg}*t_r-I_c Characteristics (Typical)

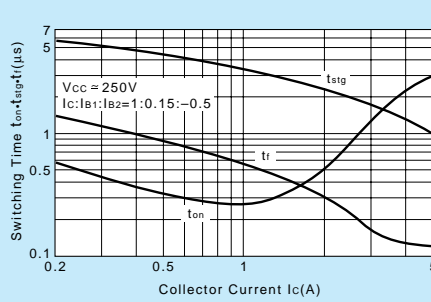


θ_{j-a}-t Characteristics

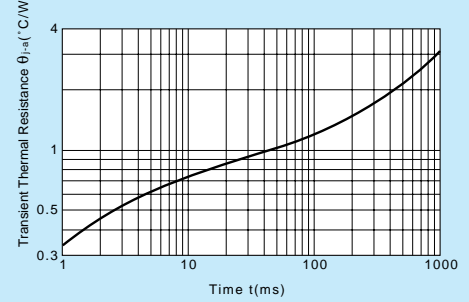

Safe Operating Area (Single Pulse)

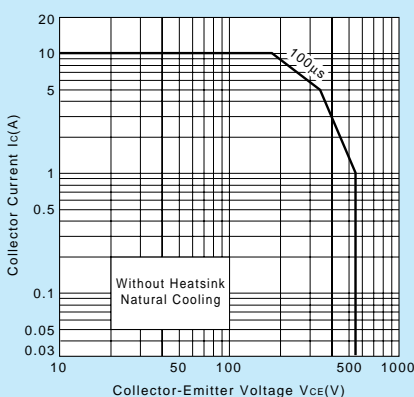

Reverse Bias Safe Operating Area

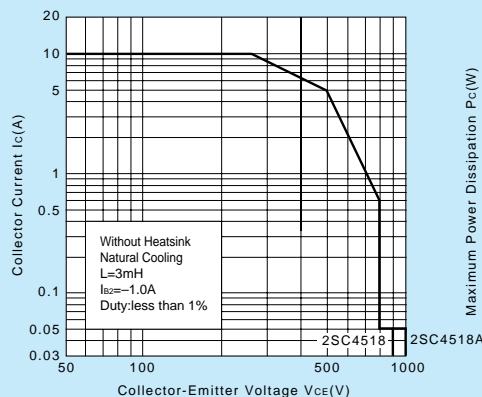

P_c-T_a Derating

