


The RF Line
PCS Band
RF Power LDMOS Amplifiers

MHW1810-1
MHW1810-2

- Specified 26 Volts, 1805–1880 MHz, Class AB Characteristics
Output Power = 16 Watts CW Typ
Power Gain = 26 dB Typ @ 10 Watts (MHW1810-1)
Power Gain = 34 dB Typ @ 10 Watts (MHW1810-2)
Efficiency = 34% Min @ 10 Watts
- 50 Ω Input/Output System
- Designed for GSM Linearity Requirements

1805–1880 MHz, 10 W
RF POWER LDMOS AMPLIFIERS



CASE 301AW-02, STYLE 1

MAXIMUM RATINGS

Rating	Symbol	Value	Unit
DC Supply Voltage	V_S	28	Vdc
DC Bias Voltage	V_{bias}	28	Vdc
RF Input Power	P_{in}	MHW1810-1: 21 MHW1810-2: 16	dBm
RF Output Power	P_{out}	20	W
Operating Case Temperature Range	T_C	-10 to +90	°C
Storage Temperature Range	T_{stg}	-30 to +100	°C

ELECTRICAL CHARACTERISTICS ($T_C = +25^\circ\text{C}$, $V_S = 26\text{ Vdc}$; $V_{bias} = 5\text{ Vdc}$; 50 Ω system, unless otherwise noted)

Characteristic	Symbol	Min	Typ	Max	Unit
Frequency Range	BW	1805	—	1880	MHz
Quiescent Current ($P_{in} = 0\text{ mW}$)	I_{DQ}	100	—	150	mA
Bias Current	I_{bias}	—	—	2	mA
Output Power at 1 dB Compression	P_{1dB}	10	14	—	W
Power Gain ($P_{out} = 10\text{ W}$) ($P_{out} = 10\text{ W}$)	G_p	MHW1810-1: 24 MHW1810-2: 32	26 34	28 36	dB
Efficiency ($P_{out} = 10\text{ W}$)	η	34	—	—	%
Input VSWR ($P_{out} = 10\text{ W}$)	VSWR _{in}	—	—	1.8:1	—
Harmonics at $2f_o$ ($P_{out} = 10\text{ W}$)	H_2	—	—	-35	dBc
Harmonics at $3f_o$ ($P_{out} = 10\text{ W}$)	H_3	—	—	-45	dBc
Reverse IMD; $P_{out} = 10\text{ W}$; Preverse = -40 dBc ($F1 = F0 \pm 200\text{ kHz}$ @ -40 dBc)	IMD _r	—	—	-50	dBc
Load Mismatch Stress Load VSWR = 5:1, All Phase Angles	ψ	No Degradation in Output Power			
Stability ($P_{out} = 10\text{ mW}$ to 10 W , $V_S \leq 26\text{ Vdc}$) Load VSWR = 5:1, All Phase Angles	—	All Spurious Outputs More Than 60 dB Below Desired Signal			

NOTE – **CAUTION** – MOS devices are susceptible to damage from electrostatic charge. Reasonable precautions in handling and packaging MOS devices should be observed.

EXTREME CASE ELECTRICAL CHARACTERISTICS ($T_C = -10$ to $+85^\circ\text{C}$, $V_S = 23.5$ to 26 Vdc, $V_{\text{bias}} = 3$ to 26 Vdc, $50\ \Omega$ system, unless otherwise noted)

Characteristic	Symbol	Min	Typ	Max	Unit
Frequency Range	BW	1805	—	1880	MHz
Quiescent Current ($P_{\text{in}} = 0$ mW)	I_{DQ}	100	—	160	mA
Bias Current	I_{bias}	—	—	2	mA
Output Power at 1 dB Compression	$P_{1\text{dB}}$	8	—	—	W
Power Gain Variation for a Given Part ($P_{\text{out}} = 10$ W)	G_p	—	5	6.5	dB
Efficiency ($P_{\text{out}} = 10$ W)	η	32	—	—	%
Input VSWR	VSWR_{in}	—	—	2:1	—
Harmonics at $2f_o$	H_2	—	—	-35	dBc
Harmonics at $3f_o$	H_3	—	—	-45	dBc
Reverse IMD; $P_{\text{out}} = 10$ W; Preverse = -40 dBc ($F1 = F0 \pm 200$ kHz @ -40 dBc)	IMD_r	—	—	-50	dBc
Load Mismatch Stress Load VSWR = 5:1, All Phase Angles	ψ	No Degradation in Output Power			
Stability ($P_{\text{out}} = 10$ mW to 10 W, $V_S \leq 26$ Vdc) Load VSWR = 5:1, All Phase Angles	—	All Spurious Outputs More Than 60 dB Below Desired Signal			

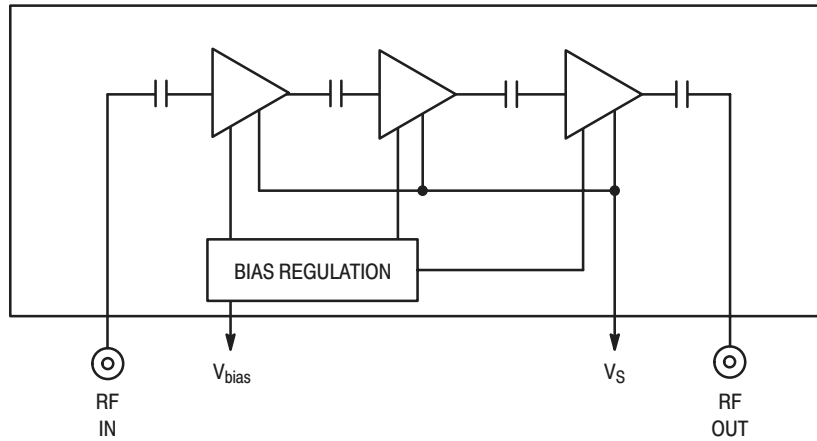


Figure 1. Internal Diagram

TYPICAL CHARACTERISTICS
MHW1810-1

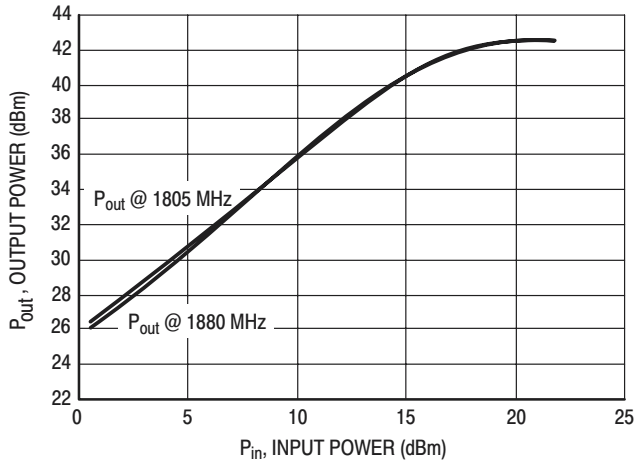


Figure 2. Output Power versus Input Power

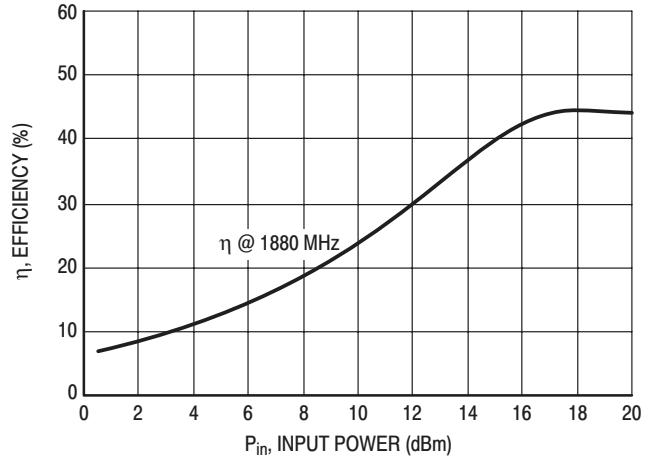


Figure 3. Efficiency versus Input Power

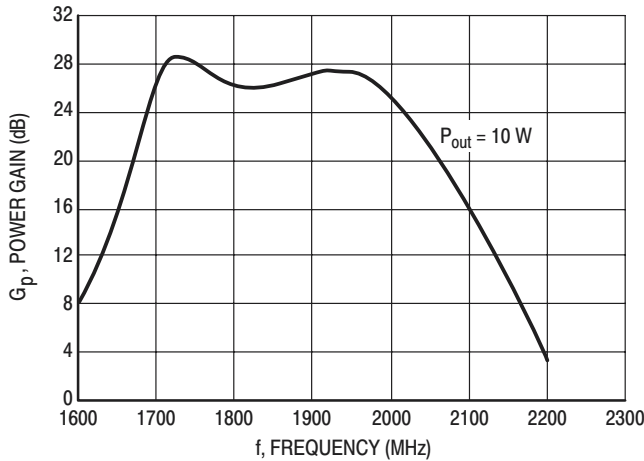


Figure 4. Power Gain versus Frequency

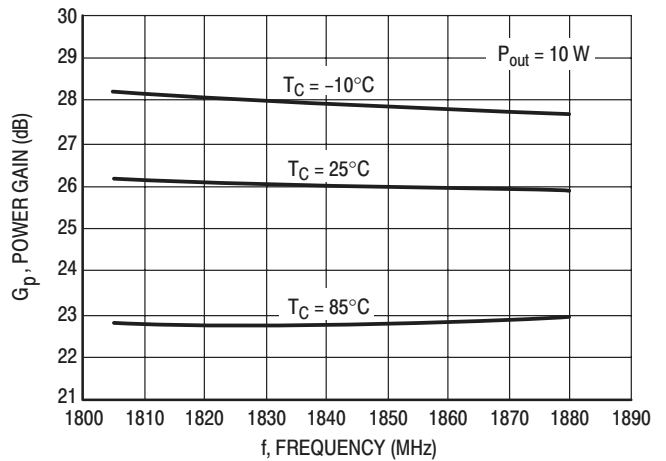


Figure 5. Gain versus Frequency

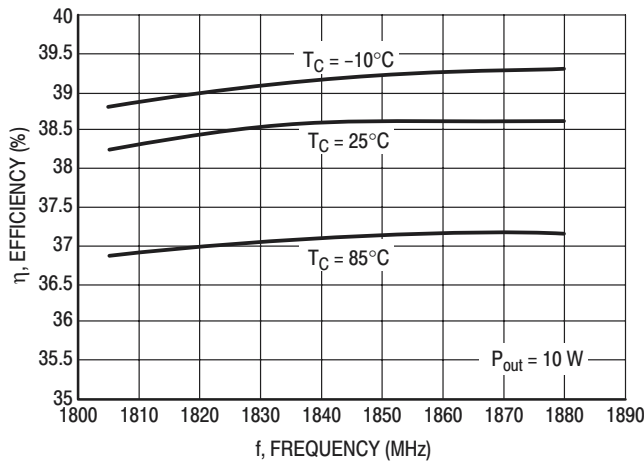


Figure 6. Efficiency versus Frequency

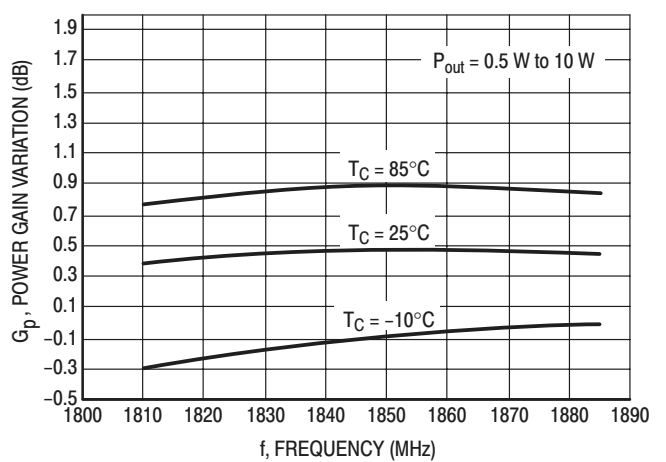


Figure 7. Power Gain Variation versus Frequency

ARCHIVE INFORMATION

ARCHIVE INFORMATION

TYPICAL CHARACTERISTICS
MHW1810-1

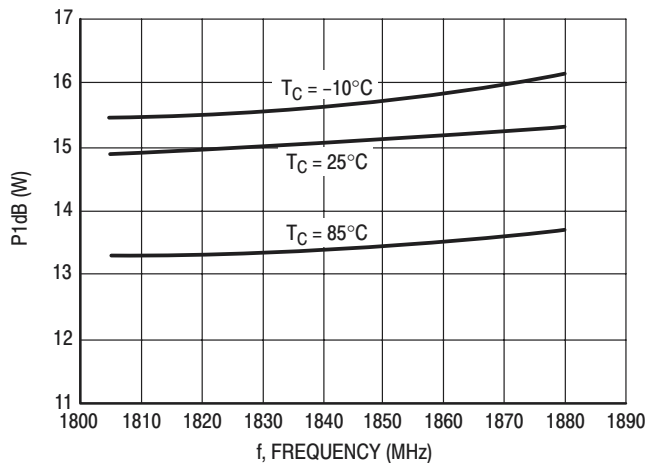


Figure 8. P1dB versus Frequency

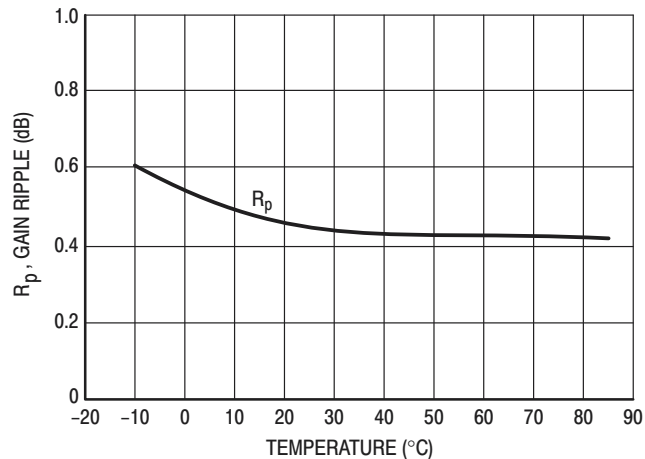


Figure 9. Gain Ripple versus Temperature

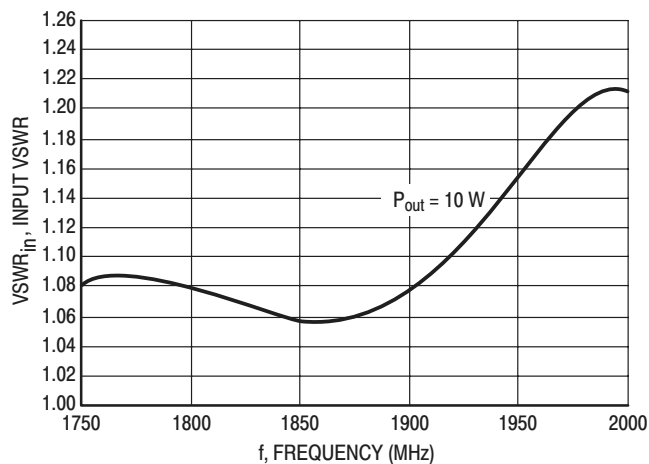


Figure 10. Input VSWR

ARCHIVE INFORMATION

ARCHIVE INFORMATION

TYPICAL CHARACTERISTICS
MHW1810-2

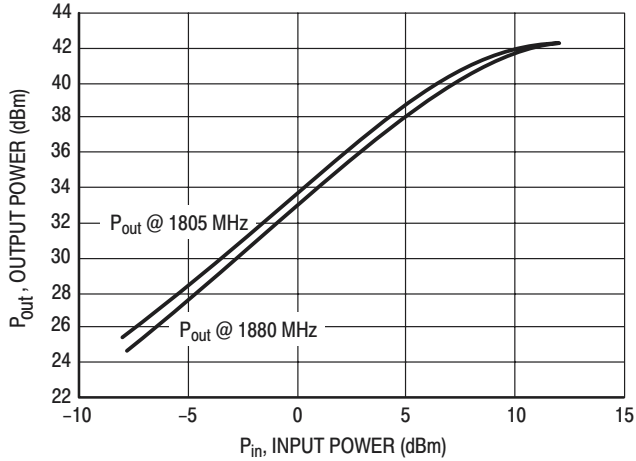


Figure 11. Output Power versus Input Power

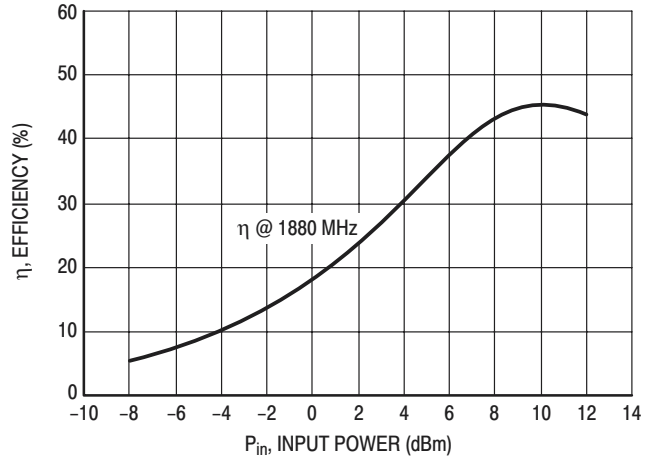


Figure 12. Efficiency versus Input Power

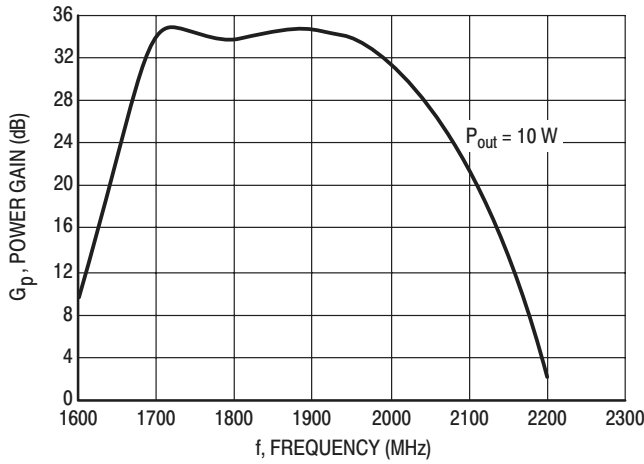


Figure 13. Power Gain versus Frequency

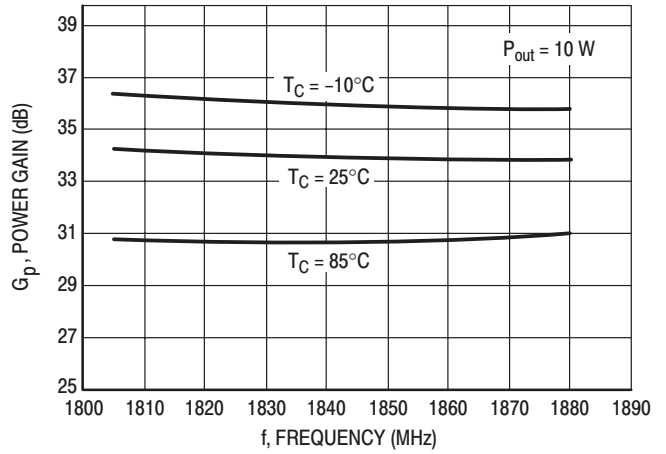


Figure 14. Gain versus Frequency

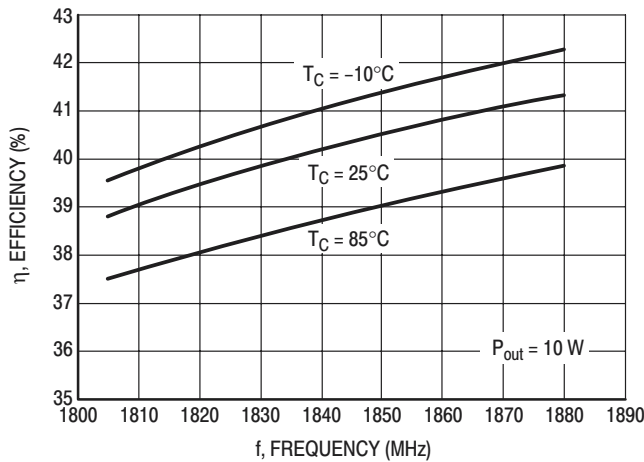


Figure 15. Efficiency versus Frequency

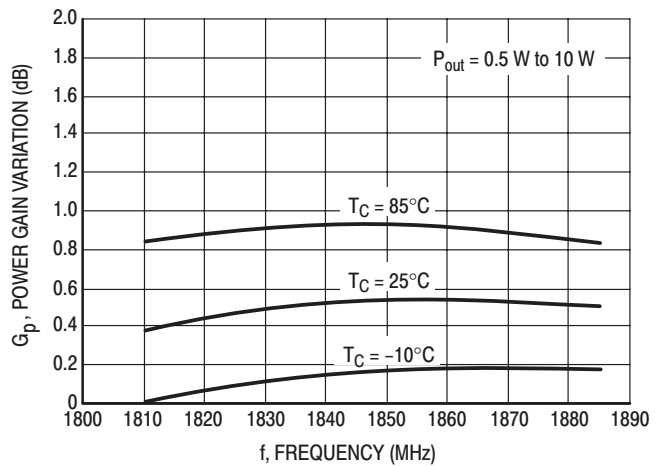


Figure 16. Power Gain Variation versus Frequency

ARCHIVE INFORMATION

ARCHIVE INFORMATION

TYPICAL CHARACTERISTICS
MHW1810-2

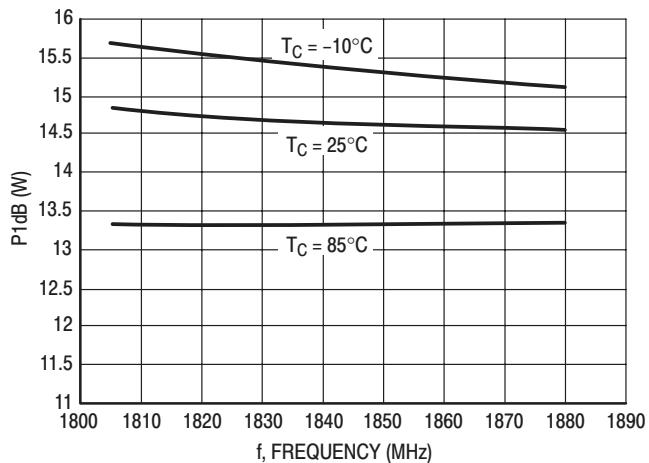


Figure 17. P1dB versus Frequency

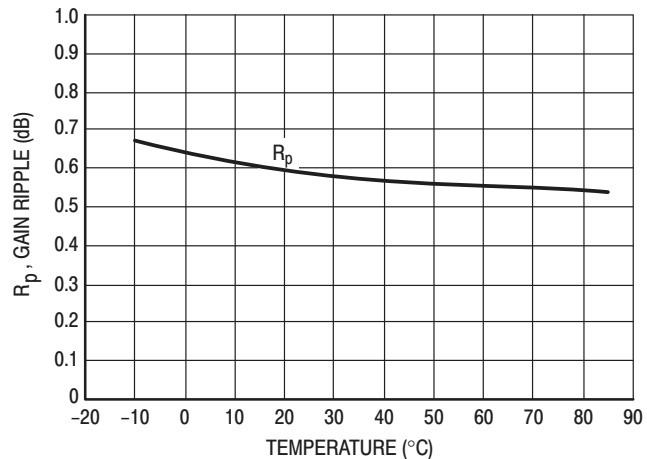


Figure 18. Gain Ripple versus Temperature

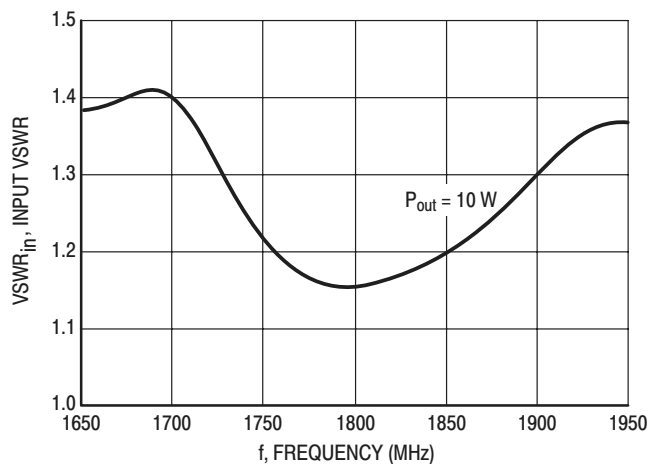



Figure 19. Input VSWR

ARCHIVE INFORMATION

ARCHIVE INFORMATION


NOTES

PACKAGE DIMENSIONS

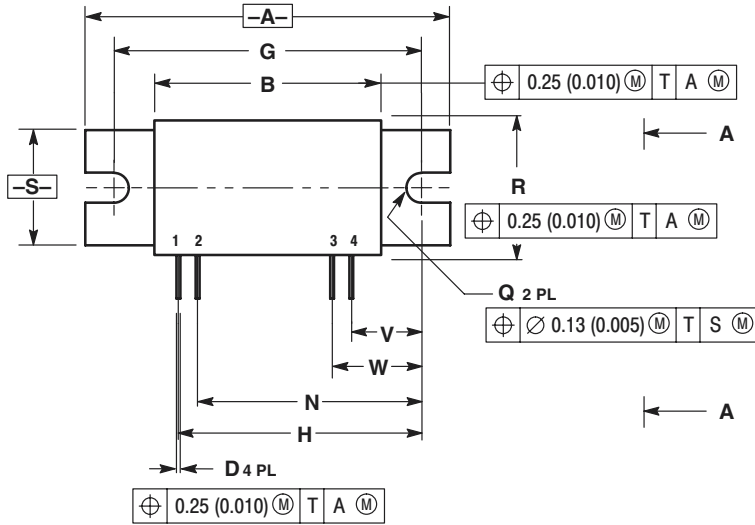


- NOTES:
1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
 2. CONTROLLING DIMENSION: INCH.
 3. DIMENSION F IS FROM THE BOTTOM OF HEATSINK TO THE TOP OF THE LEAD.
 4. DIMENSION P TO BE MEASURED AS LEAD EXITS COVER.
 5. FLANGE FLATNESS 0.038 (0.0015) MAXIMUM CONVEX, 0.063 (0.0025) MAXIMUM CONCAVE.
 6. ADHESIVE MATERIAL SHALL BE INCLUDED IN THE DIMENSIONS LISTED.

DIM	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	1.890	1.910	48.01	48.51
B	1.170	1.190	29.72	30.22
C	0.350	0.376	8.89	9.55
D	0.018	0.022	0.46	0.55
E	0.115	0.135	2.92	3.42
F	0.170 BSC		4.31 BSC	
G	1.600 BSC		40.64 BSC	
H	1.265 BSC		32.13 BSC	
J	0.325	0.375	8.25	9.52
K	0.225	---	5.72	---
N	1.165 BSC		29.59 BSC	
P	0.010 REF		0.25 REF	
Q	0.150	0.160	3.81	4.06
R	0.685	0.705	17.40	17.90
S	0.598	0.612	15.18	15.54
V	0.365 BSC		9.27 BSC	
W	0.465 BSC		11.81 BSC	

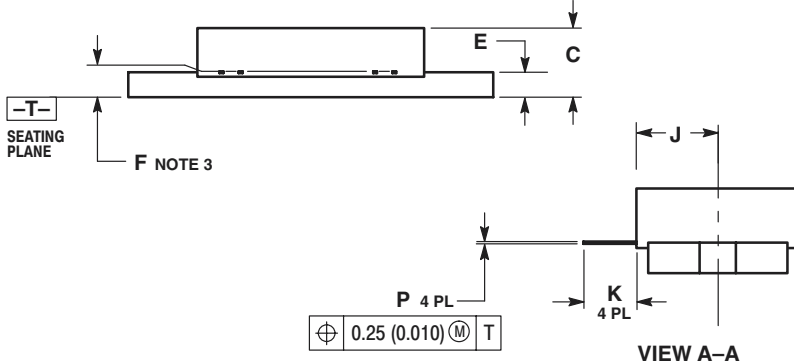

- STYLE 1:
1. RF IN
 2. V BIAS
 3. V SUPPLY
 4. RF OUT

CASE 301AW-02 ISSUE B

Motorola reserves the right to make changes without further notice to any products herein. Motorola makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does Motorola assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation consequential or incidental damages. "Typical" parameters which may be provided in Motorola data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. Motorola does not convey any license under its patent rights nor the rights of others. Motorola products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the Motorola product could create a situation where personal injury or death may occur. Should Buyer purchase or use Motorola products for any such unintended or unauthorized application, Buyer shall indemnify and hold Motorola and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that Motorola was negligent regarding the design or manufacture of the part. Motorola, Inc. Motorola, Inc. is an Equal Opportunity/Affirmative Action Employer. MOTOROLA and the  logo are registered in the US Patent & Trademark Office. All other product or service names are the property of their respective owners.

© Motorola, Inc. 2002.

How to reach us:

USA/EUROPE/Locations Not Listed: Motorola Literature Distribution; P.O. Box 5405, Denver, Colorado 80217. 1-303-675-2140 or 1-800-441-2447

JAPAN: Motorola Japan Ltd.; SPS, Technical Information Center, 3-20-1, Minami-Azabu, Minato-ku, Tokyo 106-8573 Japan. 81-3-3440-3569

ASIA/PACIFIC: Motorola Semiconductors H.K. Ltd.; Silicon Harbour Centre, 2 Dai King Street, Tai Po Industrial Estate, Tai Po, N.T., Hong Kong. 852-26668334

Technical Information Center: 1-800-521-6274

HOME PAGE: <http://www.motorola.com/semiconductors/>

