

PRELIMINARY

4-BIT SINGLE CHIP OTP MICRO CONTROLLER

■ GENERAL DESCRIPTION


The **NJU3554** is the C-MOS 4-bit Single Chip OTP type Micro Controller with programmable Flash Memory.

It is completely compatible with the **NJU3504** in function and the pin configuration. Therefore, the **NJU3554** is suitable for the final evaluation before **NJU3504** mask generation, the small quantity production and short lead-time.


- * In this data sheet, only OTP programming and the difference between **NJU3554** and **NJU3504** are mentioned mainly.

Therefore the detail function and specification should be referred on the **NJU3504** data sheet.

■ PACKAGE OUTLINE



NJU3554FA1




NJU3554L

■ FEATURES


- Internal One Time Programmable ROM 4,096 X 8bits
- Internal Data RAM 256 X 4bits
- Wide operating voltage range 2.7V ~ 5.5V
- Package outline QFP44-A1 / SDIP42 (Compatible with **NJU3504**)
- ROM programmer "SUPERPRO/L" by XELTEK co.,

■ PIN CONFIGURATION IN OTP PROGRAMMING MODE

[QFP44-A1]

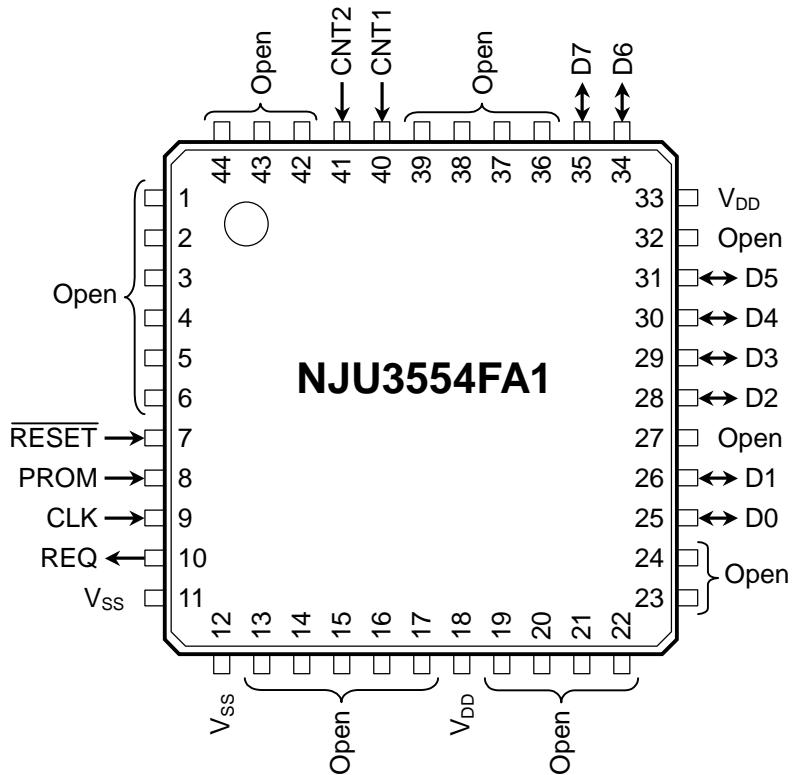


[SDIP42]

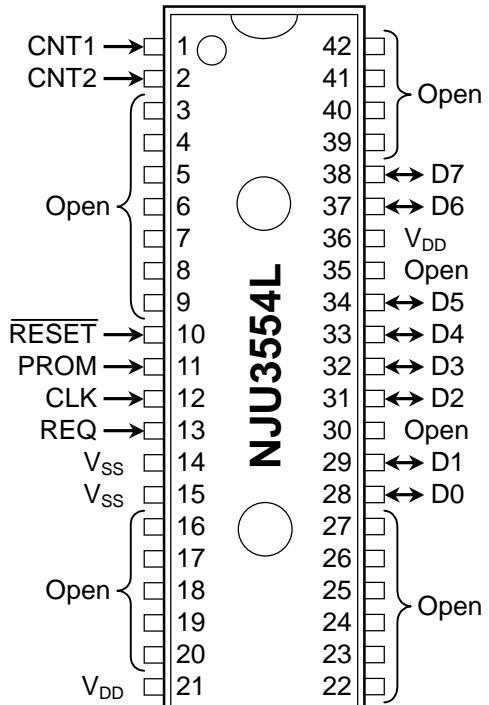

Note) The pin configuration in Normal operating mode is the same as **NJU3504**.

■ BLOCK DIAGRAM

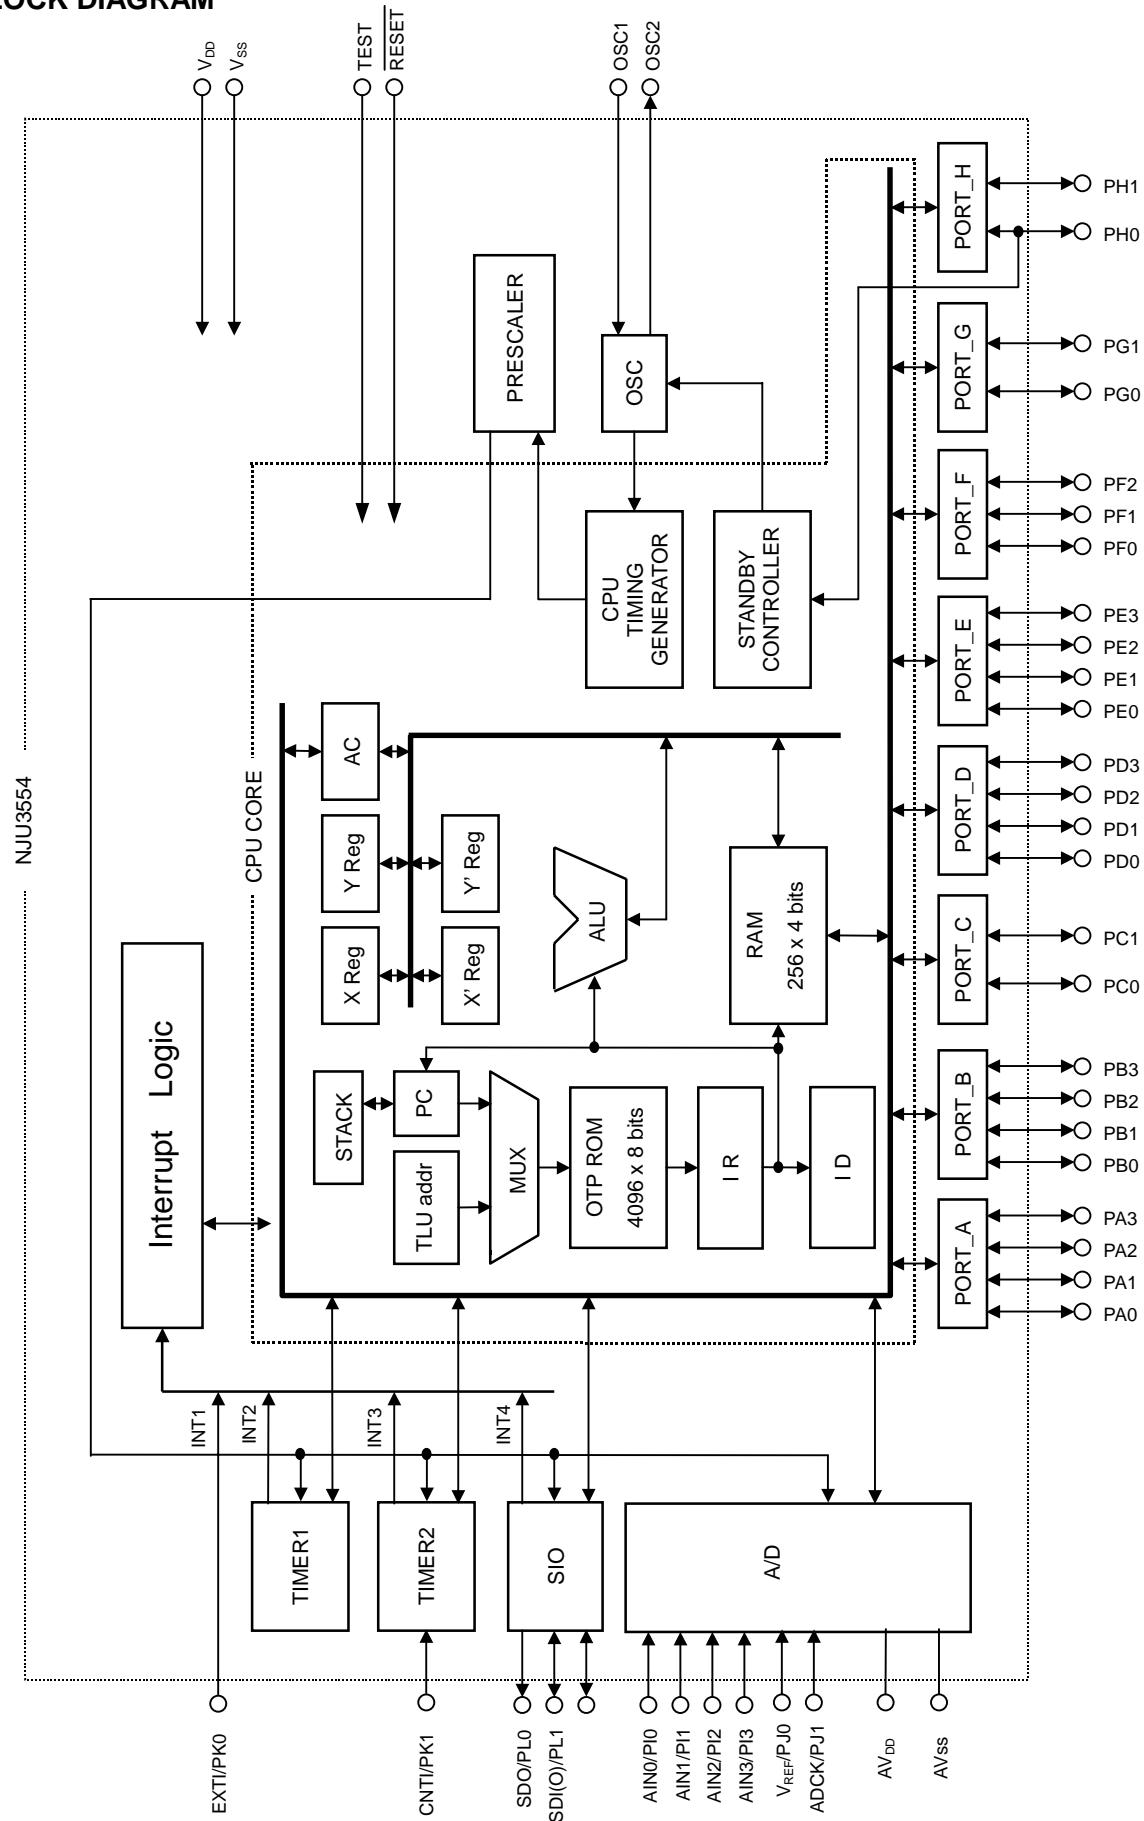

* Refer [INPUT OUTPUT TERMINAL TYPE]

■ TERMINAL DESCRIPTION IN OTP PROGRAMMING MODE

No.		SYMBOL	INPUT / OUTPUT	FUNCTION
NJU 3554F	NJU 3554L			
7	10	RESET	INPUT	RESET terminal. When the low-level input-signal, the system is initialized.
25, 26, 28-31, 34, 35	28, 29, 31-34, 37, 38	D0 - D7	INPUT/OUTPUT	Data bus
1	40,	CNT1	INPUT	OTP control input terminal
2	41	CNT2	INPUT	
10	13	REQ	OUTPUT	Request output terminal
9	12	CLK	INPUT	Clock input terminal
8	11	PROM	INPUT	OTP programming enable terminal
18, 33	21, 36	V _{DD}	-	Power Source (5V)
11, 12	14, 15	V _{SS}	-	Power Source (0V)

- Note 1) Use at V_{DD}=5V in OTP programming mode.
 2) Non connect anything to the other terminals.

■ Difference between NJU3554 (OTP version) and NJU3504 (MASK version)

● Operating mode

NJU3554 has two operating modes. One is "Normal operating mode" and the other is "OTP programming mode".

- Normal operating mode

The "TEST" terminal is set to low level. (The terminal is recommended to connect to GND.)
 Operating voltage range; 2.7V ~ 5.5V.

- OTP Programming mode

User program is read out from or written into the OTP by the universal programmer "SUPERPRO/L" and converting adapter made by XELTEK co.,(USA).


● Reset Terminal Type

	NJU3554	NJU3504
Internal Pull-up Resistance	With Pull-up	Without Pull-up

● Option information set in the initialization

When the initialization is performed(RESET terminal is "L"), the operation information stored in option area is set as shown in the following timing chart . The option information is set in the term of 1/f_{osc}x 512clock after RESET releasing and oscillation stability time. After information set, the program counter is set to 0000H and the **NJU3554** operates in normal.

[TIMING CHART]

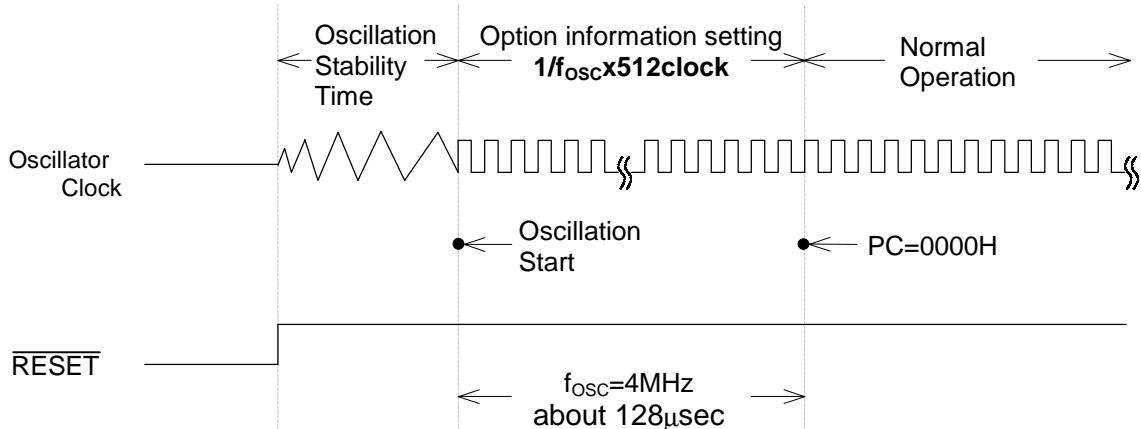

NJU3554

■ ABSOLUTE MAXIMUM RATINGS

(Ta=25°C)

PARAMETER	SYMBOL	RATINGS	UNIT
Supply Voltage	V _{DD}	-0.3 ~ +7.0	V
Input Voltage	V _{IN}	-0.3 ~ V _{DD} + 0.3	V
Output Voltage	V _{OUT}	-0.3 ~ V _{DD} + 0.3	V
Analog Supply Voltage	AV _{DD}	-0.3 ~ V _{DD} + 0.3	V
Analog Reference Voltage	V _{REF}	-0.3 ~ AV _{DD} + 0.3	V
Analog Input Voltage	AIN0 ~ AIN3	-0.3 ~ AV _{DD} + 0.3	V
Operating Temperature	T _{opr}	-20 ~ +75	°C
Storage Temperature	T _{stg}	-55 ~ +125	°C

Note)

The difference of electrical characteristics between **NJU3554** (OTP version) and **NJU3504** (MASK version)

		NJU3504		NJU3554	
• Supply Voltage (V _{DD}) MIN.		2.4V	→	2.7V	
• Supply Current					
5V	(I _{DD1}) Max.	4.0mA	→	30mA	
	(I _{DD2}) Max.	4.0mA	→	30mA	
	(I _{DD3}) Max.	3.8mA	→	30mA	
	(I _{DD4}) Max.	5.2mA	→	30mA	
	(I _{DD5}) Max.	4.0μA	→	20μA	
3V	(I _{DD1}) Max.	2.0mA	→	20mA	
	(I _{DD2}) Max.	2.0mA	→	20mA	
	(I _{DD3}) Max.	1.8mA	→	20mA	
	(I _{DD4}) Max.	1.4mA	→	20mA	
	(I _{DD5}) Max.	2.0μA	→	20μA	

■ ELECTRICAL CHARACTERISTICS DC CHARACTERISTICS 1-1

(V_{DD}=3.6~5.5V, V_{SS}=0V, Ta=-20~75°C)

PARAMETER	SYM BOL	CONDITIONS	MIN	TYP	MAX	UNIT	NOTE
Supply Voltage	V _{DD}	V _{DD}	3.6		5.5	V	
Supply Current	I _{DD1}	V _{DD} V _{DD} =5V, f _{OSC} =2MHz X'tal Oscillation in Reset			30	mA	*3
	I _{DD2}	V _{DD} V _{DD} =5V, f _{OSC} =2MHz Ceramic Oscillation in Reset			30	mA	*3
	I _{DD3}	V _{DD} V _{DD} =5V, f _{OSC} =2MHz CR Oscillation in Reset			30	mA	*3
	I _{DD4}	V _{DD} V _{DD} =5V, f _{OSC} =4MHz Operating (Except ADC)			30	mA	*3
	I _{DD5}	V _{DD} V _{DD} =5V, STANDBY Mode			20	µA	*3
	I _{ADD}	A _V _{DD} A _V _{DD} =V _{DD} =5V, ADCK=225kHz		3.0	5.0	mA	*3
High-Level Input Voltage	V _{IH1}	PA0~PA3, PB0~PB3, PC0, PC1, PD0~PD3, PE0~PE3, AIN0/PI0~AIN3/PI3, SDI(O)/PL1, SCK/CKOUT	0.7V _{DD}		V _{DD}	V	*1
	V _{IH2}	PF0~PF2, PG0, PG1, PH0, PH1, V _{REF} /PJ0, ADCK/PJ1, EXTI/PK0, CNTI/PK1, RESET	0.8V _{DD}		V _{DD}	V	*1
	V _{IH3}	OSC1	V _{DD} -1.0		V _{DD}	V	
Low-level Input Voltage	V _{IL1}	PA0~PA3, PB0~PB3, PC0, PC1, PD0~PD3, PE0~PE3, AIN0/PI0~AIN3/PI3, SDI(O)/PL1, SCK/CKOUT	0		0.3V _{DD}	V	*1
	V _{IL2}	PF0~PF2, PG0, PG1, PH0, PH1, V _{REF} /PJ0, ADCK/PJ1, EXTI/PK0, CNTI/PK1, RESET	0		0.2V _{DD}	V	*1
	V _{IL3}	OSC1	0		1.0	V	

*1 Input/output port is set as an Input terminal.

*2 Input/output port is set as an Output terminal.

*3 Except the current through Pull-up resistor.

■ ELECTRICAL CHARACTERISTICS DC CHARACTERISTICS 1-2

($V_{DD}=3.6\sim 5.5V$, $V_{SS}=0V$, $T_a=-20\sim 75^{\circ}C$)

PARAMETER	SYM BOL	CONDITIONS	MIN	TYP	MAX	UNIT	NOTE
High-Level Input Current	I_{IH}	$V_{DD}=5.5V$, $V_{IN}=5.5V$ PA0~PA3, PB0~PB3, PC0, PC1, PD0~PD3, PE0~PE3, PF0~PF2, PG0, PG1, PH0, PH1, AIN0/PI0~AIN3/PI3, $V_{REF}/PJ0$, ADCK/PJ1, EXTI/PK0, CNTI/PK1, SDI(O)/PL1, RESET, SCK/CKOUT			10	μA	*1
Low-Level Input Current	I_{IL1}	$V_{DD}=5.5V$, $V_{IN}=0V$ Without pull-up resistance PA0~PA3, PB0~PB3, PC0, PC1, PD0~PD3, PE0~PE3, PF0~PF2, PG0, PG1, PH0, PH1, AIN0/PI0~AIN3/PI3, $V_{REF}/PJ0$, ADCK/PJ1, EXTI/PK0, CNTI/PK1, SDI(O)/PL1, SCK/CKOUT			-10	μA	*1
	I_{IL2}	$V_{DD}=5.5V$, $V_{IN}=0V$ With pull-up resistance PA0~PA3, PB0~PB3, PC0, PC1, PD0~PD3, PE0~PE3, PF0~PF2, PG0, PG1, PH0, PH1, AIN0/PI0~AIN3/PI3, $V_{REF}/PJ0$, ADCK/PJ1, EXTI/PK0, CNTI/PK1, SDI(O)/PL1, RESET, SCK/CKOUT			-100	μA	*1
High-Level Output Voltage	V_{OH}	$I_{OH}=100\mu A$ PD0~PD3, PE0~PE3, PF0~PF2, PG0, PG1, PH0, PH1, SDO/PL0, SDI(O)/PL1, SCK/CKOUT	$V_{DD}-0.5$			V	*2
Low-Level Output Voltage	V_{OL1}	$I_{OL1}=400\mu A$ PD0~PD3, PE0~PE3, PF0~PF2, PG0, PG1, PH0, PH1, SDO/PL0, SDI(O)/PL1, SCK/CKOUT			0.5	V	*2
	V_{OL2}	$I_{OL2}=15mA$ PA0~PA3, PB0~PB3, PC0, PC1			2.0	V	*2
Output Leakage Current	I_{OD}	$V_{DD}=5.5V$, $V_{OH}=5.5V$ PA0~PA3, PB0~PB3, PC0, PC1			10	μA	*2
Input Capacitance	C_{IN}	Except V_{DD} , V_{SS} terminals $f_{osc}=1MHz$ Other terminals : 0V		10	20	pF	

*1 Input/output port is set as an Input terminal.

*2 Input/output port is set as an Output terminal.

*3 Except the current through Pull-up resister.

■ ELECTRICAL CHARACTERISTICS DC CHARACTERISTICS 2-1

(V_{DD}=2.7~3.6V, V_{SS}=0V, Ta=-20~75°C)

PARAMETER	SYM BOL	CONDITIONS	MIN	TYP	MAX	UNIT	NOTE
Supply Voltage	V _{DD}	V _{DD}	2.7		3.6	V	
Supply Current	I _{DD1}	V _{DD} V _{DD} =3V, f _{OSC} =1MHz X'tal Oscillation in Reset			20	mA	*3
	I _{DD2}	V _{DD} V _{DD} =3V, f _{OSC} =1MHz Ceramic Oscillation in Reset			20	mA	*3
	I _{DD3}	V _{DD} V _{DD} =3V, f _{OSC} =1MHz CR Oscillation in Reset			20	mA	*3
	I _{DD4}	V _{DD} V _{DD} =3V, f _{OSC} =2MHz Operating (Except ADC)			20	mA	*3
	I _{DD5}	V _{DD} V _{DD} =3V, STANDBY Mode			20	μA	*3
	I _{ADD}	A _{VDD} A _{VDD} =V _{DD} =3V, ADCK=225kHz		2.5	3.5	mA	*3
High-Level Input Current	V _{IH1}	PA0~PA3, PB0~PB3, PC0, PC1, PD0~PD3, PE0~PE3, AIN0/PI0~AIN3/PI3, SDI(O)/PL1, SCK/CKOUT	0.8V _{DD}		V _{DD}	V	*1
	V _{IH2}	PF0~PF2, PG0, PG1, PH0, PH1, V _{REF} /PJ0, ADCK/PJ1, EXTI/PK0, CNTI/PK1, RESET	0.85V _{DD}		V _{DD}	V	*1
	V _{IH3}	OSC1	V _{DD} -0.3		V _{DD}	V	
Low-Level Input Voltage	V _{IL1}	PA0~PA3, PB0~PB3, PC0, PC1, PD0~PD3, PE0~PE3, AIN0/PI0~AIN3/PI3, SDI(O)/PL1, SCK/CKOUT	0		0.2V _{DD}	V	*1
	V _{IL2}	PF0~PF2, PG0, PG1, PH0, PH1, V _{REF} /PJ0, ADCK/PJ1, EXTI/PK0, CNTI/PK1, RESET	0		0.15V _{DD}	V	*1
	V _{IL3}	OSC1	0		0.3	V	

*1 Input/output port is set as an Input terminal.

*2 Input/output port is set as an Output terminal.

*3 Except the current through Pull-up resistor.

■ ELECTRICAL CHARACTERISTICS DC CHARACTERISTICS 2-2

($V_{DD}=2.7\sim3.6V$, $V_{SS}=0V$, $T_a=-20\sim75^{\circ}C$)

PARAMETER	SYM BOL	CONDITIONS	MIN	TYP	MAX	UNIT	NOTE
High-Level Input Current	I_{IH}	$V_{DD}=3.6V$, $V_{IN}=3.6V$ PA0~PA3, PB0~PB3, PC0, PC1, PD0~PD3, PE0~PE3, PF0~PF2, PG0, PG1, PH0, PH1, AIN0/PI0~AIN3/PI3, $V_{REF}/PJ0$, ADCK/PJ1, EXTI/PK0, CNTI/PK1, SDI(O)/PL1, RESET, SCK/CKOUT			10	μA	*1
Low-Level Input Current	I_{IL1}	$V_{DD}=3.6V$, $V_{IN}=0V$ Without pull-up resistance PA0~PA3, PB0~PB3, PC0, PC1, PD0~PD3, PE0~PE3, PF0~PF2, PG0, PG1, PH0, PH1, AIN0/PI0~AIN3/PI3, $V_{REF}/PJ0$, ADCK/PJ1, EXTI/PK0, CNTI/PK1, SDI(O)/PL1, SCK/CKOUT			-10	μA	*1
	I_{IL2}	$V_{DD}=3.6V$, $V_{IN}=0V$ With pull-up resistance PA0~PA3, PB0~PB3, PC0, PC1, PD0~PD3, PE0~PE3, PF0~PF2, PG0, PG1, PH0, PH1, AIN0/PI0~AIN3/PI3, $V_{REF}/PJ0$, ADCK/PJ1, EXTI/PK0, CNTI/PK1, SDI(O)/PL1, RESET, SCK/CKOUT			-100	μA	*1
High-Level Output Voltage	V_{OH}	$I_{OH}=-80\mu A$ PD0~PD3, PE0~PE3, PF0~PF2, PG0, PG1, PH0, PH1, SDO/PL0, SDI(O)/PL1, SCK/CKOUT	$V_{DD}-0.5$			V	*2
Low-Level Output Voltage	V_{OL1}	$I_{OL1}=350\mu A$ PD0~PD3, PE0~PE3, PF0~PF2, PG0, PG1, PH0, PH1, SDO/PL0, SDI(O)/PL1, SCK/CKOUT			0.5	V	*2
	V_{OL2}	$I_{OL2}=5mA$ PA0~PA3, PB0~PB3, PC0, PC1			1.0	V	*2
Output Leakage Current	I_{OD}	$V_{DD}=3.6V$, $V_{OH}=3.6V$ PA0~PA3, PB0~PB3, PC0, PC1			10	μA	*2
Input Capacitance	C_{IN}	Except V_{DD} , V_{SS} terminals $f_{osc}=1MHz$ Other terminals : 0V		10	20	pF	

*1 Input/output port is set as an Input terminal.

*2 Input/output port is set as an Output terminal.

*3 Except the current through Pull-up resistor.


■ ELECTRICAL CHARACTERISTICS AC CHARACTERISTICS 1

(V_{SS}=0V, Ta= -20~75°C)


PARAMETER	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNIT
Operating Frequency	f _{OSC}	V _{DD} =2.7~3.6V	X'tal Resonator	0.03		2.0
			Ceramic Resonator	0.03		2.0
			External Resistor Oscillation	0.03		1.0
			External Clock	0.03		2.0
		V _{DD} =3.6~5.5V	X'tal Resonator	0.03		4.0
			Ceramic Resonator	0.03		4.0
			External Resistor Oscillation	0.03		2.0
			External Clock	0.03		4.0
Instruction Cycle Time	t _C			6/f _{OSC}		s
External Clock Pulse Width	t _{CPH}	V _{DD} =2.7~3.6V	250		16600	ns
	t _{CPL}	V _{DD} =3.6~5.5V	125		16600	
External Clock Rise Time Fall Time	t _{CPR} t _{CPF}	V _{DD} =2.7~5.5V			20	ns
RESET Low-Level Width	t _{RST}	V _{DD} =2.7~5.5V	4/f _{OSC}			s
RESET Rise Time	t _{RSR}	V _{DD} =2.7~5.5V			20	ms
Port Input Level Width	t _{PIN}	V _{DD} =2.7~5.5V	6/f _{OSC}			s
Edge Detection (PH1) Rise Time Fall Time	t _{EDR} t _{EDF}	V _{DD} =2.7~5.5V			200	ns
Restart Signal (PH0) Rise Time	t _{STR}	V _{DD} =2.7~5.5V			200	ns
External interrupt input (EXTI) Rise Time	t _{EXR}	V _{DD} =2.7~5.5V			200	ns
CNTI Clock Frequency	f _{CT}	V _{DD} =2.7~5.5V			f _{OSC} /64	Hz
CNTI High-Level Width	t _{CT}	V _{DD} =2.7~5.5V	6/f _{OSC}			s
CNTI Rise Time Fall Time	t _{CTR} t _{CTF}	V _{DD} =2.7~5.5V			200	ns

■ AC CHARACTERISTICS 1 TIMING CHART


EXTERNAL CLOCK

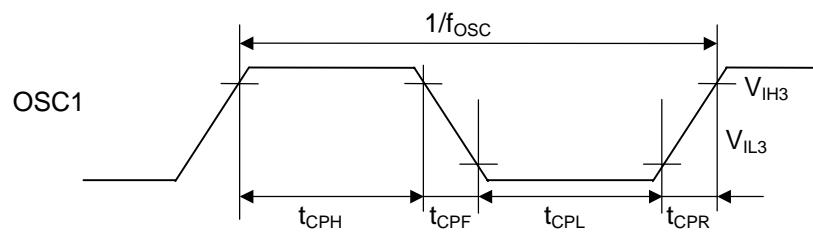


RESET INPUT

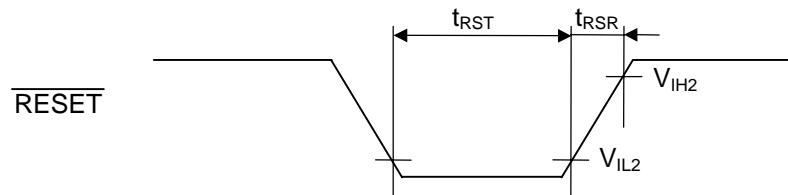


PORT INPUT

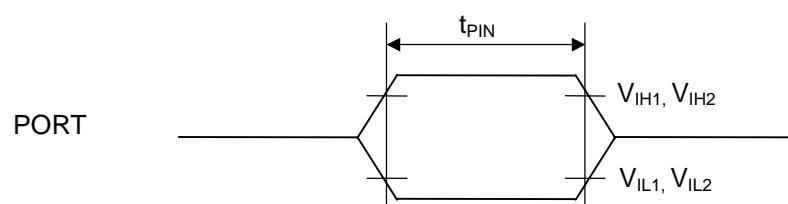


EDGE DETECTOR INPUT

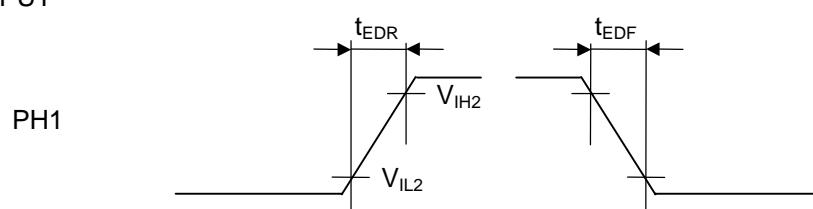


RESTART SIGNAL INPUT

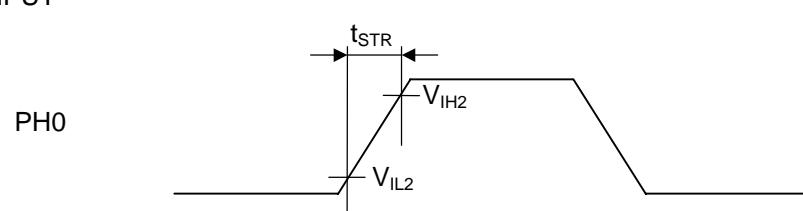

EXTERNAL INTERRUPT

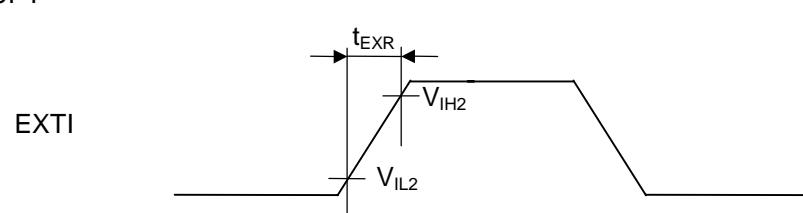

TIMER2 EXTERNAL CLOCK TIMING CHART

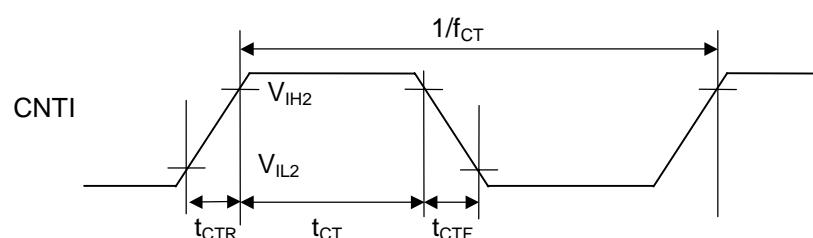


■ ELECTRICAL CHARACTERISTICS AC CHARACTERISTICS 2 SERIAL INTERFACE

($V_{SS}=0V$, $V_{DD}=2.7\sim 5.5V$, $T_a = -20\sim 75^{\circ}C$)

PARAMETER	SYM BOL	CONDITIONS		MIN	TYP	MAX	UNIT
Serial Operating Frequency	f_{SC}	Internal Clock				$(1/12) \times f_{OSC}^*$	Hz
		External Clock				500k	
Clock Pulse Width Low-Level	t_{SCL}	Internal Clock	$V_{DD}=2.7\sim 3.6V$ $f_{OSC}=2MHz$	3.0			μs
			$V_{DD}=3.6\sim 5.5V$ $f_{OSC}=4MHz$	1.5			
		External Clock		1.0			
Clock Pulse Width High-Level	t_{SCH}	Internal Clock	$V_{DD}=2.7\sim 3.6V$ $f_{OSC}=2MHz$	3.0			μs
			$V_{DD}=3.6\sim 5.5V$ $f_{OSC}=4MHz$	1.5			
		External Clock		1.0			
SDI setup Time To SCK	t_{DS}			0.5			μs
SDI Hold time To SCK	t_{DH}			0.5			μs
SDO Data Fix Time To SCK	t_{DCD}					0.5	μs

* The dividing ratio of the internal clock is 1/2.

■ AC CHARACTERISTICS 2 SERIAL INTERFACE TIMING CHART

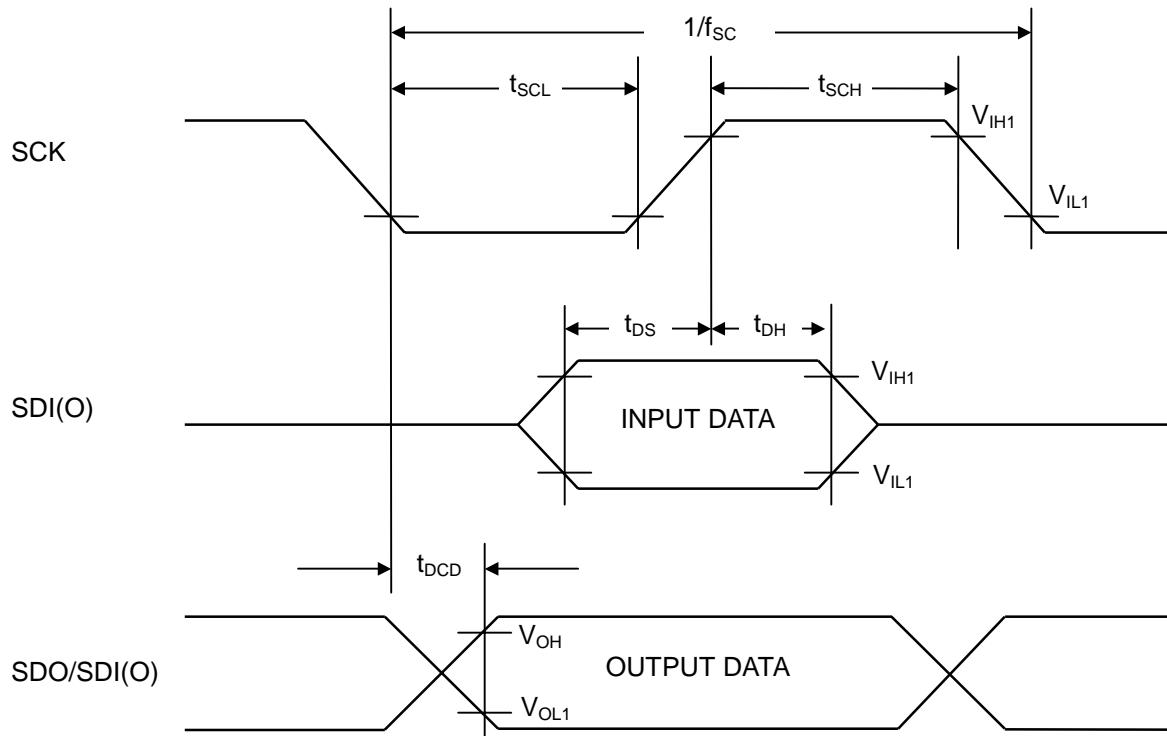

NJU3554

■ ELECTRICAL CHARACTERISTICS A/D CONVERTER CHARACTERISTICS

($V_{DD}=AV_{DD}=2.7\sim 5.5V$, $V_{SS}=AV_{SS}=0V$, $T_a=25^{\circ}C$, $f_{OSC}=4MHz$)

PARAMETER	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNIT
Resolution	-		-	8	-	bits
Absolute Accuracy	-	$V_{DD}=5V$, $AV_{DD}=5V$, $V_{REF}=5V$			± 2	LSB
Conversion Time	t_{CONV}	$V_{DD}=5V$, $AV_{DD}=5V$, $V_{REF}=5V$	40			μs
Reference Voltage	V_{REF}		2.7		AV_{DD}	V
Analog Input Voltage	V_{IA}		AV_{SS}		V_{REF}	V
ADCK Frequency	f_{ADCK}				225	kHz

■ OPTION as same as mask version (NJU3504)

1) INPUT OUTPUT Terminal Selection

All of input-output terminals select a terminal type for each port from the following table1 and table2 by the mask option.

[CIRCUIT TYPE TABLE 1]

SYMBOL	TERMINAL TYPES			EXTRA FUNCTION	REMARKS		
	Input / Output Terminal*1		Programmable Input / Output				
	Port of Input	Port of Output					
PA0			IOP IO				
PA1			IOP IO				
PA2			IOP IO				
PA3			IOP IO				
PB0			IOP IO				
PB1			IOP IO				
PB2			IOP IO				
PB3			IOP IO				
PC0	ICP IC	ONP ON					
PC1	ICP IC	ONP ON					
PD0	ICP IC	OC					
PD1	ICP IC	OC					
PD2	ICP IC	OC					
PD3	ICP IC	OC					
PE0	ICP IC	OC					
PE1	ICP IC	OC					
PE2	ICP IC	OC					
PE3	ICP IC	OC					

Note) The symbol in the above table is the same as in mask option generator software.

*1) The symbol and the detail circuits of INPUT OUTPUT TERMINAL are written in INPUT OUTPUT TERMINAL TYPE.

[CIRCUIT TYPE TABLE 2]

SYMBOL	TERMINAL TYPES			EXTRA FUNCTION	REMARKS		
	Input / Output Terminal*1						
	Port of Input	Port of Output	Programmable Input / Output				
PF0	ISP IS	OC					
PF1	ISP IS	OC					
PF2	ISP IS	OC					
PG0	ISP IS	OC					
PG1	ISP IS	OC					
PH0	ISP IS	OC		Restart signal input			
PH1	ISP IS	OC		Edge detection	R F Rise edge detection Fall edge detection		
AIN0 / PI0	ICP IC		AD	Analog input to ADC (AIN0)			
AIN1 / PI1	ICP IC		AD	Analog input to ADC (AIN1)			
AIN2 / PI2	ICP IC		AD	Analog input to ADC (AIN2)			
AIN3 / PI3	ICP IC		AD	Analog input to ADC (AIN3)			
V _{REF} / PJ0	ISP IS		AD	Reference input (V _{REF})			
ADCK / PJ1 *2	ISP IS		ACP AC	External clock input (ADCK)			
EXTI / PK0 *2	ISP IS		IIP II	External interrupt input (EXTI)	R F Rise interrupt input Fall interrupt input		
CNTI / PK1 *2	ISP IS		IIP II	External clock of Timer 2 input (CNTI)			
SDO / PL0		OC	SO	Serial data output	MSB LSB MSB first LSB first		
SDI(O) / PL1 *2	ICP IC	OC	SDP SD	Serial data input/output			
SCK / CKOUT *2 *3			SCP SC	Serial clock input/output			
			-	Output clock divide by pre-scaler			

Note) The symbol in the above table is the same as in mask option generator software.

*1) The symbol and the detail circuits of INPUT OUTPUT TERMINAL are written in INPUT OUTPUT TERMINAL TYPE.

*2) The pull-up resistance is added to the terminal selected as the extra function.










*3) When Serial INPUT-OUTPUT is selected, "SCK" is selected automatically. When it is not selected, "CKOUT" is selected automatically.

[MASK OPTION LIST]

SYM BOL	FUNCTION
ICP	C-MOS input with pull-up resistance
ISP	C-MOS Schmitt trigger input with pull-up resistance
IC	C-MOS input
IS	C-MOS Schmitt trigger input
ONP	Nch-FET Open-Drain output with pull-up resistance
OC	C-MOS output
ON	Nch-FET Open-Drain output
IIP	External interrupt input with pull-up resistance
II	External interrupt input
SDP	Serial data input/output with pull-up resistance
SD	Serial data input/output
SO	Serial data output
SCP	Serial clock input/output with pull-up resistance
SC	Serial clock input/output
AD	A/D converter
ACP	External clock input with pull-up resistance for ADC
AC	External clock input for ADC
IOP	Programmable input/output with pull-up resistance
IO	Programmable input/output

SYM BOL	FUNCTION
R	Rise edge detection
F	Fall edge detection
MSB	Serial data order MSB first
LSB	Serial data order LSB first
1	1/2
2	1/4
3	1/8
4	1/16
5	1/32
6	1/64
7	1/128
8	1/256
9	1/512
a	1/1024
b	1/2048
c	1/4096

[INPUT OUTPUT TERMINAL TYPE]

	Types	With Pull-up	Without Pull-up	Terminals
INPUT TERMINAL	C-MOS	Type ICP 	Type IC 	PC0, PC1, PD0~PD3, PE0~PE3, AIN0/PI0~ AIN3/PI3, SDI(O)/PL1
	SCHMITT TRIGGER	Type ISP 	Type IS 	PF0~PF2, PG0, PG1, PH0, PH1, V _{REF} /PJ0, ADCK/PJ1, EXTI/PK0, CNTI/PK1
OUTPUT TERMINAL	C-MOS		Type ON 	PD0~PD3, PE0~PE3, PF0~PF2, PG0, PG1, PH0, PH1, SDO/PL0, SDI(O)/PL1
	N-channel(Nch) OPEN DRAIN	Type ONP 	Type ON 	PC0, PC1
PROGRAMMABLE INPUT OUTPUT TERMINAL	C-MOS INPUT / Nch OPEN DRAIN OUTPUT	Type IOP 	Type IO 	PA0~PA3, PB0~PB3

2) Edge Detector Selection

PH1 terminal is added the “Edge detect function” by the mask option.



3) The data order (MSB, LSB) of the Serial Interface

The data order of the Serial Interface is selected select either MSB or LSB first by the mask option.

4) A/D Control Clock

A/D Control Clock is selected either the external clock from ADCK terminal or the internal clock from the prescaler by the mask option.

5) Dividing ration of the internal clock

Each dividing ration of the count clocks of Timer1 and Timer2, the Internal shift clock of the Serial Interface, the clock of the A/D control clock and the output clock through the SCK/CKOUT terminal is selected among the following by the mask option.

The frequency of each clock is determined by the dividing ration and the 1-instruction term ($1/fosc \times 6$).

1/2, 1/4, 1/8, 1/16, 1/32, 1/64, 1/128, 1/256, 1/512, 1/1024, 1/2048, 1/4096

Note) As Timer2 clock, the external clock or the internal is selected by the program.

As the shift clock of the serial interface, the external clock or the internal is selected by the program.

[CAUTION]
The specifications on this databook are only given for information , without any guarantee as regards either mistakes or omissions. The application circuits in this databook are described only to show representative usages of the product and not intended for the guarantee or permission of any right including the industrial rights.