

Descriptions

- Switching application
- Interface circuit and driver circuit application

Features

- With built-in bias resistors
- Simplify circuit design
- Reduce a quantity of parts and manufacturing process
- High packing density

Ordering Information

| Type NO. | Marking | Package Code |
|-----------|---------|--------------|
| SRC1203SF | RC3 | SOT-23F |

Outline Dimensions

unit : mm

• Equivalent Circuit

PIN Connections

1. Base
2. Emitter
3. Collector

| R ₁ | R ₂ |
|----------------|----------------|
| 22KΩ | 22KΩ |

Absolute maximum ratings

(Ta=25°C)

| Characteristic | Symbol | Ratings | Unit |
|----------------------|-----------|-----------|------|
| Out Voltage | V_o | 50 | V |
| Input Voltage | V_i | 40 | V |
| Out Current | I_o | 100 | mA |
| Power Dissipation | P_D | 200 | mW |
| Junction Temperature | T_J | 150 | °C |
| Storage Temperature | T_{STG} | -55 ~ 150 | °C |

Electrical Characteristics

(Ta=25°C)

| Characteristic | Symbol | Test Condition | Min. | Typ. | Max. | Unit |
|------------------------|--------------|-----------------------|------|------|------|------|
| Output Cut-off Current | $I_{O(OFF)}$ | $V_o=50V, V_i=0$ | - | - | 500 | nA |
| DC Current Gain | G_I | $V_o=5V, I_o=10mA$ | 70 | 120 | - | - |
| Output Voltage | $V_{O(ON)}$ | $I_o=10mA, I_i=0.5mA$ | - | 0.1 | 0.3 | V |
| Input Voltage (ON) | $V_{I(ON)}$ | $V_o=0.2V, I_o=5mA$ | - | 2.1 | 3.0 | V |
| Input Voltage (OFF) | $V_{I(OFF)}$ | $V_o=5V, I_o=0.1mA$ | 1.0 | 1.2 | - | V |
| Transition Frequency | f_T^* | $V_o=10V, I_o=5mA$ | - | 200 | - | MHz |
| Input Current | I_i | $V_i=5V$ | - | - | 0.36 | mA |

* : Characteristic of Transistor Only

Electrical Characteristic Curves

Fig. 1 $I_o - V_{I(ON)}$

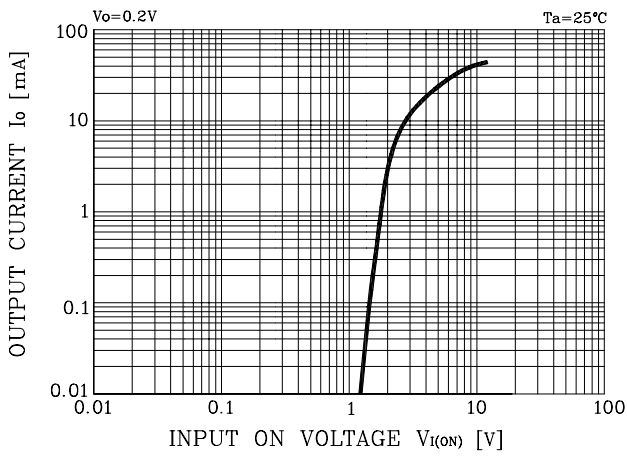


Fig. 2 $I_o - V_{I(OFF)}$

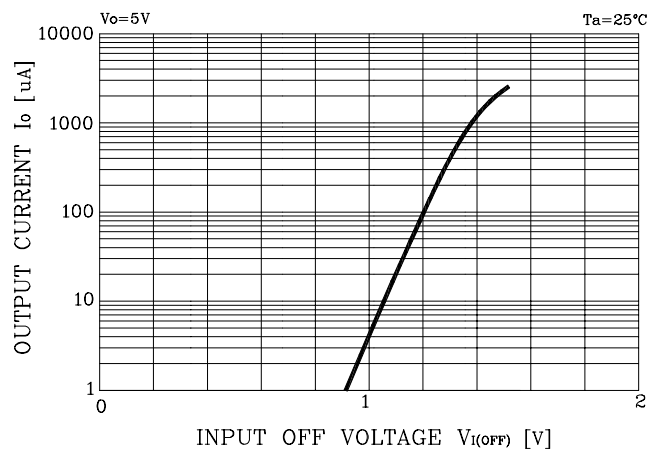


Fig. 3 $G_1 - I_o$

