



### ■ General Description

The AME8805/8810 family of positive, linear regulators feature low quiescent current (30 $\mu$ A typ.) with low dropout voltage, making them ideal for battery applications. The space-saving SOT-89 and SOT-223 packages are attractive for "Pocket" and "Hand Held" applications.


These rugged devices have both Thermal Shutdown, and Current Fold-back to prevent device failure under the "Worst" of operating conditions.

The AME8805/8810 is stable with an output capacitance of 2.2 $\mu$ F or greater.

### ■ Features

- Very Low Dropout Voltage
- Guaranteed 600mA Output
- Accurate to within 1.5%
- 30 $\mu$ A Quiescent Current
- Over-Temperature Shutdown
- Current Limiting
- Short Circuit Current Fold-back
- Space-Saving SOT-89 Package
- Factory Pre-set Output Voltages
- Low Temperature Coefficient


### ■ Functional Block Diagram

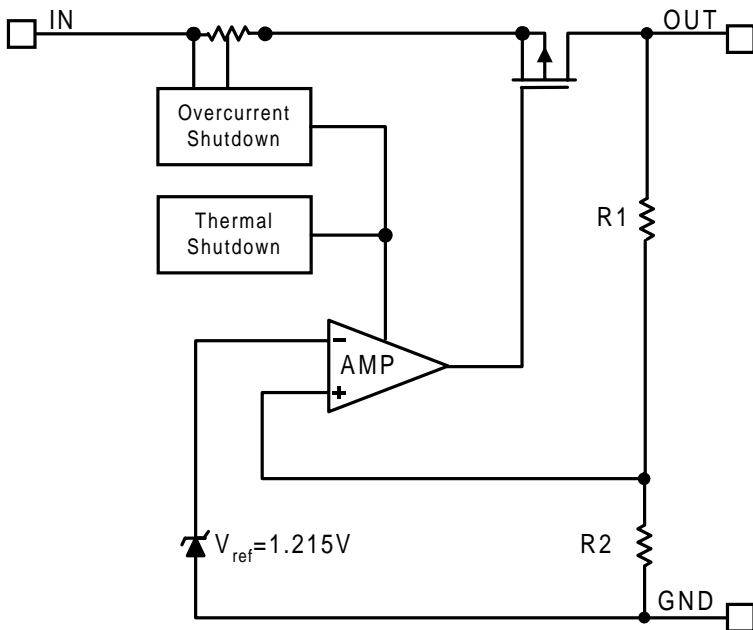

### ■ Applications

- Instrumentation
- Portable Electronics
- Wireless Devices
- Cordless Phones
- PC Peripherals
- Battery Powered Widgets
- Electronic Scales


### ■ Typical Application

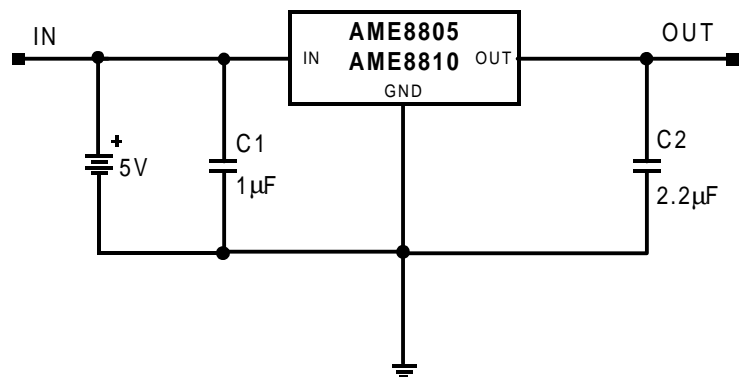




■ Pin Configuration

SOT-89 Top View




- 1. GND
- 2.  $V_{IN}$
- 3.  $V_{OUT}$

SOT-223 Top View



- 1.  $V_{IN}$
- 2. GND
- 3.  $V_{OUT}$

SOT-223 Top View



- 1. GND
- 2.  $V_{OUT}$
- 3.  $V_{IN}$



■ Ordering Information

| Part Number | Marking         | Output | Package | Temperature    |
|-------------|-----------------|--------|---------|----------------|
| AME8805AEFT | A8805<br>AEFw w | 3.3V   | SOT-89  | -40°C to +85°C |
| AME8805BEFT | A8805<br>BEFw w | 3.0V   | SOT-89  | -40°C to +85°C |
| AME8805CEFT | A8805<br>CEFw w | 2.8V   | SOT-89  | -40°C to +85°C |
| AME8805DEFT | A8805<br>DEFw w | 2.5V   | SOT-89  | -40°C to +85°C |
| AME8805FEFT | A8805<br>FEFw w | 3.6V   | SOT-89  | -40°C to +85°C |
| AME8805GEFT | A8805<br>GEFw w | 3.5V   | SOT-89  | -40°C to +85°C |
| AME8805HEFT | A8805<br>HEFw w | 2.7V   | SOT-89  | -40°C to +85°C |
| AME8805IEFT | A8805<br>IEFw w | 3.4V   | SOT-89  | -40°C to +85°C |
| AME8805JEFT | A8805<br>JEFw w | 2.85V  | SOT-89  | -40°C to +85°C |
| AME8805KEFT | A8805<br>KEFw w | 3.7V   | SOT-89  | -40°C to +85°C |
| AME8805LEFT | A8805<br>LEFw w | 1.5V   | SOT-89  | -40°C to +85°C |
| AME8805MEFT | A8805<br>MEFw w | 1.8V   | SOT-89  | -40°C to +85°C |
| AME8805NEFT | A8805<br>NEFw w | 2.9V   | SOT-89  | -40°C to +85°C |
| AME8805OEFT | A8805<br>OEFw w | 3.1V   | SOT-89  | -40°C to +85°C |
| AME8805AEGT | ADBw w          | 3.3V   | SOT-223 | -40°C to +85°C |
| AME8805BEGT | ADCw w          | 3.0V   | SOT-223 | -40°C to +85°C |
| AME8805CEGT | ADDw w          | 2.8V   | SOT-223 | -40°C to +85°C |
| AME8805DEGT | ADEw w          | 2.5V   | SOT-223 | -40°C to +85°C |
| AME8805EEGT | ADFw w          | 3.8V   | SOT-223 | -40°C to +85°C |
| AME8805FEGT | ADGw w          | 3.6V   | SOT-223 | -40°C to +85°C |
| AME8805GEGT | ADHw w          | 3.5V   | SOT-223 | -40°C to +85°C |
| AME8805HEGT | AJyw w          | 2.7V   | SOT-223 | -40°C to +85°C |
| AME8805IEGT | AERyw w         | 3.4V   | SOT-223 | -40°C to +85°C |
| AME8805JEGT | AGTyw w         | 2.85V  | SOT-223 | -40°C to +85°C |
| AME8805KEGT | AHVyw w         | 3.7V   | SOT-223 | -40°C to +85°C |
| AME8805MEGT | AJJyw w         | 1.8V   | SOT-223 | -40°C to +85°C |
| AME8805NEGT | AKSyw w         | 2.9V   | SOT-223 | -40°C to +85°C |
| AME8805OEGT | AKTyw w         | 3.1V   | SOT-223 | -40°C to +85°C |



### ■ Ordering Information

| Part Number | Marking | Output | Package | Temperature    |
|-------------|---------|--------|---------|----------------|
| AME8810AEGT | ADlyw w | 3.3V   | SOT-223 | -40°C to +85°C |
| AME8810BEGT | ADJyw w | 3.0V   | SOT-223 | -40°C to +85°C |
| AME8810CEGT | ADKyw w | 2.8V   | SOT-223 | -40°C to +85°C |
| AME8810DEGT | ADLyw w | 2.5V   | SOT-223 | -40°C to +85°C |
| AME8810EEGT | ADMyw w | 3.8V   | SOT-223 | -40°C to +85°C |
| AME8810FEGT | ADNyw w | 3.6V   | SOT-223 | -40°C to +85°C |
| AME8810GEGT | ADOyw w | 3.5V   | SOT-223 | -40°C to +85°C |
| AME8810HEGT | AEKyw w | 2.7V   | SOT-223 | -40°C to +85°C |
| AME8810IEGT | AESyw w | 3.4V   | SOT-223 | -40°C to +85°C |
| AME8810JEGT | AGVyw w | 2.85V  | SOT-223 | -40°C to +85°C |
| AME8810KEGT | AHXyw w | 3.7V   | SOT-223 | -40°C to +85°C |
| AME8810LEGT | AJFyw w | 1.5V   | SOT-223 | -40°C to +85°C |
| AME8810MEGT | AJGyw w | 1.8V   | SOT-223 | -40°C to +85°C |
| AME8810NEGT | AKWyw w | 2.9V   | SOT-223 | -40°C to +85°C |
| AME8810OEGT | AKXyw w | 3.1V   | SOT-223 | -40°C to +85°C |

Please consult AME sales office or authorized Rep./Distributor for other output voltage and package type availability.



■ Absolute Maximum Ratings

| Parameter             | Maximum                     | Unit |
|-----------------------|-----------------------------|------|
| Input Voltage         | 8                           | V    |
| Output Current        | 1                           | A    |
| Input, Output Voltage | GND - 0.3 to $V_{IN} + 0.3$ | V    |
| ESD Classification    | B                           |      |

■ Recommended Operating Conditions

| Parameter                 | Rating      | Unit |
|---------------------------|-------------|------|
| Supply Voltage            | 4.5 to 5.5  | V    |
| Ambient Temperature Range | -40 to +85  | °C   |
| Junction Temperature      | -40 to +125 | °C   |

■ Thermal Information

| Parameter  |         | Maximum | Unit   |
|--|---------|---------|--------|
| Thermal Resistance ( $\theta_{ja}$ )   | SOT-89  | 180     | °C / W |
|  | SOT-223 | 160     |        |
| Thermal Resistance ( $\theta_{jc}$ )   | SOT-89  | 18      | °C / W |
|  | SOT-223 | 15      |        |
| Internal Power Dissipation ( $P_D$ )<br>( $\Delta T = 100^\circ\text{C}$ , No Heat Sink)   | SOT-89  | 550     | mW     |
|  | SOT-223 | 625     |        |
| Internal Power Dissipation ( $P_D$ )<br>( $\Delta T = 100^\circ\text{C}$ , With Heat Sink) | SOT-89  | 2750*   | mW     |
|  | SOT-223 | 3300*   |        |
| Maximum Junction Temperature   |         | 150     | °C     |
| Maximum Lead Temperature ( 10 Sec)   |         | 300     | °C     |

\* Using twice the  $\theta_{jc}$  for this calculation.

**Caution: Stress above the listed absolute rating may cause permanent damage to the device**



## ■ Electrical Specifications

*TA = 25°C unless otherwise noted*

| Parameter                     | Symbol        | Test Condition                                   | Min                           | Typ       | Max  | Units            |   |
|-------------------------------|---------------|--|-------------------------------|-----------|------|------------------|---|
| Input Voltage                 | $V_{IN}$      |  | Note 1                        |           | 7    | V                |   |
| Output Voltage Accuracy       | $V_O$         | $I_O=1mA$  | -1.5                          |           | 1.5  | %                |   |
| Dropout Voltage               | $V_{DROPOUT}$ | $I_O=600mA$<br>$V_O=V_{ONOM}-2.0%$               | $1.4V < V_{O(NOM)} \leq 2.0V$ | See chart | 1400 | mV               |   |
|                               |               |  | $2.0V < V_{O(NOM)} \leq 2.8V$ |           | 800  |                  |   |
|                               |               |  | $2.8V < V_{O(NOM)}$           |           | 600  |                  |   |
| Output Current                | $I_O$         | $V_O > 1.2V$                                     | 600                           |           |      | mA               |   |
| Current Limit                 | $I_{LIM}$     | $V_O > 1.2V$                                     | 600                           | 800       |      | mA               |   |
| Short Circuit Current         | $I_{SC}$      | $V_O < 0.8V$                                     |                               | 300       | 600  | mA               |   |
| Quiescent Current             | $I_Q$         | $I_O=0mA$  |                               | 30        | 50   | $\mu A$          |   |
| Ground Pin Current            | $I_{GND}$     | $I_O=1mA$ to 600mA                               |                               | 35        |      | $\mu A$          |   |
| Line Regulation               | $REG_{LINE}$  | $I_O=5mA$<br>$V_{IN}=V_O+1$ to $V_O+2$           | $V_O < 2.0V$                  | -0.15     |      | 0.15             | % |
|                               |               |  | $4.0V > V_O \geq 2.0V$        | -0.1      | 0.02 | 0.1              | % |
|                               |               |  | $V_O \geq 4.0V$               | -0.4      |      | 0.4              | % |
| Load Regulation               | $REG_{LOAD}$  | $I_O=1mA$ to 600mA                               |                               | 0.2       | 1    | %                |   |
| Over Temperature Shutdown     | OTS           |  |                               | 150       |      | $^{\circ}C$      |   |
| Over Temperature Hysteresis   | OTH           |  |                               | 30        |      | $^{\circ}C$      |   |
| $V_O$ Temperature Coefficient | TC            |  |                               | 30        |      | ppm/ $^{\circ}C$ |   |
| Power Supply Rejection        | PSRR          | $I_O=100mA$<br>$C_O=2.2\mu F$                    | $f=1kHz$                      |           | 50   | dB               |   |
|                               |               |  | $f=10kHz$                     |           | 20   |                  |   |
|                               |               |  | $f=100kHz$                    |           | 15   |                  |   |
| Output Voltage Noise          | eN            | $f=10Hz$ to 100kHz<br>$I_O=10mA, C_{BYP}=0\mu F$ | $C_O=2.2\mu F$                |           | 30   | $\mu V_{rms}$    |   |

Note1:  $V_{IN(min)} = V_{OUT} + V_{DROPOUT}$



### ■ Detailed Description

The AME8805/8810 family of CMOS regulators contain a PMOS pass transistor, voltage reference, error amplifier, over-current protection, and thermal shutdown.

The P-channel pass transistor receives data from the error amplifier, over-current shutdown, and thermal protection circuits. During normal operation, the error amplifier compares the output voltage to a precision reference. Over-current and Thermal shutdown circuits become active when the junction temperature exceeds 150°C, or the current exceeds 600mA. During thermal shutdown, the output voltage remains low. Normal operation is restored when the junction temperature drops below 120°C.







The AME8805/8810 switches from voltage mode to current mode when the load exceeds the rated output current. This prevents over-stress. The AME8805/8810 also incorporates current foldback to reduce power dissipation when the output is short circuited. This feature becomes active when the output drops below 0.8 volts, and reduces the current flow by 65%. Full current is restored when the voltage exceeds 0.8 volts.

### ■ External Capacitors

The AME8805/8810 is stable with an output capacitor to ground of 2.2 $\mu$ F or greater. Ceramic capacitors have the lowest ESR, and will offer the best AC performance. Conversely, Aluminum Electrolytic capacitors exhibit the highest ESR, resulting in the poorest AC response. Unfortunately, large value ceramic capacitors are comparatively expensive. One option is to parallel a 0.1 $\mu$ F ceramic capacitor with a 10 $\mu$ F Aluminum Electrolytic. The benefit is low ESR, high capacitance, and low overall cost.

A second capacitor is recommended between the input and ground to stabilize  $V_{in}$ . The input capacitor should be at least 0.1 $\mu$ F to have a beneficial effect.


All capacitors should be placed in close proximity to the pins. A "Quiet" ground termination is desirable. This can be achieved with a "Star" connection.

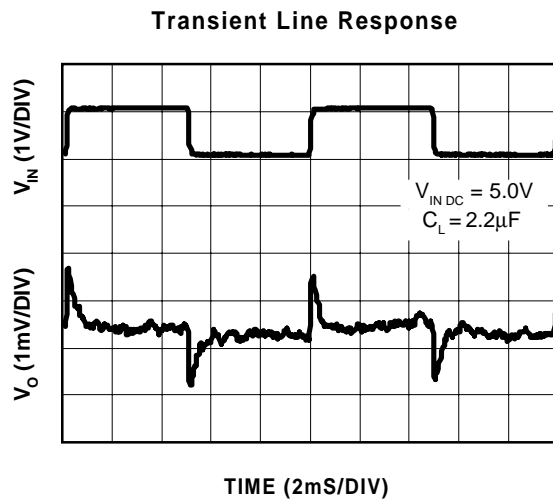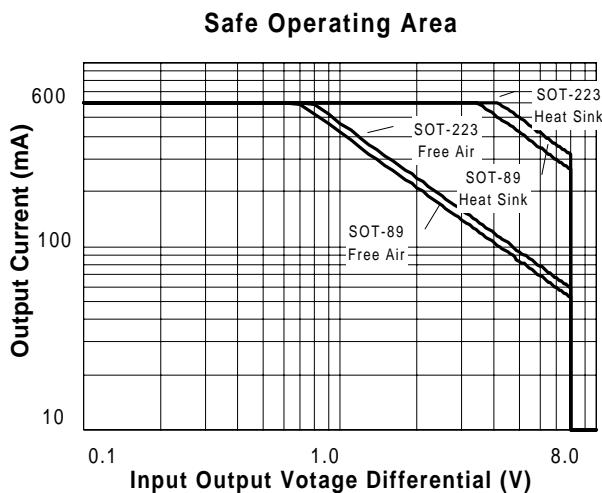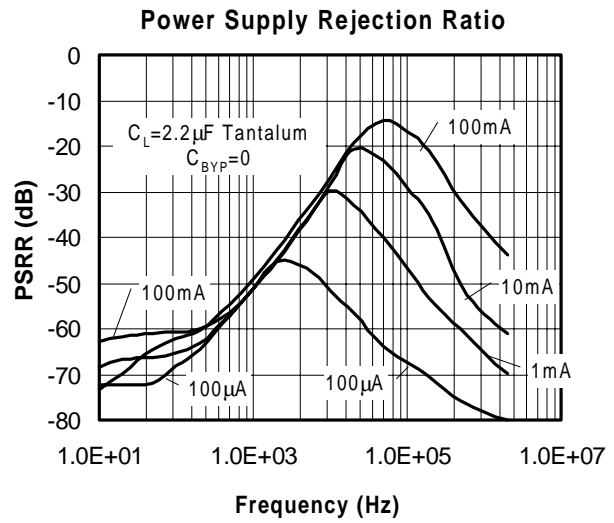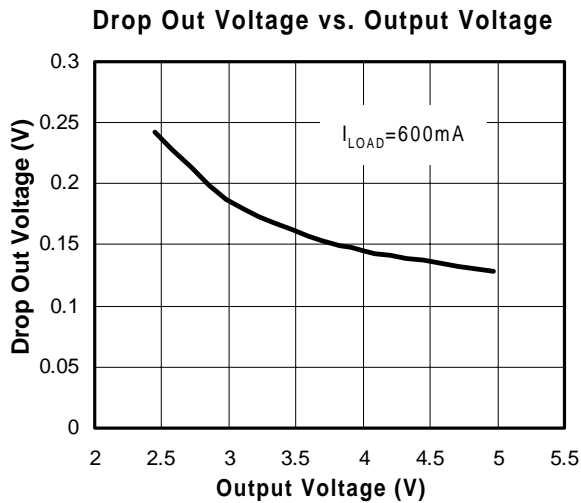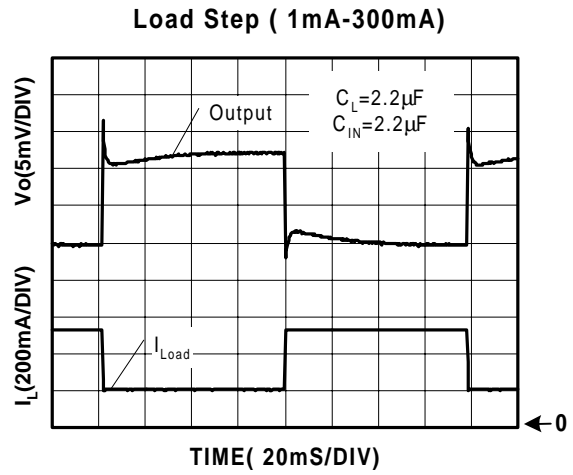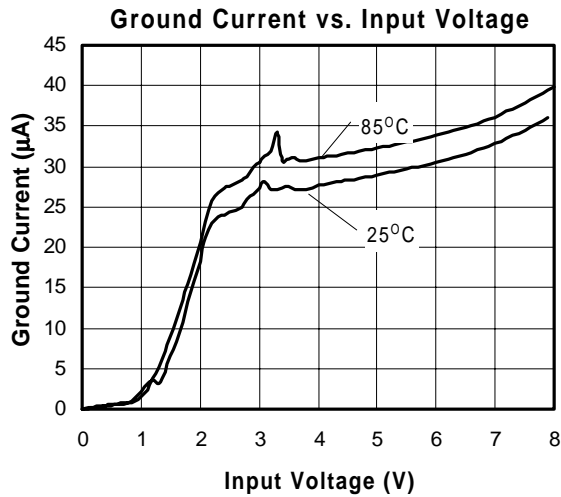







Noise Measurement

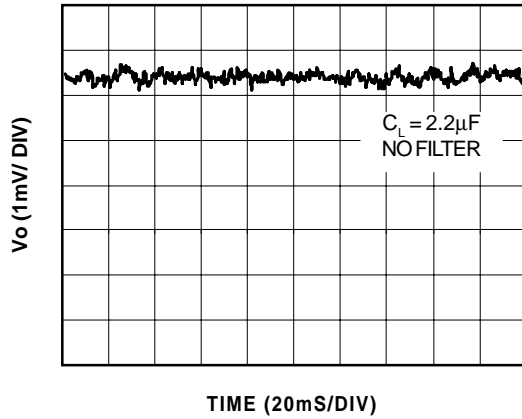


Overtemperature Shutdown

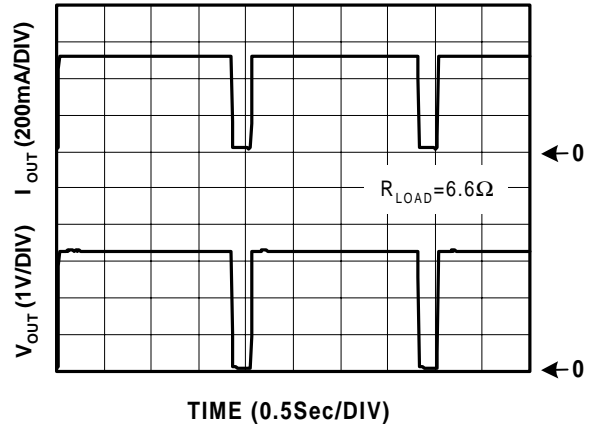

Current Limit Response

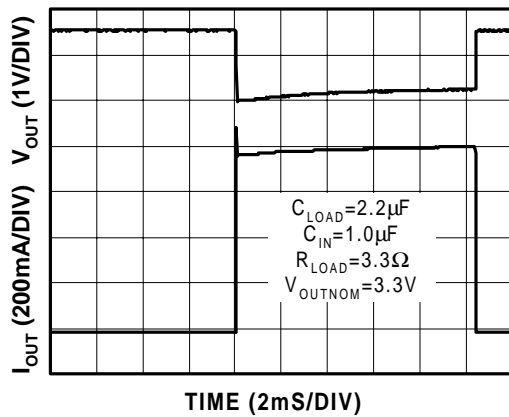


Short Circuit Response

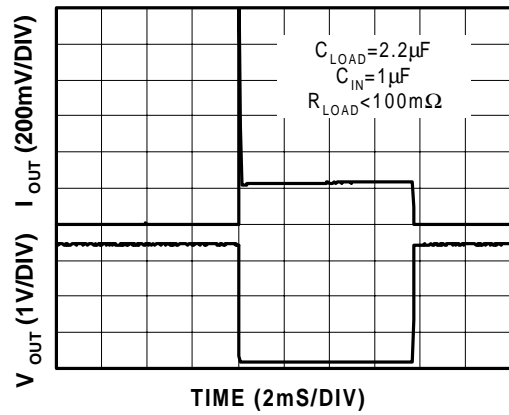




■ Package Dimension

SOT-89

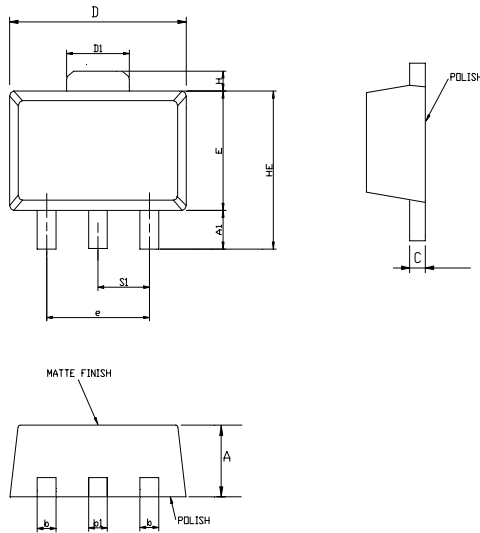

| SYMBOLS        | MILLIMETERS |      | INCHES |        |
|----------------|-------------|------|--------|--------|
|                | MIN         | MAX  | MIN    | MAX    |
| A              | 1.40        | 1.60 | 0.0551 | 0.0630 |
| A <sub>1</sub> | 0.89        | -    | 0.0350 | -      |
| b              | 0.36        | 0.52 | 0.0142 | 0.0205 |
| b <sub>1</sub> | 0.41        | 0.56 | 0.0161 | 0.0220 |
| C              | 0.35        | 0.44 | 0.0138 | 0.0173 |
| D              | 4.40        | 4.60 | 0.1732 | 0.1811 |
| D <sub>1</sub> | 1.35        | 1.83 | 0.0531 | 0.0720 |
| HE             | -           | 4.25 | -      | 0.1673 |
| E              | 2.29        | 2.60 | 0.0902 | 0.1024 |
| e              | 2.90        | 3.10 | 0.1142 | 0.1220 |
| H              | 0.35        | 0.70 | 0.0138 | 0.0276 |
| SI             | 1.40        | 1.60 | 0.0551 | 0.0630 |

SOT-223

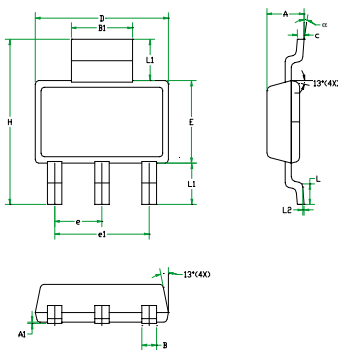

| SYMBOLS        | MILLIMETERS |       | INCHES     |        |
|----------------|-------------|-------|------------|--------|
|                | MIN         | MAX   | MIN        | MAX    |
| A              | 1.50        | 1.80  | 0.0591     | 0.0709 |
| A <sub>1</sub> | 0.02        | 0.10  | 0.0008     | 0.0039 |
| B              | 0.60        | 0.838 | 0.0236     | 0.033  |
| B <sub>1</sub> | 2.895       | 3.15  | 0.1140     | 0.1240 |
| C              | 0.24        | 0.381 | 0.0094     | 0.0150 |
| D              | 6.299       | 6.706 | 0.2480     | 0.2640 |
| E              | 3.30        | 3.708 | 0.1299     | 0.1460 |
| e              | 2.30 BSC    |       | 0.090 BSC  |        |
| e <sub>1</sub> | 4.60 BSC    |       | 0.181 BSC  |        |
| H              | 6.70        | 7.30  | 0.2638     | 0.2874 |
| L              | 0.91 MIN    |       | 0.0360 MIN |        |
| L <sub>1</sub> | 2.00 MAX    |       | 0.0787 MAX |        |
| L <sub>2</sub> | 0.06 BSC    |       | 0.0024 BSC |        |
| α              | 0°          | 10°   | 0°         | 10°    |



**www.analogmicro.com**  
**E-Mail: info@analogmicro.com**

Life Support Policy:

These products of Analog Microelectronics, Inc. are not authorized for use as critical components in life-support devices or systems, without the express written approval of the president of Analog Microelectronics, Inc.

Analog Microelectronics, Inc. reserves the right to make changes in the circuitry and specifications of its devices and advises its customers to obtain the latest version of relevant information.

© Analog Microelectronics, Inc. , August 2001

Document: 2006-DS8805/8810-E

**Corporate Headquarters**  
**Analog Microelectronics, Inc.**

3100 De La Cruz Blvd. Suite 201  
Santa Clara, CA. 95054-2046  
Tel : (408) 988-2388  
Fax: (408) 988-2489

**Asia Pacific Headquarters**  
**AME, Inc.**

2F, 187 Kang-Chien Road, Nei-Hu District  
Taipei 114, Taiwan, R.O.C.  
Tel : 886 2 2627-8687  
Fax: 886 2 2659-2989