

PROGRAMMABLE PRECISION REFERENCE



DESCRIPTION

The UTC431 is three-terminal adjustable regulator with a guaranteed thermal stability over applicable temperature ranges. The output Voltage may be set to any value between Vref(approximately 2.5V) and 26 V with two external resistors. These devices have provides a very sharp turn-on characteristic, making these devices excellent replacement for zener diodes in many applications.

FEATURE

- *Programmable output Voltage to 36V
- *Low dynamic output impedance 0.2Ω
- *Sink current capability of 1.0 to 100mA
- *Equivalent full-range temperature coefficient of $50\text{ppm}/^{\circ}\text{C}$ typical
- *Temperature compensated for operation over full rated operating temperature range
- *Low output noise voltage
- *Fast turn on response

BLOCK DIAGRAM

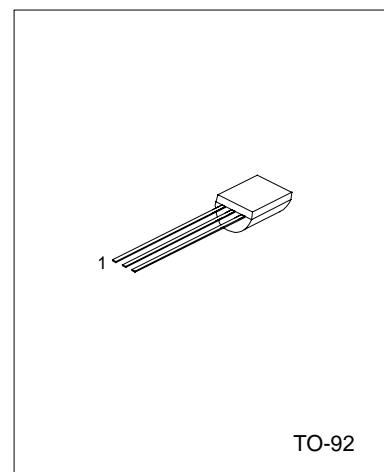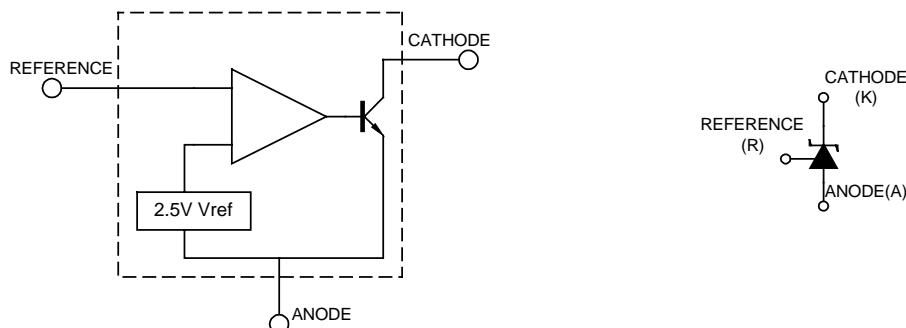

1:Ref; 2:Anode; 3:Cathode

ABSOLUTE MAXIMUM RATINGS (Operating temperature range applies unless otherwise specified)

CHARACTERISTICS	SYMBOL	VALUE	UNITS
Cathode Voltage	V _{KA}	37	V
Cathode Current Range(Continuous)	I _{KA}	-100~+150	mA
Reference Input Current Range	I _{ref}	0.05~+10	mA
Power Dissipation D,Z Suffix Package N Suffix Package	P _D	770 1000	mW mW
Operating temperature	T _{opr}	0~70	°C
Storage temperature Temperature	T _{stg}	-65~+150 °C	°C

RECOMMENDED OPERATING CONDITIONS




Characteristic	Symbol	Min	Typ	Max	Unit
Cathode Voltage	V _{KA}	V _{REF}		36	V
Cathode Current	I _{KA}	1.0		100	mA

ELECTRICAL CHARACTERISTICS(Ta=25°C,unless otherwise specified)

Characteristic	Symbol	Test conditions		MIN	TYP	MAX	UNIT
Reference Input Voltage	V _{ref}	V _{KA} =V _{REF} ,I _{KA} =10mA		2.440	2.495	2.550	V
Deviation of reference Input Voltage Over temperature(note 1)	ΔV _{ref} /ΔT	V _{KA} =V _{REF} ,I _{KA} =10mA T _{MIN} ≤T _A ≤T _{MAX}			4.5	17	mV
Ratio of Change in Reference Input Voltage to the Change in Cathode Voltage	ΔV _{ref} /ΔV _{KA}	I _{KA} =10mA	ΔV _{KA} =10V~V _{REF}		-1.0	-2.7	mV/V
			ΔV _{KA} =36V~10V		-0.5	-2.0	
Reference Input Current	I _{ref}	I _{KA} =10mA,R ₁ =10kΩ,R ₂ =∞			1.5	4	μA
Deviation of Reference Input Current Over Full Temperature Range	ΔI _{ref} /ΔT	I _{KA} =10mA,R ₁ =10kΩ,R ₂ =∞, T _A = full Temperature			0.4	1.2	μA
Minimum cathode current for regulation	I _{KA(min)}	V _{KA} =V _{REF}			0.45	1.0	mA
Off-state cathode Current	I _{KA(OFF)}	V _{KA} =36V,V _{REF} =0			0.05	1.0	μA
Dynamic Impedance	Z _{KA}	V _{KA} =V _{REF} ,I _{KA} =1 to 100mA f≤1.0kHz			0.15	0.5	Ω

Note: T_{MIN}=0°C,T_{MAX}=+70°C

TEST CIRCUITS

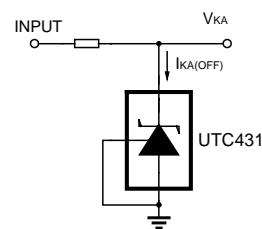Fig 7 Test Circuit For $V_{KA}=V_{REF}$ Fig 8 Test Circuit for $V_{KA} \geq V_{REF}$ Fig 9 Test Circuit For $I_{KA(OFF)}$

TYPICAL APPLICATION




Fig 10 Shutdown Regulator




Fig 11 Output Control of a Three-Terminal Fixed Regulator




Fig 12 Higher-current Shunt Regulator




Fig 13 Constant-current Sink




Fig 14 Current Limiting or Current Source

TYPICAL PERFORMANCE CHARACTERISTICS

