

SANYO	No. 1032A	2SA1248 / 2SC3116
PNP/NPN Epitaxial Planar Silicon Transistors		
160V/700mA Switching Applications		

Uses

- Color TV sound output, converters, inverters

Features

- High breakdown voltage
- Large current capacity
- Using MBIT process

(): 2SA1248

Absolute Maximum Ratings/ $T_a=25^\circ\text{C}$

			unit
Collector-to-Base Voltage	V_{CBO}	(-)180	V
Collector-to-Emitter Voltage	V_{CEO}	(-)160	V
Emitter-to-Base Voltage	V_{EBO}	(-)6	V
Collector Current	I_C	(-)0.7	A
Collector Current (Pulse)	I_{CP}	(-)1.5	A
Collector Dissipation	P_C	1	W
		$T_c=25^\circ\text{C}$	10
Junction Temperature	T_j	150	$^\circ\text{C}$
Storage Temperature	T_{stg}	-55 to +150	$^\circ\text{C}$

Electrical Characteristics/ $T_a=25^\circ\text{C}$


			min	typ	max	unit
Collector Cutoff Current	I_{CBO}	$V_{CB}=(-)120\text{V}, I_E=0$			(-)1.0	μA
Emitter Cutoff Current	I_{EBO}	$V_{EB}=(-)4\text{V}, I_C=0$			(-)1.0	μA
DC Current Gain	$h_{FE}(1)$	$V_{CE}=(-)5\text{V}, I_C=(-)100\text{mA}$	100*		400*	
	$h_{FE}(2)$	$V_{CE}=(-)5\text{V}, I_C=(-)10\text{mA}$	90			
Gain-bandwidth product	f_T	$V_{CE}=(-)10\text{V}, I_C=(-)50\text{mA}$		120		MHz
Common Base Output Capacitance	C_{ob}	$V_{CB}=(-)10\text{V}, f=1\text{MHz}$		8		pF
				(11)		
Collector-to-Emitter Saturation Voltage	$V_{CE(sat)}$	$I_C=(-)250\text{mA}, I_B=(-)25\text{mA}$		0.12	0.4	V
				(-0.2)	(-0.5)	
Base-to-Emitter Saturation Voltage	$V_{BE(sat)}$	$I_C=(-)250\text{mA}, I_B=(-)25\text{mA}$		(-)0.85	(-)1.2	V
Collector-to-Base Breakdown Voltage	$V_{(BR)CBO}$	$I_C=(-)10\mu\text{A}, I_E=0$	(-)180			V
Collector-to-Emitter Breakdown Voltage	$V_{(BR)CEO}$	$I_C=(-)1\text{mA}, R_{BE}=\infty$	(-160)			V
Emitter-to-Base Breakdown Voltage	$V_{(BR)EBO}$	$I_E=(-)10\mu\text{A}, I_C=0$	(-)6			V
Turn-on Time	t_{on}	See specified test circuit.		(60)50		ns
Storage Time	t_{stg}	See specified test circuit.		(900)1000		ns
Fall Time	t_f	See specified test circuit.		(60)60		ns

* The 2SA1248/2SC3116 are classified as follows according to h_{FE} at 100mA.

100	R	200	140	S	280	200	T	400
-----	---	-----	-----	---	-----	-----	---	-----

Switching Time Test Circuit

(For PNP, the polarity is reversed.)

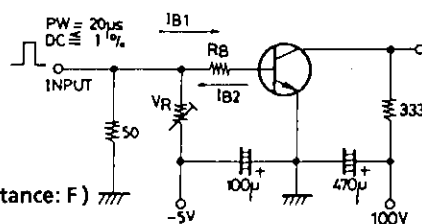


Unit (resistance: Ω , capacitance: F)

$$20I_{B1} = -20I_{B2} = I_C = 300\text{mA}$$









Package Dimensions 2009A






(unit: mm)

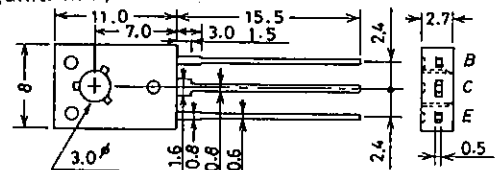

JEDEC: TO-126

B: Base
C: Collector
E: Emitter

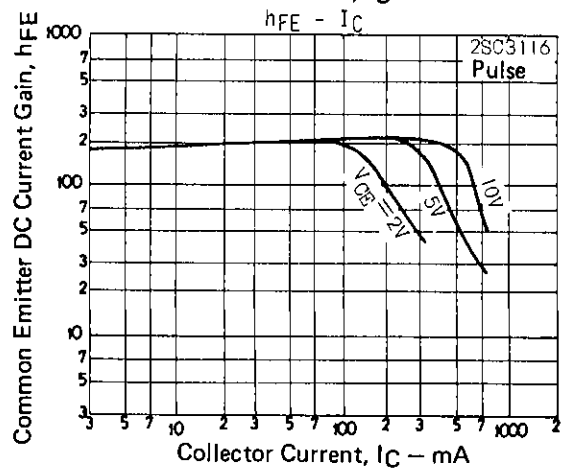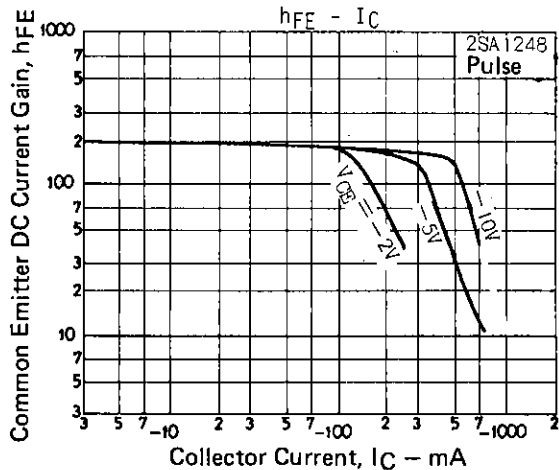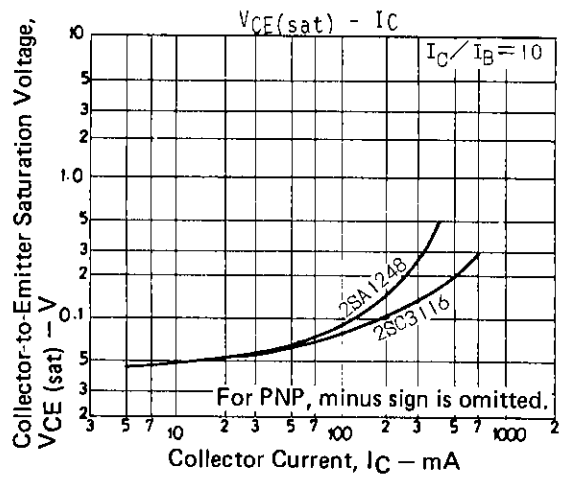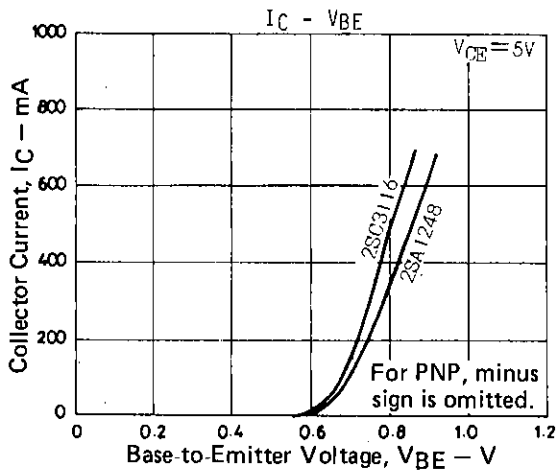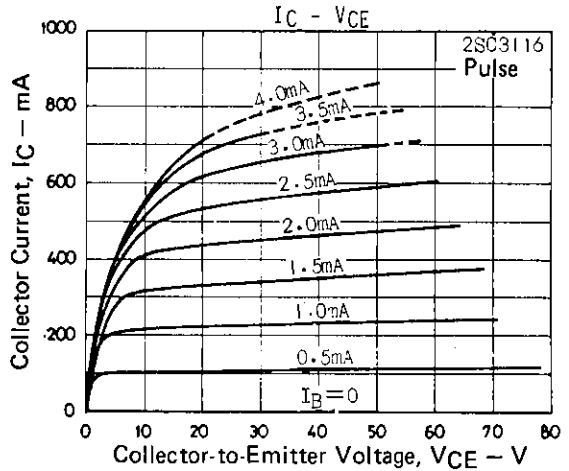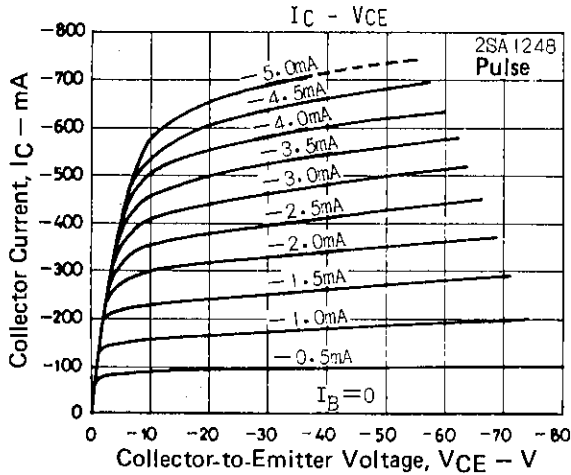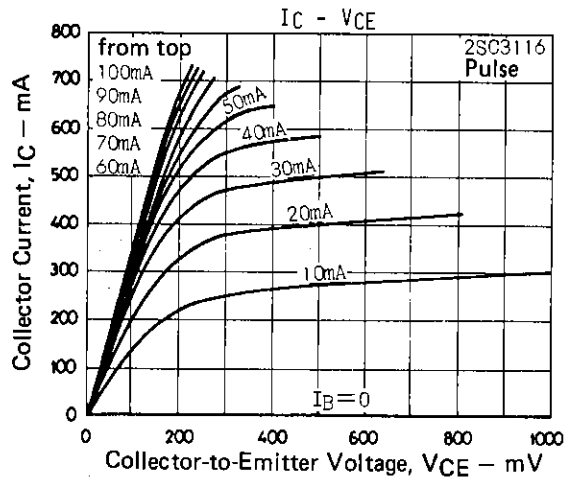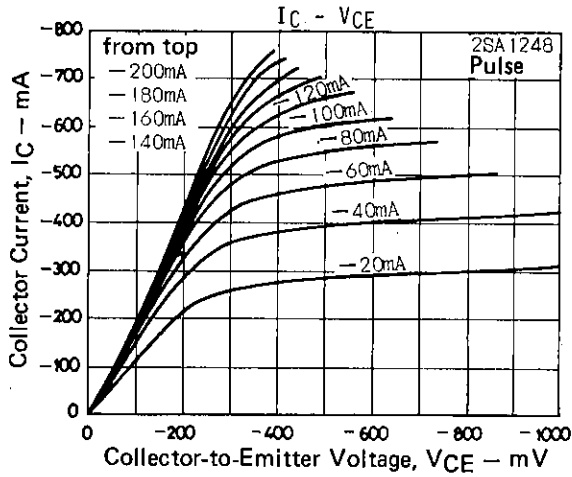

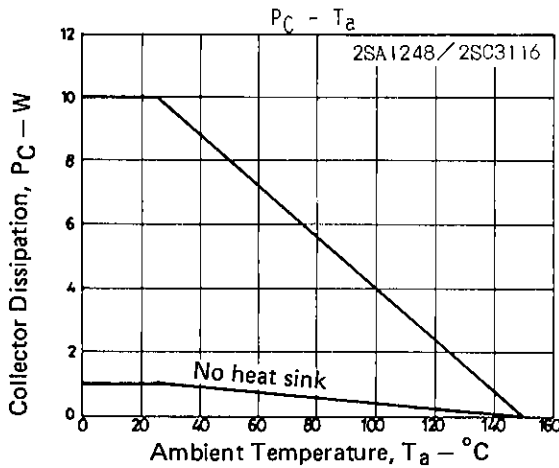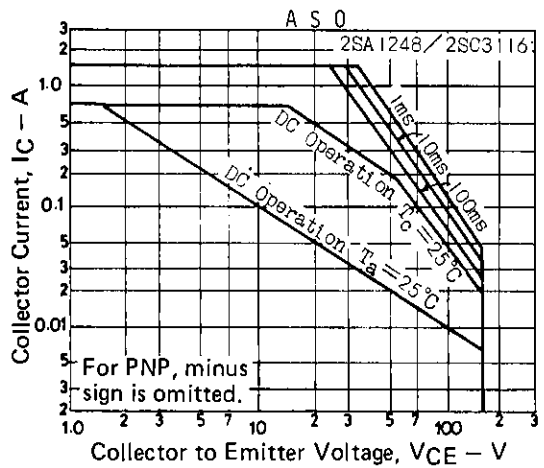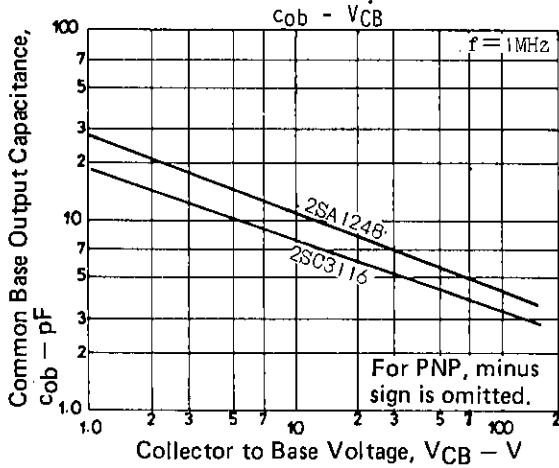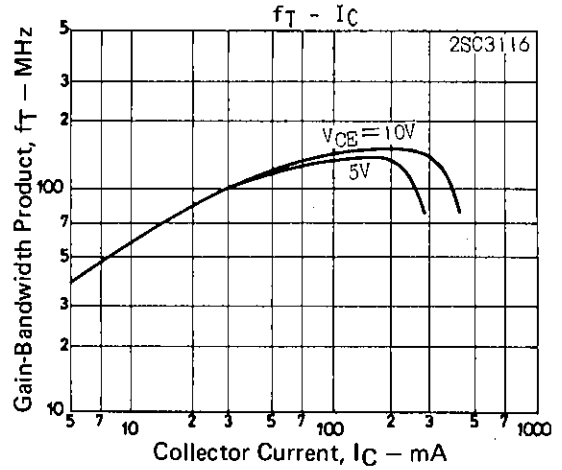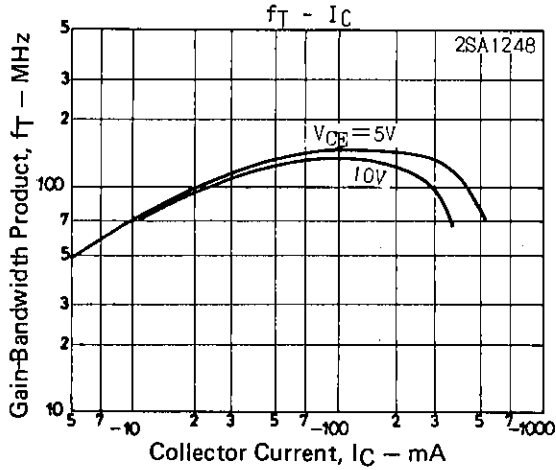

- No products described or contained herein are intended for use in surgical implants, life-support systems, aerospace equipment, nuclear power control systems, vehicles, disaster/crime-prevention equipment and the like, the failure of which may directly or indirectly cause injury, death or property loss.
- Anyone purchasing any products described or contained herein for an above-mentioned use shall:
 - ① Accept full responsibility and indemnify and defend SANYO ELECTRIC CO., LTD., its affiliates, subsidiaries and distributors and all their officers and employees, jointly and severally, against any and all claims and litigation and all damages, cost and expenses associated with such use;
 - ② Not impose any responsibility for any fault or negligence which may be cited in any such claim or litigation on SANYO ELECTRIC CO., LTD., its affiliates, subsidiaries and distributors or any of their officers and employees jointly or severally.
- Information (including circuit diagrams and circuit parameters) herein is for example only; it is not guaranteed for volume production. SANYO believes information herein is accurate and reliable, but no guarantees are made or implied regarding its use or any infringements of intellectual property rights or other rights of third parties.