

CNA1007H

Photo Interrupter


For contactless SW, object detection

Overview

CNA1007H is a transmissive photosensor in which a high efficiency GaAs infrared light emitting diode is used as the light emitting element, and a high sensitivity phototransistor is used as the light detecting element. The two elements are arranged so as to face each other, and objects passing between them are detected.

Features

- Position detection accuracy : 0.3 mm
- Gap width : 5 mm
- Horizontal slit type
- The type directly attached to PCB (with a positioning pins)

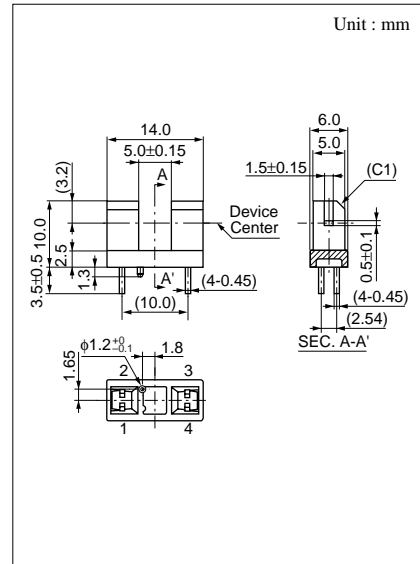


Absolute Maximum Ratings (Ta = 25°C)

Parameter		Symbol	Rated	Unit
Input (Light emitting diode)	Reverse voltage (DC)	V_R	5	V
	Forward current (DC)	I_F	50	mA
	Power dissipation	P_D^{*1}	75	mW
Output (Photo transistor)	Collector current	I_C	20	mA
	Collector to emitter voltage	V_{CEO}	30	V
	Emitter to collector voltage	V_{ECO}	5	V
Temperature	Collector power dissipation	P_C^{*2}	100	mW
	Operating ambient temperature	T_{opr}	-25 to +85	°C
	Storage temperature	T_{sig}	-40 to +100	°C

*1 Input power derating ratio is 1.0 mW/°C at Ta = 25°C.

*2 Output power derating ratio is 1.33 mW/°C at Ta = 25°C.

Internal connector


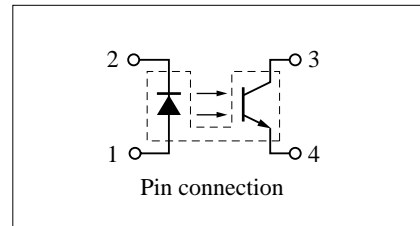


Pin connection

Electrical Characteristics (Ta = 25°C)

Parameter		Symbol	Conditions	min	typ	max	Unit
Input characteristics	Forward voltage (DC)	V_F	$I_F = 20mA$		1.25	1.4	V
	Reverse current (DC)	I_R	$V_R = 3V$			10	μA
Output characteristics	Collector cutoff current	I_{CEO}	$V_{CE} = 10V$			200	nA
Transfer characteristics	Collector current	I_C	$V_{CE} = 5V, I_F = 20mA$	0.5		14	mA
	Collector to emitter saturation voltage	$V_{CE(sat)}$	$I_F = 40mA, I_C = 1mA$			0.4	V
	Response time	t_r, t_f^*	$V_{CC} = 5V, I_C = 1mA, R_L = 100\Omega$		5		μs

* Switching time measurement circuit



t_r : Rise time (Time required for the collector current to increase from 10% to 90% of its final value)

t_f : Fall time (Time required for the collector current to decrease from 90% to 10% of its initial value)

