

Low Voltage / Low Power CMOS 16-Bit Microcontrollers

TMP93CS40F / TMP93CS41F TMP93CS40DF / TMP93CS41DF

1. Outline and Device Characteristics

The TMP93CS40/S41 are high-speed advanced 16-bit microcontrollers developed for controlling medium-to large-scale equipment. The TMP93CS41 does not have a ROM; the TMP93CS40 has a built-in ROM. Otherwise, the devices function in the same way.

The TMP93CS40/S41F are housed in a 100-pin flat package.

The device characteristics are as follows:

- (1) Original 16-bit CPU (900/L CPU)
 - TLCS-90 instruction mnemonic upward-compatible
 - 16-Mbyte linear address space
 - General-purpose registers, register bank system
 - 16-bit multiplication / division and bit transfer / arithmetic instructions
 - Micro DMA: 4 channels (1.6 μ s / 2 bytes at 20 MHz)
- (2) Minimum instruction execution time: 200 ns at 20 MHz
- (3) Internal RAM: 2 Kbyte

Internal ROM:

TMP93CS40	64-Kbyte ROM
TMP93CS41	None

- (4) External memory expansion
 - Can be expanded to up to 16 Mbytes (for both programs and data).
 - AM8/ $\overline{16}$ pin (selects the external data bus width)
 - Can mix 8- and 16-bit external data buses.
 - ... Dynamic bus sizing
- (5) 8-bit timer: 2 channels
- (6) 8-bit PWM timer: 2 channels

000707EBP1

- For a discussion of how the reliability of microcontrollers can be predicted, please refer to Section 1.3 of the chapter entitled Quality and Reliability Assurance / Handling Precautions.
- TOSHIBA is continually working to improve the quality and reliability of its products. Nevertheless, semiconductor devices in general can malfunction or fail due to their inherent electrical sensitivity and vulnerability to physical stress. It is the responsibility of the buyer, when utilizing TOSHIBA products, to comply with the standards of safety in making a safe design for the entire system, and to avoid situations in which a malfunction or failure of such TOSHIBA products could cause loss of human life, bodily injury or damage to property. In developing your designs, please ensure that TOSHIBA products are used within specified operating ranges as set forth in the most recent TOSHIBA products specifications. Also, please keep in mind the precautions and conditions set forth in the "Handling Guide for Semiconductor Devices," or "TOSHIBA Semiconductor Reliability Handbook" etc..
- The TOSHIBA products listed in this document are intended for usage in general electronics applications (computer, personal equipment, office equipment, measuring equipment, industrial robotics, domestic appliances, etc.). These TOSHIBA products are neither intended nor warranted for usage in equipment that requires extraordinarily high quality and/or reliability or a malfunction or failure of which may cause loss of human life or bodily injury ("Unintended Usage"). Unintended Usage include atomic energy control instruments, airplane or spaceship instruments, transportation instruments, traffic signal instruments, combustion control instruments, medical instruments, all types of safety devices, etc.. Unintended Usage of TOSHIBA products listed in this document shall be made at the customer's own risk.
- The products described in this document are subject to the foreign exchange and foreign trade laws.
- The information contained herein is presented only as a guide for the applications of our products. No responsibility is assumed by TOSHIBA CORPORATION for any infringements of intellectual property or other rights of the third parties which may result from its use. No license is granted by implication or otherwise under any intellectual property or other rights of TOSHIBA CORPORATION or others.
- The information contained herein is subject to change without notice.

- (7) 16-bit timer: 2 channels
- (8) 4-bit pattern generator: 2 channels
- (9) Serial interface: 2 channels
- (10) 10-bit AD converter: 8 channels
- (11) Watchdog timer
- (12) Chip select/ wait controller: 3 blocks
- (13) Interrupt functions: 29
 - 9 CPU interrupts SWI instruction, and Illegal instruction
 - 14 internal interrupts
 - 6 external interrupts 7-level priority can be set.
- (14) I/O ports
79 pins for TMP93CS40 and 61 pins for TMP93CS41
- (15) Standby function: 4 Halt modes (Run, Idle2, Idle1, Stop)
- (16) Clock gear function
 - Dual clock operation
 - Clock gear: High-frequency clock can be varied from f_c to $f_c/16$.
- (17) Wide Operating Voltage
 - $V_{cc}=2.7$ to 5.5 V

(18) Package

Type No.	Package
TMP93CS40F TMP93CS41F	P-QFP100-1414-0.50
TMP93CS40DF TMP93CS41DF	P-LQFP100-1414-0.50D

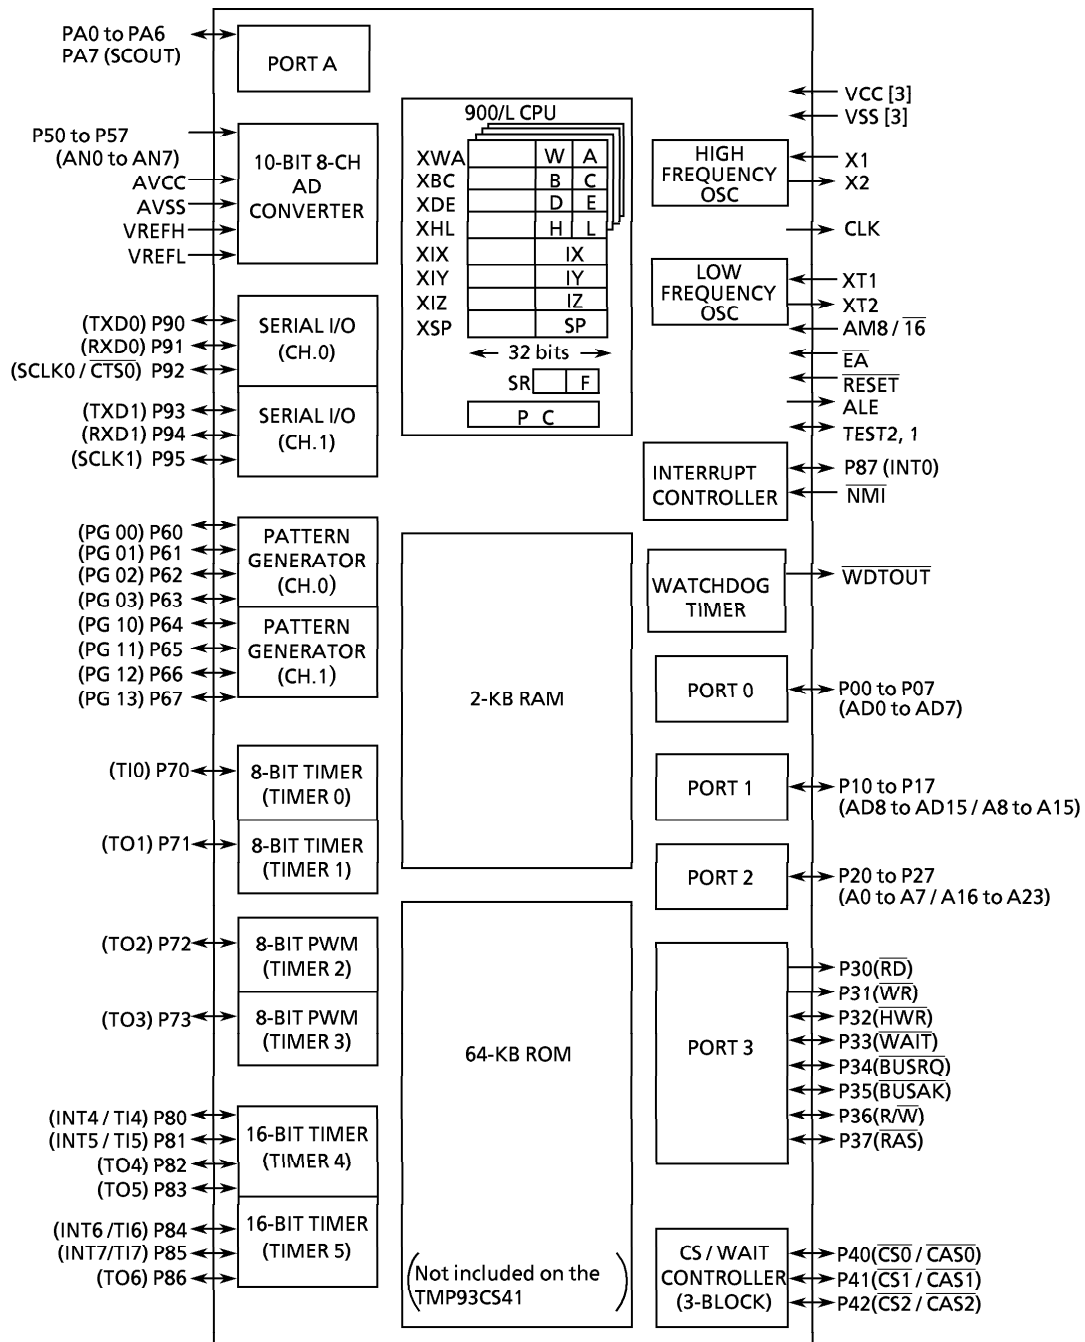



Figure 1.1 TMP93CS40/TMP93CS41 Block Diagram

2. Pin Assignment and Functions

The assignment of input / output pins on the TMP93CS40/TMP93CS41, their names and outline functions are described below.

2.1 Pin Assignment

Figure 2.1.1 shows the pin assignment for the TMP93CS40F/S41F and TMP93CS40DF/S41DF.

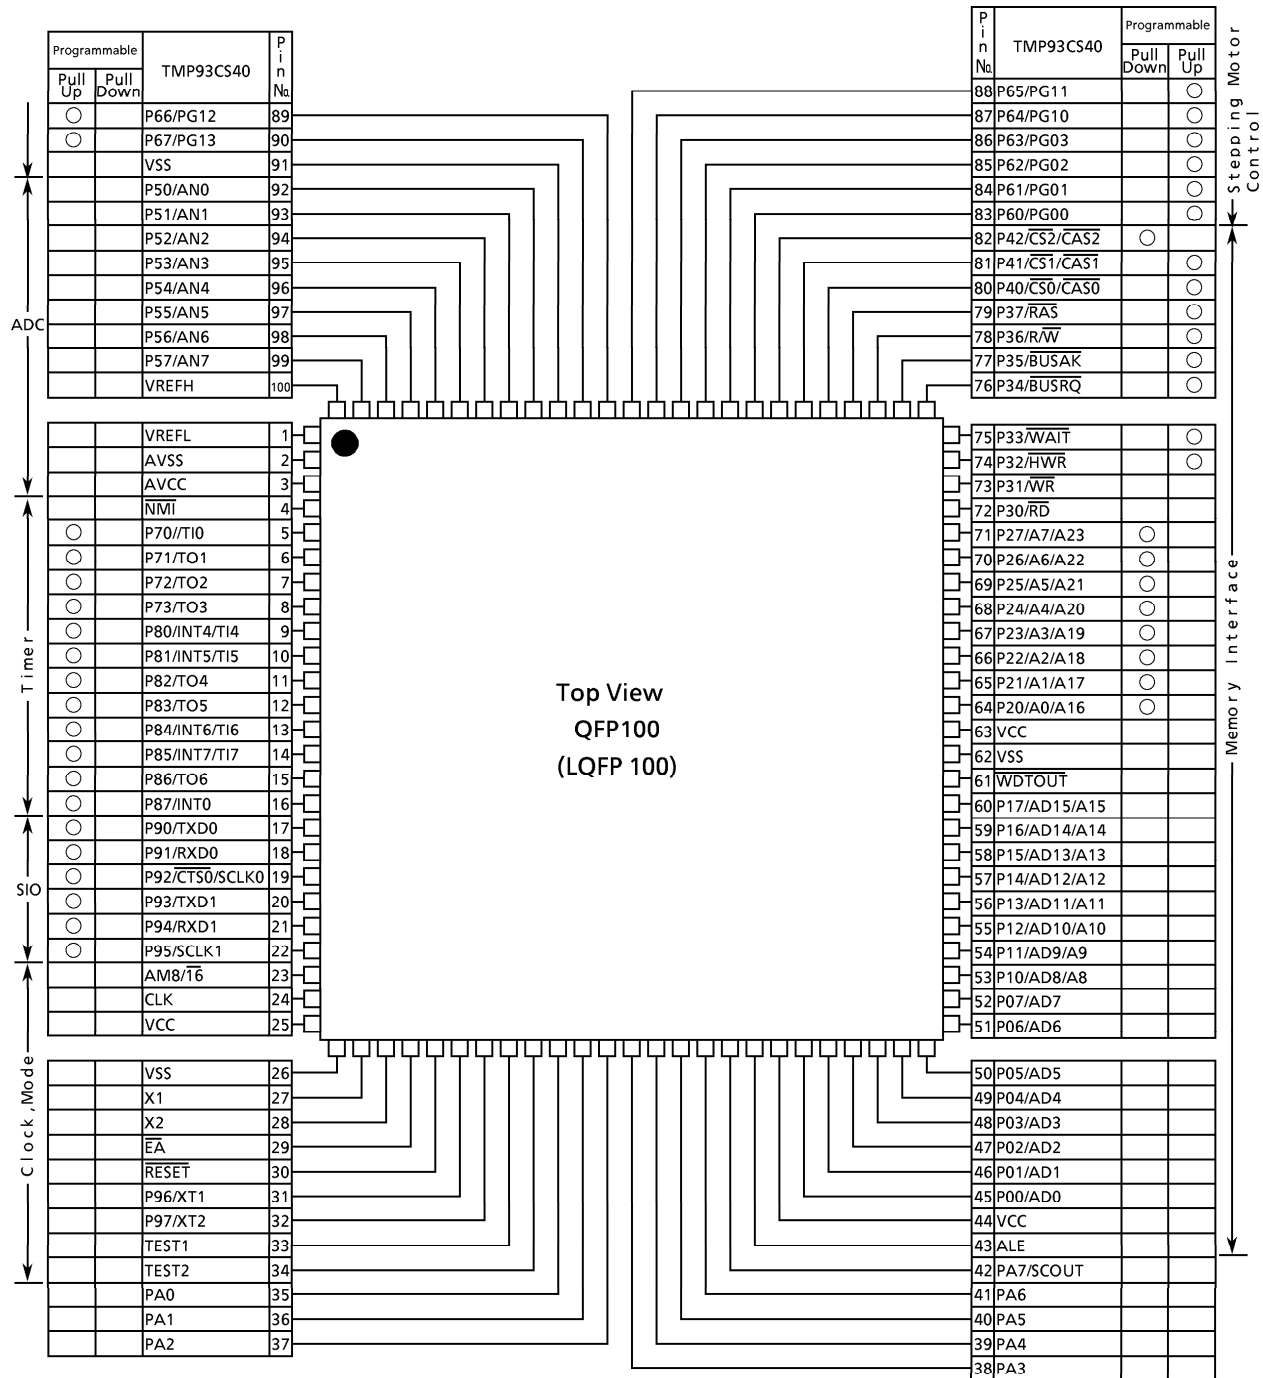

Note: Because the TMP93CS41 does not have an internal ROM, pins P00 to P17 are tied to AD0 to AD15 (when AM8/T $\bar{6}$ =0), or to AD0 to AD7 and A8 to A15 (when AM8/T $\bar{6}$ =1). P30 is tied to RD, P31 to WR.

Figure 2.1.1 Pin Assignment (100-pin QFP and 100-pin LQFP)

2.2 Pin Names and Functions

The names of the input / output pins and their functions are described below.

Table 2.2.1 Pin Names and Functions

Table 2.2.1 Pin Names and Functions (1/4)

Pin Name	Number of Pins	I/O	Function
P00 to P07 AD0 to AD7	8	I/O Tri-State	Port 0: I/O port that allows at the bit level Address/data (lower): Bits 0 to 7 of address/data bus
P10 to P17 AD8 to AD15 A8 to A15	8	I/O Tri-State Output	Port 1: I/O port that allows at the bit level Address data (upper): Bits 8 to 15 of address/data bus Address: Bits 8 to 15 of address bus
P20 to P27 A0 to A7 A16 to A23	8	I/O Output Output	Port 2: I/O port that allows selection of I/O at the bit level (with pull-down resistor) Address: bits 0 to 7 of address bus Address: bits 16 to 23 of address bus
P30 \overline{RD}	1	Output Output	Port 30: Output port Read: Strobe signal for reading external memory
P31 \overline{WR}	1	Output Output	Port 31: Output port Write: Strobe signal for writing data on pins AD0 to AD7
P32 \overline{HWR}	1	I/O Output	Port 32: I/O port (with pull-up resistor) High write: Strobe signal for writing data on pins AD8 to AD15
P33 \overline{WAIT}	1	I/O Input	Port 33: I/O port (with pull-up resistor) Wait: Pin used to request CPU bus wait
P34 \overline{BUSRQ}	1	I/O Input	Port 34: I/O port (with pull-up resistor) Bus request: Signal used to request bus release
P35 \overline{BUSAK}	1	I/O Output	Port 35: I/O port (with pull-up resistor) Bus acknowledge: Signal used to acknowledge bus release
P36 R/\overline{W}	1	I/O Output	Port 36: I/O port (with pull-up resistor) Read/write: 1 represents read or dummy cycle; 0 represents write cycle.
P37 \overline{RAS}	1	I/O Output	Port 37: I/O port (with pull-up resistor) Row address strobe: Outputs \overline{RAS} strobe for DRAM.
P40 $\overline{CS0}$ $\overline{CAS0}$	1	I/O Output Output	Port 40: I/O port (with pull-up resistor) Chip select 0: Outputs 0 when address is within specified address area. Column address strobe 0: Outputs \overline{CAS} strobe for DRAM when address is within specified address area.

Note: This device's built-in memory or built-in I/O cannot be accessed by an external DMA controller using the \overline{BUSRQ} and \overline{BUSAK} signals.

Table 2.2.1 Pin Names and Functions (2/4)

Pin Name	Number of Pins	I/O	Function
P41 $\overline{CS1}$ $\overline{CAS1}$	1	I/O Output Output	Port 41: I/O port (with pull-up resistor) Chip select 1: Outputs 0 if address is within specified address area. Column address strobe 1: Outputs \overline{CAS} strobe for DRAM if address is within specified address area.
P42 $\overline{CS2}$ $\overline{CAS2}$	1	I/O Output Output	Port 42: I/O port (with pull-down resistor) Chip select 2: Outputs 0 if address is within specified address area. Column address strobe 2: Outputs \overline{CAS} strobe for DRAM if address is within specified address area.
P50 to P57 AN0 to AN7	8	Input Input	Port 5: Input port Analog input: Analog signal input for AD converter
VREFH	1	Input	Pin for high level reference voltage input to AD converter
VREFL	1	Input	Pin for low level reference voltage input to AD converter
P60 to P63 PG00 to PG03	4	I/O Output	Ports 60 - 63: I/O ports that allow selection of I/O at the bit level (with pull-up resistor) Pattern generator ports: 00 to 03
P64 to P67 PG10 to PG13	4	I/O Output	Ports 64 - 67: I/O ports that allow selection of I/O on a bit basis (with pull-up resistor) Pattern generator ports: 10 to 13
P70 TI0	1	I/O Input	Port 70: I/O port (with pull-up resistor) Timer input 0: Timer 0 input
P71 TO1	1	I/O Output	Port 71: I/O port (with pull-up resistor) Timer output 1: Timer 0 or timer 1 output
P72 TO2	1	I/O Output	Port 72: I/O port (with pull-up resistor) PWM output 2: 8-bit PWM timer 2 output
P73 TO3	1	I/O Output	Port 73: I/O port (with pull-up resistor) PWM output 3: 8-bit PWM timer 3 output
P80 TI4 INT4	1	I/O Input Input	Port 80: I/O port (with pull-up resistor) Timer input 4: Timer 4 count / capture trigger signal input Interrupt request pin 4: Interrupt request pin with programmable rising / falling edge
P81 TI5 INT5	1	I/O Input Input	Port 81: I/O port (with pull-up resistor) Timer input 5: Timer 5 count / capture trigger signal input Interrupt request pin 5: Interrupt request pin with rising edge
P82 TO4	1	I/O Output	Port 82: I/O port (with pull-up resistor) Timer output 4: Timer 4 output pin
P83 TO5	1	I/O Output	Port 83: I/O port (with pull-up resistor) Timer output 5: Timer 4 output pin

Table 2.2.1 Pin Names and Functions (3/4)

Pin Name	Number of Pins	I/O	Function
P84 TI6 INT6	1	I/O Input Input	Port 84: I/O port (with pull-up resistor) Timer input 6: Timer 5 count / capture trigger signal input Interrupt request pin 6: Interrupt request pin with programmable rising / falling edge
P85 TI7 INT7	1	I/O Input Input	Port 85: I/O port (with pull-up resistor) Timer input 7: Timer 5 count / capture trigger signal input Interrupt request pin 7: Interrupt request pin with rising edge
P86 TO6	1	I/O Output	Port 86: I/O port (with pull-up resistor) Timer output 6: Timer 5 output pin
P87 INT0	1	I/O Input	Port 87: I/O port (with pull-up resistor) Interrupt request pin 0: Interrupt request pin with programmable level / rising edge
P90 TXD0	1	I/O Output	Port 90: I/O port (with pull-up resistor) Serial data send 0
P91 RXD0	1	I/O Input	Port 91: I/O port (with pull-up resistor) Serial data receive 0
P92 CTS0 SCLK0	1	I/O Input I/O	Port 92: I/O port (with pull-up resistor) Serial data send enable 0 (Clear to Send) Serial Clock I/O 0
P93 TXD1	1	I/O Output	Port 93: I/O port (with pull-up resistor) Serial data send 1
P94 RXD1	1	I/O Input	Port 94: I/O port (with pull-up resistor) Serial data receive 1
P95 SCLK1	1	I/O I/O	Port 95: I/O port (with pull-up resistor) Serial clock I/O 1
PA0 to PA6	7	I/O	Ports A0 to A6: I/O ports
PA7 SCOUT	1	I/O Output	Port A7: I/O port System Clock Output: Outputs f_{FPH} or f_{SYS} clock.
$\overline{\text{WDTOUT}}$	1	Output	Watchdog timer output pin
$\overline{\text{NMI}}$	1	Input	Non-maskable interrupt request pin: Interrupt request pin with programmable falling edge or with both edges programmable.
CLK	1	Output	Clock output: Outputs $\lceil f_{\text{SYS}} \div 2 \rceil$ clock. Pulled-up during reset. Can be disabled to reduce noise.
$\overline{\text{EA}}$	1	Input	External access: On the TMP93CS41, the V_{SS} pin should be connected. On the TMP93CS40, the V_{CC} pin should be connected.

Table 2.2.1 Pin Names and Functions (4/4)

Pin Name	Number of Pins	I/O	Function
AM8 / $\overline{16}$	1	Input	Address Mode: Selects external Data Bus width. (On the TMP93CS40) The Vcc pin should be connected. The Data Bus Width for external access is set by the Chip Select / WAIT Control register, Port 1 Control register. (On the TMP93CS41) The Vss pin should be connected to access either fixed 16-bit Bus width, or 16-bit Bus interchangeable with 8-bit Bus. The Vcc pin should be connected to access a fixed 8-bit Bus Width.
ALE	1	Output	Address Latch Enable (Can be disabled to reduce noise.)
$\overline{\text{RESET}}$	1	Input	Reset: Initializes TMP93CS40/TMP93CS41. (with pull-up resistor)
X1/X2	2	I/O	High Frequency Oscillator connecting pin
P96 XT1	1	I/O Input	Port 96: I/O port (open drain output) Low Frequency Oscillator connecting pin
P97 XT2	1	I/O Output	Port 97: I/O port (open drain output) Low Frequency Oscillator connecting pin
TEST1 / TEST2	2	Output / Input	TEST1: should be connected to TEST2 pin.
VCC	3		Power supply pin (All VCC pins should be connected to the power supply pin.)
VSS	3		GND pin (0 V) (All VSS pins should be connected to GND (0 V).)
AVCC	1		Power supply pin for AD converter
AVSS	1		GND pin for AD converter (0 V)

Note: All pins that have built-in pull-up/down resistors (other than the $\overline{\text{RESET}}$ pin) can be disconnected from the built-in pull-up/down resistor by software.

3. Operation

This section describes in blocks the functions and basic operations of TMP93CS40 and S41 devices. Please also refer to section 7., Precautions in use, which describes some points requiring careful attention.

3.1 CPU

TMP93CS40 and S41 devices have a built-in high-performance 16-bit CPU (900/L CPU). (For basics of the CPU operation, see the information on the TLCS-900/L CPU in the previous chapter).

This section describes some CPU functions unique to the TMP93CS40 and S41, that are not described in the previous chapter, entitled TLCS-900/L CPU.

3.1.1 Reset

To reset a TMP93CS40 or S41 device, the $\overline{\text{RESET}}$ pin must be kept at 0 for at least ten system clock cycles (160 states: 16 μs at 20 MHz) while remaining within the specified operating voltage range and sustaining a stable clock oscillation.

When a reset signal is accepted, the CPU sets itself as follows:

- The Program Counter (PC) is set according to the Reset Vector that is stored from 8000H to 8002H.
PC (7 to 0) ← data in location 8000H
PC (15 to 8) ← data in location 8001H
PC (23 to 16) ← data in location 8002H
- The Stack pointer (XSP) for system mode is set to 100H.
- The <IFF2 to 0> bits of the status register SR are set to 111. (Sets mask register to interrupt level 7)
- The <MAX> bit of SR is set to 1. (Sets to maximum mode. See previous chapter).
- The <RFP2 to 0> bits of SR are set to 000. (Clears register banks to 0)

When the reset is released, instruction execution starts from PC (the reset vector). The reset makes no changes in any CPU internal registers other than those specifically mentioned above.

When a reset is received, signal and data processing for built-in I/Os, ports, and other pins is affected as follows:

- Initializes built-in I/O registers as per specifications.
- Sets port pins (including pins also used as built-in I/Os) to General-Purpose Input / Output Port mode.
- Sets the $\overline{\text{WDTOUT}}$ pin to 0. (The watchdog timer is set to Enable after reset.)
- Pulls up the CLK pin to 1.
- Sets the ALE pin to 0 in the case of the TMP93CS41, and to High Impedance (Hi-Z) in the case of TMP93CS40.


Note 1: Resetting makes no change in any register in the CPU except the program counter (PC), status register (SR) and stack pointer (XSP), nor in the data in the internal RAM.

Note 2: The CLK pin is pulled up during reset. When the voltage is externally reduced, there is a possibility of causing malfunctions.

Figures 3.1.1 and 3.1.2 show the reset timing chart of the TMP93CS41 and S40.

3.2 Memory Map

Figure 3.2.1 is a memory map of the TMP93CS40 and S41.

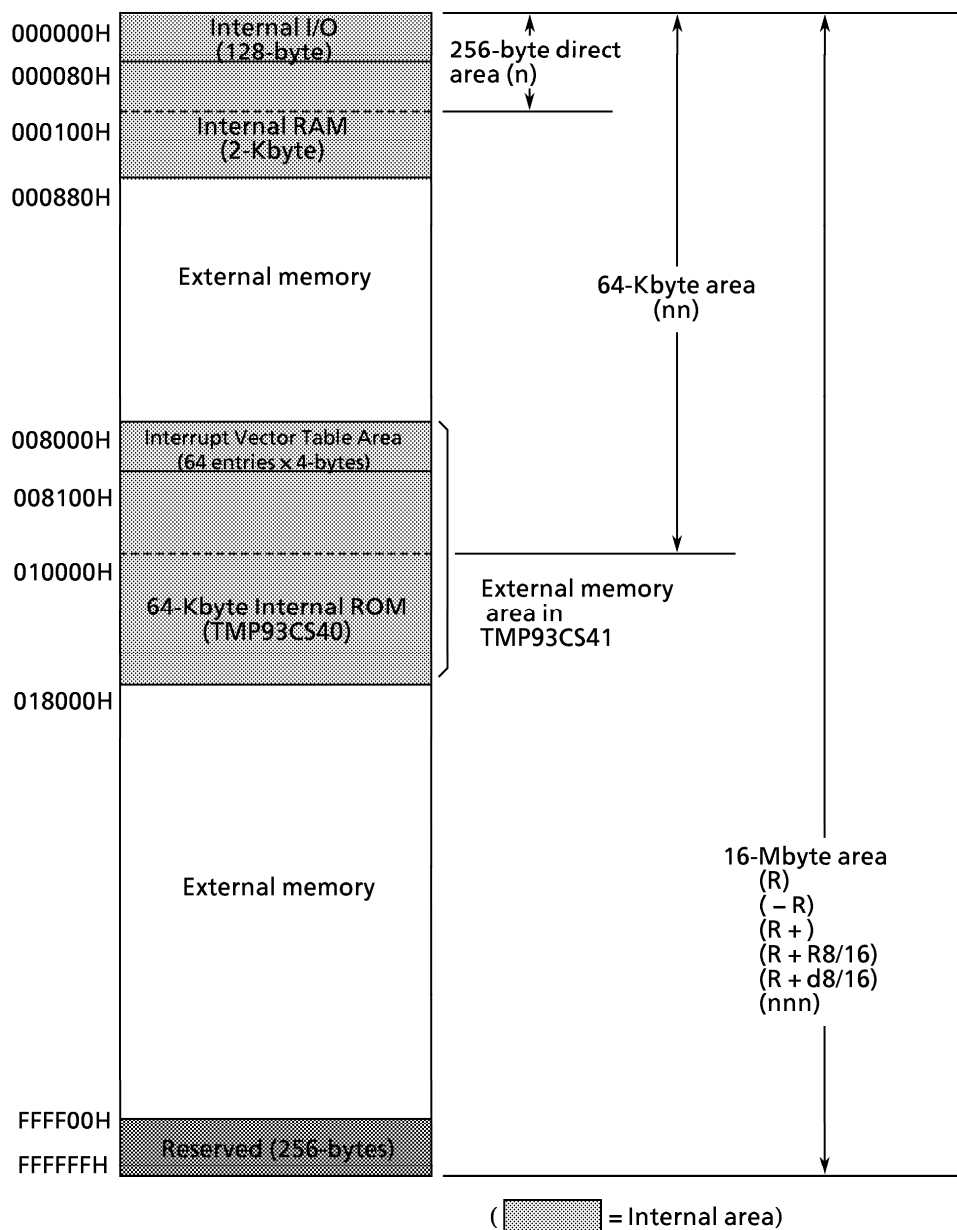

Note: The 256-byte area from FFFF00H to FFFFFFFH can not be used.

Figure 3.2.1 Memory map

4. Electrical Characteristics

4.1 Absolute Maximum Ratings

(TMP93CS40F, TMP93CS41F
TMP93CS40DF, TMP93CS41DF)

"X" used in an expression shows a frequency for the clock f_{PPH} selected by $\text{SYSCR1} < \text{SYSCK} >$. The value of X changes according to whether a clock gear or a low speed oscillator is selected. An example value is calculated for f_c , with gear = 1/ f_c ($\text{SYSCR1} < \text{SYSCK}$, GEAR 2 to 0) = 0000).

Parameter	Symbol	Rating	Unit
Power Supply Voltage	V_{CC}	- 0.5 to 6.5	V
Input Voltage	V_{IN}	- 0.5 to $V_{\text{CC}} + 0.5$	V
Output Current (total)	ΣI_{OL}	120	mA
Output Current (total)	ΣI_{OH}	- 80	mA
Power Dissipation ($T_a = 85^\circ\text{C}$)	P_{D}	600	mW
Soldering Temperature (10 s)	T_{SOLDER}	260	$^\circ\text{C}$
Storage Temperature	T_{STG}	- 65 to 150	$^\circ\text{C}$
Operating Temperature	T_{OPR}	- 40 to 85	$^\circ\text{C}$

Note: The absolute maximum ratings are rated values which must not be exceeded during operation, even for an instant. Any one of the ratings must not be exceeded. If any absolute maximum rating is exceeded, a device may break down or its performance may be degraded, causing it to catch fire or explode resulting in injury to the user. Thus, when designing products which include this device, ensure that no absolute maximum rating value will ever be exceeded.

4.2 DC Characteristics (1/2)

$T_a = -40$ to 85°C

Parameter	Symbol	Condition	Min	Typ. (Note)	Max	Unit
Power Supply Voltage ($\Delta V_{\text{CC}} = V_{\text{CC}}$ $\Delta V_{\text{CC}} = V_{\text{SS}} = 0\text{V}$)	V_{CC}	$f_c = 4$ to 20 MHz $f_s =$	4.5		5.5	V
		$f_c = 4$ to 12.5 MHz 30 to 34 kHz	2.7			
Input Low Voltage	AD0 to 15	V_{IL}	$V_{\text{CC}} \geq 4.5\text{V}$ $V_{\text{CC}} < 4.5\text{V}$		0.8 0.6	V
	Port 2 to A (except P87, P5)	V_{IL1}	$V_{\text{CC}} = 2.7$ to 5.5 V	-0.3	0.3 V_{CC}	
	RESET, NMI, INT0	V_{IL2}			0.25 V_{CC}	
	EA, AM8/16	V_{IL3}			0.3	
	X1, P5	V_{IL4}			0.2 V_{CC}	
Input High Voltage	AD0 to 15	V_{IH}	$V_{\text{CC}} \geq 4.5\text{V}$ $V_{\text{CC}} < 4.5\text{V}$	2.2 2.0	$V_{\text{CC}} + 0.3$	V
	Port 2 to A (except P87)	V_{IH1}	$V_{\text{CC}} = 2.7$ to 5.5 V	0.7 V_{CC}		
	RESET, NMI, INT0	V_{IH2}		0.75 V_{CC}		
	EA, AM8/16	V_{IH3}		$V_{\text{CC}} - 0.3$		
	X1	V_{IH4}		0.8 V_{CC}		
Output Low Voltage	V_{OL}	$I_{\text{OL}} = 1.6\text{mA}$ ($V_{\text{CC}} = 2.7$ to 5.5 V)			0.45	V
Output High Voltage	V_{OH1}	$I_{\text{OH}} = -400\ \mu\text{A}$ ($V_{\text{CC}} = 3\text{V} \pm 10\%$)	2.4			
	V_{OH2}	$I_{\text{OH}} = -400\ \mu\text{A}$ ($V_{\text{CC}} = 5\text{V} \pm 10\%$)	4.2			

Note: Typical values are for $T_a = 25^\circ\text{C}$ and $V_{\text{CC}} = 5\text{V}$ unless otherwise noted.

4.2 DC Characteristics (2/2)

Parameter	Symbol	Condition	Min	Typ. (Note 1)	Max	Unit
Darlington Drive Current (8 Output Pins Max)	I_{DAR} (Note 2)	$V_{EXT} = 1.5\text{ V}$ $R_{EXT} = 1.1\text{ k}\Omega$ (when $V_{CC} = 5\text{ V} \pm 10\%$)	- 1.0		- 3.5	mA
Input Leakage Current	I_{LI}	$0.0 \leq V_{IN} \leq V_{CC}$		0.02	± 5	μA
Output Leakage Current	I_{LO}	$0.2 \leq V_{IN} \leq V_{CC} - 0.2$		0.05	± 10	
Powerdown Voltage (at Stop, RAM Back-up)	V_{STOP}	$V_{IL2} = 0.2V_{CC}$, $V_{IH2} = 0.8V_{CC}$	2.0		6.0	V
RESET Pull-up Resistor	R_{RST}	$V_{CC} = 5\text{ V} \pm 10\%$ ----- $V_{CC} = 3\text{ V} \pm 10\%$	50 80		150 200	$\text{k}\Omega$
Pin Capacitance	C_{IO}	$f_c = 1\text{ MHz}$			10	pF
Schmitt Width RESET, NMI, INTO	V_{TH}		0.4	1.0		V
Programmable Pull-down Resistor	R_{KL}	$V_{CC} = 5\text{ V} \pm 10\%$ ----- $V_{CC} = 3\text{ V} \pm 10\%$	10 30		80 150	$\text{k}\Omega$
Programmable Pull-up Resistor	R_{KH}	$V_{CC} = 5\text{ V} \pm 10\%$ ----- $V_{CC} = 3\text{ V} \pm 10\%$	50 100		150 300	
Normal (Note 3) Normal2 (Note 4) Run Idle2 Idle1	I_{CC}	$V_{CC} = 5\text{ V} \pm 10\%$ $f_c = 20\text{ MHz}$		19	25	mA
				24	30	
				17	25	
				10	15	
				3.5	5	
Normal (Note 3) Normal2 (Note 4) Run Idle2 Idle1		$V_{CC} = 3\text{ V} \pm 10\%$ $f_c = 12.5\text{ MHz}$ (Typ: $V_{CC} = 3.0\text{ V}$)		6.5	10	mA
				9.5	13	
				5.0	9	
				3.0	5	
				0.8	1.5	
Slow (Note 3) Run Idle2 Idle1		$V_{CC} = 3\text{ V} \pm 10\%$ $f_s = 32.768\text{ kHz}$ (Typ: $V_{CC} = 3.0\text{ V}$)		20	35	μA
				16	30	
				10	20	
			5	15		
Stop		$V_{CC} = 2.7\text{ to }5.5\text{ V}$		0.2	10	μA

Note 1: Typical values are for $T_a = 25^\circ\text{C}$ and $V_{CC} = 5\text{ V}$ unless otherwise noted.

Note 2: I_{DAR} is guaranteed for up to eight ports.

Note 3: I_{CC} measurement conditions (Normal, Slow):

Only CPU is operational; output pins are open and input pins are fixed.

Note 4: I_{CC} measurement conditions (Normal2):

All functions are operational; output pins are open and input pins are fixed.

4.3 AC Characteristics

(1) $V_{CC} = 5V \pm 10\%$

No.	Parameter	Symbol	Variable		16 MHz		20 MHz		Unit
			Min	Max	Min	Max	Min	Max	
1	Osc. Period (= x)	t_{OSC}	50	31250	62.5		50		ns
2	CLK pulse Width	t_{CLK}	$2x - 40$		85		60		ns
3	A0 to A23 Valid → CLK Hold	t_{AK}	$0.5x - 20$		11		5		ns
4	CLK Valid → A0 to A23 Hold	t_{KA}	$1.5x - 70$		24		5		ns
5	A0 to A15 Valid → ALE Fall	t_{AL}	$0.5x - 15$		16		10		ns
6	ALE Fall → A0 to A15 Hold	t_{LA}	$0.5x - 20$		11		5		ns
7	ALE High pulse Width	t_{LL}	$x - 40$		23		10		ns
8	ALE Fall → $\overline{RD}/\overline{WR}$ Fall	t_{LC}	$0.5x - 25$		6		0		ns
9	$\overline{RD}/\overline{WR}$ Rise → ALE Rise	t_{CL}	$0.5x - 20$		11		5		ns
10	A0 to A15 Valid → $\overline{RD}/\overline{WR}$ Fall	t_{ACL}	$x - 25$		38		25		ns
11	A0 to A23 Valid → $\overline{RD}/\overline{WR}$ Fall	t_{ACH}	$1.5x - 50$		44		25		ns
12	$\overline{RD}/\overline{WR}$ Rise → A0 to A23 Hold	t_{CA}	$0.5x - 25$		6		0		ns
13	A0 to A15 Valid → D0 to D15 Input	t_{ADL}		$3.0x - 55$		133		95	ns
14	A0 to A23 Valid → D0 to D15 Input	t_{ADH}		$3.5x - 65$		154		110	ns
15	\overline{RD} Fall → D0 to D15 Input	t_{RD}		$2.0x - 60$		65		40	ns
16	\overline{RD} Low Pulse Width	t_{RR}	$2.0x - 40$		85		60		ns
17	\overline{RD} Rise → D0 to D15 Hold	t_{HR}	0		0		0		ns
18	\overline{RD} Rise → A0 to A15 Output	t_{RAE}	$x - 15$		48		35		ns
19	\overline{WR} Low Pulse Width	t_{WW}	$2.0x - 40$		85		60		ns
20	D0 to D15 Valid → \overline{WR} Rise	t_{DW}	$2.0x - 55$		70		45		ns
21	\overline{WR} Rise → D0 to D15 Hold	t_{WD}	$0.5x - 15$		16		10		ns
22	A0 to A23 Valid → \overline{WAIT} Input ^(1 WAIT + n mode)	t_{AWH}		$3.5x - 90$		129		85	ns
23	A0 to A15 Valid → \overline{WAIT} Input ^(1 WAIT + n mode)	t_{AWL}		$3.0x - 80$		108		70	ns
24	$\overline{RD}/\overline{WR}$ Fall → \overline{WAIT} Hold ^(1 WAIT + n mode)	t_{CW}	$2.0x + 0$		125		100		ns
25	A0 to A23 Valid → PORT Input	t_{APH}		$2.5x - 120$		36		5	ns
26	A0 to A23 Valid → PORT Hold	t_{APH2}	$2.5x + 50$		206		175		ns
27	\overline{WR} Rise → PORT Valid	t_{CP}		200		200		200	ns
28	A0 to A23 Valid → \overline{RAS} Fall	t_{ASRH}	$1.0x - 40$		23		10		ns
29	A0 to A15 Valid → \overline{RAS} Fall	t_{ASRL}	$0.5x - 15$		16		10		ns
30	\overline{RAS} Fall → D0 to D15 Input	t_{RAC}		$2.5x - 70$		86		55	ns
31	\overline{RAS} Fall → A0 to A15 Hold	t_{RAH}	$0.5x - 15$		16		10		ns
32	\overline{RAS} Low Pulse Width	t_{RAS}	$2.0x - 40$		85		60		ns
33	\overline{RAS} High Pulse Width	t_{RP}	$2.0x - 40$		85		60		ns
34	\overline{CAS} Fall → \overline{RAS} Rise	t_{RSH}	$1.0x - 40$		23		10		ns
35	\overline{RAS} Rise → \overline{CAS} Rise	t_{RSC}	$0.5x - 25$		6		0		ns
36	\overline{RAS} Fall → \overline{CAS} Fall	t_{RCD}	$1.0x - 40$		23		10		ns
37	\overline{CAS} Fall → D0 to D15 Input	t_{CAC}		$1.5x - 65$		29		10	ns
38	\overline{CAS} Low Pulse Width	t_{CAS}	$1.5x - 30$		64		40		ns

AC Measuring Conditions

- Output Level: High 2.2 V / Low 0.8 V, $CL = 50$ pF
(However, $CL = 100$ pF for AD0 to AD15, A0 to A23, ALE, \overline{RD} , \overline{WR} , \overline{HWR} , $\overline{R/W}$, CLK, \overline{RAS} , $\overline{CAS0}$ to $\overline{CAS2}$)
- Input Level: High 2.4 V / Low 0.45 V (AD0 to AD15)
High $0.8 \times V_{CC}$ / Low $0.2 \times V_{CC}$ (except for AD0 to AD15)


(2) $V_{CC} = 3V \pm 10\%$

No.	Parameter	Symbol	Variable		12.5 MHz		Unit
			Min	Max	Min	Max	
1	Osc. Period (= x)	t_{OSC}	80	31250	80		ns
2	CLK pulse Width	t_{CLK}	$2x - 40$		120		ns
3	A0 to A23 Valid → CLK Hold	t_{AK}	$0.5x - 30$		10		ns
4	CLK Valid → A0 to A23 Hold	t_{KA}	$1.5x - 80$		40		ns
5	A0 to A15 Valid → ALE Fall	t_{AL}	$0.5x - 35$		5		ns
6	ALE Fall → A0 to A15 Hold	t_{LA}	$0.5x - 35$		5		ns
7	ALE High pulse Width	t_{LL}	$x - 60$		20		ns
8	ALE Fall → $\overline{RD}/\overline{WR}$ Fall	t_{LC}	$0.5x - 35$		5		ns
9	$\overline{RD}/\overline{WR}$ Rise → ALE Rise	t_{CL}	$0.5x - 40$		0		ns
10	A0 to A15 Valid → $\overline{RD}/\overline{WR}$ Fall	t_{ACL}	$x - 50$		30		ns
11	A0 to A23 Valid → $\overline{RD}/\overline{WR}$ Fall	t_{ACH}	$1.5x - 50$		70		ns
12	$\overline{RD}/\overline{WR}$ Rise → A0 to A23 Hold	t_{CA}	$0.5x - 40$		0		ns
13	A0 to A15 Valid → D0 to D15 Input	t_{ADL}		$3.0x - 110$		130	ns
14	A0 to A23 Valid → D0 to D15 Input	t_{ADH}		$3.5x - 125$		155	ns
15	\overline{RD} Fall → D0 to D15 Input	t_{RD}		$2.0x - 115$		45	ns
16	\overline{RD} Low Pulse Width	t_{RR}	$2.0x - 40$		120		ns
17	\overline{RD} Rise → D0 to D15 Hold	t_{HR}	0		0		ns
18	\overline{RD} Rise → A0 to A15 Output	t_{RAE}	$x - 25$		55		ns
19	\overline{WR} Low Pulse Width	t_{WW}	$2.0x - 40$		120		ns
20	D0 to D15 Valid → \overline{WR} Rise	t_{DW}	$2.0x - 120$		40		ns
21	\overline{WR} Rise → D0 to D15 Hold	t_{WD}	$0.5x - 40$		0		ns
22	A0 to A23 Valid → WAIT Input $\left(\begin{smallmatrix} 1 \text{ WAIT} \\ + n \text{ mode} \end{smallmatrix} \right)$	t_{AWH}		$3.5x - 130$		150	ns
23	A0 to A15 Valid → WAIT Input $\left(\begin{smallmatrix} 1 \text{ WAIT} \\ + n \text{ mode} \end{smallmatrix} \right)$	t_{AWL}		$3.0x - 100$		140	ns
24	$\overline{RD}/\overline{WR}$ Fall → WAIT Hold $\left(\begin{smallmatrix} 1 \text{ WAIT} \\ + n \text{ mode} \end{smallmatrix} \right)$	t_{CW}	$2.0x + 0$		160		ns
25	A0 to A23 Valid → PORT Input	t_{APH}		$2.5x - 195$		5	ns
26	A0 to A23 Valid → PORT Hold	t_{APH2}	$2.5x + 50$		250		ns
27	\overline{WR} Rise → PORT Valid	t_{CP}		200		200	ns
28	A0 to A23 Valid → \overline{RAS} Fall	t_{ASRH}	$1.0x - 60$		20		ns
29	A0 to A15 Valid → \overline{RAS} Fall	t_{ASRL}	$0.5x - 40$		0		ns
30	\overline{RAS} Fall → D0 to D15 Input	t_{RAC}		$2.5x - 90$		110	ns
31	\overline{RAS} Fall → A0 to A15 Hold	t_{RAH}	$0.5x - 25$		15		ns
32	\overline{RAS} Low Pulse Width	t_{RAS}	$2.0x - 40$		120		ns
33	\overline{RAS} High Pulse Width	t_{RP}	$2.0x - 40$		120		ns
34	\overline{CAS} Fall → \overline{RAS} Rise	t_{RSH}	$1.0x - 55$		25		ns
35	\overline{RAS} Rise → \overline{CAS} Rise	t_{RSC}	$0.5x - 25$		15		ns
36	\overline{RAS} Fall → \overline{CAS} Fall	t_{RCD}	$1.0x - 40$		40		ns
37	\overline{CAS} Fall → D0 to D15 Input	t_{CAC}		$1.5x - 120$		0	ns
38	\overline{CAS} Low Pulse Width	t_{CAS}	$1.5x - 30$		80		ns


AC Measuring Conditions

- Output Level: High $0.7 \times V_{CC}$ / Low $0.3 \times V_{CC}$, $CL = 50$ pF
- Input Level: High $0.9 \times V_{CC}$ / Low $0.1 \times V_{CC}$

(1) Read Cycle

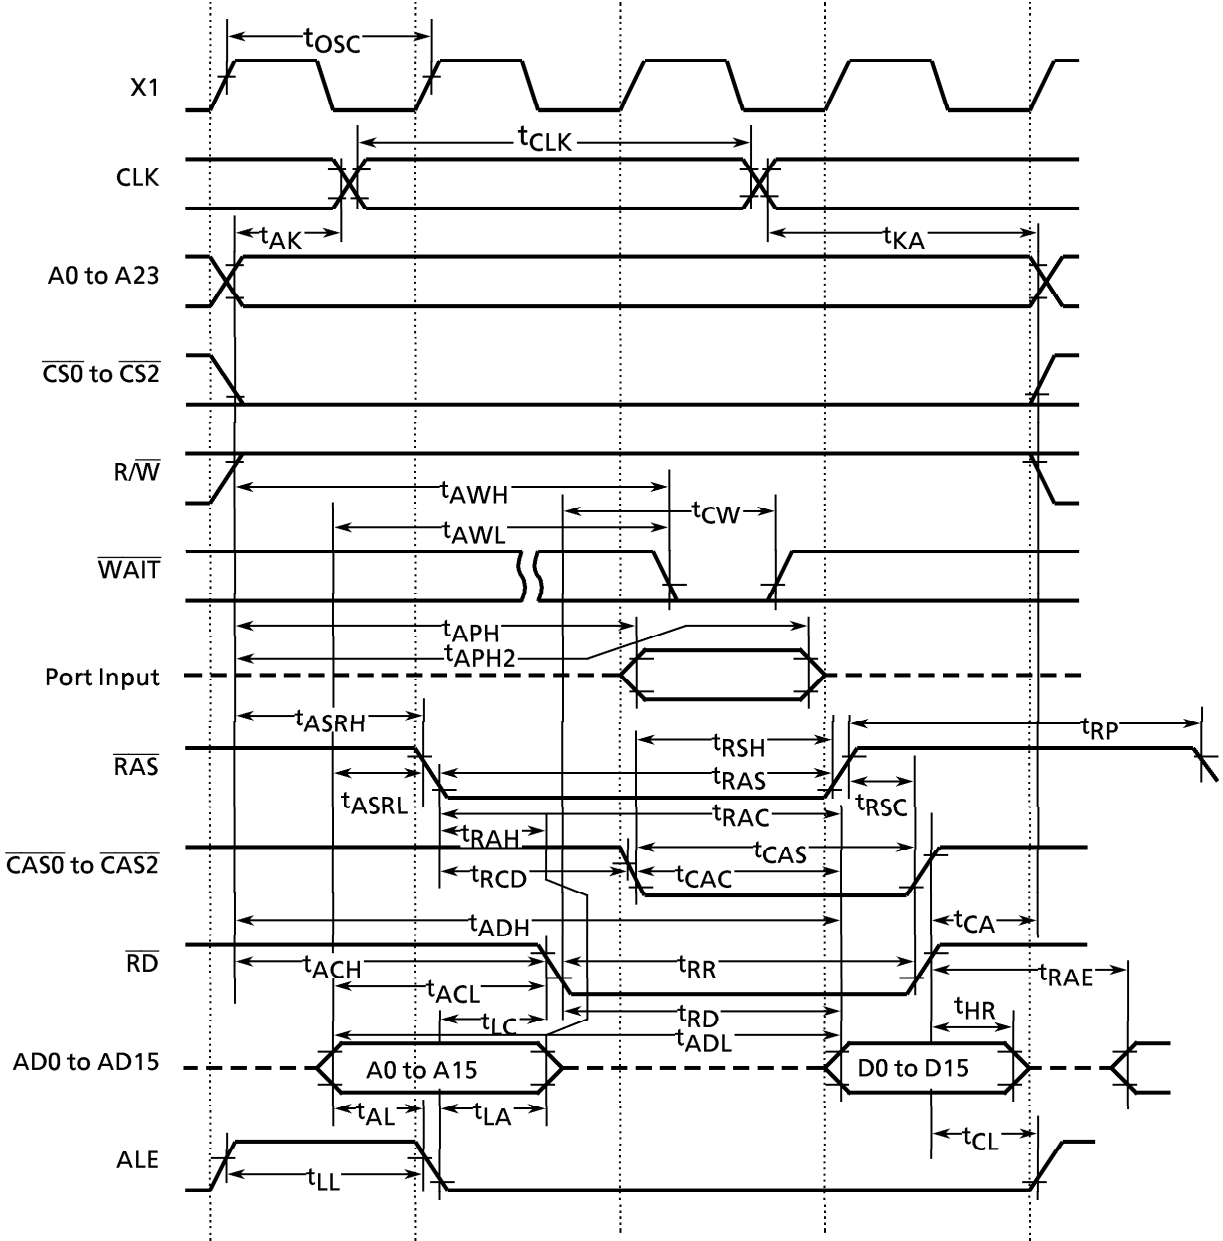

(2) Write Cycle

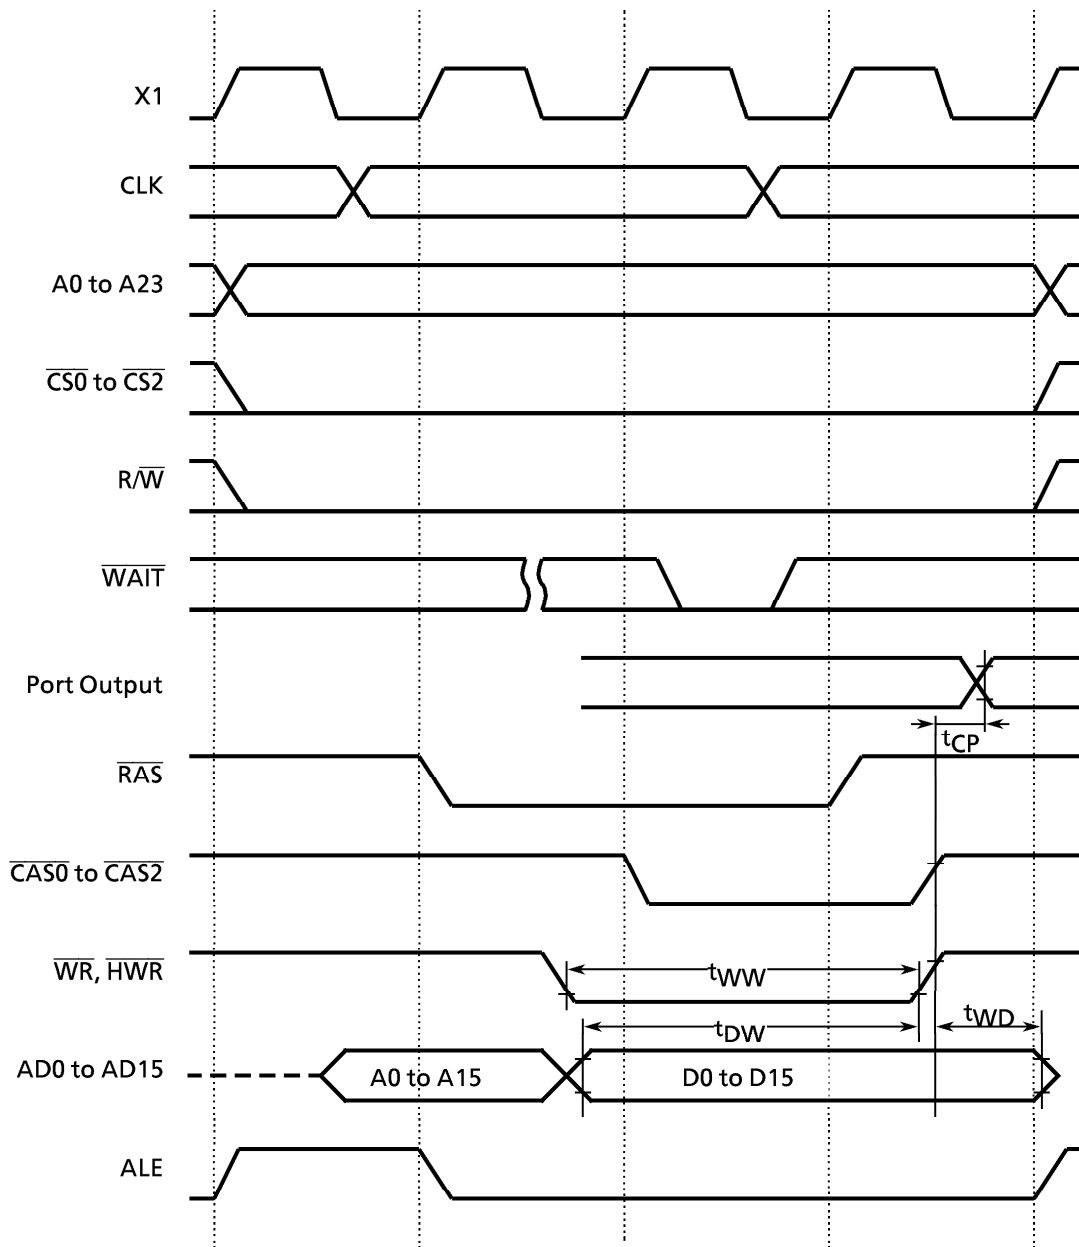

4.4 AD Conversion Characteristics

$$AV_{CC} = V_{CC}, AV_{SS} = V_{SS}$$

Parameter	Symbol	Power Supply	Min	Typ	Max	Unit
Analog Reference Voltage (+)	V _{REFH}	V _{CC} = 5V ± 10%	V _{CC} - 1.5V	V _{CC}	V _{CC}	V
		V _{CC} = 3V ± 10%	V _{CC} - 0.2V	V _{CC}	V _{CC}	
Analog Reference Voltage (-)	V _{REFL}	V _{CC} = 5V ± 10%	V _{SS}	V _{SS}	V _{SS} + 0.2V	
		V _{CC} = 3V ± 10%	V _{SS}	V _{SS}	V _{SS} + 0.2V	
Analog Input Voltage Range	V _{AIN}		V _{REFL}		V _{REFH}	
Analog Current for Analog Reference Voltage <VREFON> = 1 <VREFON> = 0	I _{REF} (V _{REFL} = 0 V)	V _{CC} = 5V ± 10%		0.5	1.5	
		V _{CC} = 3V ± 10%		0.3	0.9	
		V _{CC} = 2.7 to 5.5V		0.02	5.0	μA
Error (not including quantizing errors)	-	V _{CC} = 5V ± 10%		± 1.0	± 3.0	LSB
		V _{CC} = 3V ± 10%		± 1.0	± 3.0	

Note 1: 1LSB = (V_{REFH} - V_{REFL}) / 2¹⁰ [V]

Note 2: The operation of this AD converter is guaranteed only using fc (the high-frequency oscillator).
It is not guaranteed for fs.

The operation above is guaranteed for f_{FPFH} ≥ 4 MHz.

Note 3: The value I_{CC} includes the current which flows through the AV_{CC} pin.

4.5 Serial Channel Timing

(1) I/O Interface Mode

① SCLK Input Mode

Parameter	Symbol	Variable		32.768 MHz (Note)		12.5 MHz		20 MHz		Unit
		Min	Max	Min	Max	Min	Max	Min	Max	
SCLK Cycle	t _{SCY}	16X		488 μs		1.28		0.8		μs
Output Data → Rising Edge or Falling Edge* of SCLK	t _{OSS}	t _{SCY} /2 - 5X - 50		91.5 μs		190		100		ns
SCLK Rising Edge or Falling Edge* → Output Data Hold	t _{OHS}	5X - 100		152 μs		300		150		ns
SCLK Rising Edge or Falling Edge* → Input Data Hold	t _{HSR}	0		0		0		0		ns
SCLK Rising Edge or Falling Edge* → Effective Data Input	t _{SRD}		t _{SCY} - 5X - 100		336 μs		780		450	ns


Note: System clock is fs, or input clock to prescaler is divisor clock of fs.

* The rising edge is used in SCLK Rising mode.
The falling edge is used SCLK Falling mode.

② SCLK Output Mode

Parameter	Symbol	Variable		32.768 MHz (Note)		12.5 MHz		20 MHz		Unit
		Min	Max	Min	Max	Min	Max	Min	Max	
SCLK Cycle (Programmable)	t _{SCY}	16X	8192X	488 μs	250 ms	1.28	655.36	0.8	409.6	μs
Output Data → SCLK Rising Edge	t _{OSS}	t _{SCY} - 2X - 150		427 μs		970		550		ns
SCLK Rising Edge → Output Data Hold	t _{OHS}	2X - 80		60 μs		80		20		ns
SCLK Rising Edge → Input Data Hold	t _{HSR}	0		0		0		0		ns
SCLK Rising Edge → Effective Data Input	t _{SRD}		t _{SCY} - 2X - 150		428 μs		970		550	ns

Note: System clock is fs, or input clock to prescaler is divisor clock of fs.

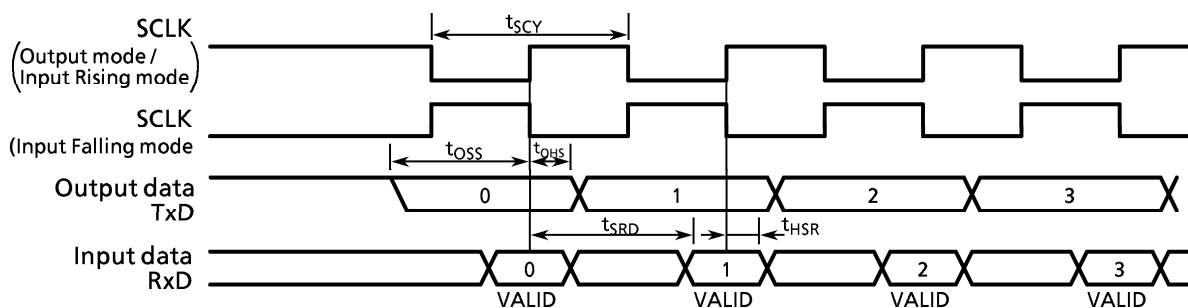

4.6 Timer / Counter Input Clock (T10, T14, T15, T16, T17)

Parameter	Symbol	Variable		12.5 MHz		20 MHz		Unit
		Min	Max	Min	Max	Min	Max	
Clock Cycle	t_{VCK}	$8X + 100$		740		500		ns
Low Level Clock Pulse Width	t_{VCKL}	$4X + 40$		360		240		ns
High Level Clock Pulse Width	t_{VCKH}	$4X + 40$		360		240		ns

4.7 Interrupt and Capture

(1) \overline{NMI} , INT0 interrupts

Parameter	Symbol	Variable		12.5 MHz		20 MHz		Unit
		Min	Max	Min	Max	Min	Max	
\overline{NMI} , INT0 Low Level Pulse Width	t_{INTAL}	$4X$		320		200		ns
\overline{NMI} , INT0 High Level Pulse Width	t_{INTAH}	$4X$		320		200		ns

(2) INT4 to 7 interrupts, capture

The INT4 to 7 input pulse width depends on the CPU operation clock and timer (9-bit prescaler). The following shows the pulse width for each clock.

System clock selected <SYSCK>	Prescaler clock selected <PRCK1 to 0>	t_{INTBL} (INT4 to 7 low level pulse width)		t_{INTBH} (INT4 to 7 high level pulse width)		Unit
		Variable	20 MHz	Variable	20 MHz	
		Min	Min	Min	Min	
0 (fc)	00 (f_{FPH})	$8X + 100$	500	$8X + 100$	500	ns
	01 (fs)	$8XT + 0.1$	244.3	$8XT + 0.1$	244.3	
	10 (fc/16)	$128X + 0.1$	6.5	$128X + 0.1$	6.5	
1 (fs) (Note 2)	00 (f_{FPH})	$8XT + 0.1$	244.3	$8XT + 0.1$	244.3	μs
	01 (fs)					

Note 1: XT represents the frequency of the low frequency clock fs. Calculated at fs = 32.768 kHz.


Note 2: When using fs as the system clock, fc/16 cannot be selected as the prescaler clock.

4.8 SCOUT pin AC characteristics


Parameter	Symbol	Variable		12.5 MHz		20 MHz		Unit
		Min	Max	Min	Max	Min	Max	
High-Level Pulse Width $V_{CC} = 5 V \pm 10\%$	t_{SCH}	0.5X - 10		40		15		ns
High-Level Pulse Width $V_{CC} = 3 V \pm 10\%$		0.5X - 20		30		-	-	
Low-Level Pulse Width $V_{CC} = 5 V \pm 10\%$	t_{SCL}	0.5X - 10		40		15		ns
Low-Level Pulse Width $V_{CC} = 3 V \pm 10\%$		0.5X - 20		30		-	-	

Measurement condition

- Output level: High 2.2 V / Low 0.8 V, CL = 10 pF



4.9 Timing Chart for Bus Request ($\overline{\text{BUSRQ}}$) / Bus Acknowledge ($\overline{\text{BUSAK}}$)

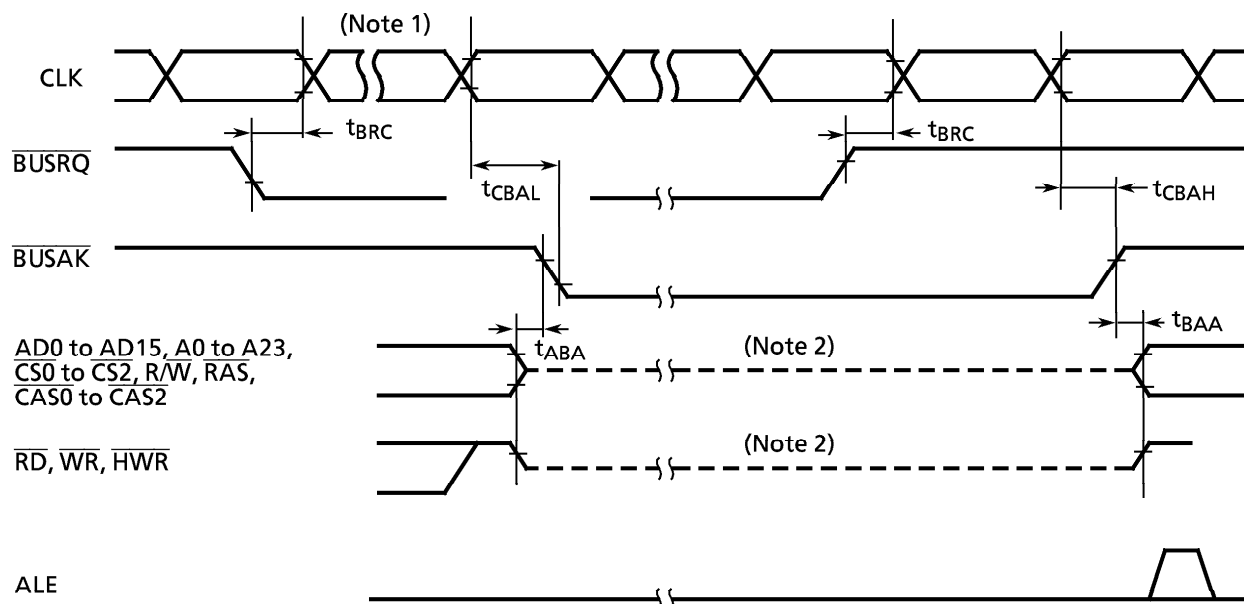

Parameter	Symbol	Variable		12.5 MHz		20 MHz		Unit
		Min	Max	Min	Max	Min	Max	
$\overline{\text{BUSRQ}}$ Set-up Time to CLK	t_{BRC}	120		120		120		ns
CLK \rightarrow $\overline{\text{BUSAK}}$ Falling Edge	t_{CBAL}		$1.5X + 120$		240		195	ns
CLK \rightarrow $\overline{\text{BUSAK}}$ Rising Edge	t_{CBAH}		$0.5X + 40$		80		65	ns
Output Buffer off to $\overline{\text{BUSAK}}$	t_{ABA}	0	80	0	80	0	80	ns
$\overline{\text{BUSAK}}$ to Output Buffer on	t_{BAA}	0	80	0	80	0	80	ns

Note 1: Even if the $\overline{\text{BUSRQ}}$ signal goes low, the bus will not be released while the $\overline{\text{WAIT}}$ signal is low. The bus will only be released when $\overline{\text{BUSRQ}}$ goes low while $\overline{\text{WAIT}}$ is high.

Note 2: This line shows only that the output buffer is in the off state. It does not indicate that the signal level is fixed. Just after the bus is released, the signal level set before the bus was released is maintained dynamically by the external capacitance. Therefore, to fix the signal level using an external resistor during bus release, careful design is necessary, as fixing of the level is delayed. The internal programmable pull-up / pull-down resistor is switched between the active and non-active states by the internal signal.

4.10 Recommended oscillator

The TMP93CS40/S41 are evaluated with various resonators. The evaluation results are displayed below to enable appropriate selection for any given application.

Note: The load capacitance of the resonator consists of the load capacitors C1 and C2 which are to be connected and the floating capacitance of the target board.

Even if the specified values of C1 and C2 are used, there is a possibility that the oscillator will malfunction due to varying load capacitance on the target boards. Hence the oscillator's wiring patterns on the board should be designed to be as short as possible.

It is recommended that evaluation of the resonators be conducted on the target board.

(1) Examples of Resonator Connection




Figure 1: Example of High Frequency Resonator Connection




Figure 2: Example of Low Frequency Resonator Connection

(2) Ceramic resonator: Toyama Murata Mfg. Co., Ltd (Note 1)

Ta = -20 to 80°C

Parameter	Frequency (MHz)	Recommended resonator	Recommended value			Vcc [V]
			C ₁ [pF]	C ₂ [pF]	Rd [kΩ]	
High-frequency oscillation	4.00	CSA4.00MG	30	30	0	2.7 to 5.5
		CST4.00MGW	(30) (Note 2)	(30) (Note 2)		
	10.00	CSA10.0MTZ093	30	30		
		CST10.0MTW093	(30) (Note 2)	(30) (Note 2)		
	12.50	CSA12.5MTZ093	30	30		
		CST12.5MTW093	(30) (Note 2)	(30) (Note 2)		
	16.00	CSA16.00MXZ040	5	5		4.5 to 5.5
		CST16.00MXW0C1	(5) (Note 2)	(5) (Note 2)		
	20.00	CSA20.00MXZ040	3	3		

Note 1: TOYAMA MURATA MFG. CO., LTD. (JAPAN)
 These product numbers and the corresponding specifications are subject to change. For up-to-date information, please refer to the following URL;
<http://www.murata.co.jp/search/index.html>

Note 2: For built-in condenser type

(3) Crystal resonator: Nihon Denpa Kogyo(Note 1)

Ta = - 10 to 60°C

Parameter	Frequency (MHz)	Recommended resonator	Recommended value			Vcc [V]
			C ₁ [pF]	C ₂ [pF]	Rd [kΩ]	
High-frequency oscillation	4.00	NT040016A	12	12	0	2.7 to 5.5
	10.00	NT100016A	10	10		
	12.50	NT125016A	10	10		
	16.00	NT160016A	10	10		
	20.00	NT200016A	7	7		4.5 to 5.5

Note 1: NDK AMERICA, INC.: U.S.A Phone: +1-510-623-6500, Fax : +1-510-623-6590
 NDK ELECTRONICS SINGAPORE PTE, LTD. Phone: +65-298-9878, Fax : +65-293-1150
 NDK ELECTRONICS (HK) LIMITED: HONG KONG Phone: +852-2956-3181, Fax : +852-2956-1567
 NDK EUROPE LIMITED: ENGLAND Phone: +44-20-8390-8344, Fax : +44-20-8390-6926
 NDK FRANCE SARL: FRANCE Phone: +33-1-60-95-0000, Fax : +33-1-60-95-8200
 NDK ITALY SRL: ITALY Phone: +39-2-96702920, Fax : +39-2-96703284
 NDK SCANDINAVIA AB: SWEDEN Phone: +46-8-444-1040, Fax : +46-8-632-0070

Note 2: High-frequency resonator
 NR-18: Lead mount type
 AT-51: Lead mount type
 CP12A: Surface mount type